

QUOTE BY: Jeff H

QUOTE #: JANG04945

SOLD TO: PHOENIX HOMES - WHITE TAIL RIDGE



SHIP TO: 142 FRANK FISHER CRES
OTTAWA, ON K0A 1A0


PROJECT NAME: LOT 135 PH 4 - NEWINGTON Elev M 5 BEDROOM


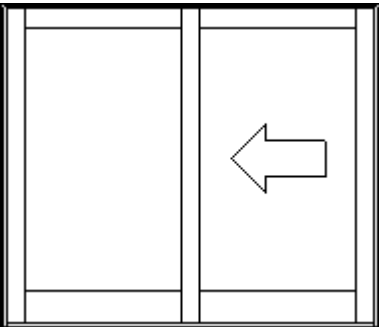

PO#:

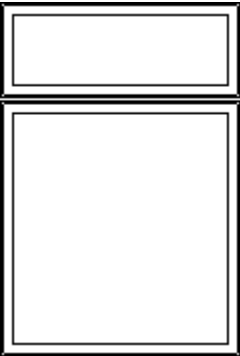


REFERENCE: G.O.L CHESTNUT BRONZE

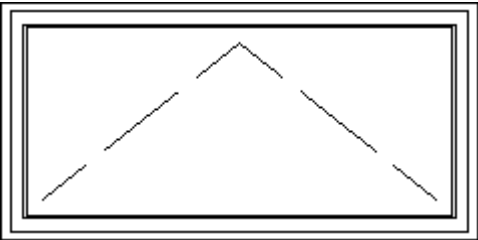
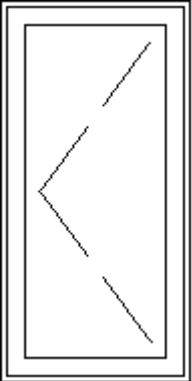
Ship Via: Ground/Next Truck


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-1	RR-MBED	C2460-2	
	Rough Opening: 49 X 61	V Csmnt 2W (Frame= 48 x 60) **(Ext= Chestnut Bronze)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 13.26 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 90.21 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-2	RR-MBED	C2460-2	
	Rough Opening: 49 X 61	V Csmnt 2W (Frame= 48 x 60) **(Ext= Chestnut Bronze)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 13.26 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 90.21 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1




LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-3	RR-OTB	P3676	
	Rough Opening: 37 X 77	V Pict 1W (Frame= 36 x 76) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 14.42 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 71.98 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-4	RR-OTB	P6076	
	Rough Opening: 61 X 77	V Pict 1W (Frame= 60 x 76) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 6mmLowE/13mm/6mm **(Argon Gas)** No Nail Fin , L/a 26.05 , , U-Factor: 1.59 , Energy Rating: 34 , SHGC: 0.5 , ,WT: 189.65 lb NRCan No NR5692-9874674-ES PGR: N/A STCP1-29 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-5	RR-OTB	P3676	
	Rough Opening: 37 X 77	V Pict 1W (Frame= 36 x 76) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 14.42 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 71.98 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

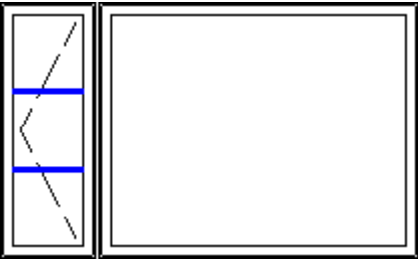
LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-6	RR-BED3	C2460-3	
	Rough Opening: 73 X 61	V Csmnt 3W (Frame= 72 x 60) **(Ext= Chestnut Bronze)** : F /L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 19.89 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 134.78 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 STCP3-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-7	RR-BKST	VPD2 80610	
	Rough Opening: 96.5 X 82.5	V PD 2 Wide (Frame= 95 1/2 x 81 1/2) FX / OP , **(Ext= Chestnut Bronze)** ,Jamb= 6 5/8 , 4mmLowETemp/13mm/4mmTemp A-Gas , (Std Lock , , ScrnCol: Chestnut Bronze , L/a 42.48 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.53 , , U-Factor 1.65 , , Energy Rating: 34 ,WT 269.22 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-8	RR-GREAT	Main Line Item	
	Rough Opening: 37 X 89	V Csmnt Mull (NoShp) (OA Frame= 36 x 88) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-9	RR-GREAT	Main Line Item	
	Rough Opening: 61 X 89	V Csmnt Mull (NoShp) (OA Frame= 60 x 88) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO *Vinyl Extension* No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-10	RR-GREAT	Main Line Item	
	Rough Opening: 37 X 89	V Csmnt Mull (NoShp) (OA Frame= 36 x 88) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-11	RR-INLAW	VPD2 60610	
	Rough Opening: 72.5 X 82.5	V PD 2 Wide (Frame= 71 1/2 x 81 1/2) FX / OP , **(Ext= Chestnut Bronze)** ,Jamb= 6 5/8 , 3mmLowETemp/13mm/3mmTemp A-Gas , (Std Lock , , ScrnCol: Chestnut Bronze , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.55 , , U-Factor 1.7 , , Energy Rating: 34 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1





LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-12	SD-BSMT Rough Opening: 61 X 31	V Awning 1W (Frame= 60 x 30) **(Ext= Chestnut Bronze)** : OP , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** MultiPoint Handle Only No Nail Fin , L/a 8.87 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 57.42 lb NRCan No NR5692-9874498-ES PGR: N/A STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			
			1
Line-13	SD-SHARE/BATH Rough Opening: 25 X 61	C2460-1 V Csmnt 1W (Frame= 24 x 60) **(Ext= Chestnut Bronze)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 6.63 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 48.10 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1
Line-14	SD-INLAW/ENS Rough Opening: 25 X 49	C2448-1 V Csmnt 1W (Frame= 24 x 48) **(Ext= Chestnut Bronze)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 5.15 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 39.89 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			
			1




LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-15	SD-BED4	P2476	
	Rough Opening: 25 X 77	V Pict 1W (Frame= 24 x 76) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 8.61 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 51.98 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-16	SD-ENS4	C2460-1	
	Rough Opening: 25 X 61	V Csmnt 1W (Frame= 24 x 60) **(Ext= Chestnut Bronze)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 6.63 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 48.10 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-17	SD-OFFICE	Main Line Item	
	Rough Opening: 73 X 65	V Csmnt Mull (NoShp) (OA Frame= 72 x 64) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-18	SD-DIN	C3064-1	
Rough Opening: 31 X 65		V Csmnt 1W (Frame= 30 x 64) **(Ext= Chestnut Bronze)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.53 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.68 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1
Line-19	SD-DIN	P3064	
Rough Opening: 31 X 65		V Pict 1W (Frame= 30 x 64) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 9.53 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , WT: 52.95 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1
Line-20	FR-BED5	Main Line Item	
Rough Opening: 69 X 65		V Csmnt Mull (NoShp) (OA Frame= 68 x 64) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , Jamb= 6 5/8 , , 6 5/8 ,BOX= 2 Box ,MODEL= 2W ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1
Line-21	FR-BED5	Main Line Item	
Rough Opening: 69 X 65		V Csmnt Mull (NoShp) (OA Frame= 68 x 64) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-22	FR-BED4	Main Line Item	
	Rough Opening: 105 X 65	V Csmnt Mull (NoShp) (OA Frame= 104 x 64) Factory Mull Int= , ** (Ext= Chestnut Bronze)** , Jamb= 6 5/8 , , 6 5/8 ,BOX= 2 Box ,MODEL= 2W ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-23	FR-BED4	P2476	
	Rough Opening: 25 X 77	V Pict 1W (Frame= 24 x 76) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 8.61 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 51.98 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-24	FR-MBED/ENS	P2460	
	Rough Opening: 25 X 61	V Pict 1W (Frame= 24 x 60) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 6.63 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 41.85 lb NRCan No NR5692-12164194-ES PGR: CW-PG70-FW , Air: Fixed , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-25	FR-FOYR	VS-A	
	Rough Opening: 38.3125 X 98.625	V 8'-Sng36" A13 (Frame= 37 5/16 x 97 5/8) LH **(Ext= Chestnut Bronze)** , 6 5/8 Steel Slab Primed DB ((22x80 Ins) (23x81 C/O) 4mmLowETemp/13mm/4mmTemp) A-Gas Chrome , L/a 11.52 , Dr 'U' Factor: 1.42 , Dr SHGC: 0.28 , Energy Star Zone: 2 Install: NONE PGR: N/A Dr NRCAN JEL-M-2-08335-00001 ,WT 129.00 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-26	FR-OFFICE	P4864	
	Rough Opening: 49 X 65	V Pict 1W (Frame= 48 x 64) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 4mmLowE/13mm/4mm **(Argon Gas)** No Nail Fin , L/a 16.76 , , U-Factor: 1.59 , Energy Rating: 35 , SHGC: 0.53 , ,WT: 97.30 lb NRCAN No NR5692-9874670-ES PGR: N/A STCP1-28 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-27	FR-OFFICE	P4864	
	Rough Opening: 49 X 65	V Pict 1W (Frame= 48 x 64) **(Ext= Chestnut Bronze)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 4mmLowE/13mm/4mm **(Argon Gas)** No Nail Fin , L/a 16.76 , , U-Factor: 1.59 , Energy Rating: 35 , SHGC: 0.53 , ,WT: 97.30 lb NRCAN No NR5692-9874670-ES PGR: N/A STCP1-28 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-28	FR-DIN	C3064-1	
	Rough Opening: 31 X 65	V Csmnt 1W (Frame= 30 x 64) **(Ext= Chestnut Bronze)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.53 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.68 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-29	FR-GAR	P4412	
	Rough Opening: 45 X 13	V Pict 1W (Frame= 44 x 12) **(Ext= Chestnut Bronze)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 2.2 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 22.12 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/2" = 1'		1
Line-30	FR-GAR	P4412	
	Rough Opening: 45 X 13	V Pict 1W (Frame= 44 x 12) **(Ext= Chestnut Bronze)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 2.2 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 22.12 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/2" = 1'		1
Line-31	FR-GAR	P5612	
	Rough Opening: 57 X 13	V Pict 1W (Frame= 56 x 12) **(Ext= Chestnut Bronze)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 2.86 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 27.49 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/2" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-32	FR-GAR	P5612	
	Rough Opening: 57 X 13	V Pict 1W (Frame= 56 x 12) **(Ext= Chestnut Bronze)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 2.86 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 27.49 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/2" = 1'		1
Line-33	FR-GAR	P5612	
	Rough Opening: 57 X 13	V Pict 1W (Frame= 56 x 12) **(Ext= Chestnut Bronze)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 2.86 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 27.49 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/2" = 1'		1
Line-34	INT-G/HSE	WS-B	
	Rough Opening: 38.3125 X 82.625	W Sng36" B01 (Frame= 37 5/16 x 81 5/8) LH , 6 5/8 Steel Slab Primed DB (NI) Spring Assist Chrome , L/a 0 , Dr 'U' Factor: 0.85 , Dr SHGC: 0.01 Energy Star Zone: 3 Install: NONE PGR: N/A Dr NRCan JEL-M-2-07953-00001 ,WT 65.00 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Total Units:			34

Patio doors on this quote have protective film. Direct sunlight may cause protective film to permanently adhere to surface. Remove film immediately after installation.

It is the responsibility of the Builder/Purchaser to ensure that all windows and doors in the quote above are in accordance with, but not limited to, the following:

1. All current Zoning requirements.
2. All current Fire Regulations.
3. All current Building Standard Regulations, including, but not limited to, the Local Building code.

Presented by: _____ Date: _____
Purchaser: _____ Date: _____