

QUOTE BY: Jeff H

QUOTE #: JANG04944

SOLD TO: PHOENIX HOMES - WHITE TAIL RIDGE


SHIP TO: 132 FRANK FISHER CRES
OTTAWA, ON K0A 1A0



PROJECT NAME: LOT 127 PH 4 - OAKSIDE 2 BED ELEV C



PO#:

REFERENCE: GOL, WHITE

Ship Via: Ground/Next Truck

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-1	RR-SUNRM Rough Opening: 72.5 X 82.5	VPD2 60610 V PD 2 Wide (Frame= 71 1/2 x 81 1/2) FX / OP , Wht ,Jamb= 6 5/8 / 3mmLowETemp/13mm/3mmTemp A-Gas , (Std Lock , , ScrnCol: White , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.55 , , U-Factor 1.7 , , Energy Rating: 34 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-2	RR-FAM Rough Opening: 29 X 69	C2868-1 V Csmnt 1W (Frame= 28 x 68) Wht : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.34 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.80 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-3	RR-FAM	C2868-1	
	Rough Opening: 29 X 69	V Csmnt 1W (Frame= 28 x 68) Wht : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.34 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.80 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-4	RR-PRBED	C3668-1	
	Rough Opening: 37 X 69	V Csmnt 1W (Frame= 36 x 68) Wht : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 12.77 , , Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 73.27 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-5	RR-PRBED	C3668-1	
	Rough Opening: 37 X 69	V Csmnt 1W (Frame= 36 x 68) Wht : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 12.77 , , Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 73.27 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-6	RR-BSMT Rough Opening: 72.5 X 82.5	VPD2 60610 V PD 2 Wide (Frame= 71 1/2 x 81 1/2) FX / OP , Wht ,Jamb= 6 5/8 3mmLowETemp/13mm/3mmTemp A-Gas , (Std Lock , , ScrnCol: White , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.55 , , U-Factor 1.7 , , Energy Rating: 34 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			1
Viewed from Exterior. Scale: 1/4" = 1'			
Line-7	RR-BSMT Rough Opening: 85 X 61	C2860-3 V Csmnt 3W (Frame= 84 x 60) Wht : F /R /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 28 - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 24.39 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 152.29 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 STCP3-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			1
Viewed from Exterior. Scale: 1/4" = 1'			
Line-8	SD-SUNRM Rough Opening: 37 X 69	P3668 V Pict 1W (Frame= 36 x 68) Wht : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 12.77 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 65.01 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			1
Viewed from Exterior. Scale: 1/4" = 1'			

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
----------	-----------------------	--------------------------	-----

Line-9 SD-FAM

Rough Opening: 53 X 69




Viewed from Exterior. Scale: 1/4" = 1'

V Csmnt 2W (Frame= 52 x 68) Wht : L / F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 26
- 3mmLowE/13mm/3mm **(Argon Gas)**
Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 16.96 ,
, Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46
, ,WT: 107.88 lb NRCan No NR5692-12164032-ES
PGR: N/A STCP1-28 STCP2-27
PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-10 SD-MBED/ENS

Rough Opening: 31 X 43




Viewed from Exterior. Scale: 1/2" = 1'

V Csmnt 1W (Frame= 30 x 42) Wht : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb
- 3mmLowE/13mm/3mmObs **(Argon Gas)**
(Multi-Point Lock) No Nail Fin , L/a 5.9 ,
, Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46
, ,WT: 43.00 lb NRCan No NR5692-12164032-ES
PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa
STCP1-28
PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-11 SD-G/OUT


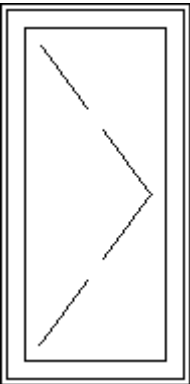
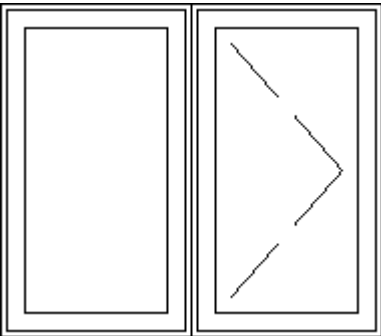
Rough Opening: 34.3125 X 82.625







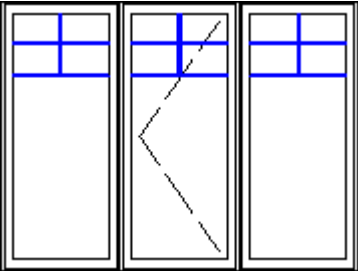
Viewed from Exterior. Scale: 1/4" = 1'


VS-B
V Sng32" B01 (Frame= 33 5/16 x 81 5/8) LH Wht , 6 5/8
Steel Slab Primed DB (NI)
Spring Assist Chrome
Dr 'U' Factor: 0.85 , Dr SHGC: 0.01 , Energy Star Zone: 3 Install:
NONE PGR: R-PG35 , Air: A3 , DP: +1680/-1680 Pa , Water: 290 Pa
Dr NRCan JEL-M-2-07953-00001 ,WT 65.00 lb
This product qualifies for Canadian ENERGY STAR
PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-12	SD-BSMT		
Rough Opening: 53 X 61		V Csmnt 2W (Frame= 52 x 60) Wht : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 26 - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm **(Multi-Point Lock)** No Nail Fin , L/a 14.76 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 96.69 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-13	SD-MAIN/BATH	C2448-1	
Rough Opening: 25 X 49		V Csmnt 1W (Frame= 24 x 48) Wht : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm **(Multi-Point Lock)** No Nail Fin , L/a 5.15 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 39.89 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			1
Line-14	SD-KIT		
Rough Opening: 49 X 43		V Csmnt 2W (Frame= 48 x 42) Wht : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 8.82 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 66.49 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-15	SD-DIN	V Csmnt 2W (Frame= 52 x 68) Wht : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 26 - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 16.96 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 107.88 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1
Line-16	SD-SUNRM	C3668-1 V Csmnt 1W (Frame= 36 x 68) Wht : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 12.77 , , Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 73.27 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1
Line-17	SD-SUNRM	P3668 V Pict 1W (Frame= 36 x 68) Wht : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 12.77 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 65.01 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			
			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-18	SD-BSMT	C2436-1	
	Rough Opening: 25 X 37	V Csmnt 1W (Frame= 24 x 36) Wht : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm **(Multi-Point Lock)** No Nail Fin , L/a 3.67 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 31.64 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/2" = 1'		1
Line-19	FR-FOYR	VD-A	
	Rough Opening: 66.8125 X 82.625	V DbI32" A01 (Frame= 65 13/16 x 81 5/8) L-Flush Bolt / Right Hinge Wht , 6 5/8 Steel Slab Primed DB X DB X (22x64 Ins) (23x65 C/O) 3mmLowETemp/13mm/3mmTemp A-Gas) ,Bars: 5/8" Int: 12" Victorian 3 W x 1 H - () Chrome , L/a 18.38 , Dr 'U' Factor: 1.42 , Dr SHGC: 0.24 , Energy Star Zone: 2 Install: NONE Dr NRCan JEL-M-2-95021-00001 ,WT 170.00 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-20	FR-BED2	C3068-3	
	Rough Opening: 91 X 69	V Csmnt 3W (Frame= 90 x 68) Wht : F /L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 30 (Bars: 5/8" Int: Custom 16" Victorian 2 W x 2 H ** White Bars **) - - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 30.6 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 179.33 lb NRCan No NR5692-12164221-ES PGR: N/A STCP1-27 STCP2-28 STCP3-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-21	INT-G/HSE	WS-B	
	Rough Opening: 34.3125 X 82.625	W Sng32" B01 (Frame= 33 5/16 x 81 5/8) LH , 6 5/8	
		Steel Slab Primed DB (NI)	
		Spring Assist Chrome	
		, L/a 0 ,	
		Dr 'U' Factor: 0.85 , Dr SHGC: 0.01 Energy Star Zone: 3 Install: NONE	
		PGR: N/A Dr NRCan JEL-M-2-07953-00001 ,WT 65.00 lb	
		This product qualifies for Canadian ENERGY STAR	
		PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	

Viewed from Exterior. Scale: 1/4" = 1'

1

Total Units: 21

It is the responsibility of the Builder/Purchaser to ensure that all windows and doors in the quote above are in accordance with, but not limited to, the following:

1. All current Zoning requirements.
2. All current Fire Regulations.
3. All current Building Standard Regulations, including, but not limited to, the Local Building code.

Presented by: _____ Date: _____

Purchaser: _____ Date: _____