

QUOTE BY: Jeff H

QUOTE #: JANG04943

SOLD TO: PHOENIX HOMES - WHITE TAIL RIDGE



SHIP TO: 136 FRANK FISHER
OTTAWA, ON K0A 1A0


PROJECT NAME: LOT 126 PH 4 - KINGSWOOD ELEV R





PO#:

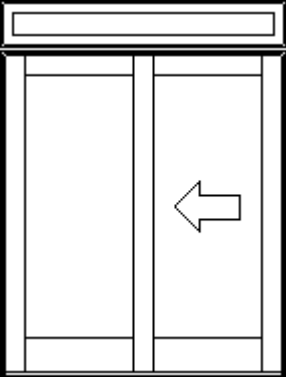
REFERENCE: GOR, BLACK

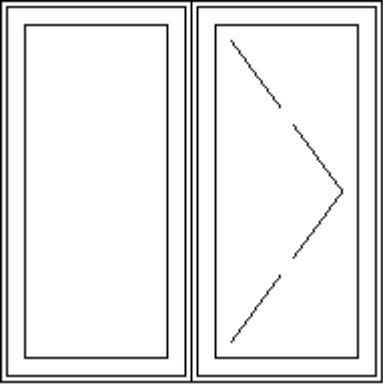


Ship Via: Ground/Next Truck



LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-1	RR-BED4	C2060-2	
	Rough Opening: 41 X 61	V Csmnt 2W (Frame= 40 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-2	RR-BED4	C2060-2	
	Rough Opening: 41 X 61	V Csmnt 2W (Frame= 40 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-3	RR-BED4	C2060-2	
	Rough Opening: 41 X 61	V Csmnt 2W (Frame= 40 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-4	RR-OTB	P2064	
	Rough Opening: 21 X 65	V Pict 1W (Frame= 20 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 5.52 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 38.67 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-5	RR-OTB	V Pict 1W (Frame= 71 1/2 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 6mmLowE/13mm/6mm **(Argon Gas)** No Nail Fin , L/a 26.18 , , U-Factor: 1.59 , Energy Rating: 34 , SHGC: 0.5 , ,WT: 190.26 lb NRCan No NR5692-9874674-ES PGR: CW-PG55-FW , Air: Fixed , DP: +2640/-2640 Pa , Water: 730 Pa STCP1-29 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
	Rough Opening: 72.5 X 65		
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-6	RR-OTB	P2064	
	Rough Opening: 21 X 65	V Pict 1W (Frame= 20 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 5.52 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 38.67 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-7	RR-MBED	C2448-3	
Rough Opening: 73 X 49		V Csmnt 3W (Frame= 72 x 48) Black)** : L /F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 15.45 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 114.56 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 STCP3-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-8	RR-FAM	C2060-2	
Rough Opening: 41 X 61		V Csmnt 2W (Frame= 40 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-9	RR-FAM	C2060-2	
Rough Opening: 41 X 61		V Csmnt 2W (Frame= 40 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-10	RR-FAM	C2060-2	
Rough Opening: 41 X 61		V Csmnt 2W (Frame= 40 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1



LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-11	RR-SUNRM	P2064	
	Rough Opening: 21 X 65	V Pict 1W (Frame= 20 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 5.52 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 38.67 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-12	RR-SUNRM	Main Line Item	
	Rough Opening: 72.5 X 94.5625	V Patio Door Mull (W/Shp) Rect (OA Frame= 71 1/2 x 93 9/16) Factory Mull Int= , Black)** , ,Jamb= 6 5/8 , Standard Jamb Extension ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Install: NONE PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-13	RR-SUNRM	P2064	
	Rough Opening: 21 X 65	V Pict 1W (Frame= 20 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 5.52 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 38.67 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

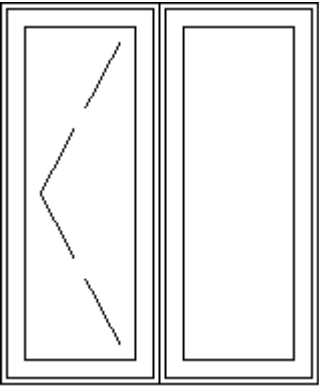

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-14	RR-KIT	C2448-2	
Rough Opening: 49 X 49		V Csmnt 2W (Frame= 48 x 48) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.3 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 74.41 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			1
Line-15	RR-BSMT	C2060-2	
Rough Opening: 41 X 61		V Csmnt 2W (Frame= 40 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-16	RR-BSMT	VPD2 60610	
Rough Opening: 72.5 X 82.5		V PD 2 Wide (Frame= 71 1/2 x 81 1/2) FX / OP , Black)** ,Jamb= 6 5/8 , 3mmLowETemp/13mm/3mmTemp A-Gas , (Std Lock , , ScrnCol: ** Black ** , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.55 , , U-Factor 1.7 , , Energy Rating: 34 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1


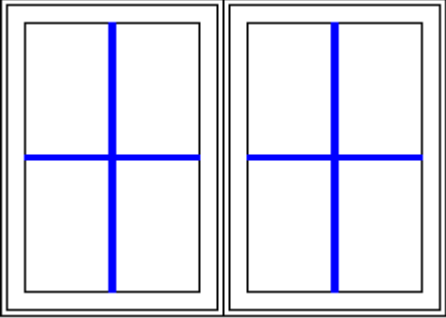
LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-17	RR-BSMT	C2460-2	
Rough Opening: 49 X 61		V Csmnt 2W (Frame= 48 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 13.26 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 90.21 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-18	SD-OTB	P2864	
Rough Opening: 29 X 65		V Pict 1W (Frame= 28 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 8.73 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 50.10 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-19	SD-MBED/ENS	C3260-1	
Rough Opening: 33 X 61		V Csmnt 1W (Frame= 32 x 60) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.62 , , Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.27 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-20	SD-OTB	P1268	
Rough Opening: 13 X 69		V Pict 1W (Frame= 12 x 68) Black)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 3.53 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 32.86 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-21	SD-SUNRM	P2864	
Rough Opening: 29 X 65		V Pict 1W (Frame= 28 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 8.73 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 50.10 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-22	SD-DIN	C2868-1	
Rough Opening: 29 X 69		V Csmnt 1W (Frame= 28 x 68) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.34 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.80 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-23	SD-DIN	C2868-1	
Rough Opening: 29 X 69		V Csmnt 1W (Frame= 28 x 68) Black)** : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.34 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 60.80 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-24	SD-LIV	P1272	
	Rough Opening: 13 X 73	V Pict 1W (Frame= 12 x 72) Black)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 3.75 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 34.65 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-25	SD-BSMT	C2060-2	
	Rough Opening: 41 X 61	V Csmnt 2W (Frame= 40 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 10.28 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 80.03 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-26	SD-LOFT	P1268	
	Rough Opening: 13 X 69	V Pict 1W (Frame= 12 x 68) Black)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 3.53 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 32.86 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-27	SD-BED3	C2860-2	
Rough Opening: 57 X 61		V Csmnt 2W (Frame= 56 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 28 - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 16.26 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 102.18 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-28	SD-OTB	P2864	
Rough Opening: 29 X 65		V Pict 1W (Frame= 28 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 8.73 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 50.10 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-29	SD-GAR/OUT	VS-B	
Rough Opening: 34.3125 X 82.625		V Sng32" B01 (Frame= 33 5/16 x 81 5/8) RH Black)** , 6 5/8 Steel Slab Primed DB (NI) Spring Assist Chrome Dr 'U' Factor: 0.85 , Dr SHGC: 0.01 , Energy Star Zone: 3 Install: NONE PGR: R-PG35 , Air: A3 , DP: +1680/-1680 Pa , Water: 290 Pa Dr NRCan JEL-M-2-07953-00001 ,WT 65.00 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-30	SD-LAUN	C2048-2	
	Rough Opening: 41 X 49	V Csmnt 2W (Frame= 40 x 48) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 20 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 7.98 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 66.14 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			1
Line-31	SD-STUDY	V Csmnt 2W (Frame= 44 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 22 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 11.78 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 85.57 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
	Rough Opening: 45 X 61		
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-32	SD-SUNRM	P2864	
	Rough Opening: 29 X 65	V Pict 1W (Frame= 28 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 8.73 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 50.10 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-33	SD-LIV	P1272	
	Rough Opening: 13 X 73	V Pict 1W (Frame= 12 x 72) Black)** : FNS , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 3.75 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 34.65 lb NRCan No NR5692-12164255-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-34	FR-LOFT	C3268-2	
	Rough Opening: 65 X 69	V Csmnt 2W (Frame= 64 x 68) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 32 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 22.1 , , Egress: 3rd Floor , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43 , ,WT: 126.27 lb NRCan No NR5692-12164059-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-35	FR-LOFT	P2840-2	
	Rough Opening: 57 X 41	V Pict 2W (Frame= 56 x 40) Black)** : F /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 28 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 10.2 , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 67.06 lb NRCan No NR5692-12164221-ES PGR: CW-PG70-FW , Air: Fixed , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-27 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
----------	-----------------------	--------------------------	-----

Line-36 FR-BED2

Rough Opening: 65 X 61



Viewed from Exterior. Scale: 1/4" = 1'

C3260-2

V Csmnt 2W (Frame= 64 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb

,BUW= 32 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) -

- 3mmLowE/13mm/3mm **(Argon Gas)**

Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 19.24 ,

, Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49

, ,WT: 113.17 lb NRCan No NR5692-12164221-ES


PGR: N/A STCP1-28 STCP2-27

PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-37 FR-BED2

Rough Opening: 65 X 61



Viewed from Exterior. Scale: 1/4" = 1'

C3260-2

V Csmnt 2W (Frame= 64 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb

,BUW= 32 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) -

- 3mmLowE/13mm/3mm **(Argon Gas)**

Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 19.24 ,

, Egress: 3rd Floor , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43

, ,WT: 113.17 lb NRCan No NR5692-12164059-ES


PGR: N/A STCP1-27 STCP2-28

PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-38 FR-LIV

Rough Opening: 65 X 73



Viewed from Exterior. Scale: 1/4" = 1'

C3272-2

V Csmnt 2W (Frame= 64 x 72) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb

,BUW= 32 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) -

- 3mmLowE/13mm/3mm **(Argon Gas)**

Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 23.54 ,

, Egress: 3rd Floor , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43

, ,WT: 132.81 lb NRCan No NR5692-12164059-ES


PGR: N/A STCP1-27 STCP2-28

PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
----------	-----------------------	--------------------------	-----

Line-39 FR-FOYR
Rough Opening: 58.4375 X 82.625




Viewed from Exterior. Scale: 1/4" = 1'

VS-T-2S
V Sng32" T01 2-Slts SLTW= 12 , (Frame= 57 7/16 x 81 5/8) FG-Slt / Right Hinge / FG-Slt Black)** , 6 5/8
Steel Slab Primed DB ((22x48 Ins) (23x49 C/O)
3mmLowETemp/13mm/3mmTemp) A-Gas ,Bars: 5/8" Int: Custom Colonial (** Black Bars **) 2 W x 2 H - (Slt 3mmLowE/13mm/3mm A-Gas)
Chrome
, L/a 16.47 ,
Dr 'U' Factor: 1.31 , Dr SHGC: 0.18 , Energy Star Zone: 2 Install: NONE PGR: R-PG40 , Air: A3 , DP: +1920/-1920 Pa , Water: 290 Pa
Dr NRCan JEL-M-2-95020-00001 ,WT 134.00 lb
This product qualifies for Canadian ENERGY STAR
PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-40 INT-G/HSE
Rough Opening: 34.3125 X 82.625



Viewed from Exterior. Scale: 1/4" = 1'

WS-B
W Sng32" B01 (Frame= 33 5/16 x 81 5/8) LH , 6 5/8
Steel Slab Primed DB (NI)
Spring Assist Chrome
Dr 'U' Factor: 0.85 , Dr SHGC: 0.01 Energy Star Zone: 3 Install: NONE
PGR: N/A Dr NRCan JEL-M-2-07953-00001 ,WT 65.00 lb
This product qualifies for Canadian ENERGY STAR
PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Total Units: 40

Patio doors on this quote have protective film. Direct sunlight may cause protective film to permanently adhere to surface. Remove film immediately after installation.

It is the responsibility of the Builder/Purchaser to ensure that all windows and doors in the quote above are in accordance with, but not limited to, the following:

1. All current Zoning requirements.
2. All current Fire Regulations.
3. All current Building Standard Regulations, including, but not limited to, the Local Building code.

Presented by: _____ Date: _____

Purchaser: _____ Date: _____