



APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
FRIDGE	WHIRLPOOL	WRS321SDHZ
DISHWASHER	WHIRLPOOL	WDF341PAPM
RANGE	LG	LSGL6335F
Type: Gas <input checked="" type="checkbox"/> Electric <input checked="" type="checkbox"/> Induction <input type="checkbox"/> Electrical: 20 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/> Waterline Required <input type="checkbox"/>		
WALL OVEN	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Waterline Required <input type="checkbox"/> Electrical: 30 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/>		
WARMING DRAWER	NA	
Electrical: 15 Amp <input type="checkbox"/> Other: Specify		
COOKTOP	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		
BUILT IN MICROWAVE	WHIRLPOOL	YWMT50011KS
Electrical: 15 Amp <input checked="" type="checkbox"/> 30Amp <input type="checkbox"/> 240 Volt <input type="checkbox"/> 120 Volt <input type="checkbox"/>		
MICROWAVE TRIM KIT	WHIRLPOOL	YWMT50011KS
OTR MICROWAVE	NA	
WASHING MACHINE	LG	WM3600HWA
DRYER	LG	DLG3601W
Type: Gas <input checked="" type="checkbox"/> Electric <input type="checkbox"/> Stacked <input type="checkbox"/>		
OTHER: WINE FRIDGE	FRIGIDAIRE	FRWW4543AS
OTHER: HOODFAN	CYCLONE	SCB51930
OTHER:		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".

A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.

Community: DIAMONDDVIEW (3)


Lot #: 118

Purchaser Signature:

Signed by:

 8241EC133F2749E...

Purchaser Signature:

Signed by:

 E2BE1CA9E3B8472...



DV3 LOT 118 - WINE FRIDGE

Wine Storage

45 Bottle Two-Zone Wine Cooler

FRWW4543AS

Available Colors : Stainless Steel

Version : 04/21

Refrigerator

Shelf Material Wood

Controls

Power Failure Alarm No

Power On/Off Yes

Exterior

Lock No

Dimensions and Volume

Height Without Hinge 34"

Width 21 1/2"

Depth of Cabinet 24 1/2"

Depth With Door 90° Open 43"

Bottle Capacity 45

Total Capacity 4.4 Cu. Ft.

Electrical Specifications

Minimum Circuit Required 15 Amps

General Specifications

Annual Energy 255 kWh

Condenser Type Air-cooled

Leveling Legs Yes

Product Weight 83.78 lbs

Prop 65 Label Yes

Refrigerant Type R-600A

Warranty - Labor 1 Year

Warranty - Parts 1 Year

Safety Certifications and Approvals

CSA Listed Yes

Initial Initial

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.caSpecifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.caUSA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.comCANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

DV3 LOT 118 - DISHWASHER - WDF341PAPM

Initial Initial
YB RA




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF340PAM	WDT730PAH
WDF111PAB	WDF520PAD	WDT735PAG
WDF120PAF	WDF540PAD	WDT735PAH
WDF121PAF	WDF545PAF	WDP540HAM
WDF130PAH	WDT530HAM	WDP560HAM
WDF131PAH	WDT540HAM	WDP730HAM
WDF320PAD	WDT710PAH	WDE332PAM**
WDF330PAH	WDT720PAD	WDF341PAP**
WDF331PAH	WDT730HAM	WDT531HAP**
WDF331PAM		

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/ IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

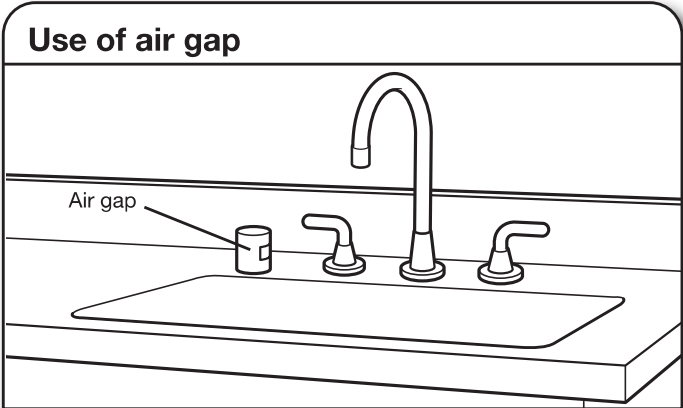

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" (13 mm) minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.

- 3/8" (95 mm) O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.


NOTE: 1/2" (13 mm) minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" (95 mm) hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply.
- Copper wire only.
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker.
- A separate circuit.

If Connecting Dishwasher with a Power Cord:

- Use UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.




Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

PRODUCT DIMENSIONS (FOR 331 AND 340 MODELS)

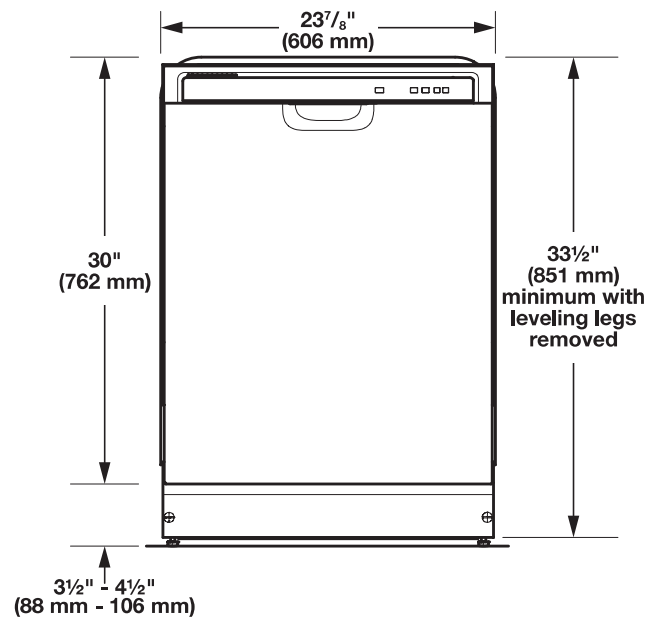


For 4" (100 mm) toe kick, height of cabinet opening is 34 1/2" (863 mm).

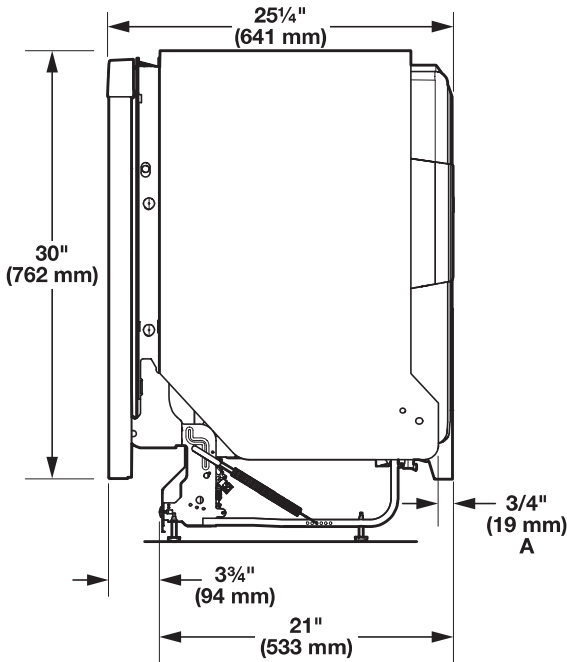


A. Insulation may be compressed (not used on all models).

PRODUCT DIMENSIONS (FOR 500 AND 700 MODELS)

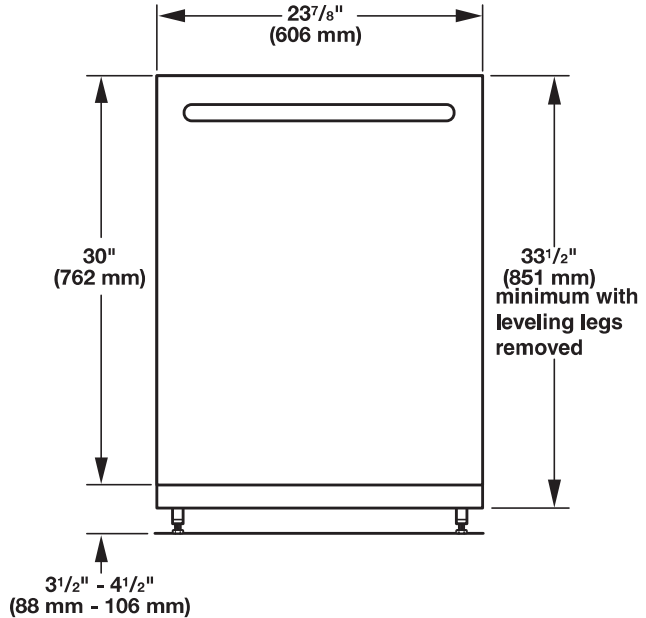

For 4" (100 mm) toe kick, height of cabinet opening is 34 1/2" (863 mm).

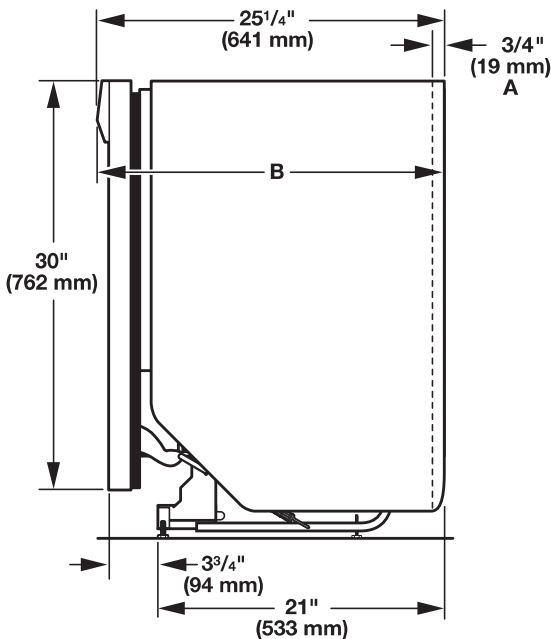


- A. Insulation may be compressed (not used on all models).
- B. Door handles may protrude forward of the face of the dishwasher, (varies by model).

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

CABINET OPENING DIMENSIONS

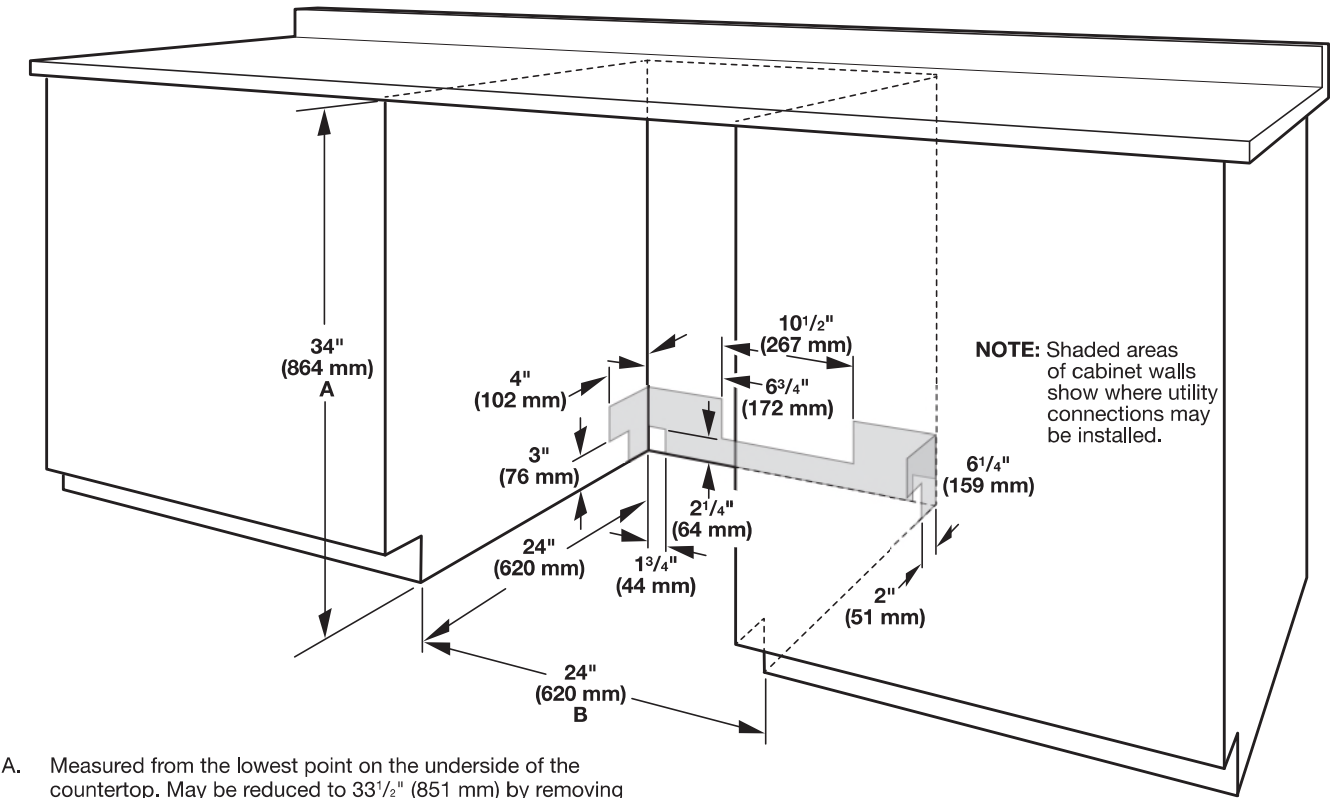

- A. Measured from the lowest point on the underside of the countertop. May be reduced to 33 1/2" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.
- B. Minimum, measured from narrowest point of opening.



LG LAUNDRY

DLE3600_ / DLG3601_
7.4 cu.ft. Front Load Dryer with Built-In Intelligence

DV3 LOT 118 - DRYER - DLG3601W



- 7.4 cu. ft. Ultra Large Capacity
- AI Fabric Sensor/ Smart Pairing™
- LG ThinQ® Technology / Proactive Customer Care
- Tempered Glass Door
- FlowSense™ Duct Clogging and Lint Filter Indicators
- ENERGY STAR® Certified
- Closet Depth
- LoDecibel™ Quiet Operation
- Reversible Door
- Wrinkle Care Option

AVAILABLE COLORS



LG ThinQ®

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



SUMMARY		CONVENIENCE FEATURES		BTU Rating	
Type	Front Load Dryer	3 Minute Installation Check	Yes	Electric: 10,000	Gas: 20,000
Capacity	7.4 cu. ft.	LoDecibel™ Quiet Operation	Yes	OPTIONS	
Matching Washer	WM3600HWA, WM3600HVA	End of Cycle Signal	Yes	LP Conversion Kit	383EEL3002D
Sensor Dry	Yes	Reversible Door	Yes	Side Venting Kit	3911EZ9131X
Color	White (W), Graphite Steel (V)	FlowSense™ Duct Clogging Indicator	Yes	Pedestal	WDP4W, WDP4V
APPEARANCE		Wrinkle Care Option	Yes	Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 1/2 D with door open)
Intelligent Electronic Controls with LED Display	Yes	Child Lock	Yes	DIMENSIONS (ELECTRIC)	
Dial-A-Cycle™	Yes	Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Product (WxHxD)	27" x 39" x 30 1/8"
Touch Buttons	Yes	4 Adjustable Legs	Yes	Depth with Door Open	51 3/8"
DRYER PROGRAMS		Remaining Time Display/Status Indicator(s)	Yes	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
No. of Programs	10	ThinQ® TECHNOLOGY		Weight (Product)	121.9 lbs.
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Small Load, Perm Press, Delicates, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded	SmartDiagnosis™ (v3.0)	Yes	Weight (Carton)	140.2 lbs
No. of Options	9	Wi-Fi	Yes	DIMENSIONS (GAS)	
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, Remote Start, Signal	Remote Start and Cycle Monitor	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
Temperature Settings	High, Med.High, Medium, Low, Ultra Low	Energy Monitoring	Yes (Wi-Fi)	Depth with Door Open	51 3/8"
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	ENERGY		Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Manual Dry Times	60 min., 40 min., 30 min., 20 min., More Time/Less Time	ENERGY STAR® Certified	Yes	Weight (Product)	136.03 lbs
FABRIC CARE FEATURES		CEF	3.94 (Electric), 3.49 (Gas)	Weight (Carton)	151.7 lbs
A.I Dry	Yes	MATERIALS AND FINISHES		LIMITED WARRANTY	
Sensor Dry	Yes	Aluminized Alloy Steel Drum	Yes	Parts & Labor	1 Year
Precise Temperature Control with Variable Heater	Yes	Tub Rear	Painted	Drum	3 Years
		Cabinet	Painted Steel	UPC CODES	
		Door	Tempered Glass Door	DLE3600W (White)	048231028332
POWER SOURCE		All Available Colors	White (W), Graphite Steel (V)	DLG3601W (White)	048231028349
Ratings	CSA Listed			WM3600HWA (White)	048231028264
Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)			DLE3600V (Graphite Steel)	048231028318
Type	Electric, Gas			DLG3601V (Graphite Steel)	048231028325
				WM3600HVA (Graphite Steel)	048231028257

Initial Initial
B B

DV3 LOT 118 - FRIDGE - WRS321SDHZ



33-inch Wide Side-by-Side Refrigerator - 21 cu. ft.

WRS321SDHZ





Get purposefully-designed storage spaces for items you use most in this side-by-side refrigerator. An in-door can caddy frees up shelf space while frameless glass shelves in the refrigerator with ice and water dispenser lets you store more items on each shelf for loading flexibility. The deli drawer refrigerator gives you plenty of space to store meat and cheese, too.



Available Finishes/Colours

	WRS321SDHB Black		WRS321SDHV Black Stainless
	WRS321SDHW White		WRS321SDHZ FingerPrint Resistant Stainless Steel

Manuals & Literature:

-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Installation Instructions](#)
-  [Use and Care](#)
-  [Warranty](#)

Top Features

Adjustable Gallon Door Bins

Move these adjustable bins anywhere in the door for increased loading flexibility when and where you need it.

Can Caddy

Free up shelf space and get more flexibility using this in-door can caddy that holds either cans or bottles.

LED Interior Lighting

Keep food looking as good as it tastes. Light is cast inside the refrigerator so food looks like it's supposed to.

Hidden Hinges

Get a seamless look with door hinges that stay out of sight.

Dimensions

Depth	33 5/8
Height	66 5/8
Width	32 3/4

Configuration and Overview

Advance Foam Insulation	NA
Counter Depth	No
Number of Doors	2

Compatibility

Connectivity	No
Works With	No

Details

Advance Foam Insulation	NA
Cooling Type	Single Evaporator

Details

Counter Depth	No
---------------	----


Misc.

Accessory Relationships	Yes
Home Delivery	Yes
Will Call	Yes


Exterior

Base Grille Color	Grey
Cabinet Color	Grey
Cabinet Finish	Textured
Door Color	Fingerprint Resistant Stainless Steel
Door Finish	Smooth
Door Opening	NA
Door Style	Contour

Initial



Initial



SC(B)519 | ALITO Collection



Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel



Long-Lasting
LED Lights



Time-Delay
OFF Feature



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
SC51924	Stainless Steel	6"	Mesh	24"	550
SC51930	Stainless Steel	6"	Mesh	30"	550
SC51936	Stainless Steel	6"	Mesh	36"	550
SCB51924	Stainless Steel	6"	Baffle	24"	550
SCB51930	Stainless Steel	6"	Baffle	30"	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.



Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

SC(B)519 | ALITO Collection



Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

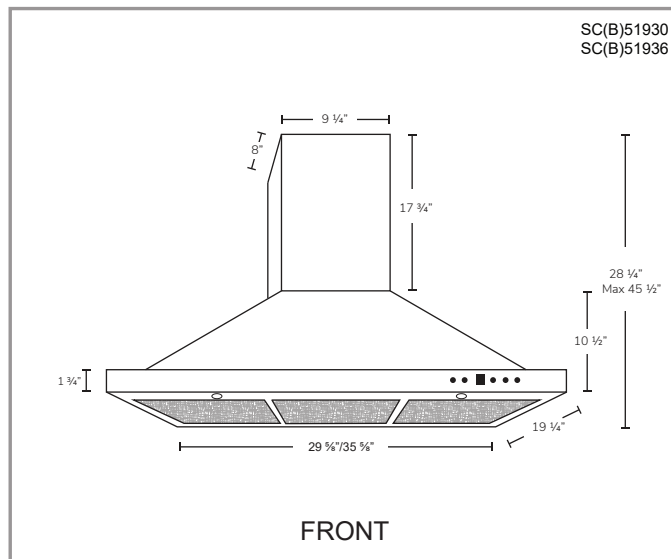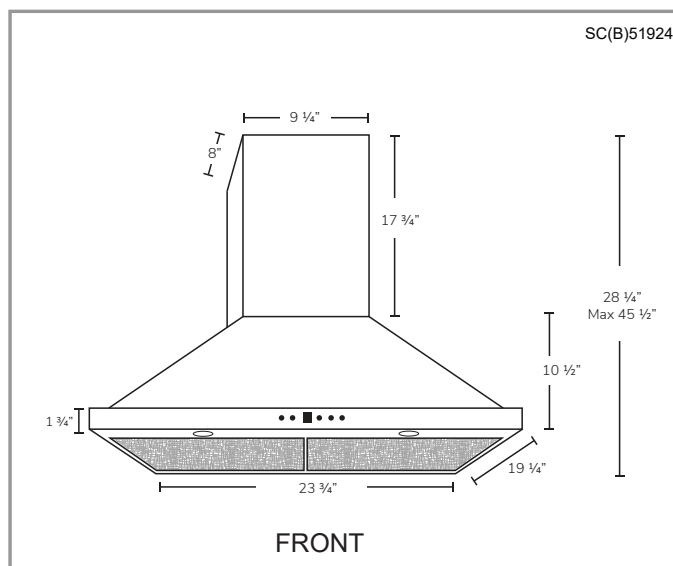

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters
 - Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
 - Widths: 24", 30", 36"
 - Charcoal Filter: CF01
- *Charcoal filter only available for 30" and 36"

Specifications

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> ▪ Air Flow Volume: 550 CFM ▪ Electrical Connection: 120 V/60 Hz ▪ Power Consumption: 300 Watts | <ul style="list-style-type: none"> ▪ Current: 2.5 Amps ▪ Fan Speed: 1599 RPM ▪ Fan Type: Centrifugal Blower | <ul style="list-style-type: none"> ▪ Finishes: Stainless Steel ▪ Ducting: 6" Round ▪ Noise Level: Min. 2 Sones
Max. 6 Sones |
|--|--|--|




DV3 LOT 118 - MICROWAVE - YWMT50011KS

DIMENSIONS

MICROWAVE OVEN
PRODUCT DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS	
	YWMT50011K / YKMBT50011K		YWMT55511K / YKMBT55511K	
Unit of Measurement	in	cm	in	cm
Overall width of microwave (A)	27 ¹³ / ₁₆	70.7	27 ¹³ / ₁₆	70.7
Overall height of microwave (B)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2
Height of the door (C)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2
Depth without door (D)	16 ³ / ₈	41.6	16 ³ / ₈	41.6
Depth with door (E)	18	45.7	18	45.7
Depth with door open 90° (F)	42 ¹ / ₈	107	42 ¹ / ₈	107
Distance from fixed wall to door open 90° (G)	1/2	1.3	1/2	1.3

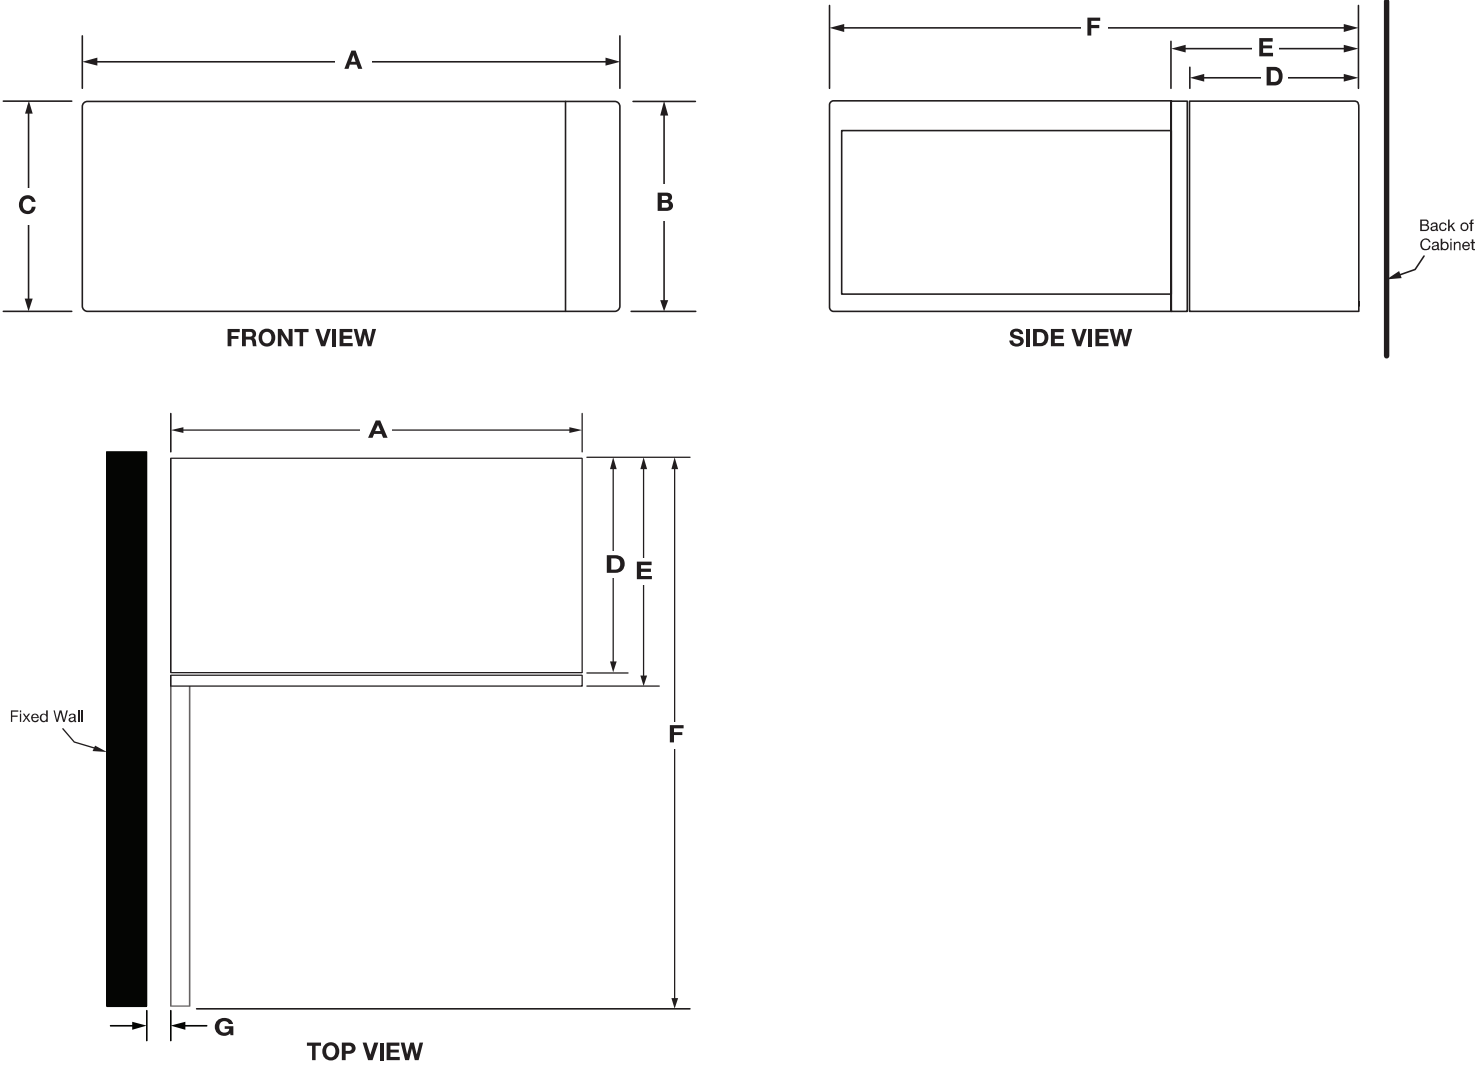

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.


W11436614A

Initial Initial
YB Aja


DIMENSIONS

TRIM KIT FRAME DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS	
	YWMT50011K / YKMBT5011K		YWMT55511K / YKMBT5511K	
Unit of Measurement	in	cm	in	cm
Overall width of trim kit frame (H)	29 ³ / ₄	75.6	29 ³ / ₄	75.6
Overall height of trim kit frame (J)	14	35.6	19 ¹ / ₈	48.6
Trim kit frame inner opening height (K)	10 ⁹ / ₁₆	26.9	10 ⁹ / ₁₆	26.9
Width of trim kit inner opening (L)	28	71.1	28	71.1
Depth of trim kit frame (M)	2 ⁵ / ₁₆	5.8	2 ⁵ / ₁₆	5.8
Trim kit frame thickness (visible) (N)	7/8	2.2	7/8	2.2

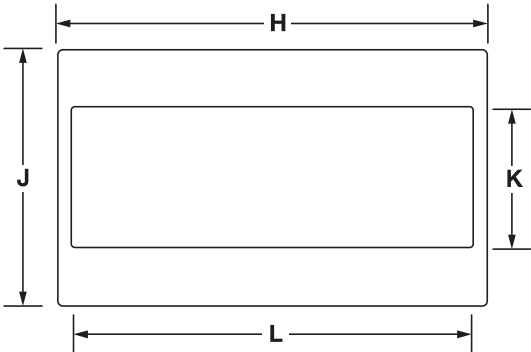

FRONT VIEW

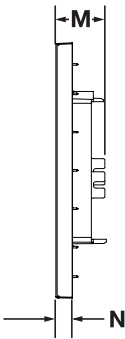




SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

DIMENSION AS INSTALLED

MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS	
	YWMT50011K / YKMBT5011K		YWMT55511K / YKMBT5511K	
Opening/Clearance Measurement	in	cm	in	cm
Height of the door (A)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2
Overall heigth of trim kit frame (B)	14	35.6	19 ¹ / ₈	48.6
Overall heigth of microwave (C)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2
Overall height with rail (D)	11 ⁹ / ₆₄	28.3	11 ⁹ / ₆₄	28.3
Depth with door (E)	18	45.7	18	45.7
Depth with door open 90° (F)	42 ¹ / ₈	93.7	42 ¹ / ₈	93.7
Trim kit frame overhang-upper frame (G)	1	2.6	1	2.6
Trim kit frame overhang-lower frame (H)	1	2.6	1	2.6
Overall width of trim kit frame (J)	29 ³ / ₄	75.6	29 ³ / ₄	75.6
Overall height of microwave (K)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2
Overall height of trim kit frame (L)	14	35.6	19 ¹ / ₈	48.6
Trim kit frame overhang-left frame (M)	5/8	1.6	5/8	1.6
Trim kit frame overhang-right frame (N)	5/8	1.6	5/8	1.6
Distance from fixed wall to door open 90° (P)	1/2	1.3	1/2	1.3

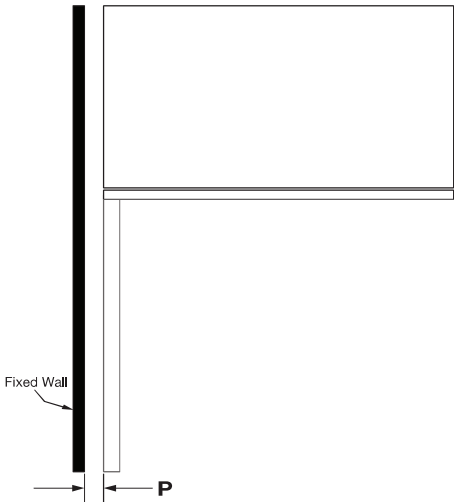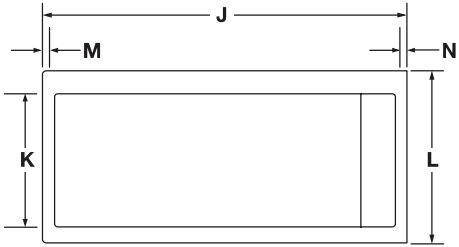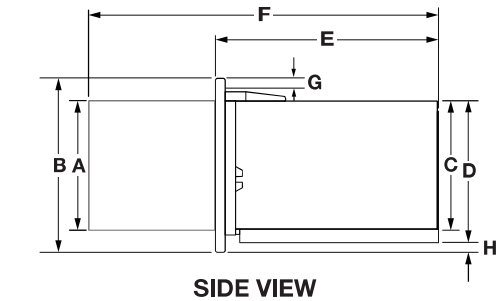


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

MICROWAVE INTERIOR CAVITY DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS	
	YWMT50011K / YKMBT5011K		YWMT55511K / YKMBT5511K	
Unit of Measurement	in	cm	in	cm
Cavity Height (J)	7	17.7	7	17.7
Cavity Height from the Highest Point of the Turntable (K)	6 ⁷ / ₈	17.5	6 ⁷ / ₈	17.5
Cavity Width (L)	18 ⁷ / ₈	48	18 ⁷ / ₈	48
Cavity Depth (M)	14	35.6	14	35.6
Turntable Diameter (N)	12	30.5	12	30.5

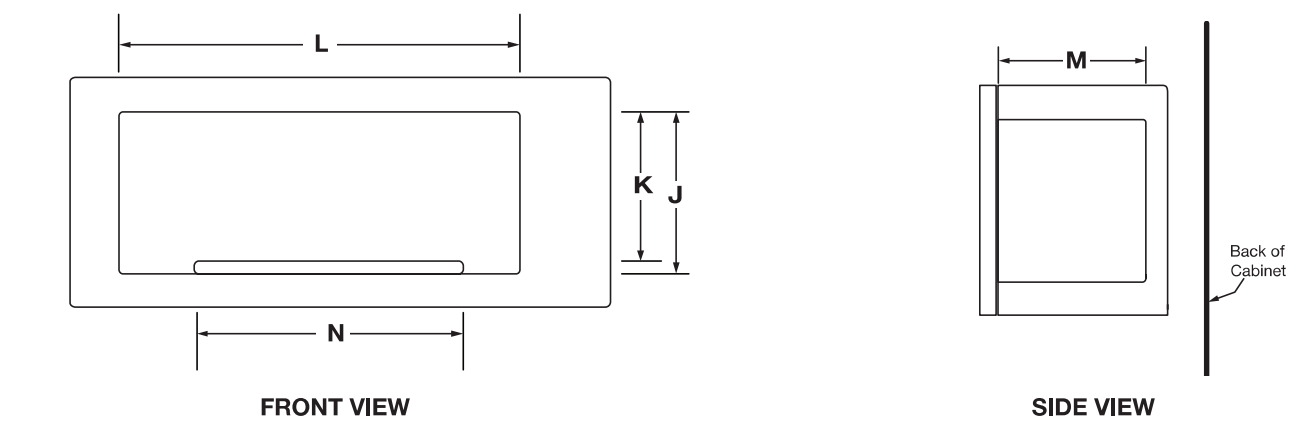


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONES

OPENING/CLEARANCE DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS		STANDARDTRIM KIT MODELS	
	YWMT50011K / YKMBT5011K		YWMT55511K / YKMBT5511K	
Unit of Measurement	in	cm	in	cm
Width of cabinet opening (min.)* (A)	30	76.2	30	76.2
Width of cutout (B)	28½	72.4	28½	72.4
Height of cutout (C)	12	30.5	17⅛	43.5
Top of cutout to bottom of upper cabinet door (min.) (D)	2	5.1	2	5.1
Bottom of cutout to top of lower cabinet door (min.) (E)	1⅑⁄₁₆	4	1⅑⁄₁₆	4
Depth of cutout (min.) (F)	21¾	55.2	21¾	55.2
Bottom of cutout to floor (min.) (G)	36	91.4	36	91.4
Back of the microwave oven to the surface of junction box (H)	4" (10.2 cm) < H < 40" (102 cm)			
Recommended junction box location (e)	Upper right quadrant			
Can this product be installed flush? Flush refers to the appliance not protruding past the cabinet depth. (Y/N) (J)	N			

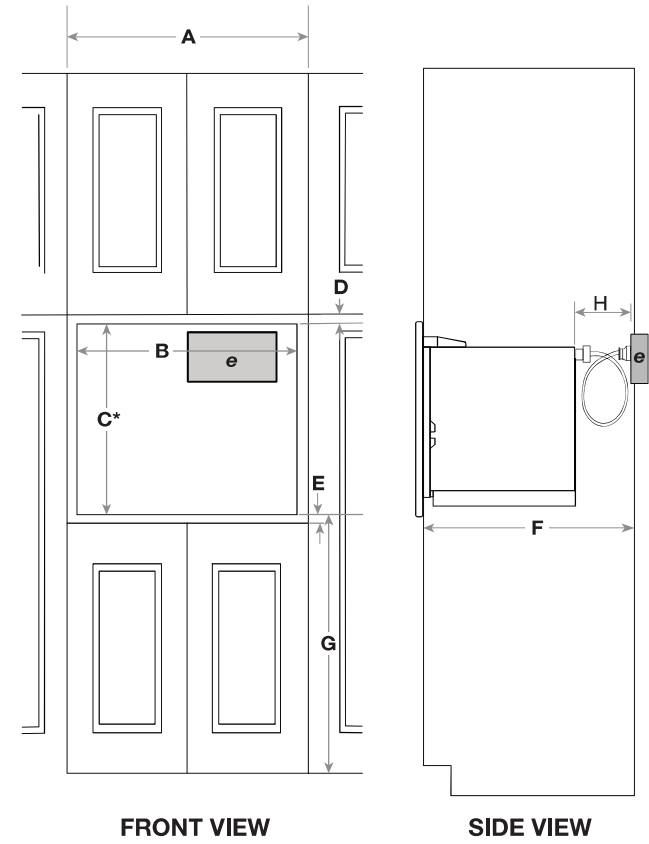


ELECTRICAL REQUIREMENTS

120 V, 60 Hz, AC only, 15 or 20 A fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Use a grounded 3 prong outlet. Do not use an extension cord.

LOCATION REQUIREMENTS

- This is a built-in appliance. Do not use as countertop microwave oven.
- Minimum of 36" from the floor to cut-out floor.
- Complete enclosure around the recessed portion of the microwave oven.
- This microwave oven must be installed into a wood cabinetry. The location must provide:
 1. Cutout opening that is plumb and square.
 2. Cutout floor that is solid, level and flush with bottom of cabinet cutout.
 3. Support for weight of at least 150 lbs (68 kg), which includes microwave oven and items placed inside.

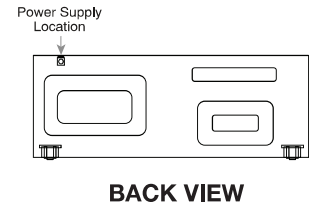

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

HOME APPLIANCES



LG COOKING

LSGL6335
6.3 cu ft. Smart Wi-Fi Enabled ProBake Convection®
InstaView™ Gas Slide-in Range with Air Fry



- 6.3 cu ft. Capacity
- Built-In Air Fry with ProBake Convection®
- EasyClean® + Self Clean
- 20K BTU on Edge-to-edge cooktop
- ThinQ® app with Proactive Customer Care

AVAILABLE COLORS

-  PRINTPROOF™ STAINLESS STEEL
-  PRINTPROOF™ BLACK STAINLESS STEEL



LG ThinQ®

Enjoy new ways to control your home with LG smart appliances

- Install Setup Quick Check
- Preventative Alerts & Guidance
- Performance & Usage Reports




SUMMARY		OVEN		SMART FEATURES	
Cooktop Type	Sealed	Oven Type	Single Oven	Wi-Fi Connect	Yes
Number of Cooktop Burners	5	Oven Cooking System	ProBake Convection®	Proactive Customer Care	Yes
Oven Type	Single Oven	Convection Conversion Auto-Adjust	Yes	Smart Diagnosis™	Yes
Oven Cooking System	ProBake Convection®	Oven Cleaning Type	EasyClean® + Self Clean	Works with	LG ThinQ®
Oven Capacity (cu. ft.)	6.3	Self-Clean Oven Door Lock	Automatic		Amazon Alexa
Oven Cleaning Type	EasyClean® + Self Clean	Oven Capacity (cu. ft.)	6.3		Google Assistant
Drawer Type	Storage	Broiler Element Power	13,500 BTU		SIDECHEF
Size in Width (in.)	30	Bake Element Power	19,000 BTU	INCLUDED ACCESSORIES	
APPEARANCE		Number of Rack Positions	7		
Color	PrintProof™ Stainless Steel, PrintProof™ Black Stainless Steel	Number of Oven Racks	2		
Control Type	SmoothTouch™ Glass	Oven Rack Type	1 Offset, 1 Heavy Duty		
Knobs	Stainless Steel Appearance, Weighted	Drawer Type	Storage	POWER/RATINGS	
Oven Door Feature	InstaView & WideView™ Window	Oven Modes	Bake, Conv. Bake, Conv. Roast, Broil High, Broil Low, Warm, Proof, Frozen Meal, Air Fry, Slow Cook, EasyClean, SelfClean	Volts/Hertz/Amps	120V/60Hz/4.2A
Cooktop Finish	EasyClean® Stainless Steel, Porcelain Enamel		Halogen	DIMENSIONS & WEIGHT	
COOKTOP		CONTROL FEATURES		Cabinet Width (in.)	30
Cooktop Type	Sealed	Kitchen Timer	Yes	Overall Depth (in.) - including handle	29 9/32 (743.9mm)
EasyClean Cooktop	Yes (PrintProof™ Stainless Steel)	Timed Cook	Yes	Overall Height (in.)	37 1/8 (943.0mm)
Number of Cooktop Burners	5	Oven Control Lock	Yes (Key)	Overall Width (in.)	30 (761.8mm)
Element/Burner - Left Front	18,000 BTU	Sabbath Mode	Yes	Product Weight (lb)	157.7
Element/Burner - Left Rear	9,100 BTU	UPC CODES		Shipping Weight (lb)	200.3
Element/Burner - Right Front	20,000 BTU UltraHeat™			Shipping Dimensions (W x H x D) (in.)	32 1/2" x 44" x 30 1/2"
Element/Burner - Right Rear	5,000 BTU			LSGL6335F (PrintProof™ Stainless Steel)	
Element/Burner - Center	10,000 BTU Oval				
Cooktop Burner Grate Features	Edge-to-edge continuous grates	LSGL6335D (PrintProof™ Black Stainless Steel)		048231341882	
Cooktop Burner Grate Material	Cast Iron			048231341899	

*These partners may not yet be available at the time of purchase of this product, please continue to check for app updates

Checking Adjustments

- 1 Place the level diagonally on the oven rack, and check each direction for level.
 - First check direction ①. Then check direction ②.

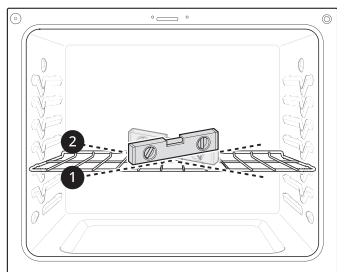

- 2 If the level doesn't show that the rack is level, adjust the leveling legs with a wrench.

Connecting Gas

Providing Adequate Gas Supply


- Your range is designed to operate at a pressure of 5" of water column on natural gas or 10" of water column on LP.
- Make sure you are supplying your range with the type of gas for which it is configured.
- This range is convertible for use on natural or LP gas. When using this range on LP gas, conversion must be made by a qualified LP installer before attempting to operate the range.
- For proper operation, the pressure of natural gas supplied to the regulator must be between 5" and 13" of water column.
- For LP gas, the pressure supplied to the regulator must be between 10" and 13" of water column. When checking for correct operation of the regulator, the inlet pressure must be at least 1" more than the operating (manifold) pressure as given above.
- The pressure regulator located at the inlet of the range must remain in the supply line regardless of which type of gas is being used.
- A flexible metal appliance connector used to connect the range to the gas supply line should have an I.D. of 5/8" and a maximum length of 5 feet. In Canada, flexible connectors must be single wall metal connectors less than 6 feet in length.

Connecting the Range to Gas

⚠ WARNING

- Isolate the range from the gas supply system by closing its individual shut-off valve during any pressure testing of the gas supply system at test pressures equal to or less than 1/2 psi (3.5 kPa).
- The appliance and its individual shut-off valve must be disconnected from the gas supply piping system during any pressure testing of that system at test pressures in excess of 1/2 psi (3.5 kPa).
- Shut off the range gas supply valve before removing the old range and leave it off until the new hook-up has been completed.
- Because hard piping restricts movement of the range, the use of a CSA International-certified flexible metal appliance connector should be used unless local codes require a hard-piped connection.
- A manual valve shall be installed in an accessible location in the gas piping external to the appliance for the purpose of turning on or shutting off gas to the appliance.
- Never reuse an old connector when installing a new range.
- To protect against gas leaks, use a qualified pipe joint sealant on all external threads.

- 1 Install a male 1/2" or 3/4" flare union adapter to the NPT internal thread of the manual shut-off valve, taking care to back-up the shut-off valve to keep it from turning.
- 2 Install a male 1/2" flare union adapter to the 1/2" NPT internal thread at the inlet of the pressure regulator. Use a backup wrench on the pressure regulator fitting to prevent damage.
 - Check that the gas pressure regulator valve is in the open position.

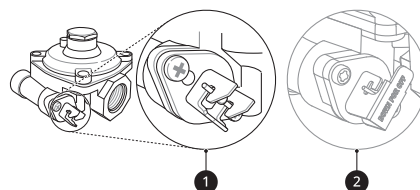

- ① Lever's open position
- ② Lever's closed position

NOTE

- The gas pressure regulator valve is open when shipped. If the range does not work properly after installation, make sure the regulator valve is still open.


- Connect a flexible metal appliance connector to the adapter on the range. Position the range to permit connection at the shut-off valve.
- When all connections have been made, be sure all range controls are in the OFF position and the pressure regulator valve is open before turning on the main gas supply valve.
 - Gas leaks may occur in your system and create a hazard. Gas leaks may not be detected by smell alone.
- Check all gas connection joints and fittings for leaks with a non-corrosive leak detection fluid, then wipe off.
 - Gas suppliers recommend you purchase and install a UL approved gas detector. Install and use in accordance with the installation instructions.

⚠ WARNING

- Do not use a flame to check for gas leaks.

Flexible Connector Hookup


Have the installer show you the location of the range gas shut-off valve and how to shut it off if necessary.

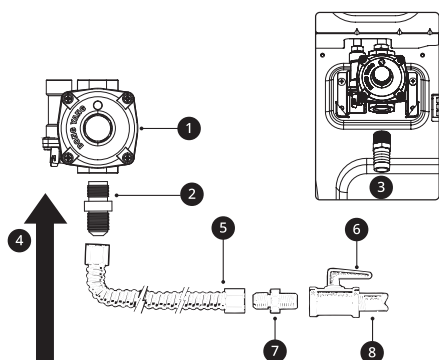

- Pressure regulator
- 1/2" Adapter

- 1/2" Adapter
- Gas Flow into Range
- Flex connector (6 ft. max.)
- Gas shut-off valve
- 1/2" Adapter
- 1/2" or 3/4" Gas pipe

Pressure Regulator Position

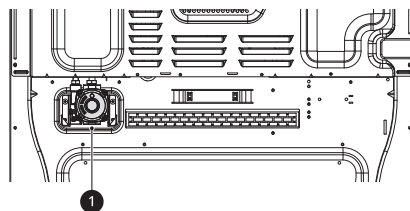

- Pressure Regulator

Adjusting Air Shutters (for LP Conversions)

The range comes from the factory with the air shutters adjusted for proper air flow for natural gas. If converted to LP, follow the instructions provided in the conversion kit to properly adjust the air shutters. LP conversion must be performed by a qualified technician.

Connecting Electricity

Electrical Requirements

120 Volt, 60 Hz, properly grounded dedicated circuit protected by a 15 or 20 Amp circuit breaker, or slow blow fuse.

If an external electrical source is utilized, the appliance, when installed, must be electrically grounded in accordance with local codes or, in the absence of local codes, with the National Electrical Code, NFPA70 or the Canadian Electric Code, CSA C22.1-02.


Grounding

⚠ WARNING

- For personal safety, this appliance must be properly grounded.

⚠ WARNING

- Do not, under any circumstances, cut or remove the third (ground) prong from the power cord.
- The customer should have the wall receptacle and circuit checked by a qualified electrician to make sure the receptacle is properly grounded.
- The power cord of this appliance is equipped with a 3-prong (grounding) plug which mates with a standard 3-prong grounding wall receptacle to minimize the possibility of electric shock hazard from this appliance.
- Where a standard two-prong wall receptacle is encountered, it is the personal responsibility and obligation of the customer to have it replaced with a properly grounded three-prong wall receptacle.
- Ensure proper ground ❶ exists before use.



- Do not use an adapter plug. Disconnecting of the power cord places undue strain on the adapter and leads to eventual failure of the adapter ground terminal.
- Installation must conform with local codes or, in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.1/NFPA 54 or, in Canada, the Natural Gas and Propane Installation Code, CSA B149.1.

NOTE

- Ground Fault Circuit Interrupters
 - GFCI's are not required or recommended for gas range receptacles.
 - Ground Fault Circuit Interrupters (GFCI's) are devices that sense leakage of current in a circuit and automatically switch off power when a threshold leakage level is detected. These devices must be manually reset by the consumer. The National Electrical Code requires the use of GFCI's in kitchen receptacles installed to serve countertop surfaces.
 - Performance of the range will not be affected if operated on a GFCI-protected circuit but the occasional resetting of the circuit can become an annoyance.


Surface Burners

Assembling the Surface Burners

⚠ CAUTION

- Do not operate the burners without all parts in place.

- 1 Place the burner caps and heads on the cooktop.
 - There are one small, one medium, one large, one oval(center), and one extra large burner head and cap.
- 2 Make sure that the caps and heads are placed in the correct locations.
- 3 Make sure the hole in the burner head is positioned over the electrode.

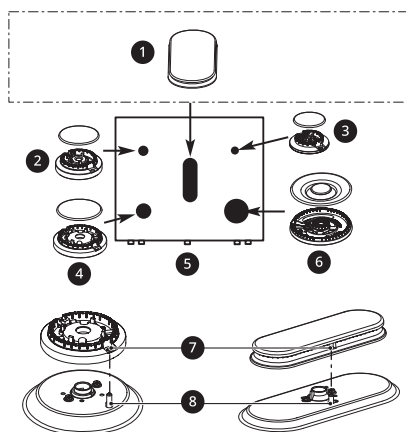

- ❶ Oval (Center) burner head/cap assembly
- ❷ Medium burner head and cap
- ❸ Small burner head and cap
- ❹ Large burner head and cap
- ❺ Front of range
- ❻ Dual burner head and cap
 - LSG6337* model only
Extra Large burner head and cap
 - LSG6335* model only
- ❼ Hole
- ❽ Electrode

LG LAUNDRY

WM3600H_A

4.5 cu.ft. Front Load Washer with Built-In Intelligence & Steam Technology

- 4.5 cu. ft. Ultra Large Capacity
- AI Fabric Sensor/ Smart Pairing™
- AAFA certified LG washer
- LG ThinQ® Technology / Proactive Customer Care
- Tempered Glass Door
- ColdWash™ Technology
- Direct Drive Motor 10-Year Limited Warranty
- ENERGY STAR® Certified
- Closet Depth
- NeveRust™ Stainless Steel Tub

AVAILABLE COLORS



LG ThinQ®

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



SUMMARY		Max RPM	1300	Control Panel	Plastic
Type	Front Load Washer	Water Levels	Load Sensing	Top Plate	Painted
Capacity (cu. ft.)	4.5 cu. ft.	No. of Soil Levels	5	Door / Rim	Glass/White Rim (White), Glass/ Silver Rim (Graphite Steel)
Matching Electric Dryer	DLE3600W, DLE3600V	FABRIC CARE FEATURES		Door Cover	Tinted Cover
Matching Gas Dryer	DLG3601W, DLG3601V	AI DD™	Yes	All Available Colors	White (W), Graphite Steel (V)
Color	White (W), Graphite Steel (V)	Steam Technology	Yes	CERTIFICATION	
APPEARANCE		Allergiene™ Cycle	Yes	AAFA	Yes
Hard Buttons	Yes	Sanitary Cycle	Yes	POWER SOURCE	
Touch Buttons	Yes	ColdWash™ Option	Yes	Ratings	UL Listed
Dial-A-Cycle™	Yes	SenseClean™ System	Yes	Electrical Requirements	120V, 10 Amps
ENERGY		CONVENIENCE FEATURES		Type	Electric
ENERGY STAR® Most Efficient 2019	Yes	TrueBalance™ Anti-Vibration System	Yes	OPTIONS/ACCESSORIES	
ENERGY STAR® Qualified	Yes	4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	Pedestal	WDP4W, WDP4V
CEE Tier	2	LoDecibel™ Quiet Operation	Yes	Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 9/16 D with door open)
IMEF	2.92	End of Cycle Signal	Yes	LG Sidekick™ Pedestal Washer	WD100CW, WD100CV
IWF	2.9	LoadSense	Yes	LG Sidekick™ Pedestal Washer (WxHxD)	27 x 14 1/8 x 30 3/4 (50 9/16 D with door open)
WASH PROGRAMS		Child Lock	Yes	Stacking Kit	KSTK1
No. of Programs	10	Auto Suds Removal	Yes	DIMENSIONS	
Wash Programs	Normal, Heavy Duty, Bedding, Allergiene™, Tub Clean, Perm. Press, Delicates, Speed Wash, Rinse + Spin, Downloaded	Leveling Legs	4 Adjustable Legs	Product (WxHxD)	27" x 39" x 30 1/4"
WASH OPTIONS		Easy Loading TilTub™	Yes	Depth with Door Open	(55" D with door open)
No. of Options	9	ThinQ® TECHNOLOGY		Carton (WxHxD)	29 23/32" x 41 27/32" x 31 17/32"
Options	Steam, Delay Wash, Pre-Wash, Extra Rinse, Cold Wash, Wi-Fi, Remote Start, Spin Only, Control Lock	SmartDiagnosis™ (v3.0)	Yes	Weight (Product/Carton)	187.4 / 209.8 lbs
WASH DETAILS		Wi-Fi	Yes	LIMITED WARRANTY	
No. of Wash/Rinse Temps	5	Remote Start and Cycle Monitor	Yes	Parts and Labor	1 Year
Wash/Rinse Temps	Extra Hot, Hot, Warm, Cold, Tap Cold	Energy Monitoring	Yes	Direct Drive Motor	10 Years
No. of Spin Speeds	5	MOTOR AND AGITATOR		Drum	3 Years
Spin Speeds	Extra High, High, Medium, Low, No Spin	Motor Type	Inverter Direct Drive Motor	UPC CODES	
		Axis	Horizontal	WM3600HWA (White)	048231028264
		MATERIALS AND FINISHES		WM3600HVA (Graphite Steel)	048231028257
		NeveRust™ Stainless Steel Drum	Yes		
		Cabinet	PCM		