




see what Delta can do™

## KITCHEN FAUCETS

- ☐ Keele™ Pull-Down Kitchen Faucet
- ☐ Single Handle Deck Mount
- ☐ MagnaTite® Magnetic Docking

SUBMITTED MODEL NO.: \_\_\_\_\_

SPECIFIC FEATURES: \_\_\_\_\_

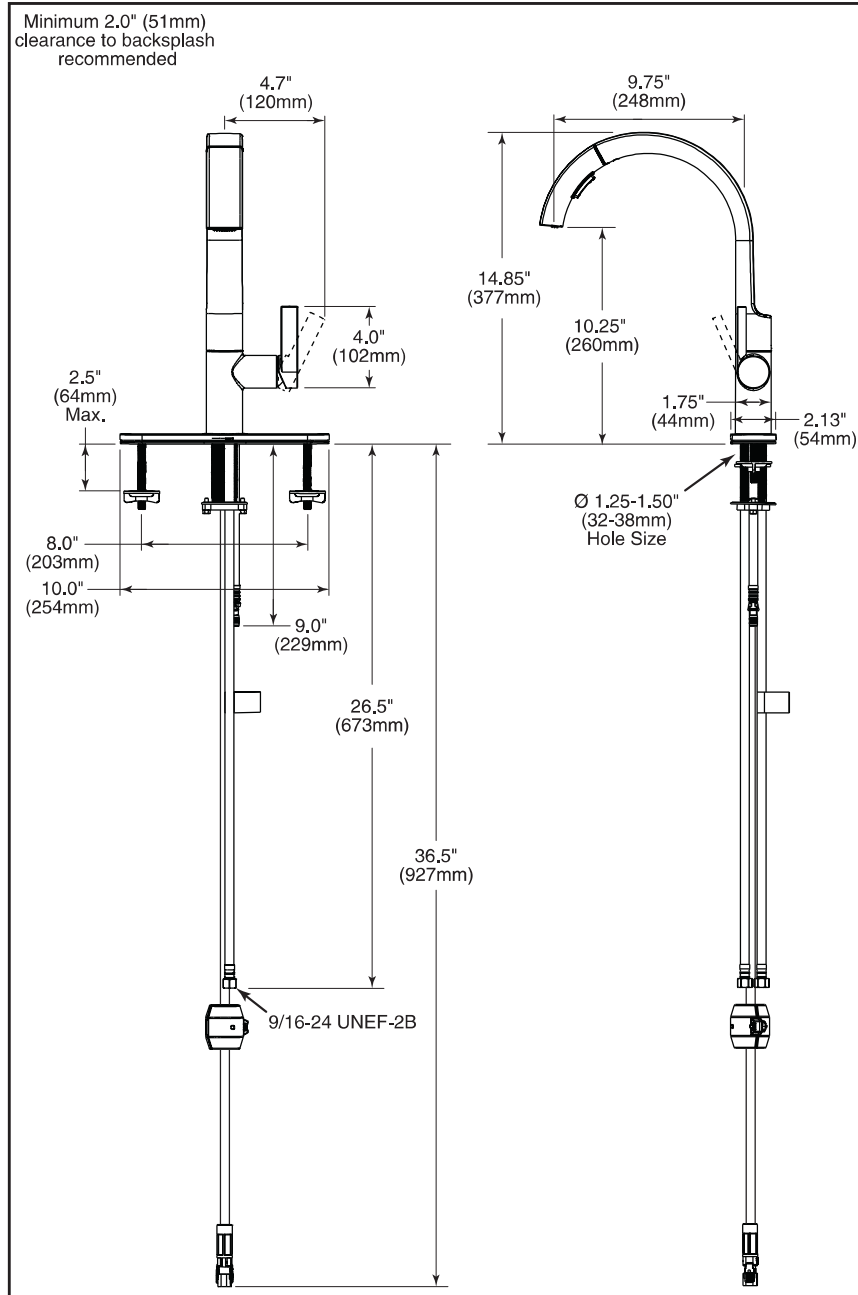

### STANDARD SPECIFICATIONS:

- Single handle kitchen faucet
- One or three hole mount (RP63209 Escutcheon optional, not included)
- 8" centres with optional 10" long escutcheon (ordered separately)
- 14.85" (377 mm) high, 9.75" (248 mm) spout length, swings 360°
- Pull-down spout operates in an aerated or spray mode via an easy push toggle button
- MagnaTite® magnetic docking
- Touch-Clean® spray head
- Quick Snap® hose installation
- Dual integral check valves
- Spout is connected to valve body with a 59" (150 cm) long hose
- Ceramic cartridge
- Standard with 3/8" compression
- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa
- Maximum flow rate 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Verified compliant with 0.25% weighted average Pb content regulations
- Indicates compliance to ICC/ANSI A117.1



## WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

▲ Designate Proper Finish Suffix

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

**Delta Faucet Company**  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
55 E. 111th Street, Indianapolis, IN 46280  
© 2023 Delta Faucet Company

**DSP-K-940LF, Rev. A**

# AVENAL TWO PIECE TOILET

4.8LPF / 1.28GPF OR 3.0LPF / 0.8GPF

- 4772HNW Bowl
- 4771HNWU Unlined Tank

PRODUCT SPECS

- High efficiency dual flush toilet
- 4.8LPF / 1.28GPF or 3.0LPF / 0.8GPF
- Elongated bowl with concealed skirted trapway
- Vitreous china
- 16 5/8" Plus Height for greater comfort
- Chrome rectangular top button
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- High quality Fluidmaster tank fittings
- 3" Flapper
- Siphon jet flush action
- Water surface: 8" x 5 3/4" (205mm x 145mm)
- Decorative soft white side caps included
- Slim smooth close toilet seat included

DIMENSIONS

402mm W x 722mm D x 797mm H  
15 7/8" W x 28 3/8" D x 31 3/8" H

COMPLIANCE CERTIFICATIONS

- Meets or exceeds the following:
- IAPMO cUPC
  - US EPA WaterSense
  - ASME A112.19.2 / CSA B45.1
  - MaP Premium Tested 1000g
  - LEED Compliant

SHIPPING

|              |         |
|--------------|---------|
| <b>Bowl:</b> |         |
| Cube         | 6.29    |
| GW           | 100 lbs |
| <b>Tank:</b> |         |
| Cube         | 1.69    |
| GW           | 37 lbs  |




TO BE SPECIFIED

- Colour:
- Soft White

**NOTES:** The drawing below shows a rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply line not included with fixture and must be ordered separately.

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

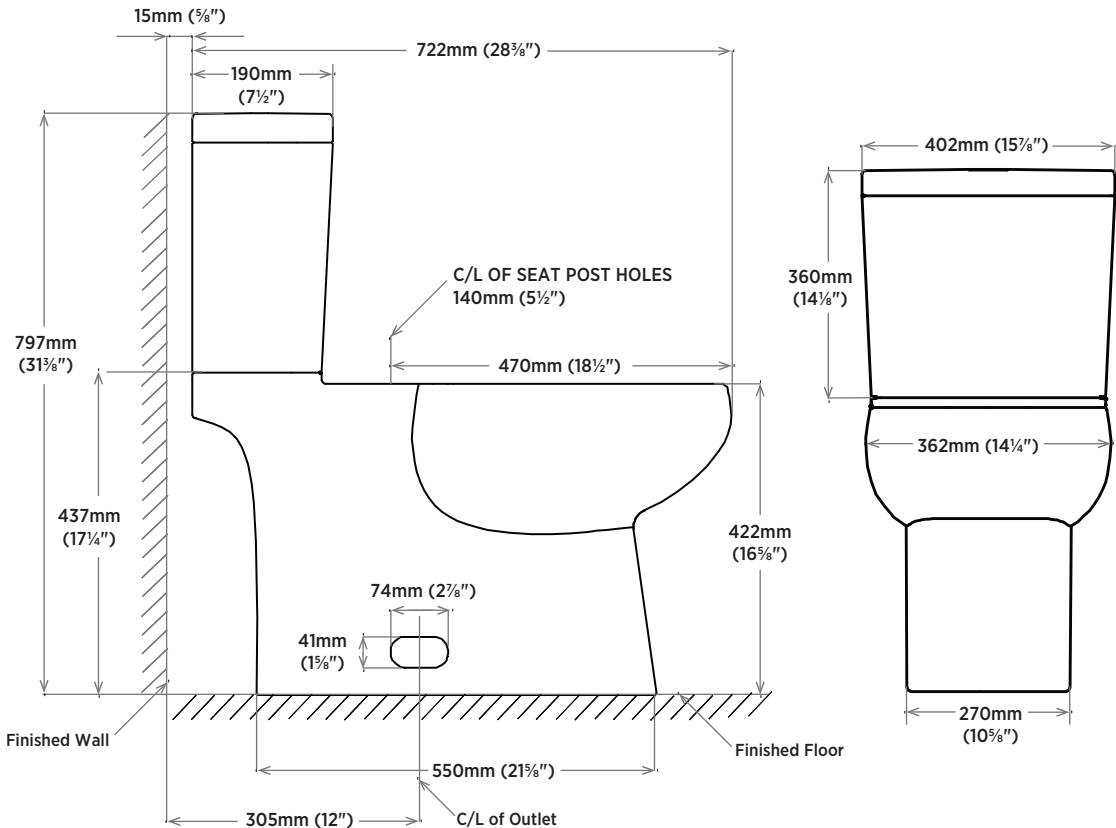

Initial  
EE RF