

CLIENT: VALECRAFT

ADDR.: 825 BRADLEY STND,

SL #: Job

Phone:

Mobile:

LOT:PST3-11

OUT BY: ABBY LOOV

DATE: 23/09/20

Email :

PST3-11

* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes.

* Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions.

* Appliances in elevations and plans are generic templates and may not reflect actual selections.



PG#

1 of 3

Sheet 1


potvin
KITCHENS & CABINETS

JAN 21, 2021

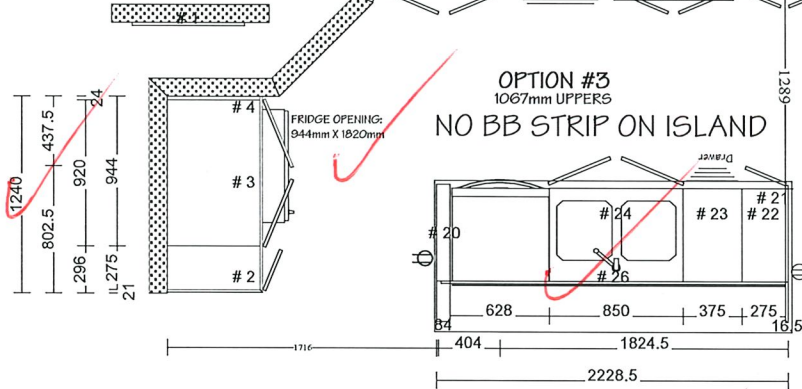


Room Name	
OPTION #3	
COUNTERTOPS	
COUNTERTOP BY OTHERS	
FINISH	AV-T764
HANDLES	POL-R7040-160-B5AE
DOOR STYLE	
based on SHAKER	AV-T764
Upper Door SHAKER NO SPLIT	AV-T764
Drawer SHAKER 5 PCS DRAWER	AV-T764
DRAWER GUIDE	
ATIRA Full Extension	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A) Potvin 32mm	
CROWN MLDG	
Finished Bulk Head 102	AV-T764
LIGHT VALANCE	
NO VALANCE	AV-T764

All Cabinets				
No	Name	Width	Height	Depth
0	Refrigerator RH	711	1695.5	800
0	30" Electric Cooktop	768.5	50	540
0	DISHWASHER	616	883	587
0	Double W/Faucet/gray	762	101.5	457
1	DW FILLER T1S	711	102	19
2	P275/2445/587D	275	2445	587
3	UC920/625/587 fridge	920	625	587
4	UC Filler	24	625	587
5	P Filler	25	2445	587
6	P850/2445/587D Doven Whirlpool WOC75EC0HS	850	2445	587
7	LC625D	625	883	587
8	LC 812 COOKTOP	812	883	587
9	LC 600	600	883	587
10	Lc Filler	25	883	587
11	P625/2445/457	625	2445	457
12	LC 600	600	883	457
13	LC 600	600	883	457
14	P625/2445/457	625	2445	457
15	P Filler	48	2445	225
16	Canopy Range Hood	762	692	690
17	UC400/1067	400	1067	302
18	UC400/1067 Wine Cubbies MLW	400	1067	302
19	UC400/1067	400	1067	302
20	DW PLUG Right Std	84	883	864
21	DW GABLE	16.5	883	864
22	LC 275	275	883	587
23	LC375D	375	883	587
24	LC 850 SK USB	850	883	587
26	ISLPANEL Horizontal	2183.5	883	16.5

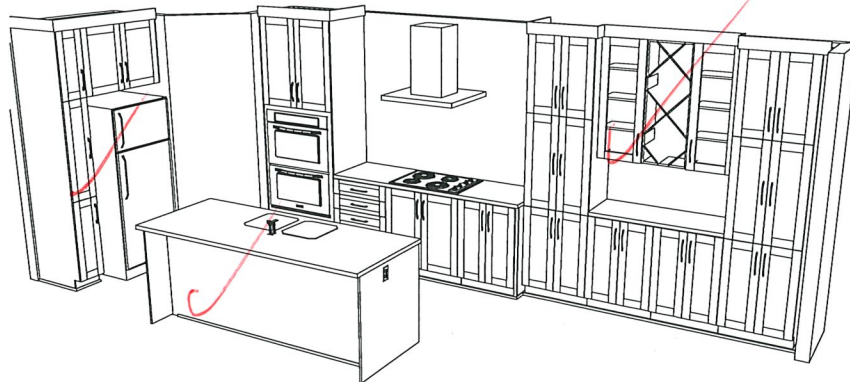

OK.
09/23/20
A.B.

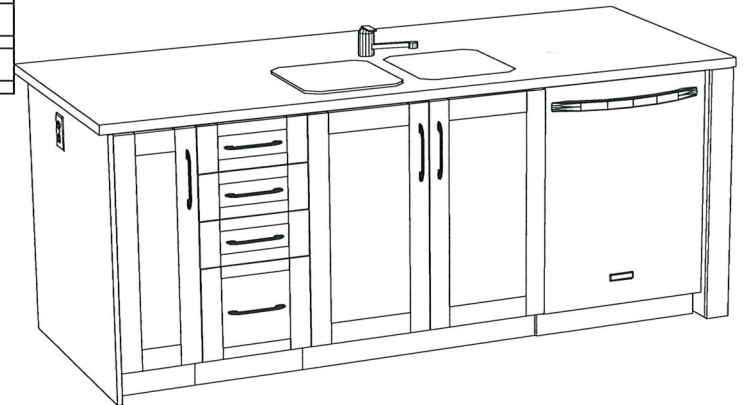


CLIENT: VALECRAFT		LOT:PST3-11	
ADDR.: 825 BRADLEY STND,			
SL #: Job			
Phone:	Mobile:	OUT BY: ABBY LOOV	DATE: 23/09/20
Email :		PST3-11	

* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes.
 * Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions.
 * Appliances in elevations and plans are generic templates and may not reflect actual selections.

PG#
2 of 3
 Sheet 3

potvin
 KITCHENS & CABINETS



JAN 21, 2021



MAIN 2ND FLOOR

All Cabinets				
No	Name	Width	Height	Depth
0	Single W/Faucet	508	51	432
27	V Filler	25	819	524
28	V 850 SK	850	819	524


Room Name	
MAIN 2ND FLOOR	
COUNTERTOPS	
COUNTERTOP BY OTHERS	
FINISH	
WS503	
HANDLES	
30596-195	
DOOR STYLE	
basedoor:SHAKER	WS503
UpperDoor:SHAKER	WS503
Drawer:SHAKER 5 PCS DRAWER	WS503
DRAWER GUIDE	
ATIRA Full Extension	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	

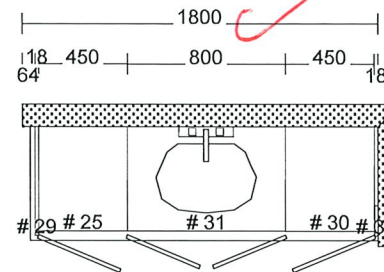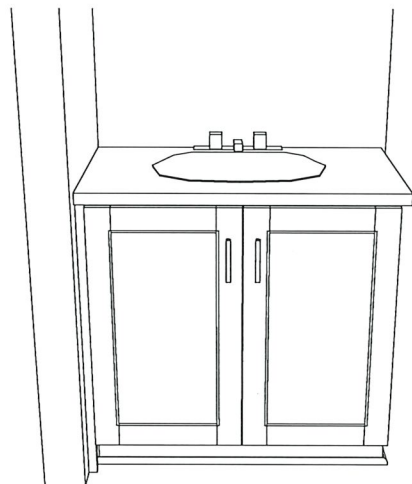

OPT ENSUITE 2ND FLOOR

All Cabinets				
No	Name	Width	Height	Depth
0	Single W/Faucet	508	51	432
25	V450	450	819	524
29	vanity Lastra gable	18	869	546
30	V450	450	819	524

**NO SHOE
 SCRIBE ON SITE**

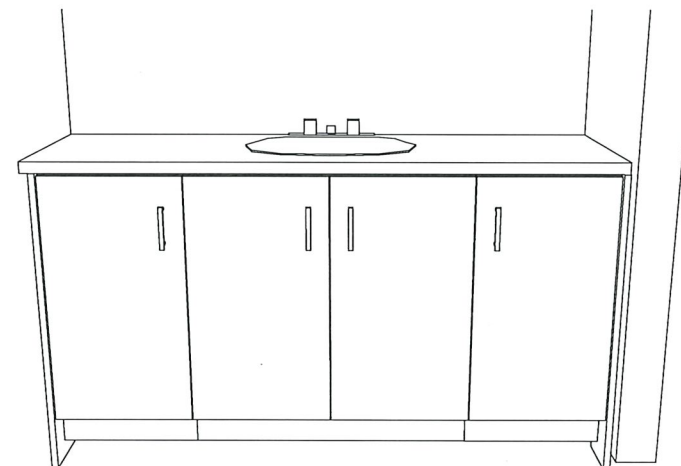

Room Name	
OPT ENSUITE 2ND FLOOR	
COUNTERTOPS	
COUNTERTOP BY OTHERS	
FINISH	
Quartz Lava	
HANDLES	
Lastra 30596-160	
DOOR STYLE	
basedoor:Lastra	Quartz Lava
UpperDoor:Lastra	Quartz Lava
Drawer:Lastra	Quartz Lava
DRAWER GUIDE	
ATIRA Full Extension	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	

Frame PST3-11

2	12	672.5
2	12	389
2	12	388

Board
Board
Board

Panel Stock

1	302	1067
1	302	1067
1	467	1067
1	284.5	467
1	284.5	467

Unfinished Left End
Unfinished Right End
Unfinished Back
Top
Bottom



18 - UC500/1067 Wine Cubbies MLW

None
None
None

AV-T764 1 Side rev
AV-T764 1 Side rev
AV-T764 1 Side
AV-T764 1 Side rev
AV-T764 1 Side rev

DRILLING CODE:UCSP

500 x 1067 x 302 (1)

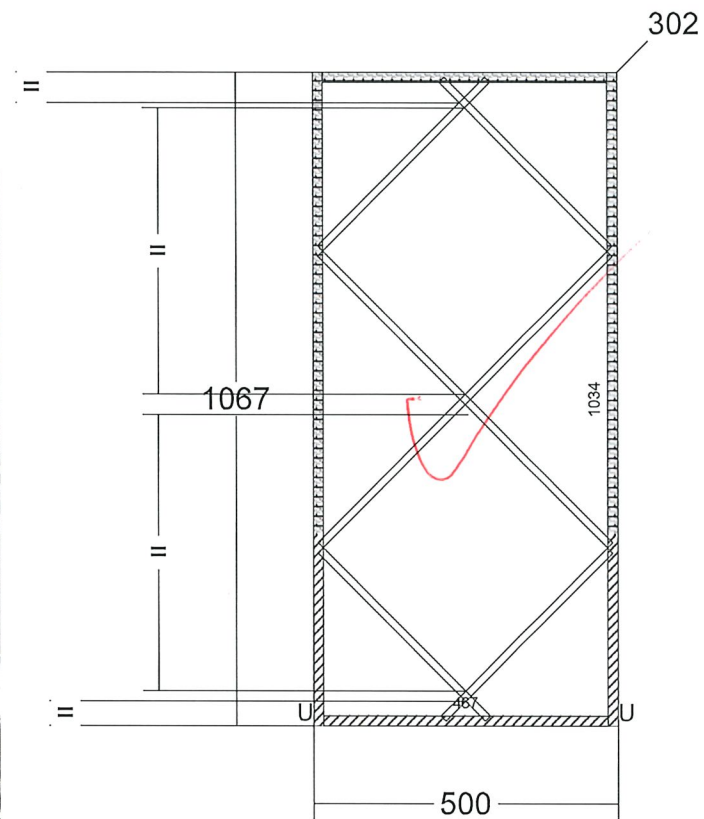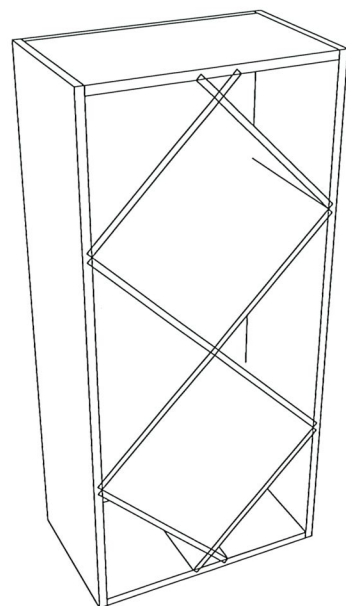

AV-T764

Assembly #18 - UC500/1067 Wine Cubbies MLW

(A)P SOLIDBACK

L. Stile = 0 L. Scribe = 0 R. Stile = 0

T. Scribe = 0 B. Scribe = 0

Toe Height = 0 Toe Recess = 65

Left End = Unfinished Right End = Unfinished

Back = Unfinished

Job

PST3-11

Room #4 (OPTION #3) - Wall #6

Date: 01/06/20