


Schedule 1: Designer Information

Use one form for each individual who reviews and takes responsibility for design activities with respect to the project.

A. Project Information			
Building number, street name		Unit no.	Lot/con.
Municipality RICHMOND HILL	Postal code	Plan number/ other description	
B. Individual who reviews and takes responsibility for design activities			
Name MICHAEL O'ROURKE		Firm HVAC DESIGNS LTD.	
Street address 375 FINLEY AVE		Unit no. 202	Lot/con. N/A
Municipality AJAX	Postal code L1S 2E2	Province ONTARIO	E-mail info@hvacdesigns.ca
Telephone number (905) 619-2300	Fax number (905) 619-2375	Cell number ()	
C. Design activities undertaken by individual identified in Section B. [Building Code Table 3.5.2.1 OF Division C]			
☐ House ☐ Small Buildings ☐ Large Buildings ☐ Complex Buildings ☒ HVAC – House ☐ Building Services ☐ Detection, Lighting and Power ☐ Fire Protection ☐ Building Structural ☐ Plumbing – House ☐ Plumbing – All Buildings ☐ On-site Sewage Systems			
Description of designer's work HEAT LOSS / GAIN CALCULATIONS DUCT SIZING RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY RESIDENTIAL SYSTEM DESIGN per CSA-F280-12		Model: 4502 OPT 2ND Project: CENTREFIELD (WEST GORMLEY)	
D. Declaration of Designer			
I, <u>MICHAEL O'ROURKE</u> declare that (choose one as appropriate): (print name)			
☐ I review and take responsibility for the design work on behalf of a firm registered under subsection 3.2.4. of Division C, of the Building Code. I am qualified, and the firm is registered, in the appropriate classes/categories. Individual BCIN: _____ Firm BCIN: _____			
☒ I review and take responsibility for the design and am qualified in the appropriate category as an "other designer" under subsection 3.2.5. of Division C, of the Building Code. Individual BCIN: <u>19669</u> Basis for exemption from registration and qualification: <u>O.B.C SENTENCE 3.2.4.1 (4)</u>			
☐ The design work is exempt from the registration and qualification requirements of the Building Code. Basis for exemption from registration and qualification: _____			
I certify that:			
1. The information contained in this schedule is true to the best of my knowledge. 2. I have submitted this application with the knowledge and consent of the firm.			
June 4, 2021		 Signature of Designer	
Date			

NOTE:

- For the purposes of this form, "individual" means the "person" referred to in Clause 3.2.4.7(1) d) of Division C, Article 3.2.5.1. of Division C, and all other persons who are exempt from qualification under Subsections 3.2.4. and 3.2.5. of Division C.
- Schedule 1 is not required to be completed by a holder of a license, temporary license, or a certificate of authorization, issued by the Ontario Association of Architects. Schedule 1 is also not required to be completed by a holder of a license to practise, a limited license to practise, or a certificate of authorization, issued by the Association of Professional Engineers of Ontario.

Application for a Permit Construct or Demolish – Effective January 1, 2015

SITE NAME: CENTREFIELD (WEST GORMLEY)				OPT 2ND				DATE: Jun-21				WINTER NATURAL AIR CHANGE RATE 0.219				HEAT LOSS ΔT °F. 78				CSA-F280-12							
BUILDER: ROYAL PINE HOMES				TYPE: 4502				GFA: 2942				LO# 87510				SUMMER NATURAL AIR CHANGE RATE 0.068				HEAT GAIN ΔT °F. 13				SB-12 PERFORMANCE			
ROOM USE		MBR		ENS		WIC		BED-4		BED-2		BED-3		BATH		BED-5		ENS-2									
EXP. WALL		32		11		14		11		33		33		9		25		9									
CLG. HT.		9		8		8		8		8		8		8		8		8									
FACTORS																											
GRS.WALL AREA		LOSS GAIN		288		88		112		88		264		264		72		200		72							
GLAZING				LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN							
NORTH		21.8	15.8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7	152	110				
EAST		21.8	40.9	0	0	0	0	0	0	0	0	56	1220	2291	40	871	1637	9	196	368	0	0	0				
SOUTH		21.8	24.5	0	0	0	0	0	0	0	18	392	442	0	0	0	0	0	0	0	0	0	0				
WEST		21.8	40.9	26	566	1064	17	370	696	0	0	0	0	0	0	0	0	0	0	17	370	696					
SKYLT.		35.8	101.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
DOORS		25.8	4.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
NET EXPOSED WALL		4.2	0.7	262	1102	181	71	299	49	112	471	77	70	294	48	208	875	144	224	942	155	63	265	44			
NET EXPOSED BSMT WALL ABOVE GR		3.7	0.6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
EXPOSED CLG		1.3	0.6	255	335	150	187	246	110	266	350	156	154	202	91	252	331	148	192	252	113	90	118	53			
NO ATTIC EXPOSED CLG		2.8	1.3	0	0	0	0	0	0	0	0	0	28	79	35	24	67	30	0	0	0	0	0	0			
EXPOSED FLOOR		2.6	0.4	0	0	0	0	0	0	110	287	47	0	0	0	280	731	120	0	0	0	24	63	10			
BASEMENT/CRAWL HEAT LOSS				0		0		0		0		0		0		0		0		0		0					
SLAB ON GRADE HEAT LOSS				0		0		0		0		0		0		0		0		0		0					
SUBTOTAL HT LOSS				2003		915		1108		889		3235		2133		642		1342		603							
SUB TOTAL HT GAIN				1395		855		281		581		2739		1935		475		913		235							
LEVEL FACTOR / MULTIPLIER		0.20	0.18	0.20 0.18		0.20 0.18		0.20 0.18		0.20 0.18		0.20 0.18		0.20 0.18		0.20 0.18		0.20 0.18		0.20 0.18							
AIR CHANGE HEAT LOSS		359		164		199		159		580		382		115		241		108									
AIR CHANGE HEAT GAIN		65		40		13		27		128		91		22		43		11									
DUCT LOSS		0		0		131		0		382		0		76		0		0									
DUCT GAIN		0		0		29		0		360		0		50		0		0									
HEAT GAIN PEOPLE		240	2	480	0	0	0	0	1	240	1	240	1	240	0	1	240	0	1	240	0	0	0				
HEAT GAIN APPLIANCES/LIGHTS				490		0		0		490		490		490		490		490		0		0					
TOTAL HT LOSS BTU/H		2362		1079		1437		1048		4197		2516		833		1583		711		319							
TOTAL HT GAIN x 1.3 BTU/H		3160		1163		421		1740		5145		3582		711		2192		319									

ROOM USE			LIV			GRT			KT/BR			DIN			LAUN			PWD			FOY			MUD												BAS		
EXP. WALL			30			34			37			17			16			6			18			11												172		
CLG. HT.			10			10			10			10			11			10			10			11												9		
FACTORS																																						
GRS.WALL AREA	LOSS	GAIN	300			340			370			170			176			60			180			121									1032					
GLAZING			LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN		LOSS	GAIN							
NORTH	21.8	15.8	0	0	0	0	0	0	0	0	0	0	0	0	8	174	126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
EAST	21.8	40.9	34	741	1391	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	14	305	573	0	0	0	0	0	0	0	0	0						
SOUTH	21.8	24.5	0	0	0	0	0	0	0	0	0	20	436	491	0	0	0	7	152	172	0	0	0	0	0	0	0	0	0	0	0	6	131	147				
WEST	21.8	40.9	0	0	0	51	1111	2087	87	1895	3560	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	65	123				
SKYLT.	35.8	101.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
DOORS	25.8	4.3	0	0	0	0	0	0	0	0	0	0	0	0	20	517	85	0	0	0	20	517	85	0	0	0	0	0	0	0	20	517	85					
NET EXPOSED WALL	4.2	0.7	266	1119	184	289	1215	200	283	1190	196	150	631	104	148	622	102	53	223	37	146	614	101	121	509	84						0	0	0				
NET EXPOSED BSMT WALL ABOVE GR	3.7	0.6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						516	1901	313				
EXPOSED CLG	1.3	0.6	0	0	0	0	0	0	15	20	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
NO ATTIC EXPOSED CLG	2.8	1.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
EXPOSED FLOOR	2.6	0.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
BASEMENT/CRAWL HEAT LOSS			0			0			0			0			0			0			0			0												5884		
SLAB ON GRADE HEAT LOSS			0			0			0			0			0			0			0			0														
SUBTOTAL HT LOSS			1859			2326			3105			1066			1314			375			1436			509												8498		
SUB TOTAL HT GAIN			1575			2287			3765			595			314			208			759			84												668		
LEVEL FACTOR / MULTIPLIER	0.30	0.29	0.30 0.29			0.30 0.29			0.30 0.29			0.30 0.29			0.30 0.29			0.30 0.29			0.30 0.29			0.30 0.29									0.50 0.68					
AIR CHANGE HEAT LOSS			537			672			896			308			379			108			414			147												5769		
AIR CHANGE HEAT GAIN			74			107			176			28			15			10			36			4												31		
DUCT LOSS			0			0			0			0			0			0			0			0												0		
DUCT GAIN			0			0			0			0			0			0			0			0												0		
HEAT GAIN PEOPLE	240		0			0			0			0			0			0			0			0												0		
HEAT GAIN APPLIANCES/LIGHTS			490			490			490			490			490			490			490			0												490		
TOTAL HT LOSS BTU/H			2396			2998			4001			1374			1693			484			1850			656												14267		
TOTAL HT GAIN x 1.3 BTU/H			2781			3750			5761			1447			1064			284			1033			114												1546		

SITE NAME: CENTREFIELD (WEST GORMLEY)
BUILDER: ROYAL PINE HOMES

OPT 2ND
TYPE: 4502

DATE: Jun-21

GFA: 2942 LO# 87510

HEATING CFM 1145 COOLING CFM 1145
TOTAL HEAT LOSS 45,486 TOTAL HEAT GAIN 36,213
AIR FLOW RATE CFM 25.17 AIR FLOW RATE CFM 31.62

furnace pressure 0.6
furnace filter 0.05
a/c coil pressure 0.2
available pressure
for s/a & r/a 0.35

**CARRIER
59TN6A-060-14V
FAN SPEED 60

AFUE = 97 %
INPUT (BTU/H) = 60,000
OUTPUT (BTU/H) = 58,000

RUN COUNT	4th	3rd	2nd	1st	Bas
S/A	0	0	11	10	4
R/A	0	0	5	3	1

plenum pressure s/a 0.18 r/a pressure 0.17
max s/a dif press. loss 0.02 r/a grille press. Loss 0.02
min adjusted pressure s/a 0.16 adjusted pressure r/a 0.15

LOW 820
MEDLOW 0
MEDIUM 1145
MEDIUM HIGH 0
HIGH 1520

DESIGN CFM = 1145
CFM @ .6" E.S.P.

TEMPERATURE RISE 47 °F

All S/A diffusers 4"x10" unless noted otherwise on layout.

All S/A runs 5"Ø unless noted otherwise on layout.

RUN #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
ROOM NAME	BED-5	ENS	BED-2	MBR	BED-2	BED-3	BATH	WIC	BED-3	ENS-2	BED-4	LIV	GRT	KT/BR	KT/BR	DIN	LAUN	PWD	FOY	MUD	BAS	BAS	BAS	BAS
RM LOSS MBH.	1.58	1.08	2.10	2.36	2.10	1.26	0.83	1.44	1.26	0.71	1.05	2.40	1.50	2.00	2.00	1.37	1.69	0.48	1.85	0.66	3.57	3.57	3.57	3.57
CFM PER RUN HEAT	40	27	53	59	53	32	21	36	32	18	26	60	38	50	50	35	43	12	47	17	90	90	90	90
RM GAIN MBH.	2.19	1.16	2.57	3.16	2.57	1.79	0.71	0.42	1.79	0.32	1.74	2.78	1.87	2.88	2.88	1.45	1.06	0.28	1.03	0.11	0.39	0.39	0.39	0.39
CFM PER RUN COOLING	69	37	81	100	81	57	22	13	57	10	55	88	59	91	91	46	34	9	33	4	12	12	12	12
ADJUSTED PRESSURE	0.17	0.17	0.16	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.17	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.16	0.16	0.16	0.16
ACTUAL DUCT LGH.	27	51	56	65	51	45	43	45	38	19	26	30	40	25	35	5	39	16	35	40	19	42	10	30
EQUIVALENT LENGTH	150	130	140	140	130	160	200	140	190	200	110	110	150	130	120	140	140	140	130	150	130	140	130	110
TOTAL EFFECTIVE LENGTH	177	181	196	205	181	205	243	185	228	219	136	140	190	155	155	145	179	156	165	190	149	182	140	140
ADJUSTED PRESSURE	0.1	0.1	0.08	0.08	0.09	0.08	0.07	0.09	0.08	0.08	0.13	0.12	0.09	0.1	0.1	0.12	0.1	0.11	0.1	0.09	0.11	0.09	0.12	0.12
ROUND DUCT SIZE	6	4	6	6	6	5	4	4	5	4	6	6	5	6	6	4	4	4	4	4	6	6	6	6
HEATING VELOCITY (ft/min)	204	310	270	301	270	235	241	413	235	207	133	306	279	255	255	402	493	138	539	195	459	459	459	459
COOLING VELOCITY (ft/min)	352	424	413	510	413	419	252	149	419	115	280	449	433	464	464	528	390	103	379	46	61	61	61	61
OUTLET GRILL SIZE	4X10	3X10	4X10	4X10	4X10	3X10	3X10	3X10	3X10	3X10	4X10	4X10	3X10	4X10	4X10	3X10	3X10	3X10	3X10	3X10	4X10	4X10	4X10	4X10
TRUNK	B	B	D	A	D	C	C	D	C	B	D	C	A	B	B	D	A	C	C	A	B	A	D	C

RUN #	25
ROOM NAME	GRT
RM LOSS MBH.	1.50
CFM PER RUN HEAT	38
RM GAIN MBH.	1.87
CFM PER RUN COOLING	59
ADJUSTED PRESSURE	0.17
ACTUAL DUCT LGH.	47
EQUIVALENT LENGTH	110
TOTAL EFFECTIVE LENGTH	157
ADJUSTED PRESSURE	0.11
ROUND DUCT SIZE	5
HEATING VELOCITY (ft/min)	279
COOLING VELOCITY (ft/min)	433
OUTLET GRILL SIZE	3X10
TRUNK	A

SUPPLY AIR TRUNK SIZE															RETURN AIR TRUNK SIZE								
	TRUNK CFM	STATIC PRESS.	ROUND DUCT	RECT DUCT			VELOCITY (ft/min)		TRUNK CFM	STATIC PRESS.	ROUND DUCT	RECT DUCT		VELOCITY (ft/min)		TRUNK CFM	STATIC PRESS.	ROUND DUCT	RECT DUCT		VELOCITY (ft/min)		
TRUNK A	285	0.08	8.8	10	x	8	513	TRUNK G	0	0.00	0	0	x	8	0	TRUNK O	0	0.05	0	0	x	8	0
TRUNK B	560	0.08	11.3	14	x	8	720	TRUNK H	0	0.00	0	0	x	8	0	TRUNK P	0	0.05	0	0	x	8	0
TRUNK C	294	0.07	9.2	10	x	8	529	TRUNK I	0	0.00	0	0	x	8	0	TRUNK Q	0	0.05	0	0	x	8	0
TRUNK D	587	0.07	11.9	16	x	8	660	TRUNK J	0	0.00	0	0	x	8	0	TRUNK R	0	0.05	0	0	x	8	0
TRUNK E	0	0.00	0	0	x	8	0	TRUNK K	0	0.00	0	0	x	8	0	TRUNK S	0	0.05	0	0	x	8	0
TRUNK F	0	0.00	0	0	x	8	0	TRUNK L	0	0.00	0	0	x	8	0	TRUNK T	0	0.05	0	0	x	8	0
															TRUNK U	0	0.05	0	0	x	8	0	
															TRUNK V	0	0.05	0	0	x	8	0	
															TRUNK W	0	0.05	0	0	x	8	0	
RETURN AIR #	1	2	3	4	5	6	7	8	0	0	0	0	0	0	BR	TRUNK X	1145	0.05	16.6	32	x	8	644
AIR VOLUME	95	75	85	75	95	155	150	240	0	0	0	0	0	0		TRUNK Y	315	0.05	10.2	12	x	8	473
PLENUM PRESSURE	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15		TRUNK Z	465	0.05	11.8	16	x	8	523
ACTUAL DUCT LGH.	47	79	54	40	47	32	27	38	1	1	1	1	1	1		DROP	1145	0.05	16.6	24	x	10	687
EQUIVALENT LENGTH	175	225	215	255	175	230	145	190	0	0	0	0	0	0									
TOTAL EFFECTIVE LH	222	304	269	295	222	262	172	228	1	1	1	1	1	1									
ADJUSTED PRESSURE	0.07	0.05	0.06	0.05	0.07	0.06	0.09	0.06	14.80	14.80	14.80	14.80	14.80	14.80									
ROUND DUCT SIZE	6	6	6	6	6	7.5	6.7	8.8	0	0	0	0	0	0									
INLET GRILL SIZE	8	8	8	8	8	8	8	6	0	0	0	0	0	0									
	X	X	X	X	X	X	X	X	X	X	X	X	X	X									
INLET GRILL SIZE	14	14	14	14	14	14	14	18	0	0	0	0	0	0									

TYPE: 4502
SITE NAME: CENTREFIELD (WEST GORMLEY)

LO # 87510
OPT 2ND

RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY

COMBUSTION APPLIANCES		9.32.3.1(1)
a)	☒ Direct vent (sealed combustion) only	
b)	☐ Positive venting induced draft (except fireplaces)	
c)	☐ Natural draft, B-vent or induced draft gas fireplace	
d)	☐ Solid Fuel (including fireplaces)	
e)	☐ No Combustion Appliances	

HEATING SYSTEM	
☒ Forced Air	☐ Non Forced Air
☐ Electric Space Heat	

HOUSE TYPE		9.32.1(2)
☒ I	Type a) or b) appliance only, no solid fuel	
☐ II	Type I except with solid fuel (including fireplaces)	
☐ III	Any Type c) appliance	
☐ IV	Type I, or II with electric space heat	
☐	Other: Type I, II or IV no forced air	

SYSTEM DESIGN OPTIONS		O.N.H.W.P.
☐ 1	Exhaust only/Forced Air System	
☐ 2	HRV with Ducting/Forced Air System	
☒ 3	HRV Simplified/connected to forced air system	
☐ 4	HRV with Ducting/non forced air system	
☐	Part 6 Design	

TOTAL VENTILATION CAPACITY		9.32.3.3(1)
Basement + Master Bedroom	<u>2</u> @ 21.2 cfm	<u>42.4</u> cfm
Other Bedrooms	<u>4</u> @ 10.6 cfm	<u>42.4</u> cfm
Kitchen & Bathrooms	<u>5</u> @ 10.6 cfm	<u>53</u> cfm
Other Rooms	<u>5</u> @ 10.6 cfm	<u>53.0</u> cfm
Table 9.32.3.A.	TOTAL	<u>190.8</u> cfm

PRINCIPAL VENTILATION CAPACITY REQUIRED		9.32.3.4.(1)
1 Bedroom	31.8	cfm
2 Bedroom	47.7	cfm
3 Bedroom	63.6	cfm
4 Bedroom	79.5	cfm
5 Bedroom	95.4	cfm
TOTAL		<u>95.4</u> cfm

SUPPLEMENTAL VENTILATION CAPACITY		9.32.3.5.
Total Ventilation Capacity	<u>190.8</u>	cfm
Less Principal Ventil. Capacity	<u>95.4</u>	cfm
Required Supplemental Capacity	<u>95.4</u>	cfm

PRINCIPAL EXHAUST FAN CAPACITY	
Model:	VANEE 65H
Location:	BSMT
<u>95.4</u> cfm	☒ HVI Approved

PRINCIPAL EXHAUST HEAT LOSS CALCULATION				
CFM	ΔT °F	FACTOR	% LOSS	
95.4 CFM	X 78 F	X 1.08	X	0.25

SUPPLEMENTAL FANS		BY INSTALLING CONTRACTOR		
Location	Model	cfm	HVI	Sones
ENS	BY INSTALLING CONTRACTOR	50	☒	3.5
BATH	BY INSTALLING CONTRACTOR	50	☒	3.5
ENS-2	BY INSTALLING CONTRACTOR	50	☒	3.5
PWD	BY INSTALLING CONTRACTOR	50	☒	3.5

HEAT RECOVERY VENTILATOR		9.32.3.11.
Model:	VANEE 65H	
<u>155</u> cfm high	<u>64</u> cfm low	
<u>75</u> % Sensible Efficiency	☒ HVI Approved	
@ 32 deg F (0 deg C)		

LOCATION OF INSTALLATION	
Lot:	Concession
Township	Plan:
Address	
Roll #	Building Permit #

BUILDER:	
ROYAL PINE HOMES	
Name:	
Address:	
City:	
Telephone #:	Fax #:

INSTALLING CONTRACTOR	
Name:	
Address:	
City:	
Telephone #:	Fax #:

DESIGNER CERTIFICATION	
I hereby certify that this ventilation system has been designed in accordance with the Ontario Building Code.	
Name:	HVAC Designs Ltd.
Signature:	<i>Michael O'Rourke</i>
HRAI #	001820
Date:	June-21

I REVIEW AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED IN THE APPROPRIATE CATEGORY AS AN "OTHER DESIGNER" UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.

INDIVIDUAL BCIN: 19669

MICHAEL O'ROURKE

Michael O'Rourke

CSA F280-12 Residential Heat Loss and Heat Gain Calculations																																																												
Formula Sheet (For Air Leakage / Ventilation Calculation)																																																												
LO#: 87510	Model: 4502	Builder: ROYAL PINE HOMES	Date: 2021-06-04																																																									
Volume Calculation			Air Change & Delta T Data																																																									
House Volume <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Level</th> <th>Floor Area (ft²)</th> <th>Floor Height (ft)</th> <th>Volume (ft³)</th> </tr> </thead> <tbody> <tr> <td>Bsmt</td> <td>1305</td> <td>9</td> <td>11745</td> </tr> <tr> <td>First</td> <td>1305</td> <td>10</td> <td>13050</td> </tr> <tr> <td>Second</td> <td>1637</td> <td>8</td> <td>13096</td> </tr> <tr> <td>Third</td> <td>0</td> <td>9</td> <td>0</td> </tr> <tr> <td>Fourth</td> <td>0</td> <td>9</td> <td>0</td> </tr> <tr> <td colspan="3" style="text-align: right;">Total:</td> <td>37,891.0 ft³</td> </tr> <tr> <td colspan="3" style="text-align: right;">Total:</td> <td>1073.0 m³</td> </tr> </tbody> </table>			Level	Floor Area (ft²)	Floor Height (ft)	Volume (ft³)	Bsmt	1305	9	11745	First	1305	10	13050	Second	1637	8	13096	Third	0	9	0	Fourth	0	9	0	Total:			37,891.0 ft³	Total:			1073.0 m³	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">WINTER NATURAL AIR CHANGE RATE</td> <td style="width: 20%;">0.219</td> </tr> <tr> <td>SUMMER NATURAL AIR CHANGE RATE</td> <td>0.068</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="5" style="text-align: center;">Design Temperature Difference</th> </tr> <tr> <th></th> <th>Tin °C</th> <th>Tout °C</th> <th>ΔT °C</th> <th>ΔT °F</th> </tr> </thead> <tbody> <tr> <td>Winter DTDh</td> <td>22</td> <td>-21</td> <td>43</td> <td>78</td> </tr> <tr> <td>Summer DTDc</td> <td>24</td> <td>31</td> <td>7</td> <td>13</td> </tr> </tbody> </table>		WINTER NATURAL AIR CHANGE RATE	0.219	SUMMER NATURAL AIR CHANGE RATE	0.068	Design Temperature Difference						Tin °C	Tout °C	ΔT °C	ΔT °F	Winter DTDh	22	-21	43	78	Summer DTDc	24	31	7	13
Level	Floor Area (ft²)	Floor Height (ft)	Volume (ft³)																																																									
Bsmt	1305	9	11745																																																									
First	1305	10	13050																																																									
Second	1637	8	13096																																																									
Third	0	9	0																																																									
Fourth	0	9	0																																																									
Total:			37,891.0 ft³																																																									
Total:			1073.0 m³																																																									
WINTER NATURAL AIR CHANGE RATE	0.219																																																											
SUMMER NATURAL AIR CHANGE RATE	0.068																																																											
Design Temperature Difference																																																												
	Tin °C	Tout °C	ΔT °C	ΔT °F																																																								
Winter DTDh	22	-21	43	78																																																								
Summer DTDc	24	31	7	13																																																								
5.2.3.1 Heat Loss due to Air Leakage			6.2.6 Sensible Gain due to Air Leakage																																																									
$HL_{airb} = LR_{airh} \times \frac{V_b}{3.6} \times DTD_h \times 1.2$ 0.219 x 298.04 x 43 °C x 1.2 = 3382 W = 11538 Btu/h			$HG_{salb} = LR_{airc} \times \frac{V_b}{3.6} \times DTD_c \times 1.2$ = 0.068 x 298.04 x 7 °C x 1.2 = 173 W = 592 Btu/h																																																									
5.2.3.2 Heat Loss due to Mechanical Ventilation			6.2.7 Sensible heat Gain due to Ventilation																																																									
$HL_{vairb} = PVC \times DTD_h \times 1.08 \times (1 - E)$ 95 CFM x 78 °F x 1.08 x 0.25 = 2004 Btu/h			$HL_{vairb} = PVC \times DTD_h \times 1.08 \times (1 - E)$ 95 CFM x 13 °F x 1.08 x 0.25 = 330 Btu/h																																																									
5.2.3.3 Calculation of Air Change Heat Loss for Each Room (Floor Multiplier Section)																																																												
$HL_{airr} = Level\ Factor \times HL_{airbv} \times \{(HL_{agcr} + HL_{bgcr}) \div (HL_{agclevel} + HL_{bgclevel})\}$ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Level</th> <th>Level Factor (LF)</th> <th>HLairve Air Leakage + Ventilation Heat Loss (Btu/h)</th> <th>Level Conductive Heat Loss: (HL_{level})</th> <th>Air Leakage Heat Loss Multiplier (LF x HLairbv / HLlevel)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.5</td> <td rowspan="5" style="text-align: center; vertical-align: middle;">11,538</td> <td>8,498</td> <td>0.679</td> </tr> <tr> <td>2</td> <td>0.3</td> <td>11,991</td> <td>0.289</td> </tr> <tr> <td>3</td> <td>0.2</td> <td>12,871</td> <td>0.179</td> </tr> <tr> <td>4</td> <td>0</td> <td>0</td> <td>0.000</td> </tr> <tr> <td>5</td> <td>0</td> <td>0</td> <td>0.000</td> </tr> </tbody> </table> *HLairbv = Air leakage heat loss + ventilation heat loss *For a balanced or supply only ventilation system HLairve = 0					Level	Level Factor (LF)	HLairve Air Leakage + Ventilation Heat Loss (Btu/h)	Level Conductive Heat Loss: (HL _{level})	Air Leakage Heat Loss Multiplier (LF x HLairbv / HLlevel)	1	0.5	11,538	8,498	0.679	2	0.3	11,991	0.289	3	0.2	12,871	0.179	4	0	0	0.000	5	0	0	0.000																														
Level	Level Factor (LF)	HLairve Air Leakage + Ventilation Heat Loss (Btu/h)	Level Conductive Heat Loss: (HL _{level})	Air Leakage Heat Loss Multiplier (LF x HLairbv / HLlevel)																																																								
1	0.5	11,538	8,498	0.679																																																								
2	0.3		11,991	0.289																																																								
3	0.2		12,871	0.179																																																								
4	0		0	0.000																																																								
5	0		0	0.000																																																								

HEAT LOSS AND GAIN SUMMARY SHEET

MODEL: 4502	OPT 2ND	BUILDER: ROYAL PINE HOMES
SFQT: 2942	LO# 87510	SITE: CENTREFIELD (WEST GORMLEY)

DESIGN ASSUMPTIONS

HEATING	°F	COOLING	°F
OUTDOOR DESIGN TEMP.	-6	OUTDOOR DESIGN TEMP.	88
INDOOR DESIGN TEMP.	72	INDOOR DESIGN TEMP. (MAX 75°F)	75

BUILDING DATA

ATTACHMENT:	DETACHED	# OF STORIES (+BASEMENT):	3
FRONT FACES:	EAST	ASSUMED (Y/N):	Y
AIR CHANGES PER HOUR:	2.50	ASSUMED (Y/N):	Y
AIR TIGHTNESS CATEGORY:	TIGHT	ASSUMED (Y/N):	Y
WIND EXPOSURE:	SHELTERED	ASSUMED (Y/N):	Y
HOUSE VOLUME (ft ³):	37891.0	ASSUMED (Y/N):	Y
INTERNAL SHADING:	BLINDS/CURTAINS	ASSUMED OCCUPANTS:	6
INTERIOR LIGHTING LOAD (Btu/h/ft ²):	1.27	DC BRUSHLESS MOTOR (Y/N):	Y
FOUNDATION CONFIGURATION	BCIN_1	DEPTH BELOW GRADE:	6.0 ft
LENGTH: 48.0 ft	WIDTH: 38.0 ft	EXPOSED PERIMETER:	172.0 ft

2012 OBC - COMPLIANCE PACKAGE		Compliance Package	
Component		SB-12 PERFORMANCE	
		Nominal	Min. Eff.
Ceiling with Attic Space Minimum RSI (R)-Value		60	59.20
Ceiling Without Attic Space Minimum RSI (R)-Value		31	27.70
Exposed Floor Minimum RSI (R)-Value		31	29.80
Walls Above Grade Minimum RSI (R)-Value		22+1.5	18.50
Basement Walls Minimum RSI (R)-Value		20	21.12
Below Grade Slab Entire surface > 600 mm below grade Minimum RSI (R)-Value		-	-
Edge of Below Grade Slab ≤ 600 mm Below Grade Minimum RSI (R)-Value		10	10
Heated Slab or Slab ≤ 600 mm below grade Minimum RSI (R)-Value		10	11.13
Windows and Sliding Glass Doors Maximum U-Value		1.6	-
Skylights Maximum U-Value		2.6	-
Space Heating Equipment Minimum AFUE		0.96	-
HRV Minimum Efficiency		75%	-
Domestic Hot Water Heater Minimum EF		TE=94%	-


INDIVIDUAL BCIN: 19669

MICHAEL O'ROURKE



Residential Foundation Thermal Load Calculator

Supplemental tool for CAN/CSA-F280

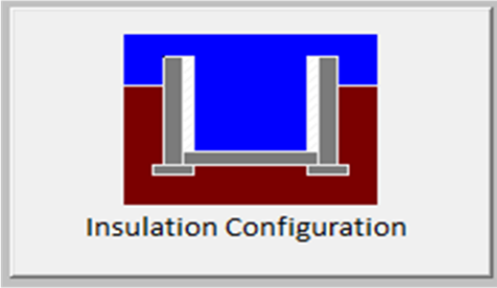Weather Station Description		
Province:	Ontario	
Region:	Richmond Hill	
Site Description		
Soil Conductivity:	Normal conductivity: dry sand, loam, clay	
Water Table:	Normal (7-10 m, 23-33 ft)	
Foundation Dimensions		
Floor Length (m):	14.6	
Floor Width (m):	11.6	
Exposed Perimeter (m):	0.0	
Wall Height (m):	2.7	
Depth Below Grade (m):	1.83	
Window Area (m ²):	0.8	
Door Area (m ²):	1.9	
Radiant Slab		
Heated Fraction of the Slab:	0	
Fluid Temperature (°C):	33	
Design Months		
Heating Month	1	
Foundation Loads		
Heating Load (Watts):		1724

TYPE: 4502
LO# 87510

OPT 2ND


Air Infiltration Residential Load Calculator

Supplemental tool for CAN/CSA-F280


Weather Station Description				
Province:	Ontario			
Region:	Richmond Hill			
Weather Station Location:	Open flat terrain, grass			
Anemometer height (m):	10			
Local Shielding				
Building Site:	Suburban, forest			
Walls:	Heavy			
Flue:	Heavy			
Highest Ceiling Height (m):	6.40			
Building Configuration				
Type:	Detached			
Number of Stories:	Two			
Foundation:	Full			
House Volume (m ³):	1073.0			
Air Leakage/Ventilation				
Air Tightness Type:	Energy Star Detached (2.5 ACH)			
Custom BDT Data:	ELA @ 10 Pa.		1001.6 cm ²	
	2.50		ACH @ 50 Pa	
Mechanical Ventilation (L/s):	Total Supply		Total Exhaust	
	45.0		45.0	
Flue Size				
Flue #:	#1	#2	#3	#4
Diameter (mm):	0	0	0	0
Natural Infiltration Rates				
Heating Air Leakage Rate (ACH/H):	0.219			
Cooling Air Leakage Rate (ACH/H):	0.068			

TYPE: 4502
LO# 87510

OPT 2ND

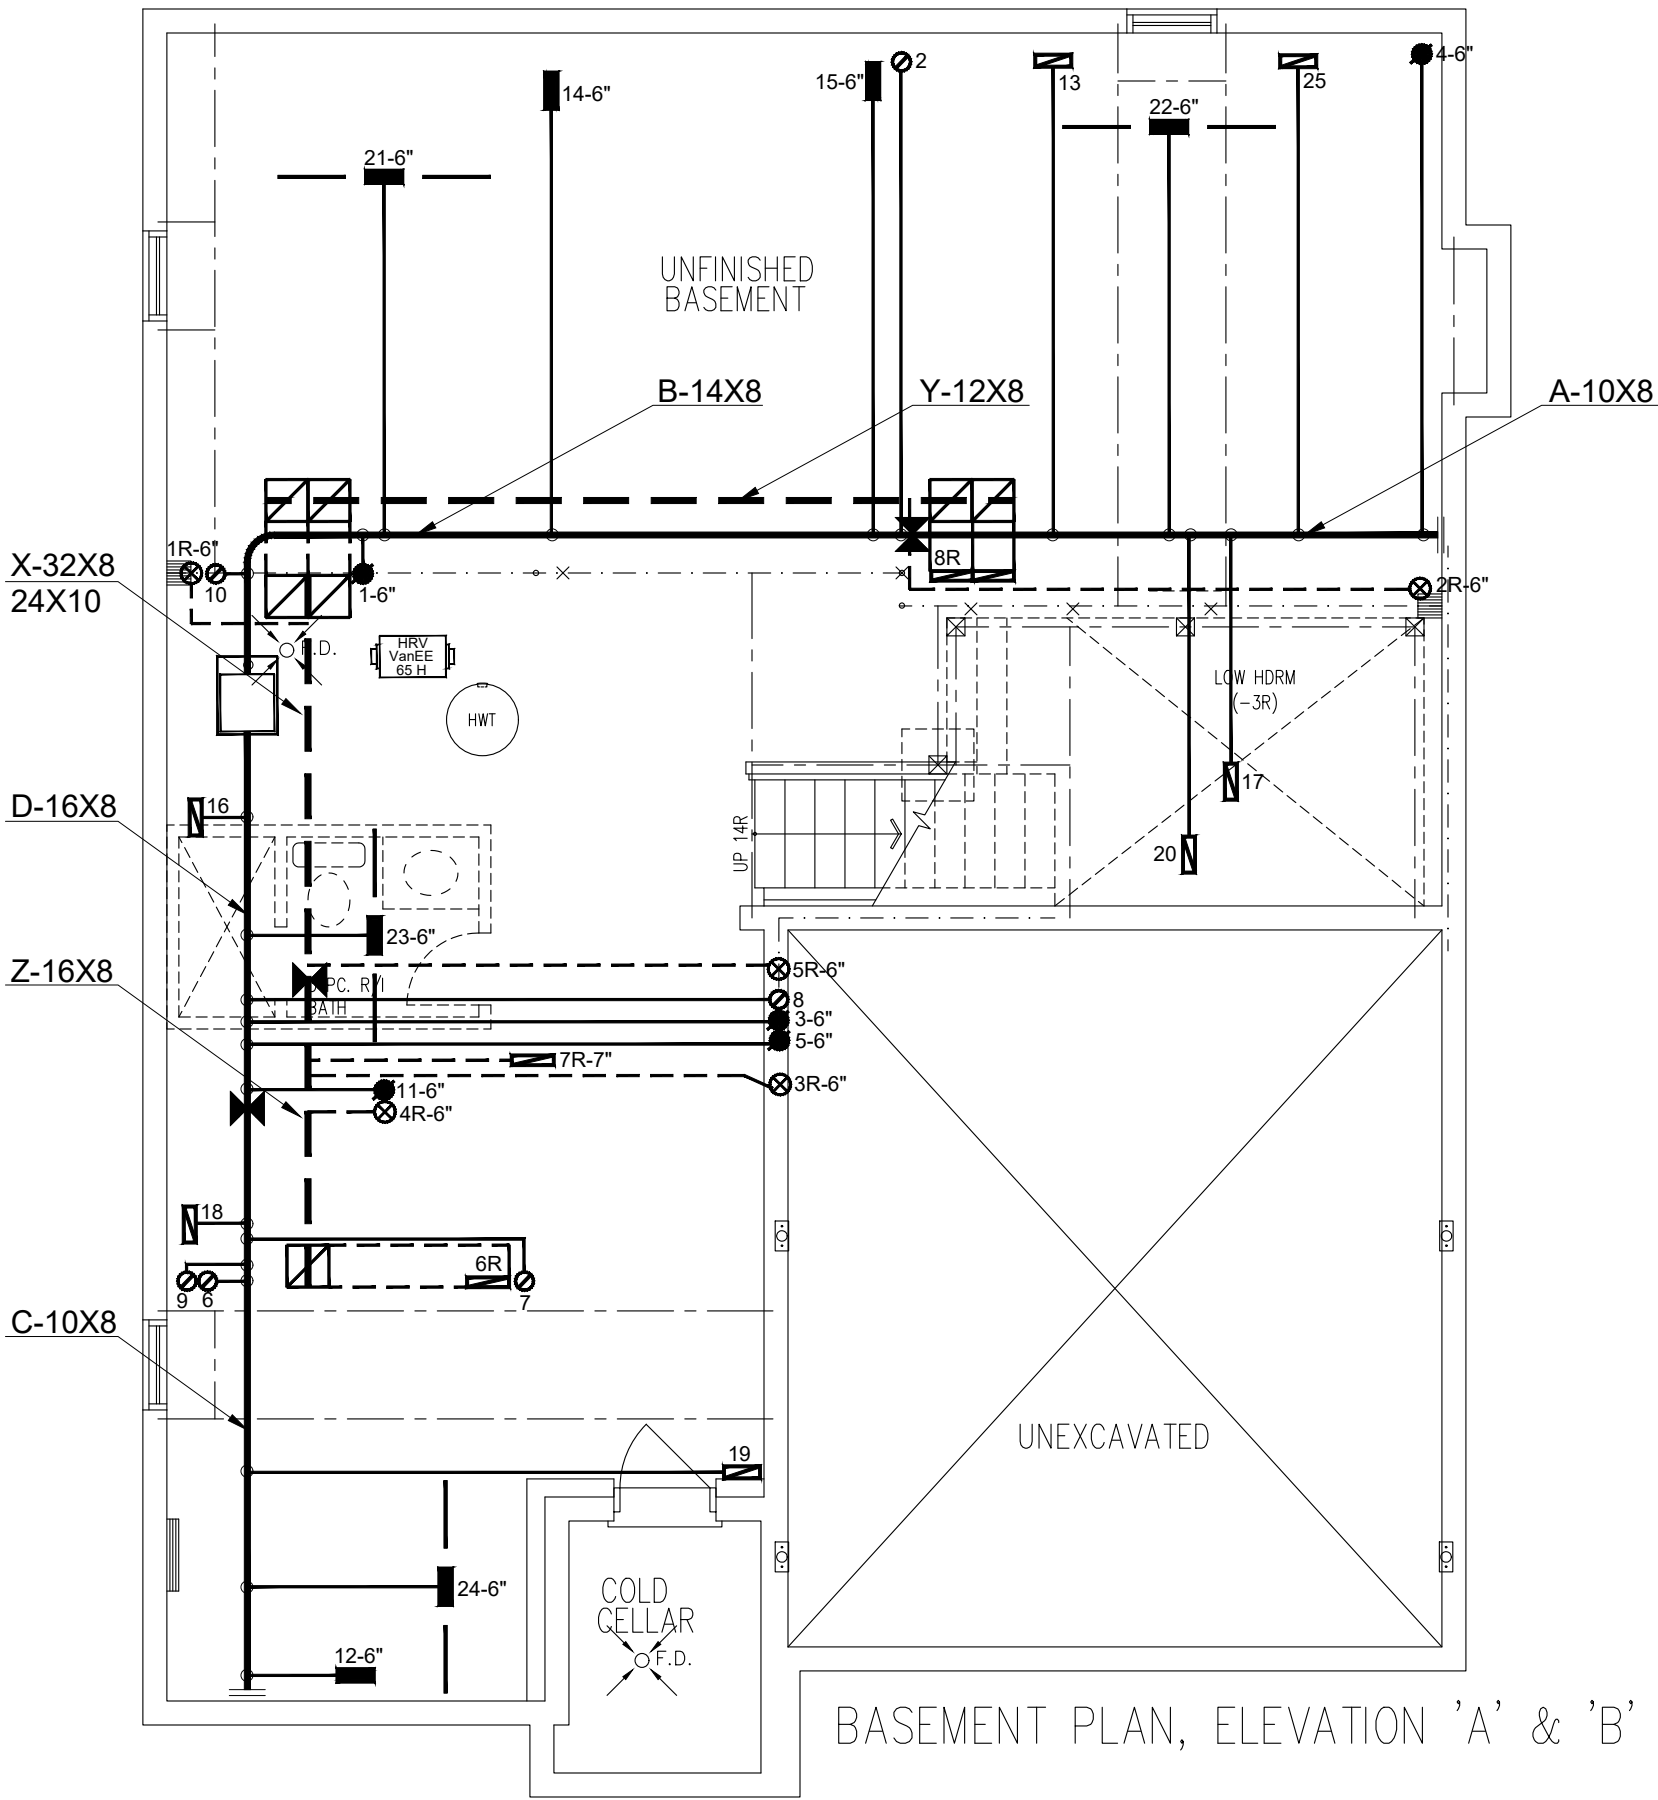

BASEMENT PLAN, ELEVATION 'A' & 'B'

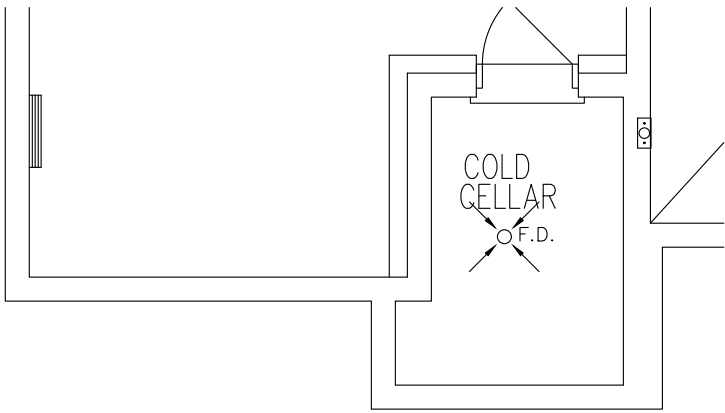

BASEMENT PLAN, ELEVATION 'C'

CSA-F280-12

SB-12 PERFORMANCE


I MICHAEL O'ROURKE HAVE REVIEW
AND TAKE RESPONSIBILITY FOR THE
DESIGN WORK AND AM QUALIFIED
UNDER DIVISION C, 3.2.5 OF THE
BUILDING CODE.

Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.


HVAC LEGEND								3.	REVISED AS PER CAD	JUNE/2021
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.	REVISED AS PER ARCHITECTURALS	APR/2021
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	REVISED TO PERFORMANCE	SEPT/2020
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.


Client	HVACDESIGNS LTD. 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	HEAT LOSS 47490 BTU/H UNIT DATA		# OF RUNS S/A R/A FANS			Sheet Title		
ROYAL PINE HOMES		MAKE CARRIER	3RD FLOOR					BASEMENT HEATING LAYOUT	
Project Name CENTREFIELD (WEST GORMLEY) RICHMOND HILL, ONTARIO		MODEL 59TN6A-060-14V	2ND FLOOR		11	5	3		
		INPUT 60 MBTU/H	1ST FLOOR		10	3	2		
		OUTPUT 58 MBTU/H	BASEMENT		4	1	0	Date	SEPT/2020
		COOLING 3.0 TONS						Scale	3/16" = 1'-0"
OPT 2ND 4502		FAN SPEED 1145 cfm @ 0.6" w.c.		ALL S/A DIFFUSERS 4 "x10" UNLESS NOTED OTHERWISE ON LAYOUT. ALL S/A RUNS 5"Ø UNLESS NOTED OTHERWISE ON LAYOUT. UNDERCUT DOORS 1" min. FOR R/A			BCIN# 19669		
2942 sqft							LO#	87510	

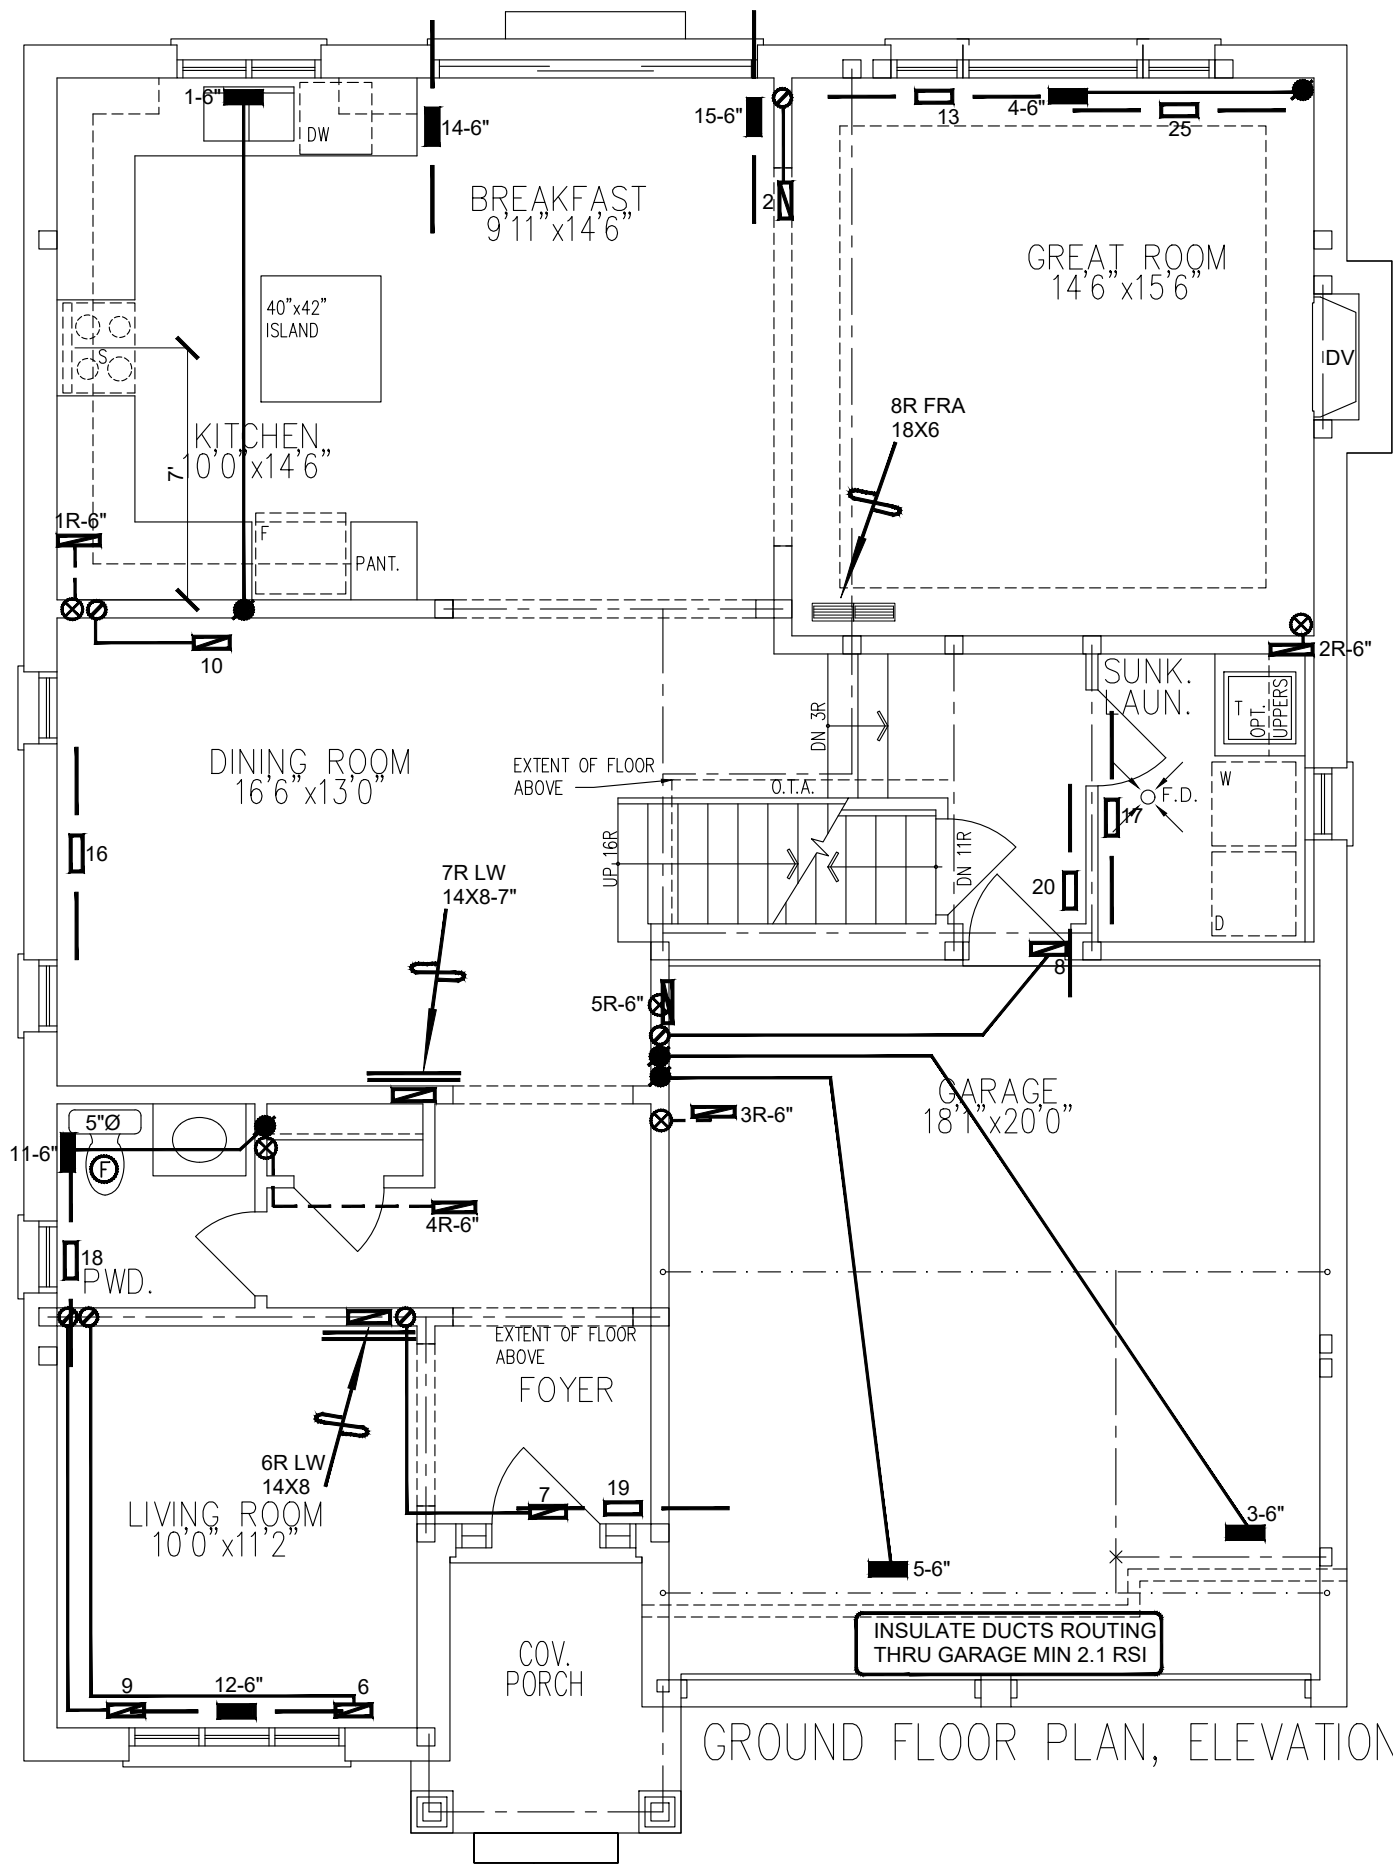

GROUND FLOOR PLAN, ELEVATION 'A'

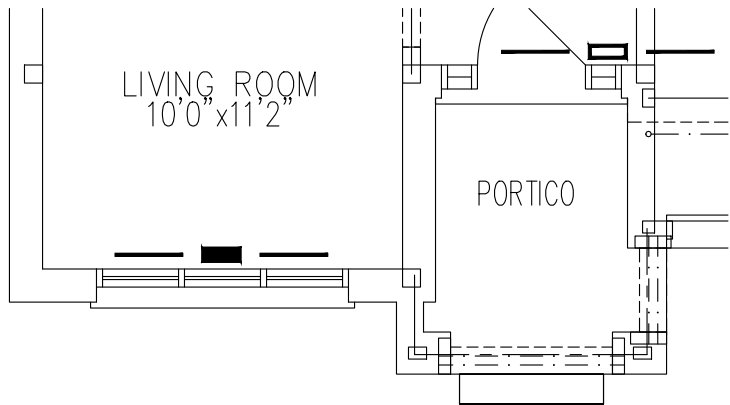

GROUND FLOOR PLAN, ELEVATION 'B'

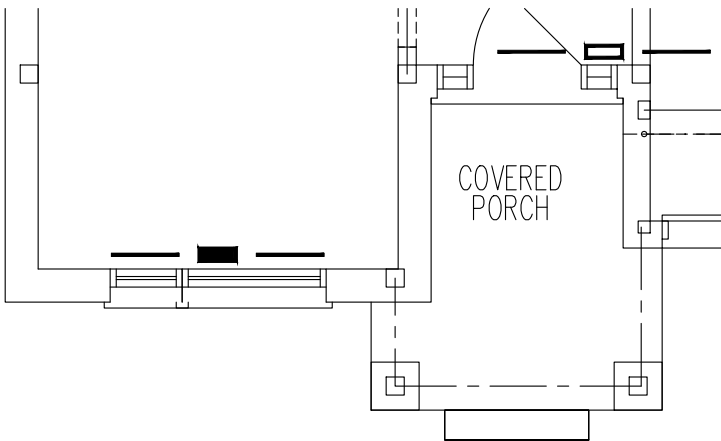

GROUND FLOOR PLAN, ELEVATION 'C'

CSA-F280-12


SB-12 PERFORMANCE

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.
Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

HVAC LEGEND								3.	REVISED AS PER CAD	JUNE/2021
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.	REVISED AS PER ARCHITECTURALS	APR/2021
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	REVISED TO PERFORMANCE	SEPT/2020
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services	Sheet Title	
ROYAL PINE HOMES			FIRST FLOOR HEATING LAYOUT	
Project Name			Date	SEPT/2020
CENTREFIELD (WEST GORMLEY) RICHMOND HILL, ONTARIO			Scale	3/16" = 1'-0"
OPT 2ND 4502		BCIN# 19669		
		LO#	87510	
2942 sqft		Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.		

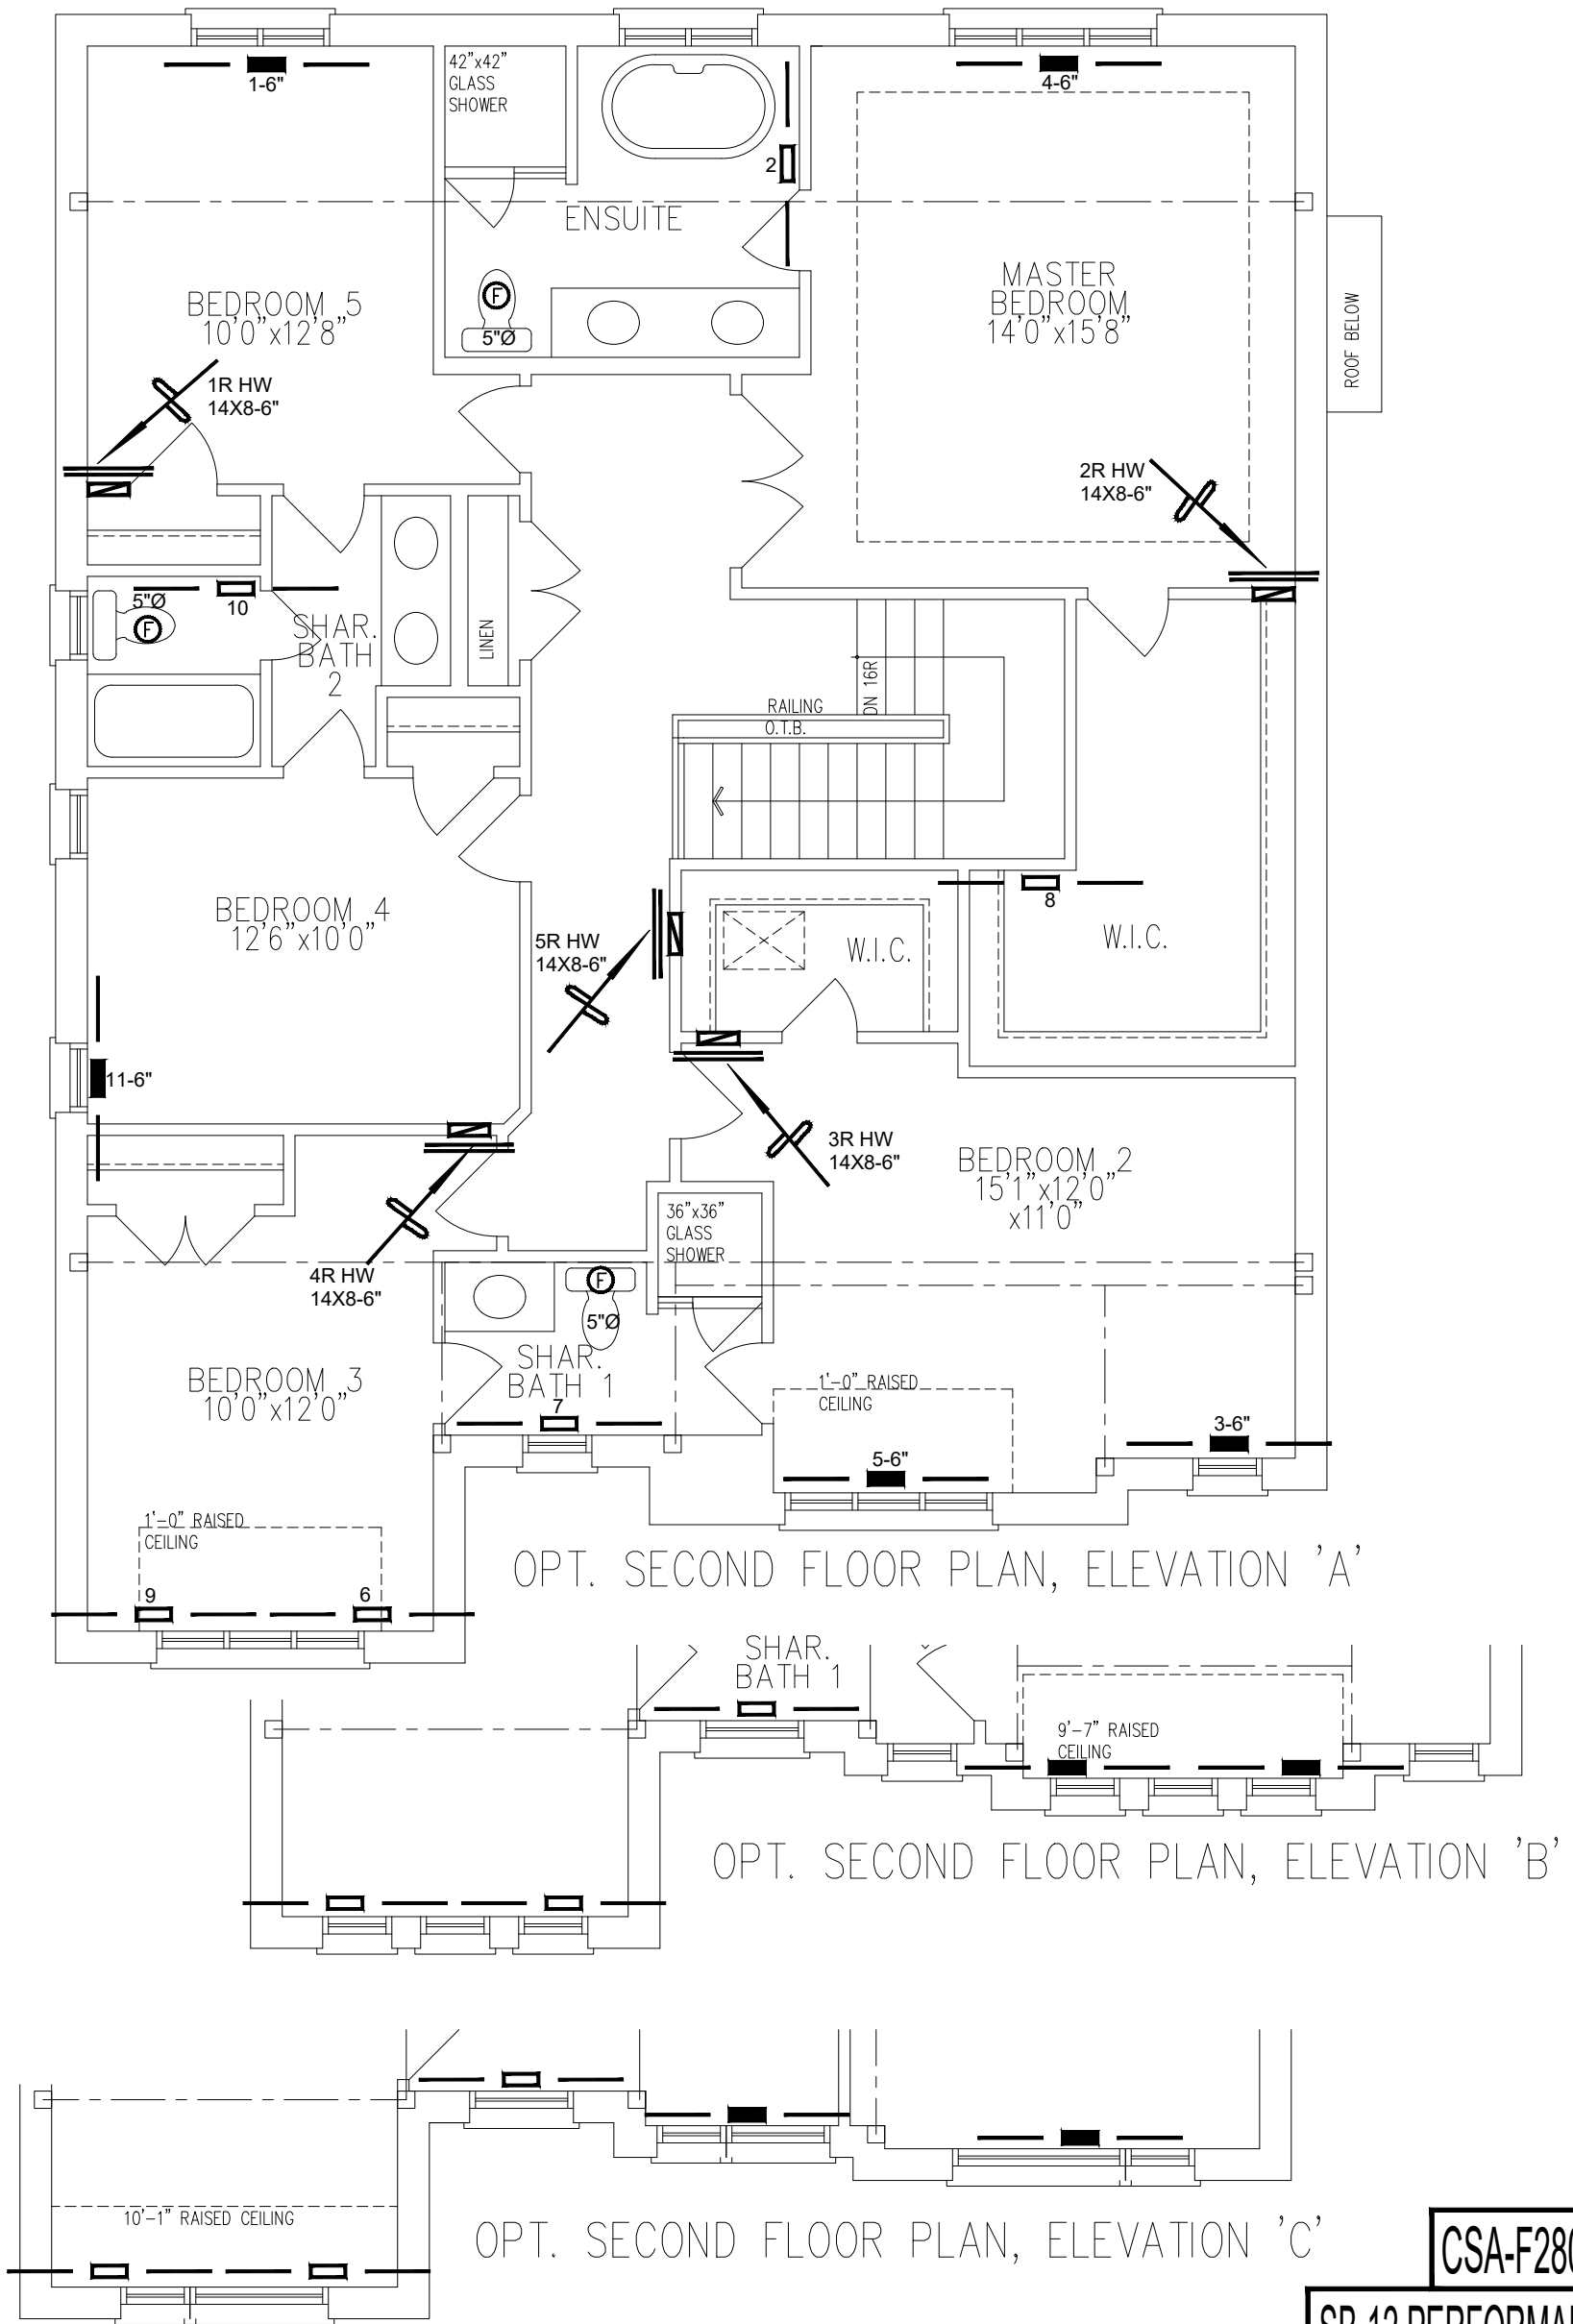

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.

Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

HVAC LEGEND								3.	REVISED AS PER CAD	JUNE/2021
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.	REVISED AS PER ARCHITECTURALS	APR/2021
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	REVISED TO PERFORMANCE	SEPT/2020
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Sheet Title		SECOND FLOOR HEATING LAYOUT
Project Name			Date	SEPT/2020	
CENTREFIELD (WEST GORMLEY) RICHMOND HILL, ONTARIO			Scale	3/16" = 1'-0"	
OPT 2ND 4502			BCIN# 19669		
2942 sqft			LO#	87510	