SCHEDULE "B"

SPECIFICATIONS TOWNHOMES 100 SERIES

ENERGY STAR

PLAN

#:

4M-1290 DEERFIELD VILLAGE 2 MODEL: 110 The Thomas Rev.

LOT:

CIVIC ADDRESS:

640 Tranquil Stream Private

Annexed to the Agreement of Purchase and Sale between VALECRAFT HOMES LIMITED Mridula Madabhushanam & Sai Mohan Kilambi

The Vendor agrees to include the following items in the purchase price herein:

LANDSCAPING:

- Nursery Grown Sodding
- Precast Patio Slab Walkway
- Tree Planting as per Municipality approved Landscape Plans
- Asphalt basecoat paved driveway
- Lot to be graded to Municipality approved Grading Plan

EXTERIOR FINISHES

- Brick, stone, vinyl & /or vinyl cedar shakes on front façade as per plan. Complete with Signature Valecraft Homes Ltd. decorative brick at front entrance as per plan
- Maintenance-free vinyl siding with aluminium soffit and fascia as per plan.
- Limited Lifetime warranty self-sealing fiberglass roof shingles
- Maintenance-free Low E Argon filled Zone 2 PVC vinyl windows and wood jamb extension throughout (where applicable) operable and non-operable as per OBC.
- Colonial embossed insulated steel clad doors leading to exterior (Front door with thermal glass lite) (as per plan)
- Front entrance door with sidelite and/ or feature highliter windows as per plan
- PVC vinyl sliding patio doors w/ wood jamb extension at rear (except Models 105 & 130 c/w full lite garden door) as per plan
- Oversized rear basement window as per plan
- Screens on all operating windows including basement and sliding patio door
- Steel sectional overhead garage door with insert lite.
- Weatherstripping on all exterior insulated doors and all operating windows
- "Augusta Satin Nickel" front entrance grip set on front entrance door with security dead bolt or equivalent
- Poured concrete steel reinforced porch (with broom finish) at front entrance
- Cement parging on all above grade concrete
- Column as per plan.
- "Bristol" vertical Aluminum Mail Box in black or equivalent
- Exterior colour packages are pre-selected by the Vendor
- Maximum Roof Air Ventilation

STRUCTURAL AND FRAMING:

- Poured concrete Foundation Walls with steel reinforcement
- High density polyethylene drainage membrane
- Engineered Steel Beams and Steel Posts as per plan
- Kiln dried floor joists or pre-engineered floor joist system
- Exterior Walls 2" x 6" kiln dried studs @ 16" o/c or equivalent structure
- Party (common) wall 2" x 4" studs staggered @ 16" o/c
- Interior Walls 2" x 4" kiln dried studs @ 16" o/c (except for basement) (as per plan)
- Basement Exterior Walls 2" x 4" kiln dried studs @ 24" o/c full height
- Tongue and groove engineered OSB subfloor sheathing (joints sanded and screwed to joists throughout)
- Engineered OSB roof sheathing c/w H-clips
- Prefabricated roof trusses as per engineered design

INSULATION:

Exterior and Walkout walls: R-20 Fiberglass batt + R5 Continuous Insulated OSB Panel

Party (common) wall R-12 Fiberglass batt Ceiling attics: R-60 Fiberglass blown

Fully insulated & drywalled garage

Floors over unheated space: R-31 Fiberglass batt or blown

Cathedral/sloped ceilings R-31 Fiberglass batt (where applicable) Concrete Basement exterior walls: 2" Closed Cell Spray Foam and R12 Fiberglass batt

6 Mil polyethylene vapour barrier

ELECTRICAL:

- Underground utility wiring including hydro, bell and cablevision
- 100 amp service with 60 circuit breaker panel
- Heavy duty receptacles for stove and dryer
- "Decora" Style white plugs and switches throughout (except exterior)
- Smoke detectors & Carbon monoxide detector as per O.B.C.
- Front door chime
- Ceiling light fixture in all bedrooms with LED bulbs
- Ceiling Fixture in dining room (where applicable as per plan) with LED bulbs
- Chrome make-up bar lighting fixture in all bathrooms with LED bulbs
- Two exterior weather protected plugs
- Silver light fixture package supplied and installed by the Vendor with LED bulbs
- Electrical outlet in garage ceiling for future garage door opener

Purchaser Vendor Purchaser

ROUGH-INS:

- Connection Centre including 5 Multi Media Outlets. Each outlet to be complete with 3x CAT5(e) and 1x RG-6 coax wire. Each
- outlet to be capped with one 4 port finishing plate. Locations to be selected by Purchaser except Inventory Homes and Models are preselected by the Vendor.
- Conduit from basement to attic space for future wiring requirements
- Central vacuum rough-in (as per plan)
- Plumbing rough-in for future basement bathroom including and ventilation rough-ins. (as per plan) (Does not include waterline or electrical rough-ins)

PLUMBING AND FIXTURES:

- Vitreous China lavatory complete with single lever faucets in all bathrooms except laundry tub as per plan
- Double stainless steel kitchen sink with single lever faucet and veggie sprayer
- Power vented high-efficiency hot water heater (rental) in Mechanical room. (rental fee is determined by utility company)
- Pedestal sink in powder room as per plan (except Model 170)
 - 5' fiberglass tub/shower combo enclosed with full height ceramic tiled walls w/self-sealing grout to ceiling in ensuite and main bathroom (as per plan)
- Pressure balanced valves on all showers
- Hot and cold taps installed for automatic washer connection
- Two exterior hosebibs (one in garage, one in rear)
- Plumbing rough-in for future dishwasher installation
- Laundry tub installed with hot and cold taps
- Low flush water conserving toilets
- Chrome tissue holders, towel bar, robe hook, towel ring where applicable
- White plumbing fixtures in all bathrooms
- Shut off valves at all hot & cold lavatory and kitchen sink supply lines
- Sleeve for future waterline to fridge
- Water pressure booster pump

HEATING AND VENTILATION:

- Natural gas fired forced air high efficiency furnace with electronic pilot ignition in Mechanical room
- Separate switch exhaust fans in all bathrooms and powder room vented to exterior
- Kitchen exhaust fan Microwave/Hood Fan combination (white) over range vented direct to exterior
- All ductwork is cleaned prior to occupancy
- Programmable thermostat
- Heat Recovery Ventilation (HRV) and Humidifier in Mechanical room
- Central air conditioning
- Enercare Smarter Home Essentials Package (complimentary for 3 years)

FIREPLACE- Standard In Great Room of Model 170 Only:

- Natural gas direct vented fireplace with decorative black trim kit w/ spark ignition
- Polished porcelain or ceramic tiled w/self-sealing grout fireplace surround

FLOORING:

- 36 oz. quality carpet in all finished areas c/w 11 mm foam underpadding except areas shown as ceramic or hardwood as per plan. Choice of one colour of carpet throughout.
- Ceramic tile w/self-sealing grout at front entrance, powder room, kitchen/dinette, laundry room, main and ensuite bathrooms (from Builder's Standard selections) as per plan
 - 3 1/8" Engineered natural oak hardwood flooring in Great Room/Living Room, Dining Room, Lower Hallway & 2nd Floor Hallway where applicable as per plan.

INTERIOR TRIM, CABINETRY AND FINISH CARPENTRY:

- Builder's standard painted raised panel interior passage doors
 - Pre-hung Builder's standard painted raised panel swing doors c/w bullet catch on all closet doors except pre-finished sliding closet doors located as per plan
- <u>4 1/8"</u> Nivaga style baseboard and 2 3/4" Nivaga style casing throughout (MDF painted white)
- Privacy sets for all bathrooms, powder room and master bedroom
- Satin chrome door hardware on interior doors
- Security deadbolt at front entrance door and garage entry door inside home (balcony door on model 130)
- Kitchen cabinetry with laminate countertops
- Vanities with laminate countertops (including backsplash in same material) in all bathrooms (except powder room as per plan)
- Approx. 36" upper kitchen cabinetry
- Kitchen cabinetry opening for future dishwasher
- Kitchen pantry where applicable as per plan
- Solid natural oak colonial spindles, posts, and/or handrail & brackets as per plan
- Natural oak nosing under standard railing areas as per plan
- Single full width Melamine Laundry shelf approximately 12" Deep to be installed in all main & second floor laundry rooms above washer and dryer.
- Soft close on all cabinetry doors & drawers (excluding corner cabinets)

INTERIOR FINISHES:

- 9' Ceiling height on ground floor
- Textured stipple ceilings with decor perimeter in all finished areas except bathrooms, powder room and kitchen which shall have smooth ceilings
- Two-tone paint: one builder standard colour latex paint to be used throughout (semi-gloss latex for bathrooms, powder room,
- kitchen), All trim & interior doors shall be white semi-gloss latex
- Mirrors with bevelled square corners above all bathroom vanities and powder room
- Kitchen backsplash ceramic tiled w/ self-sealing grout 6" x 6" (from builder's standard backsplash selections)

WARRANTY COVERAGE:

- 7 Year major structural warranty
- 2 Year mechanical and building envelope warranty
- 1 Year material and workmanship warranty

Purchaser Purchaser Vendor

The Purchaser acknowledges that:

- 1. Prices and specifications which do not form part of this Agreement are subject to change without notice at the sole discretion of the vendor.
- 2. The vendor may substitute materials of equal or greater value without consent.
- 3. The Vendor has the right to exercise full architectural control over exterior finishes and as such, the Vendor shall have final approval of all colour selections.
- 4. All colour and material selections are to be made from Vendor's standard samples unless otherwise paid for as an upgrade.
- 5. The vendor may, at his discretion, add brick to external sideyard walls to enhance the streetscape and/or to comply to municipal agreements.
- 6. The purchaser understands that all decorator items, furnishings, appliances, draperies, painted colour walls, and floors, wallpaper, panelling, alarm system, central air conditioning and eavestroughing found inside the model homes are for display purposes only and do not constitute standard items in the purchase price.
- 7. Service location, hot water tank and furnace location, basement wall height, specifications and material finishes may vary from model homes/plans.
- 8a. The number of steps required at entrances into the home may vary from the model home/plans depending on individual lot grading requirements.
- 8b. Purchaser acknowledges that exterior railings may be required at front and garage entrance stairs depending on individual lot grading.
- 9 Basement window wells may or may not be required depending upon individual lot grading requirements.
- 10. The purchaser understands that renderings and brochures are an artist's concept and that some variations may occur to the final finished product.
- 11. The Purchaser understands that vertical and horizontal chaseways, dropped ceilings and or bulkheads may be added or deleted in, but not limited to; kitchens, main floor living areas, finished basements, closets, pantries, laundry room, powder rooms, bathrooms and/or at wall and ceiling corners respectively in order to accommodate mechanical systems at the Vendor's discretion.
- 12. The Purchaser understands that all Multi Media locations are approximate and vary from chosen locations.
- 13. The purchaser understands that due to normal manufacturing production materials which are installed in their home may vary slightly in colour from the vendor's samples and/or model homes.
- 14. Due to the natural composition of such materials as Granite, Marble & some Quartz, inherent variations in texture, colour and consistency are to be expected and considered normal. As such, the Purchaser agrees not to hold the Vendor liable for such variations.
- 15. The wood used in the finishing products of your home such as wood flooring, cabinetry and railings exhibit natural variations in colour tone, graining pattern and consistency. As no two pieces of wood are identical, these natural variations will create colour variations upon staining thereby making it virtually impossible to achieve true colour consistency.
- 16. Any hardwood flooring installed in the Real Property is made of kiln-dried natural material which is subject to natural shrinkage (typically in winter when humidity levels tend to be low) and expansion (typically in summer when humidity levels tend to be high) for which the Purchaser(s) agrees is not the responsibility of the Vendor and agrees that the Vendor shall not be liable in respect of such issues. The Purchaser(s) also acknowledges being advised by the Vendor that ceramic tile rather than hardwood flooring is recommended at entry points to the home due to the possibility of water exposure. The Purchaser(s) is advised that the *Ontario Building Code* recommends against the installation of wood flooring in kitchens, bathrooms, entrance halls, laundry, and general storage areas (the "Designated Areas"). Wood flooring is water permeable and over time such flooring and sub-flooring beneath it could deteriorate if moisture persists. Should the Purchaser(s) selections for materials for the dwelling include wood flooring in the designated areas, the Purchaser(s) assumes the risks described herein voluntarily.
- 17. Zoning bylaws specify maximum driveway widths which are based upon frontages. A tapering of your driveway may be required depending upon the frontage and specifically if the frontage is less than average as in the case of a pie-shaped lot.
- 18. The grading and drainage of your lot has been designed and engineered to ensure that surface water is directed away from your home and into swales. These swales run at the side and rear of your property lines. Swales generally have more aggressive slopes relative to the general layout of your lot and will always occupy a portion of the useable space of your lot to serve their function properly.
- 19. Purchaser(s) acknowledge the requirement to install an approximate 3' x 3' landing with stairs at the garage entrance to the house as per OBC if more than 3 risers are required as a result of grading.
- 20. Purchaser(s) acknowledge that kitchen and bathroom ceramic wall border and or decorator insert tiles selected by the Purchaser(s) are installed at the discretion of the installation contractor unless specified otherwise by the Purchaser(s).
- 21. Purchaser(s) acknowledge that rooflines may be altered due to block assembly.
- 22. Purchaser(s) acknowledge that High Efficiency Washing machines have the potential to create vibrations due to the tub spinning at very high speeds.

PURCHASER		
	VALECRAFT H	IOMES LIMITED
URCHASER		
	DATE	
ATE		
	MODEL:	110 The Thomas Rev.
LOT NUMBER: M73	PROJECT:	DEERFIELD VILLAGE 2



Internal B1A Deerfield 2 - Phase 2

PURCHASERS: Mridula Madabhushanam and Sai Mohan Kilambi

Printed: 7-Apr-21 2:17 pm

LOT NUMBER	PHASE	HOUSE TYPE	CLOSING DATE
M73	2	110 THE THOMAS	
			-/4 CM


ITEM	QTY EXTRA/CHANGE	PRICE	INTERNAL USE
* 1 90831	1 STANDARD - AC UNIT 16 SEER 1.5 TON	\$ 0.00	Each
30838	Note: Location to be determined by Head Office		
* 2 90184	1 - KITCHEN - STANDARD - SLEEVE FOR FUTURE WATERLINE TO FRIDGE	\$ 0.00	Each
30839	Note:		
* 3 90183	1 STANDARD - SOFT CLOSE DOORS AND FULL EXTENSION SOFT CLOSE TRACK ON DRAWERS ON ALL CABINETRY THROUGHOUT HOUSE	\$ 0.00	Each
30840	Note: Excluding Corner Cabinetry Where Applicable		
* 4 88685	1 - ENSUITE BATH - BONUS - LUXURY ENSUITE - 4PC ENSUITE WITH TUB AND SEPARATE SHOWER IN BUILDERS STANDARD SELECTIONS	\$ 0.00	Each
30841	Note: AS PER SCHEDULE H DATED MARCH 30th, 2021 -See Item 11		
*5 90943	1 - UPPER HALL - RAILING - OAK COLONIAL POSTS, COLONIAL HANDRAILS & COLONIAL SPINDLES IN LIEU OF THE HALF WALL IN THE SECOND FLOOR HALLWAY	*\$ 2,227.00	Each
30852	Note: AS PER SCHEDULE H DATED MARCH 30th, 2021		
*6 90955 30853	1 - GREAT ROOM - RAILING - OAK COLONIAL POSTS, COLONIAL HANDRAILS & COLONIAL SPINDLES IN LIEU OF THE HALF WALL ON THE STAIRS ADJACENT TO GREAT ROOM C/W OPEN STRINGERS Note: AS PER SCHEDULE H DATED MARCH 30th, 2021	*\$ 1,682.00	Each
*7 90835	1 - KITCHEN - CABINETRY - EXTEND FRIDGE UPPER TO APPROX. 2FT DEEP	*\$ 187.00	Each
30859	Note: IN STANDARD LEVEL CABINETRY, AS PER SCHEDULE 'H' DATED MARCH 30th, 2021		
8 30861	1 - KITCHEN - SUPPLY AND INSTALL IN KITCHEN UPC9-2B, INCLUDES UPGRDAE TO 42" HIGH UPPERS WITH FILLER DETAIL TO UPGRADED BULKHEAD, APPROX. 26" DEEP X 10" HIGH IN STANDARD CABINETRY. Note: IN STANDARD KITCHEN LAYOUT. PURCHASER ACKNOWLEDGES AND ACCEPTS THAT 42" HIGH KITCHEN CABINETRY UPGRADED WOOD DOORS WILL HAVE CENTER STYLE. AS PER UPC SKETCH DATED MARCH 30th, 2021	\$ 427.00	Each
* 9 88287	1 S&S ELECTRIC UPGRADES AS PER ATTACHED QUOTE & SKETCH.	*\$ 545.79	Each
30881	Note: QUOTE # SS4420 DATED MARCH 01/2021		
*10 88294	1 ORBITAL UPGRADES AS PER ATTACHED QUOTE & SKETCH.	*\$ 183.06	Each
30882	Note: QUOTE # OR5586 DATED MARCH 01/2021		
*11 88685	1 BONUS - LUXURY ENSUITE - 4PC ENSUITE WITH TUB AND SEPARATE SHOWER IN BUILDERS STANDARD SELECTIONS	\$ 0.00	Each
32376	Note: See Item 4 for further upgrade -As per Schedule H dated March 30, 2021	10,000	

Vendor Initials:	Durchaser Initials:	

PREPARED BY: Nicole Trudel LOCKED BY: Lisa Ballard

PE 1,434-1 InvoiceSQL.rpt 28mar21 CONSTRUCTION SCHEDULING APPROVAL
PER:

DATE:



Internal B1A

Deerfield 2 - Phase 2

PURCHASERS: Mridula Madabhushanam and Sai Mohan Kilambi

Printed: 7-Apr-21 2:17 pm

LOT NUMBER PHASE HOUSE TYPE CLOSING DATE
M73 2 110 THE THOMAS

ITEM QTY EXTRA/CHANGE

PRICE INTERNAL USE

 Sub Total
 \$5,251.85

 HST
 \$0.00

 Total
 \$5,251.85

Payment Summary

Paid By

Amount

Total Payment:

PURCHASER:		07-Apr-21	VENDOR:	
	Mridula Madabhushanam	DATE		PER: Valecraft Homes Limited
PURCHASER:		07-Apr-21	DATE:	
	Sai Mohan Kilambi	DATE		

PREPARED BY: Nicole Trudel LOCKED BY: Lisa Ballard

PE 1,434-2 InvoiceSQL.rpt 28mar21 CONSTRUCTION SCHEDULING APPROVAL
PER: _____
DATE: _____




THE THOMAS 2098 sq.ft (365 sq.ft. Basement)

MODEL 110

Plan No.: 4M-1290 Lot: M73

Date: March 30th, 2021


Purchaser: Spec Home **Purchaser:**

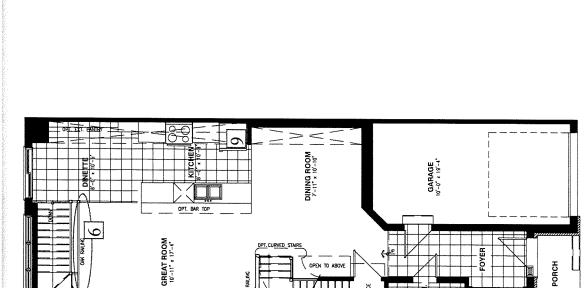

MECH./ STORAGE ROOM

2

FAMILY ROOM 18'-0' x 13'-4'

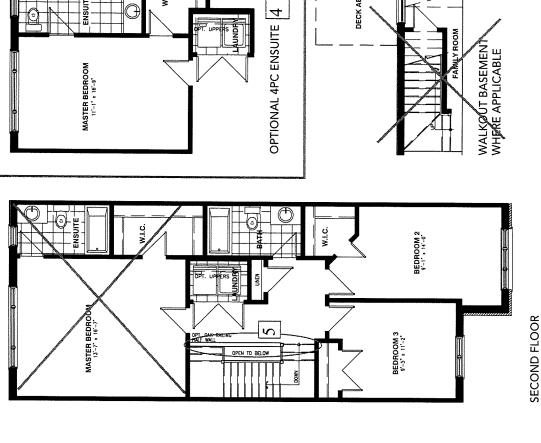

W.I.C.

Schedule

DECK ABOVE

GROUND FLOOR


BASEMENT FLOOR

| Vertical and/or horizontal bulkheads (chaseways) may be required to contain mechanical piping.

| Nature of the space of the stated floor area. *Note: Number of steps varies due to site grading.

05/22/2019

Schedule "D-1"

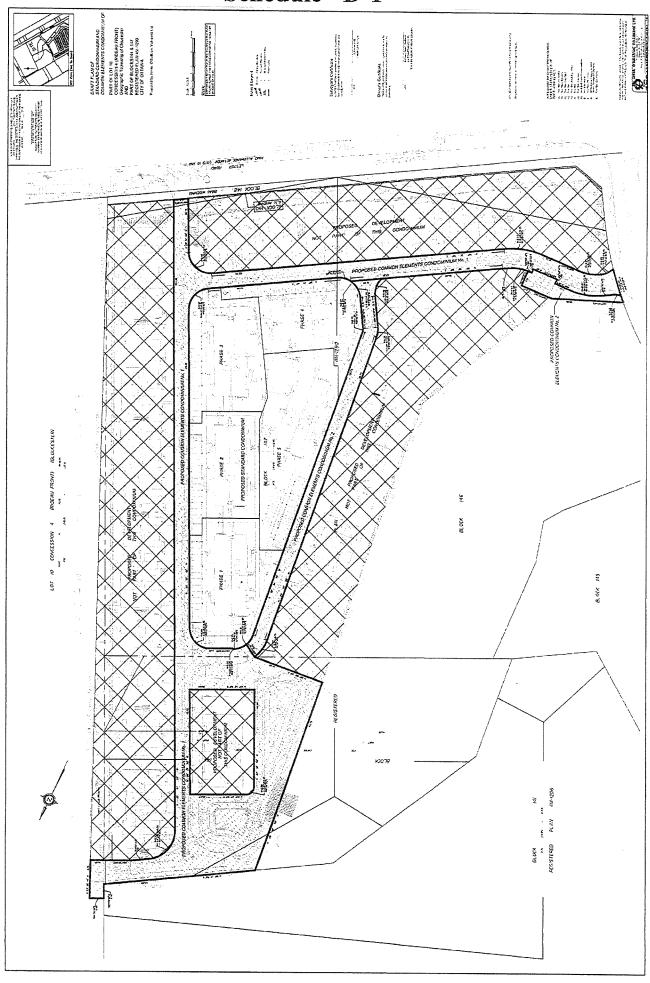

PURCHASI	ER (S):	***************************************		
PURCHASI	ER (S):			
PLAN: _	4M-1290		PROJECT:	Deerfield Village 2
BUILDER	'S LOT/ UNIT #	M73	CIVIC ADDRESS	640 Tranquil Stream Private



Roma Collection

All Models STANDARD



BREAKFAST / DINETTE A3016P-11 Bulb: 1 x A19 LED Bulb



DINING ROOM / STAIRWELL / HIGH CEILINGS (Plan Permitting) A3016ch-11 Bulbs: 3 x A19 LED Bulb




ENTRY / HALL / LAUNDRY / BEDROOMS / DEN / STUDY / BATH CEILING / KITCHEN SINK / FINISHED BASEMENT AREAS (Plan Permitting)
A3012-11
12" dia.
Bulbs: 2 x A19 LED Bulb




KITCHEN / MASTER BEDROOM (Plan Permitting) A3016-11 16" dia. Bulbs: 3 x A19 LED Bulb



BASEMENT STAIRS / SOFFIT AFR4-0930-WH LED Recessed Light 5" dia



POWDER ROOM VANITY (Plan Permitting) A16012-7 14" Wide Bulbs: 2 x A19 LED Bulb



BATHROOM VANITY A16013-7 24" Wide Bulbs: 3 x A19 LED Bulb



CLOSET / PANTRY A121-11 Bulb: 1 x A19 LED Bulb



FRONT EXTERIOR (Plan Permitting) SAN-A1010-6 Bulb: 1 x A19 LED Bulb



BACK EXTERIOR SAN-A40455-6 Bulb: 1 x A19 LED Bulb

* All dimensions are approximate.
**** Keyless LIGHT OUTLETS IN GARAGE, UNFINISHED BASEMENT AREAS***



Tel: (613) 748-0432 Fax: (613) 748-0355

Estimate No#: SS4420

Customer Copy

Customer:

Mridula Madabhushanam & Sal Mohan Kilambi

Home: 613-700-6151

Cell: 613-301-6642 Email: talk2mridula@hotmail.com;

skilambi@gmail.com

Builder: Project: VALECRAFT HOMES LTD. Deerfield Village 2 Towns

Lot:

Date:

Closing Date:

M73

Salesperson:

Jason Thompson 03/01/2021

Location	Qty	Product / Installation Details	Plan Code	Unit Price	Customer Total
Great Room	1.00	15 Amp Standard Plug Add 15 AMP plug approx 60 inches from floor above fireplace beside conduit	А	\$120.00	\$120.00
Kitchen	2.00	Standard Light Outlet (Keyless) Add 2 keyless fixtures on added switch for future pendant lighting	F	\$129.00	\$258.00
Great Room	1.00	Single Pole Switch Switch for kitchens - keyless fixtures	F	\$105.00	\$105.00
Kitchen	1.00	20 Amp USB Charger Receptacle Upgrade to USB plug (standard)	I	\$	\$0.00
			Customer Su	btotal:	\$483.00
*** Total pri	ce includ	es all applicable taxes	HST:		\$62.79
			Total:		\$545.79

"Purchaser has acknowledged that they have discussed any kitchen layout modifications with their electrical representative. If modifications are made after signing off on electrical, this will incur additional charges."

Customer Signature	Date



Tel: (613) 748-0432 Fax: (613) 748-0355

Estimate No#: OR5586

Customer Copy

Customer:

Mridula Madabhushanam & Sal Mohan Kilambi

Home: 613-700-6151 Cell: 613-301-6642 Email: talk2mridula@hotmail.com;

skilambi@gmail.com

Builder: Project: VALECRAFT HOMES LTD. Deerfield Village 2 Towns

Lot:

M73

Closing Date:

Jason Thompson (OR) 03/01/2021

Salesperson: Date:

Location	Qty	Product / Installation Details	Plan Code	Unit Price	Customer Total
N/A	1.00	2" PVC Conduit from Basement to Attic 2" PVC Conduit from Basement to Attic	CONDUIT	\$	\$0.00
N/A	1.00	Vacuum Rough-In Outlet Vacuum Rough-In Outlets	VAC RI	\$	\$0.00
Great Room	1.00	(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as show on floor plan	n 🛕	\$	\$0.00
Family Room	1.00	(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as show on floor plan	n 🛣	\$	\$0.00
Master Bedroom	1.00	(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as show on floor plan	n 🛕	\$	\$0.00
Bedroom #2	1.00	(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as show on floor plan	n 🛕	\$	\$0.00
Bedroom #3	1.00	(4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets (4) Port Plate - (1) Phone CAT5e & (2) Data CAT5e & (1) Cable RG6 Outlets - Location as show on floor plan	n Ž	\$	\$0.00
Great Room	1.00	Direct 2" Conduit w/ Wall Plates Direct 2" Conduit w/ Wall Plates - Location as shown on floor plan - Conduit installed in-wall to conceal wires connected to wall mounted TV - approx 60 inches from floor	CONDUIT	\$162.00	\$162.00
		-	Customer Sub	total:	\$162.00
*** Total pri	ce includ	es all applicable taxes	HST:		\$21.06
			Total:		\$183.06





Tel: (613) 748-0432 Fax: (613) 748-0355

Customer Signature	Date

ww.orbitalti.com