

Deerfield Village II



SCHEDULE "B"  
SPECIFICATIONS  
CONDO FLATS  
5000 Series

BUILDER'S REF #: T36  
MODEL: 5104

CIVIC ADDRESS: 715-D Dearborn Private  
Annexed to the Agreement of Purchase and Sale between VALECRAFT HOMES LIMITED  
and Portobello Partnership  
The Vendor agrees to include the following items in the purchase price herein:

EXTERIOR FINISHES

- Combination stone and brick complete with concrete sills (smooth faced) and brick soldier course headers
- Maintenance-free siding with aluminium soffit and fascia as per plan Colour pre-selected by the Vendor
- Limited Lifetime warranty self-sealing fiberglass roof shingles
- Maintenance-free Low E Argon filled triple pane PVC vinyl windows with wood jamb extension throughout operable and non-operable as per OBC. Colour pre-selected by the Vendor
- Insulated steel clad unit entry door
- Single swing door w/wood jamb extension to balcony as per plan
- Screens on all operating windows and sliding patio door
- Weatherstripping on all exterior insulated doors and all operating windows
- Satin Nickel entrance passage set on unit entry door with security dead bolt or equivalent
- Poured concrete steel reinforced front entrance slab (broom finish) as per plan
- Concrete parging on all above grade concrete
- Decorative columns at front entranceway as per plan
- Exterior colour packages are pre-determined by the Vendor
- Maintenance free exterior decking

STRUCTURAL AND FRAMING:

- High density polyethylene drainage membrane
- Engineered Beams and Posts as per plan
- Pre-engineered floor joist system
- Exterior Walls 2" x 6" kiln dried studs @ 16" o/c or equivalent structure
- Party (common) wall 2" x 4" or 2" x 6" studs as per plan
- Interior Walls 2" x 4" kiln dried studs @ 16" o/c
- Below Grade Exterior Walls 2" x 4" kiln dried studs @ 16" o/c full height
- Tongue and groove subfloor sheathing (joints screwed to joists throughout)
- Sound attenuation system between units
- 7/16" Engineered OSB roof sheathing c/w H-clips
- Pre-engineered roof trusses

INSULATION:

- Exterior walls: R-20 Fiberglass batt + R5 Continuous Insulated OSB Panel
- Party (common) wall: R-12 Fiberglass batt
- Attics: R-60 Fiberglass blown
- Floors over unheated space: R-31 Fiberglass batt or blown (3rd Floor Only)
- Exterior walls below Grade: R-12 Fiberglass batt + 2" closed cell spray foam
- 6 Mil polyethylene vapour barrier
- High density insulation under the footings (where required)

ELECTRICAL:

- Underground utility wiring including hydro, bell and cablevision
- 100 amp service with 48 circuit breaker panel
- Heavy duty receptacles for stove and dryer
- All interior plugs and switches "Decora" Style in white
- Smoke detectors & Carbon monoxide detector as per O.B.C.
- Ceiling light fixture in all bedroom suites with LED Bulbs
- Chrome vanity lighting fixture in all bathrooms with LED Bulbs
- Builder's standard Silver light fixture package supplied and installed by the Vendor with LED Bulbs

Purchaser

Purchaser

Vendor

**ROUGH-INS:**

- Connection Centre including 3 Multi Media Outlets. Each outlet to be complete with 3x CAT5(e) and 1x RG-6 coax wire. Each outlet to be capped with one 4 port finishing plate. Locations to be selected by Purchaser except Inventory Homes and Models are preselected by the Vendor.

**PLUMBING AND FIXTURES:**

- Vitreous China lavatory complete with single lever faucets in all bathrooms as per plan
- Double stainless steel kitchen sink with single lever chrome faucet and veggie sprayer
- Tankless hot water heater (rental) (rental fee is determined by utility company) (rental fee is determined by utility company)
- 5' fiberglass tub/shower combo with full height ceramic tiled walls w/self-sealing grout to ceiling in main bathroom as per plan
- 5'x3' acrylic shower base with full height ceramic tiled walls w/self-sealing grout to ceiling in ensuite bathroom as per plan
- Pressure balanced valves on all showers
- Hot and cold taps installed for automatic washer connection
- Low flush water conserving toilets
- Chrome towel bars, tissue holders and robe hook in all bathrooms
- White plumbing fixtures in all bathrooms
- Shut off valves on all hot/ cold water supply lines
- Sleeve for a future waterline to fridge

**HEATING AND VENTILATION:**

- Hydronic air handler with AC coil (heating & cooling system) and HRV & Humidifier
- All ductwork is cleaned prior to occupancy
- Enercare Smarter Home Essentials Package (complimentary for 3 years)
- Kitchen exhaust fan Microwave/Hood Fan combination (white) over range vented to exterior
- Third Party Energy Star Registration, testing and certification

**FLOORING:**

- 36 oz. quality broadloom in bedrooms c/w 11 mm foam underpadding. Choice of one colour of carpet throughout.
- Ceramic tile w/self-sealing grout at front entrance, bathrooms, kitchen/dinette,walk-in pantry/ storage,laundry room and mechanical room as per plan from Builder's Standard Selections
- 3 1/8" Engineered natural oak hardwood flooring in Living Room, Dining Room and Hallway as per plan.

**INTERIOR TRIM, CABINETS AND FINISH CARPENTRY:**

- Builder's standard painted raised panel interior passage doors
- Pre-hung Builder's standard painted raised panel swing doors c/w bullet catch on all closet doors except pre-finished sliding closet doors located as per plan
- 4 1/8" Nivaga style baseboard and 2 3/4" Nivaga style casing throughout (MDF painted white)
- Privacy sets for all bathrooms and master bedroom
- Satin Chrome door hardware on interior doors
- Security deadbolt on entrance doors and balcony door as per plan
- Kitchen cabinetry with laminate countertops
- Vanities w/laminate countertops (including backsplash in same material) in all bathrooms
- Solid natural oak colonial spindles, posts, and/or handrail & brackets as per plan

**INTERIOR FINISHES:**

- Approximately 9' ceilings (except models 5101, 5102, 5104 8'-6" & model 5103 8'-0")
- Flat ceilings throughout
- Two-tone paint: one builder standard colour latex paint to be used throughout (semi-gloss latex for bathrooms, powder room, kitchen), All trim & interior doors shall be white semi-gloss latex
- Mirrors with bevelled square corners above all bathroom vanities
- Kitchen backsplash (6" x 6") ceramic tiled w/ self-sealing grout (from builder's standard)

**APPLIANCES:**

- 6 White Appliances including Fridge, Stove, Dishwasher, Spacesaver Microwave/Rangehood, Stacked Washer and Dryer from Builder's Standard Selections installed by the Vendor

**WARRANTY COVERAGE:**

- 7 Year major structural warranty
- 2 Year mechanical and building envelope warranty
- 1 Year material and workmanship warranty

Purchaser

Purchaser

Vendor

The Purchaser acknowledges that:

1. Prices and specifications which do not form part of this Agreement are subject to change without notice at the sole discretion of the vendor.
2. The vendor may substitute materials of equal or greater value without consent.
3. The Vendor has the right to exercise full architectural control over exterior finishes and as such, the Vendor shall have final approval of all colour selections.
4. All colour and material selections are to be made from Vendor's standard samples unless otherwise paid for as an upgrade.
5. The purchaser understands that all decorator items, furnishings, appliances, draperies, painted colour walls, and floors, wallpaper, panelling, alarm system, central air conditioning and eavestroughing found inside the model homes are for display purposes only and do not constitute standard items in the purchase price.
6. Service location, tankless hot water heater and furnace location, specifications and material finishes may vary from model homes/ plans.
7. The number of steps required at entrances into the building may vary from the plans depending on grading requirements.
8. The purchaser understands that renderings and brochures are an artist's concept and that some variations may occur to the final finished product.
9. The Purchaser understands that vertical and horizontal chaseways may be required at wall corners and ceiling corners respectively in order to contain mechanical pipes as required.
10. The Purchaser understands that all Multi Media locations are approximate and vary from chosen locations.
11. The purchaser understands that due to normal manufacturing production materials which are installed in their home may vary slightly in colour from the vendor's samples and/or model homes.
12. Due to the natural composition of such materials as Granite and Marble, inherent variations in texture, colour and consistency are to be expected and considered normal. As such, the Purchaser agrees not to hold the Vendor liable for such variations.
13. The wood used in the finishing products of your home such as wood flooring, cabinetry exhibit natural variations in colour tone, graining pattern and consistency. As no two pieces of wood are identical, these natural variations will create colour variations upon staining thereby making it virtually impossible to achieve true colour consistency.
14. Any hardwood flooring installed in the Real Property is made of kiln-dried natural material which is subject to natural shrinkage (typically in winter when humidity levels tend to be low) and expansion (typically in summer when humidity levels tend to be high) for which the Purchaser(s) agrees is not the responsibility of the Vendor and agrees that the Vendor shall not be liable in respect of such issues. The Purchaser(s) also acknowledges being advised by the Vendor that ceramic tile rather than hardwood flooring is recommended at entry points to the home due to the possibility of water exposure. The Purchaser(s) is advised that the Ontario Building Code recommends against the installation of wood flooring in kitchens, bathrooms, entrance halls, laundry, and general storage areas (the "Designated Areas"). Wood flooring is water permeable and over time such flooring and sub-flooring beneath it could deteriorate if moisture persists. Should the Purchaser(s) selections for materials for the dwelling include wood flooring in the designated areas, the Purchaser(s) assumes the risks described herein voluntarily.
15. Purchaser(s) acknowledge that kitchen and bathroom ceramic wall border and or decorator insert tiles selected by the Purchaser(s) are installed at the discretion of the installation contractor unless specified otherwise by the Purchaser(s).
16. Purchaser(s) acknowledge that High Efficiency Washing machines have the potential to create vibrations due to the tub spinning at very high speeds.

PURCHASER

PURCHASER

DATE

LOT NUMBER: T36

T. Oliver

VALECRAFT HOMES LIMITED

August 4, 2021

DATE

PROJECT: DEERFIELD VILLAGE 2

Internal B1A

Deerfield 2 - Phase Condo

PURCHASER: Portobello Partnership

Printed: 4-Aug-21 11:03 am

LOT NUMBER T36 Level: 1	PHASE Condo	HOUSE TYPE 5104	CLOSING DATE 23-Jun-22
----------------------------	----------------	--------------------	---------------------------

ITEM	QTY	EXTRA / CHANGE	PRICE	INTERNAL USE
*1 118432  35077	1	- STANDARD - AC UNIT 13 SEER 1.5 TON  Note: Location to be determined by Head Office	\$ 0.00	Each
*2 120199  35078	1	- BONUS - APPLIANCES - 3 BASIC STAINLESS STEEL KITCHEN APPLIANCES + MICROWAVE COMBO HOODFAN, AND BASIC FRONT LOAD WHITE WASHER AND DRYER  Note:	\$ 0.00	Each
*3 88294  34915	1	- ORBITAL UPGRADES AS PER ATTACHED QUOTE & SKETCH.  Note: As per quote #OR6338 Rev.01, dated 07/15/2021	* \$ 549.18	Each
*4 88287  34916	1	- S&S ELECTRIC UPGRADES AS PER ATTACHED QUOTE & SKETCH.  Note: As per quote #SS5011, dated 07/09/2021	* \$ 2,315.37	Each
5 120202  35132	1	- KITCHEN - Redesign Kitchen into galley design including peninsula with flush breakfast bar in Builder's Standard Finishes  Note: Includes Design fees. As per Schedule H dated August 4, 2021.	\$ 2,266.00	Each
6 118398  35383	1	- KITCHEN - CABINETS - UPC9-2B - BUILDERS STD CABINETS - STANDARD LAYOUT. INCLUDES UPGRADE TO 42IN UPPERS WITH FILLER DETAIL ON UPPER KITCHEN CABINETS TO UPGRADED BULKHEAD  Note: As per Sketch dated August 4, 2021. Purchaser Acknowledges and accepts that Upper Kitchen cabinets upgraded wood doors will have center style	\$ 1,932.00	Each
7 88441  35384	1	- ENSUITE BATH - BATHROOMS - ZITTA NICHE 12X12 STAINLESS STEEL  Note: Approximately centered on the long wall opposing the shower door with top of niche approximately 5' from floor, as per Schedule H dated August 4, 2021	\$ 447.00	Each

Sub Total	\$7,509.55
HST	\$0.00
Total	\$7,509.55

Payment Summary

<u>Paid By</u>	<u>Amount</u>
<u>Total Payment:</u>	

Vendor Initials: \_\_\_\_\_ Purchaser Initials: \_\_\_\_\_

PREPARED BY: Simon Clarke  
LOCKED BY: Lisa Ballard  
PE 1,619-1

InvoiceSQL.rpt 05may21

CONSTRUCTION SCHEDULING APPROVAL

PER: \_\_\_\_\_  
DATE: \_\_\_\_\_

Internal B1A

Deerfield 2 - Phase Condo

PURCHASER: Portobello Partnership

Printed: 4-Aug-21 11:03 am

LOT NUMBER T36 Level: 1	PHASE Condo	HOUSE TYPE 5104	CLOSING DATE 23-Jun-22
----------------------------	----------------	--------------------	---------------------------

ITEM	QTY	EXTRA / CHANGE	PRICE	INTERNAL USE
------	-----	----------------	-------	--------------

PURCHASER: 

Portobello Partnership

04-Aug-21

DATE

VENDOR: 

PER: Valecraft Homes Limited

DATE:

CONSTRUCTION SCHEDULING APPROVAL

PER:

DATE:



MODEL 5104

BLOCKS T - U - V

1258 SQ.FT

FIRST FLOOR

Site: DV2


Plan No.: 4M-1290

Unit: T36

Date: August 4, 2021

Purchaser: Portobello Partnership

Purchaser:

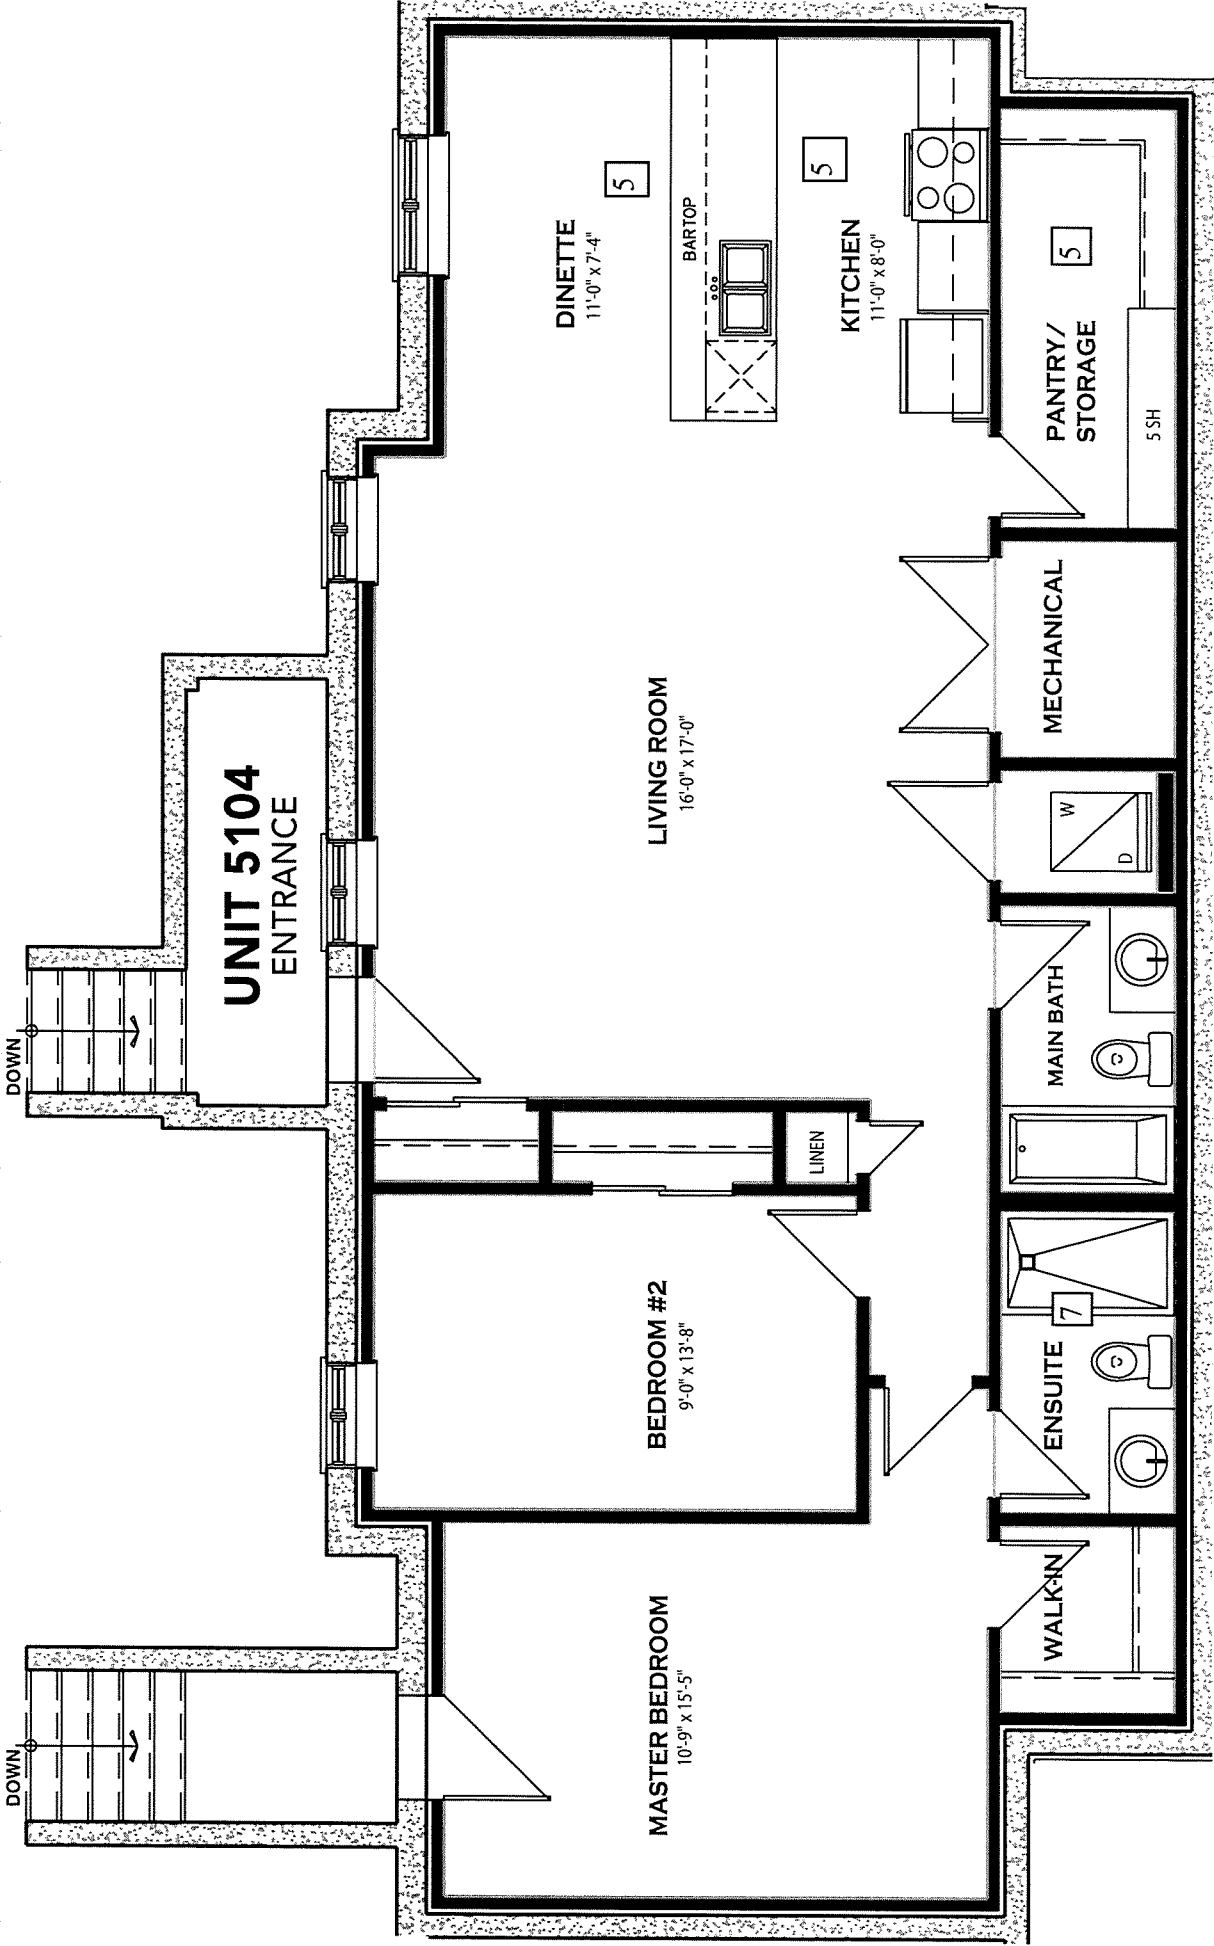

Schedule H




Vertical and/or horizontal bulkheads (chaseways) may be required to contain mechanical piping.  
All dimensions are approximate. E. & O.E., plans, materials and specifications are subject to change without notice. Actual useable floor space may vary from the stated floor area. \*Note: Number of steps varies due to site grading.



Valecraft  
Homes Ltd.

## Roma Collection


All Models  
STANDARD



### BREAKFAST / DINETTE

A3016P-11

Bulb: 1 x A19 LED Bulb

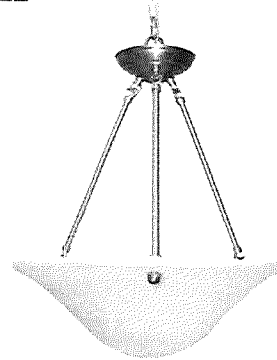

### DINING ROOM / STAIRWELL / HIGH CEILINGS

(Plan Permitting)

A3016ch-11

Bulbs: 3 x A19 LED Bulb




### ENTRY / HALL / LAUNDRY / BEDROOMS / DEN / STUDY / BATH CEILING / KITCHEN SINK / FINISHED BASEMENT AREAS

(Plan Permitting)

A3012-11

12" dia.

Bulbs: 2 x A19 LED Bulb




### KITCHEN / MASTER BEDROOM

(Plan Permitting)

A3016-11

16" dia.

Bulbs: 3 x A19 LED Bulb




### BASEMENT STAIRS / SOFFIT

AFR4-0930-WH

LED Recessed Light

5" dia.




### POWDER ROOM VANITY

(Plan Permitting)

A16012-7

14" Wide

Bulbs: 2 x A19 LED Bulb

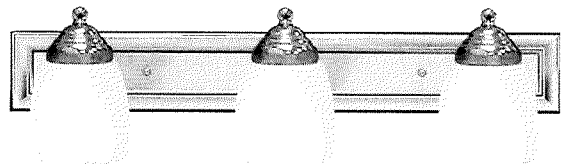


### BATHROOM VANITY

A16013-7

24" Wide

Bulbs: 3 x A19 LED Bulb



### CLOSET / PANTRY

A121-11

Bulb: 1 x A19 LED Bulb




### FRONT EXTERIOR

(Plan Permitting)

SAN-A1010-6

Bulb: 1 x A19 LED Bulb



### BACK EXTERIOR

SAN-A40455-6

Bulb: 1 x A19 LED Bulb

\* All dimensions are approximate.

\*\*\* Keyless LIGHT OUTLETS IN GARAGE, UNFINISHED BASEMENT AREAS\*\*\*

Project: DV2

Purchaser: Portobello Partnership

Plan #: 4M-1290

Purchaser: \_\_\_\_\_

Lot: T36

Date: August 4, 2021


Model: 5104

Upgrade #: STD, 4

OPTIONAL KITCHEN CABINET CROWN MOULDING,  
FILLER & **UPGRADE** BULKHEAD DETAILS


UPC9-1C Upgrade #: \_\_\_\_\_

- Includes upgrade to 40" uppers with filler detail & valence on upper kitchen cabinetry. Raised approx. 2" to upgraded bulkhead.

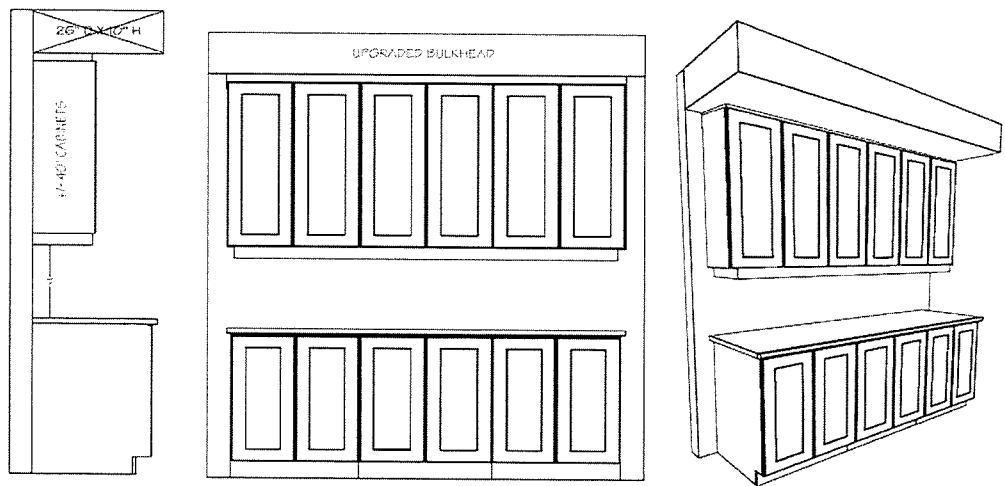


UPC9-2B Upgrade #: 6

- Includes upgrade to 42" uppers with filler detail on upper kitchen cabinetry to upgraded bulkhead.

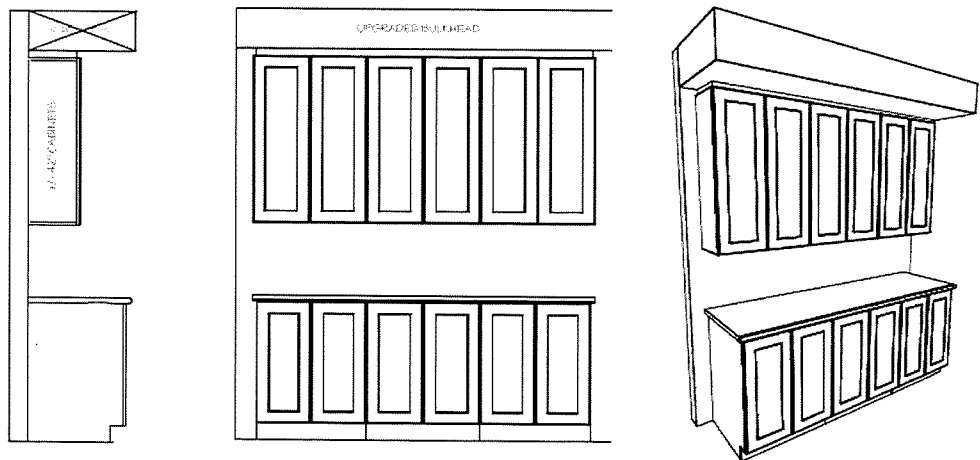

UPC9-3A Upgrade #: \_\_\_\_\_

- Includes upgrade to 40" uppers with crown moulding & filler detail on upper kitchen cabinetry to upgraded bulkhead.

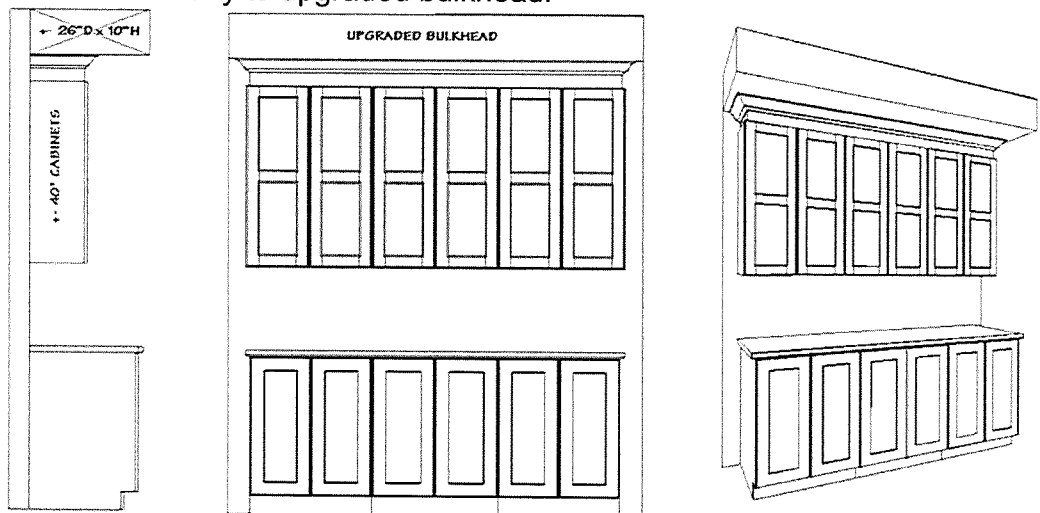

Site: DV2

Purchaser: Portobello Partnership

Plan No: 4M-1290

Lot: T36

Purchaser:

Date: August 4, 2021



# SCHEDULE 'D'

DEERFIELD VILLAGE PHASE 2 CONDOMINIUMS










Civic address 715-D Dearborn Private K1T 0W4

Block & Unit number T36


Purchasers: Portobello Partnership

Date: August 4, 2021

## LEGEND

-  COMMUNITY MAIL BOX
-  HYDRO TRANSFORMER
-  FIRE HYDRANT
-  BICYCLE PARKING
-  REFUSE STORAGE
-  LIGHT STANDARD
-  MAIN ENTRANCE
-  SECONDARY ENTRANCE
-  VISITOR PARKING

MODELS  
5101-5104 = 1ST FLOOR  
5205-5208 = 2ND FLOOR  
5309-5312 = 3RD FLOOR

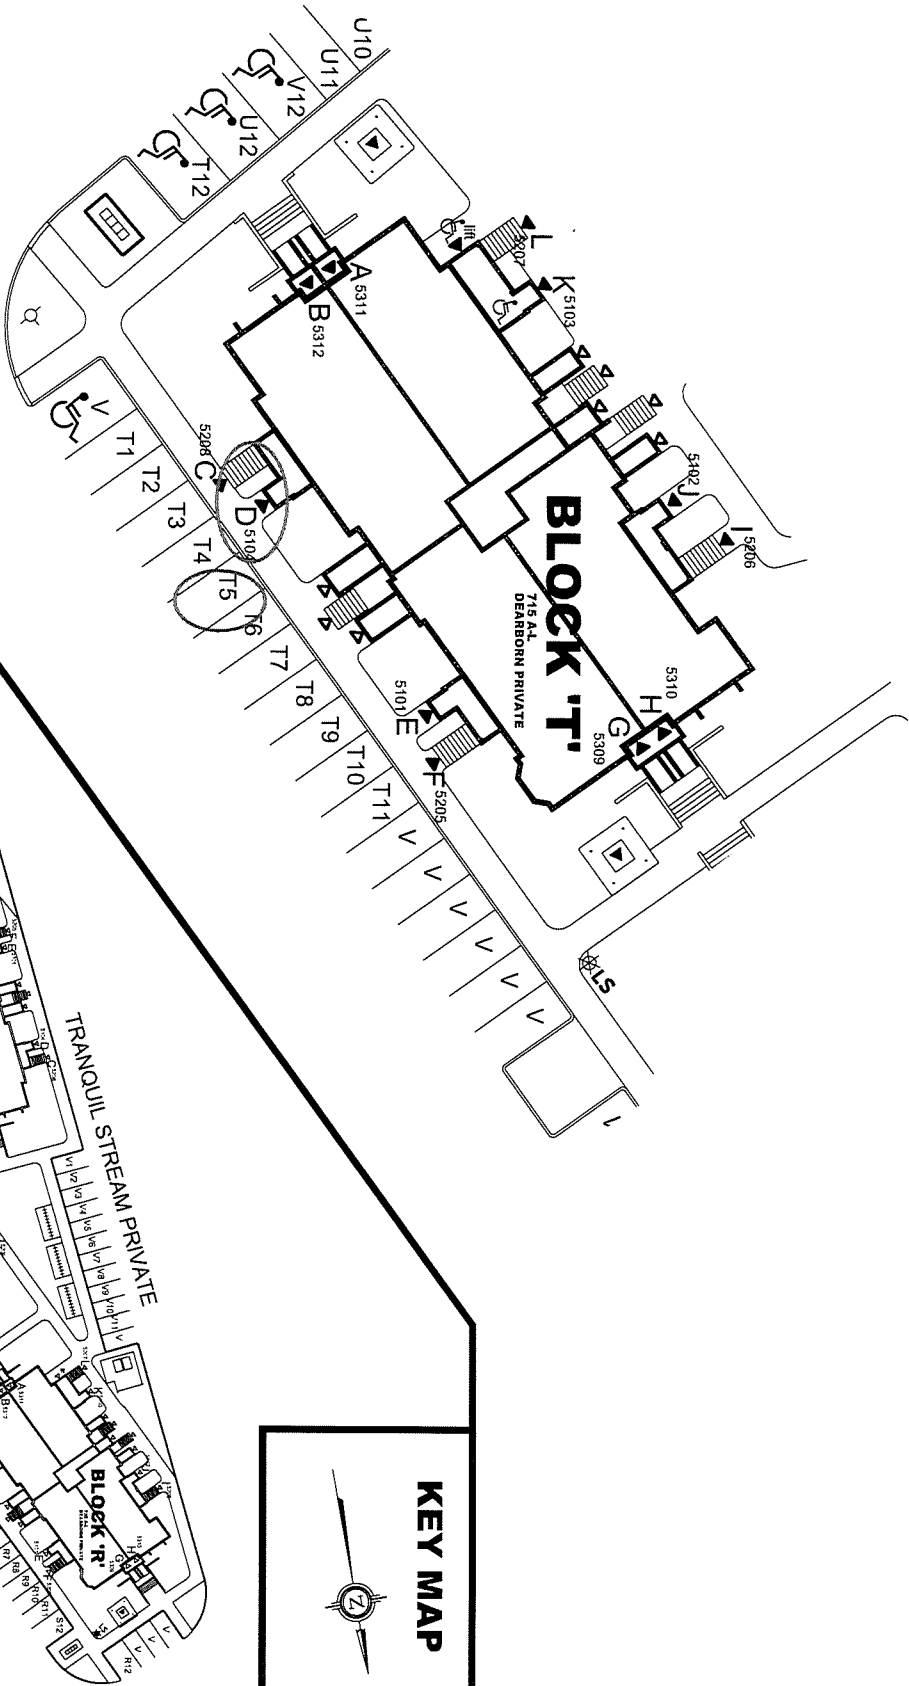

## KEY MAP



Estimate No#: SS5011

Customer Copy

Customer:

Inventory Unit

Builder:  
Project:  
Lot:  
Closing Date:

VALECRAFT HOMES LTD.  
Deerfield Village Condos  
DV2 T-36  
06/23/2022

Salesperson:  
Date:

Jason Thompson  
07/09/2021

Location	Qty	Product / Installation Details	Plan Code	Unit Price	Customer Total
Living Room	1.00	<b>15 Amp Standard Plug</b> Add 15 Amp Plug - Approx 60 inches from floor beside conduit	A	\$141.00	\$141.00
Master Bedroom	1.00	<b>15 Amp Standard Plug</b> Add 15 Amp Plug - Approx 60 inches from floor beside conduit	B	\$141.00	\$141.00
Bedroom #2	1.00	<b>15 Amp Standard Plug</b> Add 15 Amp Plug - Approx 60 inches from floor beside conduit	C	\$141.00	\$141.00
Kitchen	5.00	<b>4" LED slim Pot Light White (AFR4C-0930-WH)</b> Delete standard fixture and add 5 LED Halo potlight (AFR4-0930-WH) on upgraded dimmer switch	D	\$236.00	\$1,180.00
Kitchen	1.00	<b>Upgrade Switch to Dimmer</b> Upgrade Switch to Dimmer	D	\$103.00	\$103.00
Kitchen	1.00	<b>20 Amp USB Charger Receptacle</b> 20 Amp USB Charger Receptacle (standard)	F	\$	\$0.00
Ensuite Bath	1.00	<b>4" LED slim Pot Light White (AFR4C-0930-WH)</b> Add 1 LED Halo potlight (AFR4-0930-WH) on added switch	K	\$238.00	\$238.00
Ensuite Bath	1.00	<b>Single Pole Switch</b> Switch for added potlight	K	\$105.00	\$105.00

\*\*\* Total price includes all applicable taxes

Customer Subtotal:	\$2,049.00
HST:	\$266.37
Total:	\$2,315.37


Notes:

"Purchaser has acknowledged that they have discussed any kitchen layout modifications with their electrical representative. If modifications are made after signing off on electrical, this will incur additional charges."

Phone: (613) 748-0432 | Fax: (613) 748-0355 | Email: info@sandselectric.ca | Website: www.sandselectric.ca

5 4 1 1 Canotek Road, Ottawa, Ontario K1J 9M3

Printed By: Jason Thompson - Page: 2

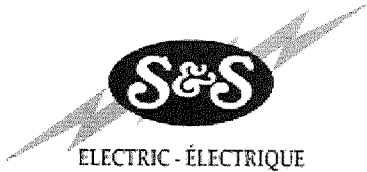

ELECTRIC - ÉLECTRIQUE

Tel: (613) 748-0432

Fax: (613) 748-0355

A Division of the S&S Bolton Group  
[www.ssbolton.com](http://www.ssbolton.com)

\_\_\_\_\_

Customer Signature

\_\_\_\_\_


Date

[www.sandselectric.ca](http://www.sandselectric.ca)

Phone: (613) 748-0432 | Fax: (613) 748-0355 | Email: [info@sandselectric.ca](mailto:info@sandselectric.ca) | Website: [www.sandselectric.ca](http://www.sandselectric.ca)

5 4 1 1 Canotek Road, Ottawa, Ontario K1J 9M3

Printed By: Jason Thompson - Page: 3




FIRST FLOOR

MODEL 5104

1258 SQ.FT

Site:	Deerfield Village 2	Purchaser:	Portobello Partnership
Plan No.:	4M-1290		
Unit:	T-36	Purchaser:	
Date:	July 9, 2021		

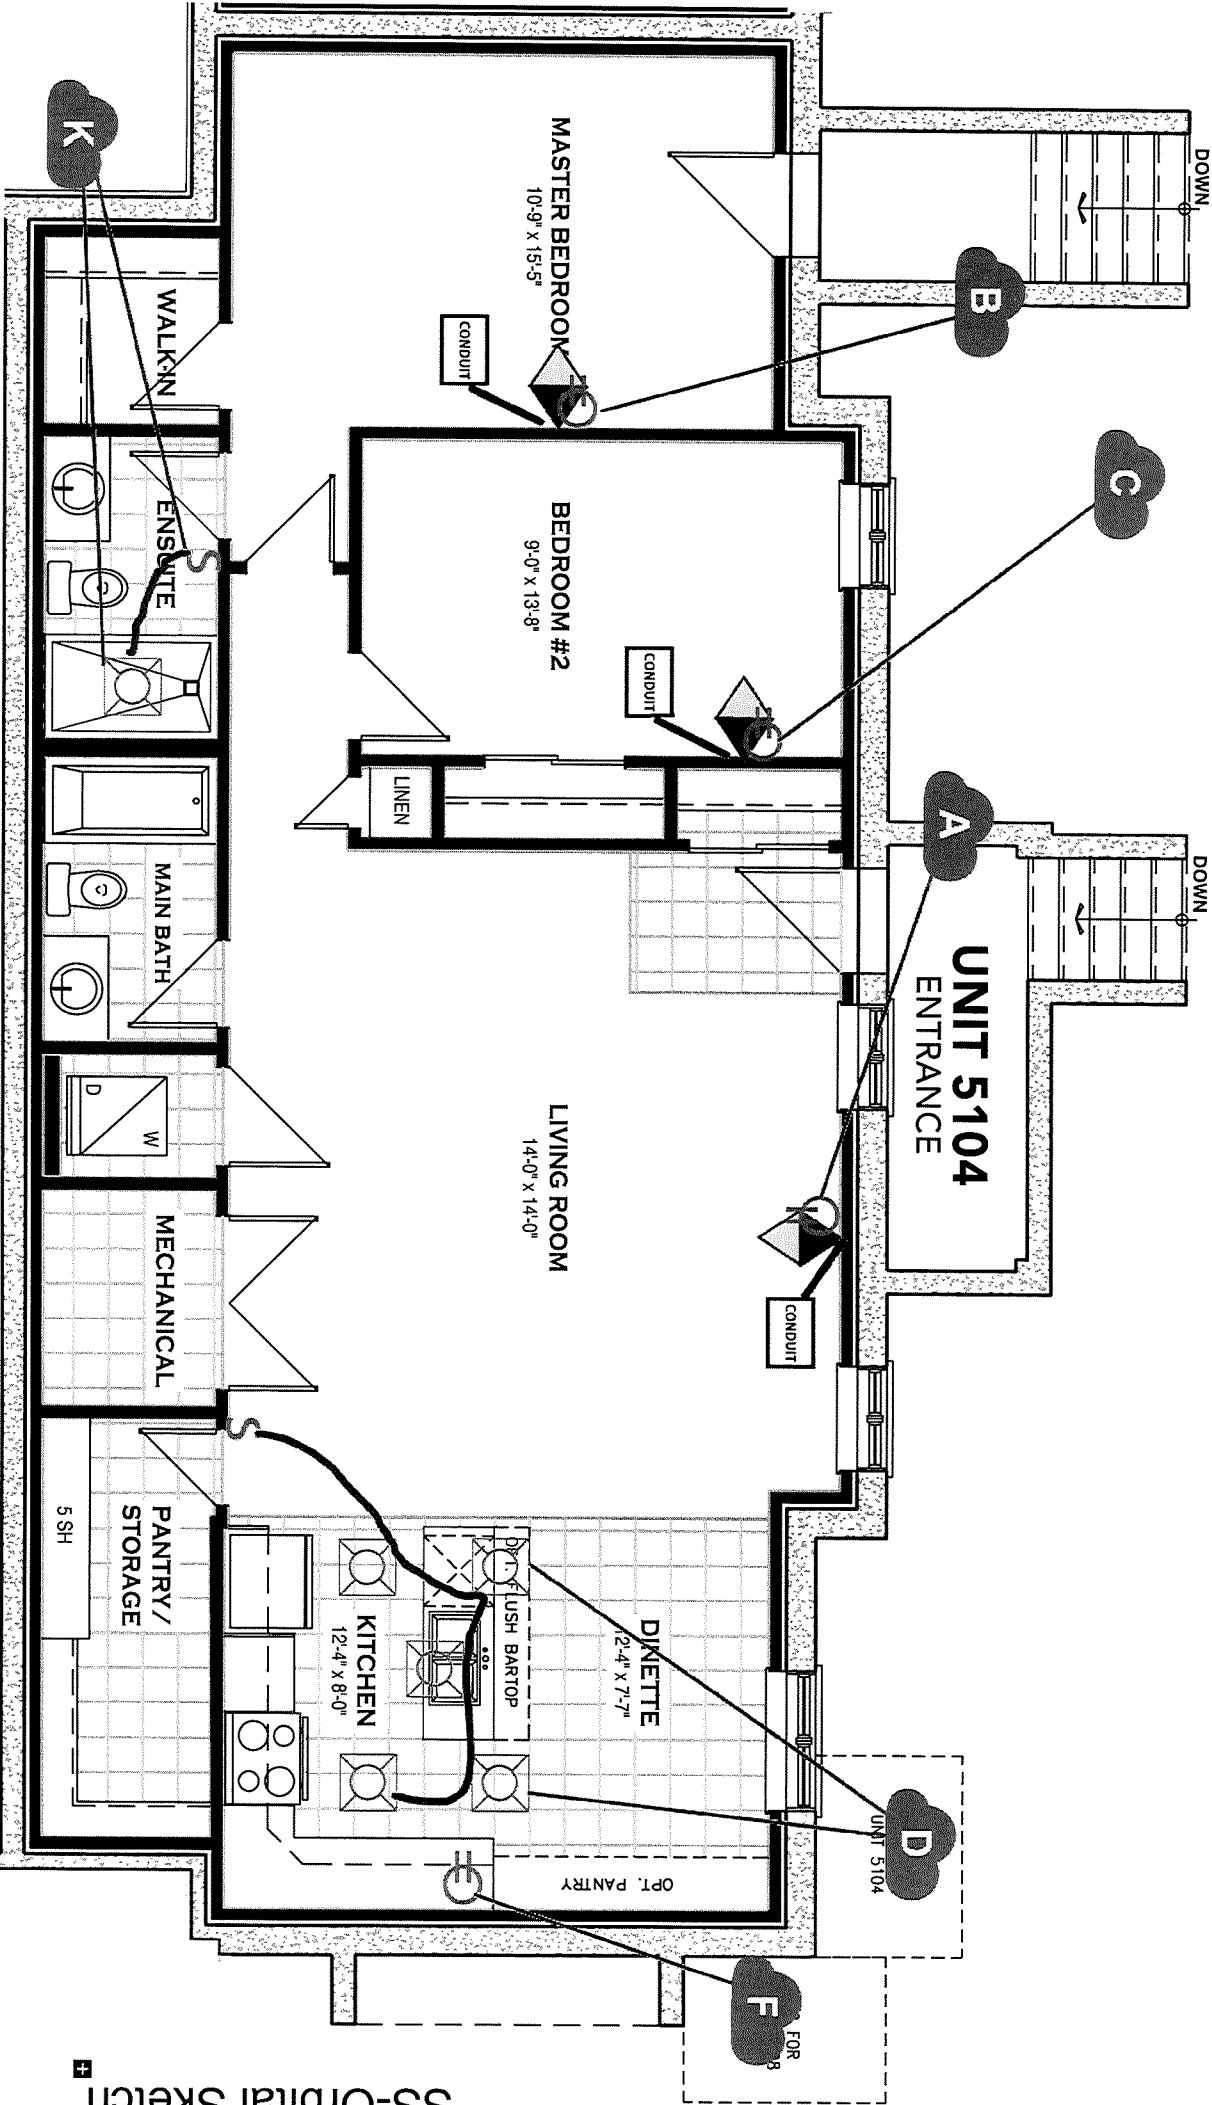

SS-Orbital Sketch

Vertical and/or horizontal bulkheads (chaseways) may be required to contain mechanical piping.  
All dimensions are approximate. E. & O.E., plans, materials and specifications are subject to change without notice. Actual useable floor space may vary from the stated floor area. \*Note: Number of steps varies due to site grading.