


CLIENT: VALECRAFT		LOT:PST6-17	
ADDR.: 825 BRADLEY STND, ,			
SL #: 1080409			
Phone:	Mobile:	OUT BY: ABBY LOOV	DATE: 09/11/21
Email :		PST6-17	



* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes.
 * Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions.
 * Appliances in elevations and plans are generic templates and may not reflect actual selections.

PG#
1 of 2
 Sheet 1

potvin
 KITCHENS & CABINETS


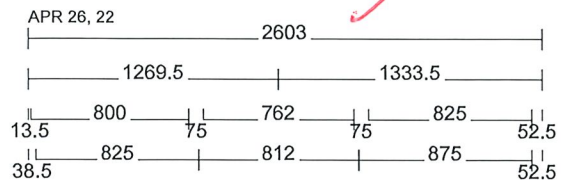


OK
 A.P.P.

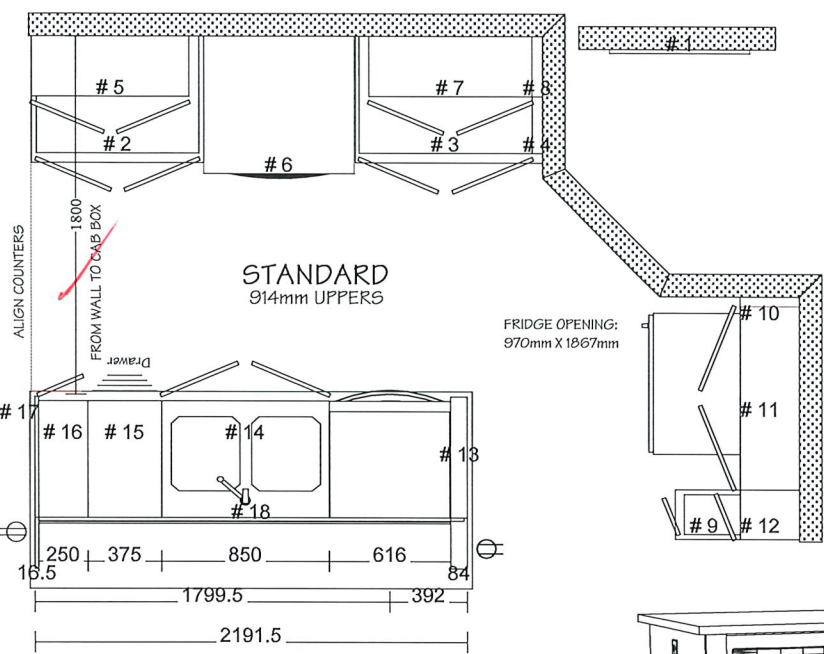

Room Name	
STANDARD	
COUNTERTOPS	
QUARTZ BY OTHERS	
FINISH	
BirChestnut (S)	
HANDLES	
81091-195	
DOOR STYLE	
basedoor:P100	BirChestnut
UpperDoor:P100	BirChestnut
Drawer:P100 DRAWER 5PC	BirChestnut
DRAWER GUIDE	
ARCI TECH	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	
CROWN MLDG	
NO CROWN	BirChestnut
LIGHT VALANCE	
NO VALANCE	BirChestnut

All Cabinets				
No	Name	Width	Height	Depth
0	Electric range	762	1118	716
0	Refrigerator RH	711	1695.5	800
0	DISHWASHER	616	883	587
0	Double W/Faucet/gray	762	101.5	457
1	DW FILLER T1S	711	102	19
2	LC 825	825	883	587
3	LC 875	875	883	587
4	Lc Filler	52.5	883	587
5	UC800/914	800	914	302
6	Canopy Range Hood	762	539	690
7	UC825/914	825	914	302
8	UC Filler	52.5	914	302
9	LC 200	200	883	587
10	UC Filler	50	425	302
11	UC920/425/302 Fridge	920	425	302
12	UC250/914	250	914	302
13	DW PLUG Left Std	84	883	864
14	LC 850 SK USB	850	883	587
15	LC375D	375	883	587
16	LC 250	250	883	587
17	DW GABLE	16.5	883	864
18	ISLPANEL2	2158.5	883	16.5

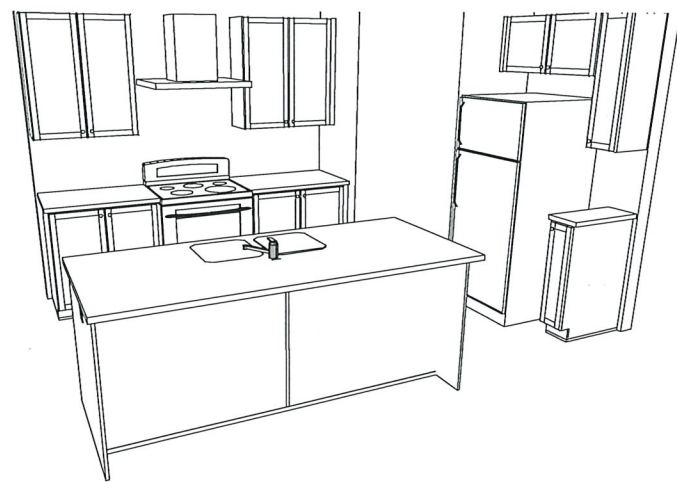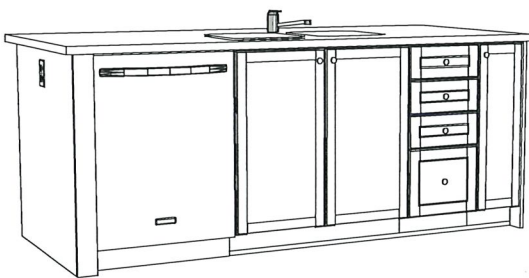

AS PER PLAN Cabinet Production


Valecraft approves this plan for production.
 Valecraft guarantees site dimensions (walls/ windows / height / Clearances)
 and all plumbing, mechanical and electrical placements will suit this cabinet
 plan. Any cost associated with cabinet rework due to fitment issues will be
 Valecraft's responsibility.

AB 11/09/21
 Valecraft's approval date

PA: Builders: Valecraft, Production: PLACE 57-110MMAS (EMBRUN) PST6/PST6-17, BRADLEY STND Potvin

CLIENT: VALECRAFT		LOT:PST6-17	* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes. * Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions. * Appliances in elevations and plans are generic templates and may not reflect actual selections.	PG# 2 of 2 Sheet 2	potvin KITCHENS & CABINETS
ADDR.: 825 BRADLEY STND.,					
SL #: 1080409					
Phone:	Mobile:				
Email :		OUT BY: ABBY LOOV	DATE: 09/11/21		
		PST6-17			


APR 26, 22




MAIN 2ND FLOOR

All Cabinets				
No	Name	Width	Height	Depth
0	Single W/Faucet	508	51	432
19	vanity Lastra gable	19	819	546
20	V 800 SK	800	819	524
21	vanity Lastra gable	19	819	152

NO SHOE
SCRIBE ON SITE

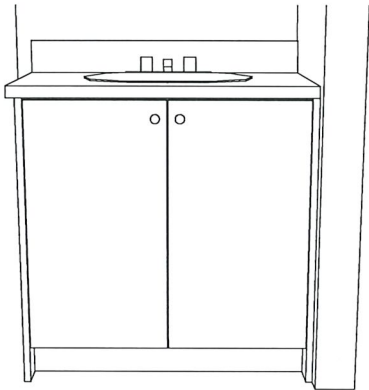


Room Name	
MAIN 2ND FLOOR	
COUNTERTOPS	
QUARTZ BY OTHERS	
FINISH	
TA-M2003	
HANDLES	
81091-195	
DOOR STYLE	
basedoor:Lastra	19mm TA-M2003
UpperDoor:Lastra	19mm TA-M2003
Drawer:Lastra	19mm TA-M2003
DRAWER GUIDE	
ARCITECH	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	



ENSUITE 2ND FLOOR

All Cabinets				
No	Name	Width	Height	Depth
0	Single W/Faucet	508	51	432
22	vanity Lastra gable	19	819	546
23	V350	350	819	524
24	V 725 SK	725	819	524

NO SHOE
SCRIBE ON SITE

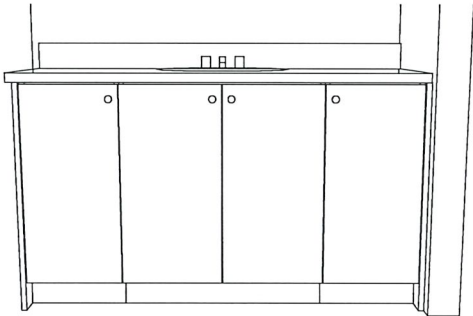

Room Name	
ENSUITE 2ND FLOOR	
COUNTERTOPS	
QUARTZ BY OTHERS	
FINISH	
TA-M2003	
HANDLES	
81091-195	
DOOR STYLE	
basedoor:Lastra	19mm TA-M2003
UpperDoor:Lastra	19mm TA-M2003
Drawer:Lastra	19mm TA-M2003
DRAWER GUIDE	
ARCITECH	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	