


CLIENT: VALECRAFT		LOT:DEER-S13	
ADDR.: UNIT 5103, ,			
SL #: 1075491			
Phone:	Mobile:	OUT BY: ABBYVAL	DATE: 22/11/21
Email :		DEER-S13	

* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes.
* Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions.
* Appliances in elevations and plans are generic templates and may not reflect actual selections.


PG#
1 of 3
Sheet 1

potvin
KITCHENS & CABINETS

JAN 20, 22

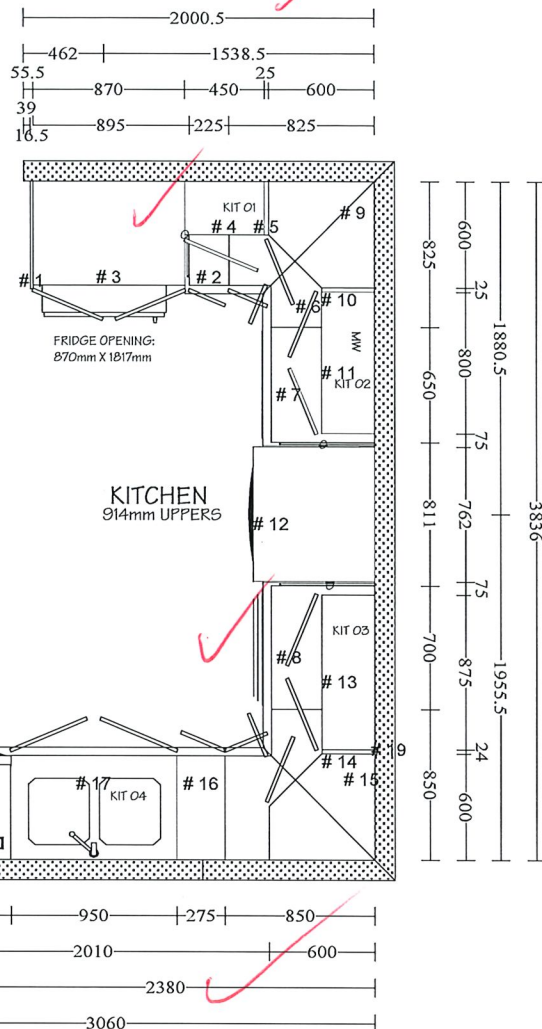

Room Name	
KITCHEN	
COUNTERTOPS	
(A)P394-VL	
FINISH	
TF-5303	
HANDLES	
Lastra R7040-192-BSAE	
DOOR STYLE	
basedoor:TF-1000F	TF-5303
UpperDoor:TF-1000F	TF-5303
Drawer:TF-1000F Drawer	TF-5303
DRAWER GUIDE	
ARCITECH	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	
CROWN MLDG	
NO CROWN	TF-5303
LIGHT VALANCE	
NO VALANCE	TF-5303



All Cabinets				
No	Name	Width	Height	Depth
0	Refrigerator LH	711	1695.5	800
0	Electric range	762	1118	716
0	37" X 46"	1245	1092	114.5
0	DISHWASHER	610	883	587
0	Double W/Faucet/gray	762	101.5	457
1	FGABLE	16.5	2292	609
2	LC 225	225	883	587
3	UC870/475/587 fridge	870	475	587
4	UC450/914	450	914	302
5	UC Filler	25	914	302
6	LC825-825 CC	825	883	825
7	LC 850 MW/D	650	883	587
8	LC 700 PP 6-12-12	700	883	587
9	UC600-600/914 DIA	600	914	600
10	UC Filler	25	914	302
11	UC800/914	800	914	302
12	Canopy Range Hood	762	539	690
13	UC875/914	875	914	302
14	UC Filler	24	914	302
15	LC850-850 CC	850	883	850
16	LC 275	275	883	587
17	LC 950 SK USB	950	883	587
18	LC 350	350	883	587
19	UC600-600/914 DIA	600	914	600
20	UC450/914	450	914	302
21	DW FILLER T1S	711	102	19
22	16mm Raw MDF 16"/48"	1200	406.5	16.5

AS PER PLAN Cabinet Production

Valecraft approves this plan for production.
Valecraft guaranties site dimensions (walls/ windows / height / Clearances) and all plumbing, mechanical and electrical placements will suit this cabinet plan. Any cost associated with cabinet rework due to fitment issues will be Valecraft's responsibility.


Handwritten: AB
Valecraft's approval

Handwritten: 11/29/21
date



CLIENT: VALECRAFT		LOT:DEER-S13	* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes. * Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions. * Appliances in elevations and plans are generic templates and may not reflect actual selections.	PG# 2 of 3 Sheet 5	
ADDR.: UNIT 5103, ,					
SL #: 1075491					
Phone:	Mobile:	OUT BY: ABBYVAL	DATE: 22/11/21		
Email :		DEER-S13			


JAN 20, 22



MAIN BATH

All Cabinets					
No	Name	Width	Height	Depth	
0	Single W/Faucet	508	51	432	
24	V 825 SK	825	819	524	
25	V Filler	25	819	524	

Room Name	
MAIN BATH	
COUNTERTOPS	
(A)P394-VL	
FINISH	
PM-F434WT	
HANDLES	
81091-195	
DOOR STYLE	
basedoor:1001	PM-F434WT
UpperDoor:1001	PM-F434WT
Drawer:1001 DRAWER	PM-F434WT
DRAWER GUIDE	
ARCITECH	
DOOR HINGE STYLE	
SOFTCLOSE HINGES	
Construction	
(A)Potvin 32mm	

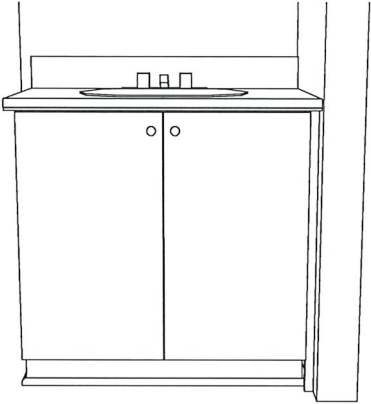

B:_Buildera_Valecraft_Production\DEERFIELD VILLAGE\DEER-BLOCK S\DEER-S13, 5103\DEER-S13, UNIT 5103_Pot

