



CONSTRUCTION SUMMARY

North Oakville - 111 - 1 - WILLOW VALLEY (43-02) ELEV A

Registere Plan Number: Municipal Address: Closing: 14-Jan-20

CEILING

Inv. 6	1 - MASTER BEDROOM: EXTEND COFFERED CEILING TO THE NEW DIMENTIONS OF ROOM.
13	
Line 165	Note:
24Jun19 / 26Aug19	

CEILING

Inv. 6	1 - KITCHEN/ BREAKFAST AREA: INSTALL COFFERED -KITCHEN AND BREAKFAST AREA
17	
Line 164	Note:
24Jun19 / 26Aug19	

CONSTRUCTION

Inv. 6	1 - MASTER BEDROOM CLOSETS: EXTEND THE STANDARD SHELIVING TO THE NEW
14	DIMENTIONS
Line 166	Note:
24Jun19 / 26Aug19	
Inv. 6	1 - MASTER BEDROOM: INSTALL ADDITIONAL SOUNDPROOF INSULATION ON WALL THAT
11	IS BESIDE LOFT AREA, ABOVE THE GREAT ROOM. SEE SKETCH. **ONE WALL ONLY**
Line 161	Note:
24Jun19 / 26Aug19	

Inv. 6	1 - 2ND FLOOR: REDESIGN THE 2ND FLOOR TO SWITCH BED #2 WITH THE MASTER
12	ENSUITE IN ORDER TO ENLARGE THE MASTER CLOSETS, THEREFORE ELIMINATING BED
	#2 ENTIRELY.
	COST INCLUDES REDESIGN AND NEW HEAT CALCULATIONS
Line 162	Note:
24Jun19 / 26Aug19	

Inv. 6	1 - MASTER ENSUITE: PREPARE ONE (1) ROUGH OPENING FOR SHOWER NICHE : 14 1/4"W x
32	16"H x 3 5/8"D
	**NOTE: PURCHASER IS AWARE THAT COST TO FINISH NICHE CAN RANGE BETWEEN
	\$1200.00-\$1400.00**
Line 270	Note:
24Jun19 / 26Aug19	

ELECTRICAL

Inv. 6	1 - LIVING ROOM: INSTALL CEILING LIGHT ROUGH IN - FOR 1 CEILING LIGHT - ON
25	SEPARATE SWITCH (DOES NOT INCLUDE FIXTURE), LOCATIONS MAY VARY SLIGHTLY
	DUE TO JOIST LOCATIONS
Line 224	Note:
24Jun19 / 26Aug19	

Inv. 6	4 - GREAT ROOM: INSTALL FOUR (4) POT LIGHTS, ON SEPERATE SWITCH - 4" LED
26	NON-INSULATED CEILINGS. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS
Line 225	Note:
24Jun19 / 26Aug19	

Inv. 6	5 - KITCHEN: INSTALL FIVE (5) POT LIGHTS, ON SEPERATE SWITCH - 4" LED
27	NON-INSULATED CEILINGS. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS
Line 226	Note:
24Jun19 / 26Aug19	

Inv. 6	1 - TELEPHONE AND CABLE ROUGH-IN LOCATION SKETCH. LOCATIONS MAY VARY
1	SLIGHTLY DUE TO JOIST LOCATIONS
Line 55	Note:
24Jun19 / 26Aug19	



CONSTRUCTION SUMMARY

North Oakville - 111 - 1 - WILLOW VALLEY (43-02) ELEV A

Register Plan Number: Municipal Address: Closing: 14-Jan-20

24Jun19 / 26Aug19	
Inv.6 30 Line 231	1 - ENSUITE 3: INSTALL RECEPTACLES - DEDICATED 15 AMP 120 VOLT GFCI RECEPTABLE (INTERIOR). TO GO BESIDE TOILET, 8" OFF FINISHED FLOOR Note:
24Jun19 / 26Aug19	
Inv.6 29 Line 232	1 - ENSUITE 2: INSTALL RECEPTACLES - DEDICATED 15 AMP 120 VOLT GFCI RECEPTABLE (INTERIOR) TO GO BESIDE TOILET, 8" OFF FINISHED FLOOR Note:
24Jun19 / 26Aug19	
Inv.6 28 Line 233	1 - MASTER ENSUITE: RECEPTACLES - DEDICATED 15 AMP 120 VOLT GFCI RECEPTABLE (INTERIOR)- TO GO BESIDE TOILET, 8" OFF FINISHED FLOOR Note:
24Jun19 / 26Aug19	
Inv.6 31 Line 230	1 - ENSUITE 4: INSTALL RECEPTACLES - DEDICATED 15 AMP 120 VOLT GFCI RECEPTABLE (INTERIOR). TO GO BESIDE TOILET, 8" OFF FINISHED FLOOR Note:
24Jun19 / 26Aug19	
Inv.6 23 Line 173	1 - KITCHEN: INSTALL OUTLETS - DEDICATED 40 AMP 220 VOLT RANGE OUTLET- FOR WALL OVEN UNIT. SEE SKETCH FOR LOCATION Note:
24Jun19 / 26Aug19	
Inv.6 6 Line 222	1 - MUD ROOM: INSTALL DEDICATED 15 AMP 120 VOLT RECEPTABLE- TO BE INSTALLED 4' FROM FINISHED CEILING. SEE SKETCH. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONSRECEPTACLES - Note:
24Jun19 / 26Aug19	
Inv.6 24 Line 223	1 - KITCHEN: CEILING FIXTURE - RELOCATE STANDARD CEILING FIXTURE. TO GO ABOVE KITCHEN ISLAND. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS Note:
24Jun19 / 26Aug19	
Inv.6 4 Line 220	1 - GREAT ROOM: INSTALL RECEPTACLES - DEDICATED 15 AMP 120 VOLT RECEPTABLE- ABOVE FIREPLACE FOR FUTURE TV Note:
24Jun19 / 26Aug19	
HVAC	
24Jun19 / 26Aug19	
Inv.6 19 Line 169	1 - KITCHEN: INSTALL GAS PIPING AND OTHER - GAS LINE R/I FOR STOVE - UP TO 3/4 INCH LINE Note:
24Jun19 / 26Aug19	
Inv.6 20 Line 170	1 - EXTERIOR: INSTALL GAS PIPING AND OTHER - GAS LINE R/I FOR BBQ - UP TO 3/4 INCH LINE Note:
24Jun19 / 26Aug19	
INTERIOR DOORS & TRIM	



CONSTRUCTION SUMMARY

North Oakville - 111 - 1 - WILLOW VALLEY (43-02) ELEV A

Register Plan Number: Municipal Address: Closing: **14-Jan-20**

Inv.6 15 Line 167 24Jun19 / 26Aug19	1 - MASTER BEDROOM: INSTALL DOUBLE DOOR ENTRY INTO MASTER BEDROOM Note:
--	--

MISCELLANEOUS

Inv.6 33 Line 227 24Jun19 / 26Aug19	1 - Purchaser has attended a Structural appointment at the Decor Centre & has DECLINED any additional upgrades and accepts and acknowledges that there will be no further structural changes/additions/deletions to be made upon signing on July 30, 2019. Note:
Inv.6 34 Line 228 24Jun19 / 26Aug19	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers Extra Form are subject to a minimum administration fee of \$500. PLUS a 10% holdback fee Note:

PLUMBING

Inv.6 18 Line 168 24Jun19 / 26Aug19	1 - KITCHEN: INSTALL EXTRA ROUGH-IN LINE FOR FRIDGE ICE MAKER WITH SHUT-OFF Note:
Inv.6 21 Line 171 24Jun19 / 26Aug19	1 - MASTER ENSUITE: INSTALL SHOWER HEAD - RAINSHOWER HEAD- PLUMBING ONLY. SHOWERHEAD MUST BE SELECTED AT THE TIME OF COLOUR APPOINTMENT. Note:
Inv.6 16 Line 163 24Jun19 / 26Aug19	1 - MASTER ENSUITE: INSTALL SHOWER SEAT IN MASTER ENSUITE SHOWER STALL Note:

STAIRS

Inv.6 10 Line 160 24Jun19 / 26Aug19	1 - STAIRCASE: ELIMINATE THE 42" KNEE WALL, BUILD WALL UNDER STAIRS. LANDING AREA TO BE CLOSED IN. SEE PICTURE PROVIDED. **NOTE: STAIRS AND RAILINGS ARE STANDARD AND IN A NATURAL FINISH.** Note:
--	--

VACCUM/BELL

Inv.6 5 Line 221 24Jun19 / 26Aug19	1 - MUD ROOM: INSTALL TELEVISION - RG6U CABLE TV- TO BE INSTALLED 4' FROM FINISHED CEILING. SEE SKETCH. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS Note:
Inv.6 3 Line 219 24Jun19 / 26Aug19	1 - GREAT ROOM: INSTALL CONDUIT - 1 1/4" ORANGE FLEX CONDUIT APPROX. 35FT FOR FIREPLACE Note:
Inv.6 7 Line 57 24Jun19 / 26Aug19	1 - Conduit - 1 1/4" Orange Flex Conduit Approx. 15ft for attic Note:

WINDOWS



North Oakville - 111 - 1 - WILLOW VALLEY (43-02) ELEV A

Registere Plan Number: Municipal Address: Closing: 14-Jan-20

Inv.6	1 - GREAT ROOM/ LOFT: ENLARGE THE WINDOWS IN THE LOFT AREA TO MATCH THE
8	HEIGHT OF THE GREAT ROOM.
Line 158	Note:
24Jun19 / 26Aug19	
Inv.6	1 - GREAT ROOM/ LOFT: WIDEN THE WINDOWS IN THE GREAT ROOM AND LOFT AREA BY
9	1 FOOT (NEW WIDTH TO BE 8')
Line 159	Note:
24Jun19 / 26Aug19	

WINDOWS & DOORS

Inv.6	4 - BASEMENT: ENLARGE ALL FOUR (4) BASEMENT WINDOWS TO 36" X 30"
2	
Line 56	Note:
24Jun19 / 26Aug19	

503

Lot 111
July 30, 2019

Willow Valley




Elevation A
3,623 Sq.ft.

Includes 47 Sq.ft. of Finished Basement

Elevation B
3,628 Sq.ft.


Includes 47 Sq.ft. of Finished Basement

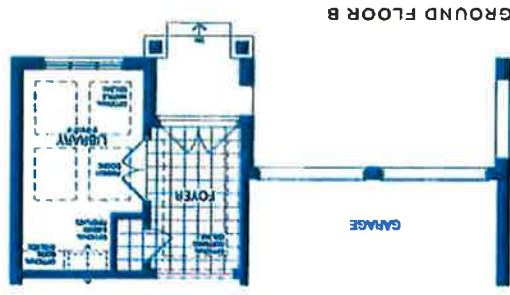

GROUND FLOOR B




GROUND FLOOR A

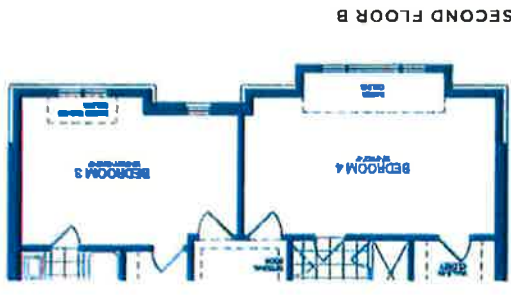


SECOND FLOOR B



SECOND FLOOR A



BASEMENT B

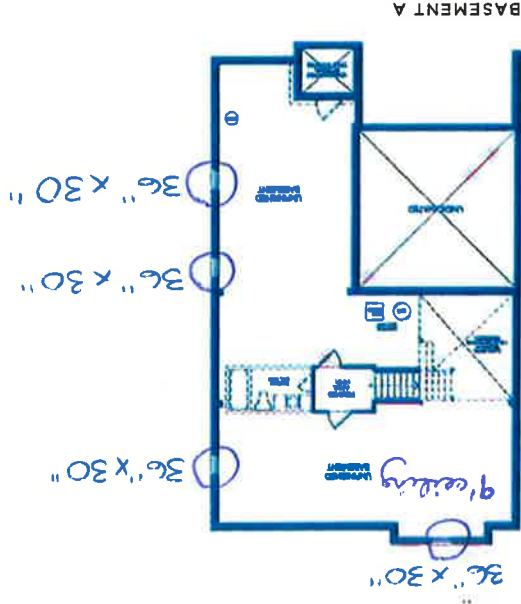

BASEMENT A

- Telephone — (T)
- Cable — (C)
- Electrical — (E)



Disclaimer: All dimensions are approximate and subject to normal construction variances. Dimensions may exceed the useable floor area. Sizes and specifications subject to change without notice. Furniture is displayed for illustration purposes only and does not necessarily reflect the electrical plan for the suite. Suites are sold unfinished. Balcony and fence variations may apply, contact a sales representative for further details. E.A.O.E. ©Valery Homes 2019. All rights reserved.

503

7/16/2019

36'-8"

Architectural floor plan of a three-unit residential building (B2, B3, B4) with handwritten annotations. The plan shows unit layouts, dimensions, and structural details. Handwritten notes in blue and purple include:

- Additional Second Floor Insulation:** A yellow circle 'C' is marked on the exterior wall of Unit B4, with a blue line pointing to it from the note.
- Shower:** A blue circle is drawn around a shower area in Unit B4, with a blue line pointing to it from the note.
- Purple Circles:** Purple circles 'E' and 'F' are marked on the plan, with purple lines pointing to them from the note.
- NO WINDOWS ON THIS WALL:** This text appears twice, once on the left side and once on the right side of the plan.
- LOT LINE:** A dashed line indicates the lot line, with a 4'-0" MIN. dimension.
- Dimensions:** The overall building dimensions are 56'-8" by 36'-8". Individual unit dimensions are provided: B3 (18'-8" x 11'-0"), B4 (12'-0" x 13'-8" x 11'-0"), and B2 (16'-0" x 11'-0" x 10'-0").

Other features include: Unit B3 with a garden door and cat entry; Unit B4 with a flat roof below, open to below, and a railing; Unit B2 with a flat roof below and a freestanding tub; and various structural details like glass showers, glass doors, and optional ceiling cladding.

NOTE: 9'-0" HIGH CEILING FOR SECOND FLOOR ROOMS

PRELIMINARY
NOT FOR BUILDING PERMIT
NOT FOR CONSTRUCTION
LAST REVISION JUL.16, 2019



<p>CAVALIER HORSES</p>	<p>THE ASSOCIATED HORSE BREEDERS AND TRainers' ASSOCIATION OF AMERICA, INC. is pleased to announce the 1987 CAVALIER HORSE SHOW. The show will be held at the CAVALIER HORSE SHOW CENTER, 11111 N. 11th Ave., Suite 110, Phoenix, AZ 85021. The show will be held on Saturday, September 12, 1987, from 10:00 a.m. to 5:00 p.m. The admission fee is \$10.00. The show is open to all ages. For more information, contact: BERNARD J. ANDERSON & ASSOCIATES, INC., P.O. Box 30580, Phoenix, AZ 85068. Phone: (602) 998-1111.</p>
-----------------------------------	--

[illegible]

**SECOND
FLOOR PLAN
ELEVATION A
CUSTOM LOT 111**

SCALE	DATE
3/16" = 1'-0"	JUN. 2018
DRAWN BY	CHECKED BY
PROJ.	
TRANSFER DATE	ORDER
	1713_A22-0111111
PROJECT NO.	DRAWING NO.
1716	A

27-1700 SPEEDY ROAD • GARYVILLE
CALLING 1-800-344-7000
ANDERSON
♦ ASSOCIATES INC.

111
207


July 30, 2019

575



Lot 111
July 30, 2019



Staircase change

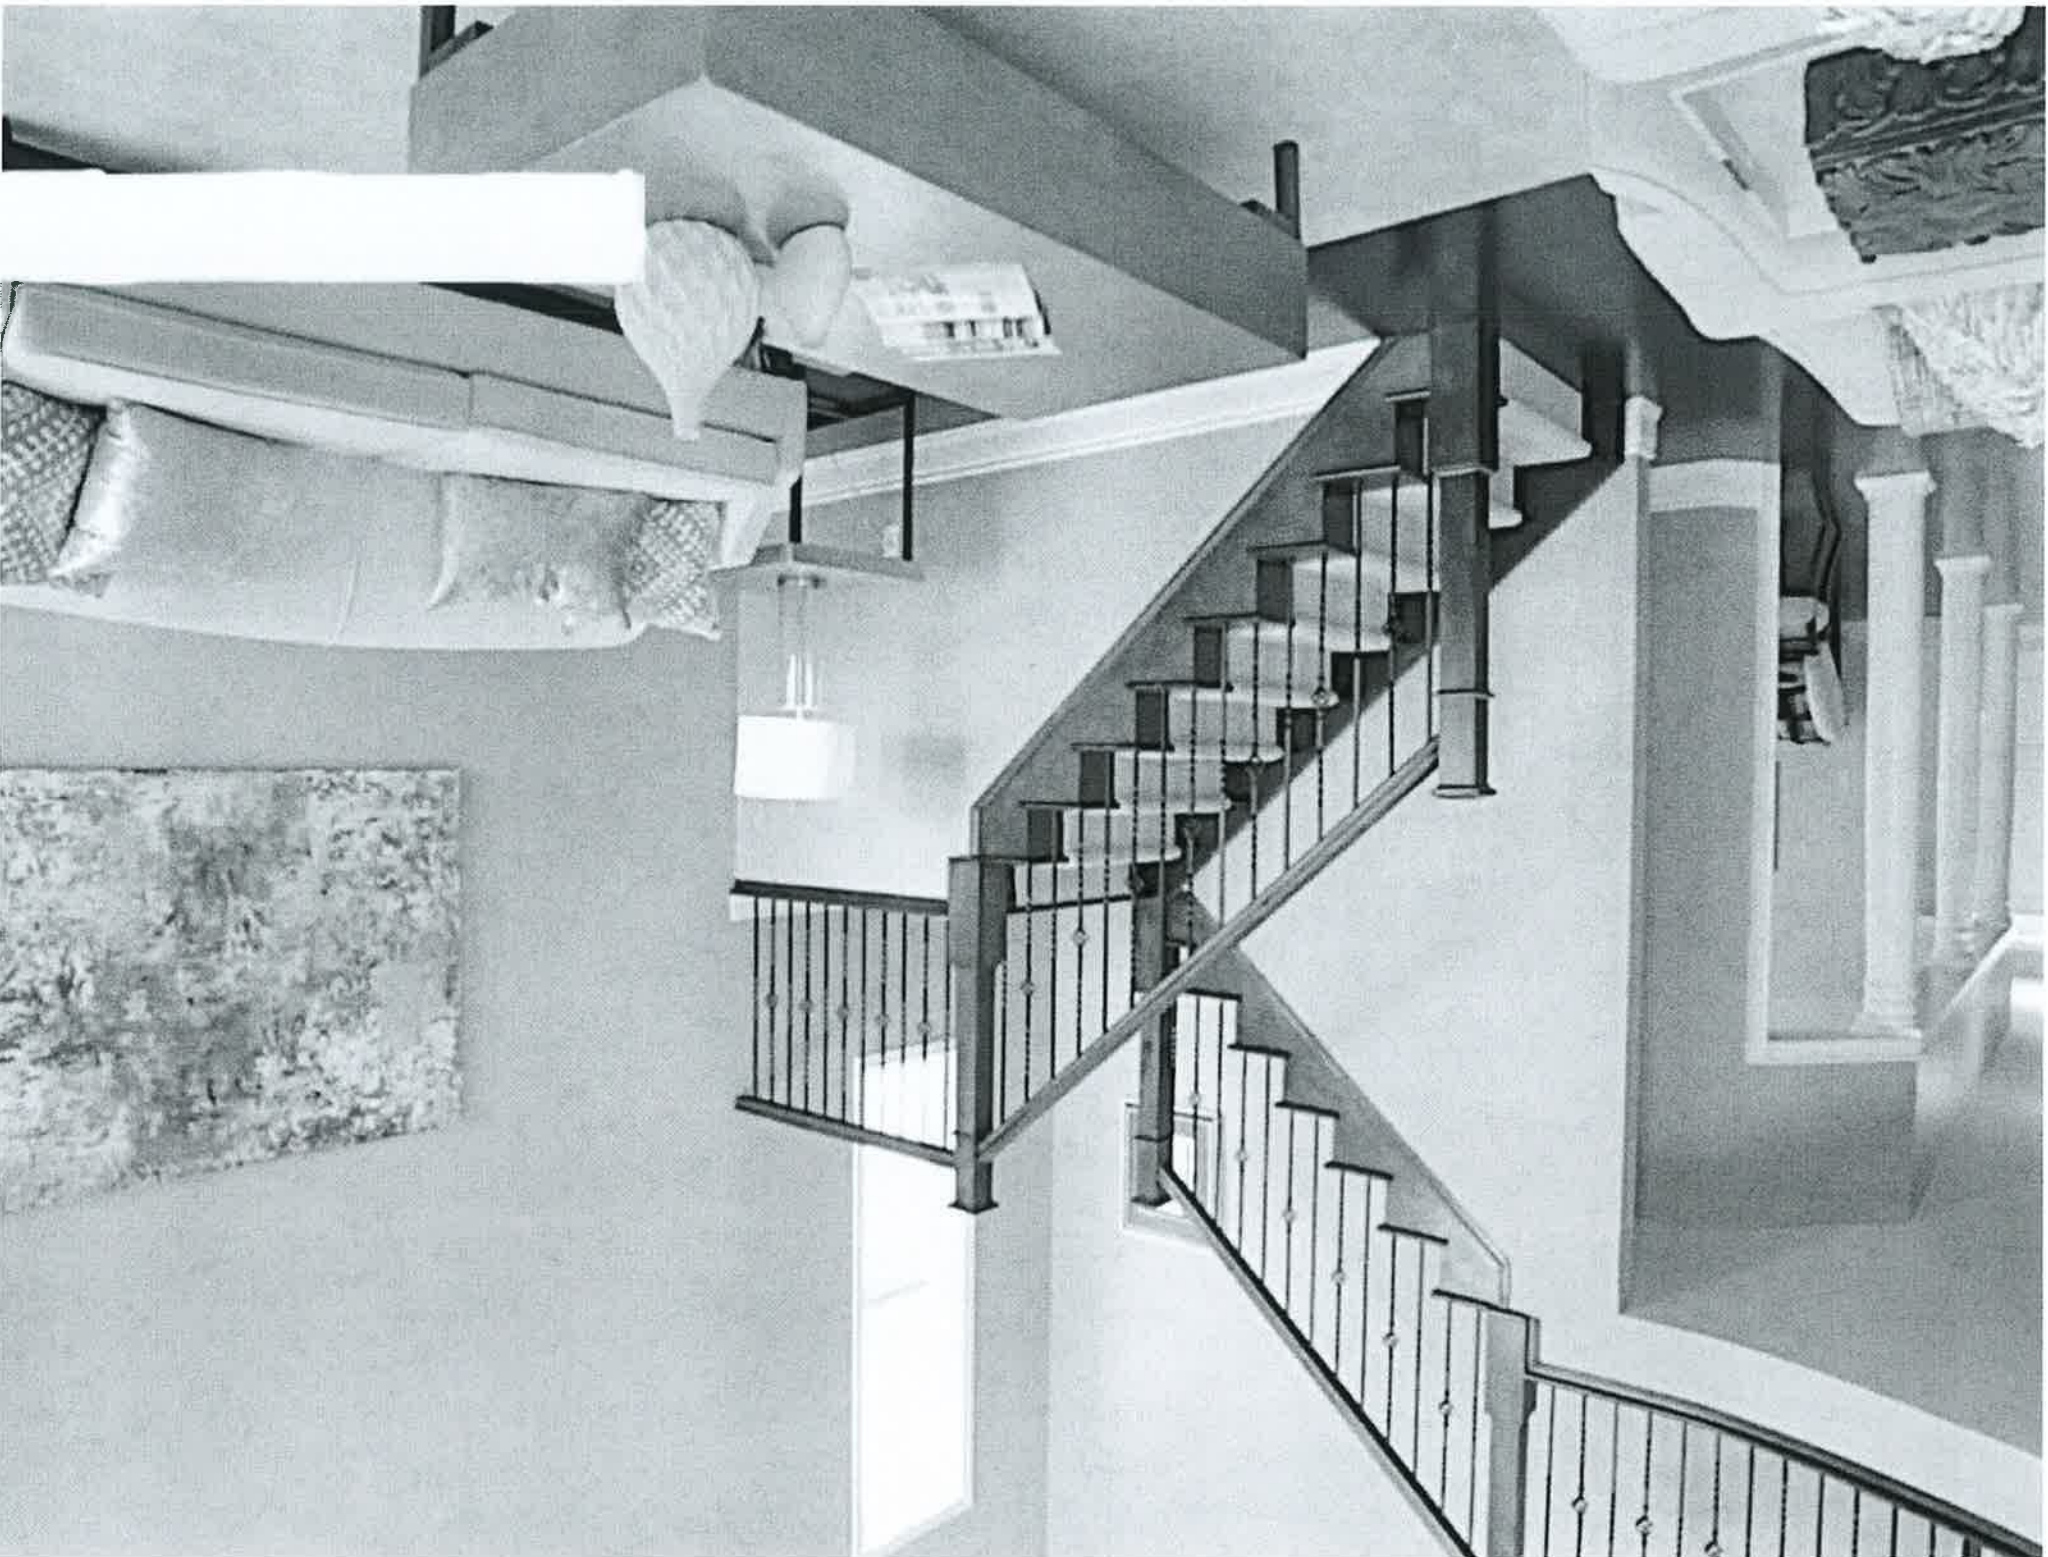

Lot 111
Aug 6, 2019

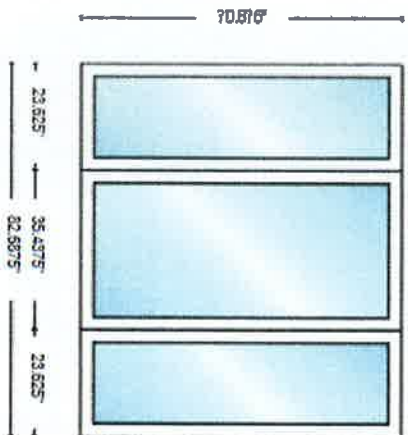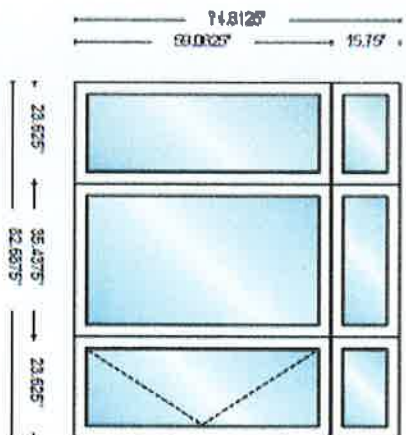

207111


Prepared by

Ali Taher

ataher@appliancecanada.com (905) 660-2424 2352

Appliance Canada
For Your Home, For Your Life

S/S
DR

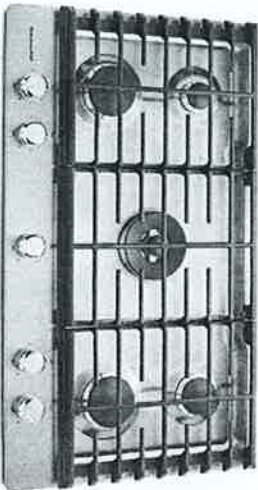

KitchenAid® 36" 5-Burner Gas Cooktop

KCGS556ESS

Available Finishes/Colours

KCGS556ESS
Stainless Steel

Dimensions

Depth	21
Height	3 1/16
Width	36
Cutout Depth	19 13/16
Cutout Height	5 1/4
Cutout Width	35 3/16

If you love to experiment and push culinary limits, you'll appreciate the power and versatility of this 36-inch cooktop. Five individual burners includes a powerful 20K BTU Dual Ring Burner that is among the most powerful in the industry. The eye-catching design includes Multi-Finish Knobs and the scratch-resistant CookShield Finish help protect the surface against stains that may occur with high-temperature cooking.

Top Features

20K BTU Professional Dual Ring Burner

6K BTU Even-Heat™ Simmer Burner

CookShield Finish

Performance

Fuel Type Gas

Design

Hot Surface Indicator No

Manuals & Literature:

Use and Care

Dimension Guide

Installation Instructions

Warranty

KitchenAid

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

Ref 111

OR 50

PRODUCT MODEL NUMBERS

KCGS350E	KCGS950E	MGC9530D	WCG75US0D
KCGS356E	KCGS956E	MGC9536D	WCG97US0D
KCGS550E	MGC7430D	WCG51US0D	WCG97US6D
KCGS556E	MGC7536D	WCG51US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas
Natural Gas:

This cooktop is factory set for use with Natural gas. If converting to LP gas, see the "LP Gas Conversion" instructions provided in the package containing literature. The model/serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion instructions provided in the package containing literature.

Gas Supply Line

Provide a gas supply line of 1/2" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLO[®] tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.

Flexible metal appliance connector:

If local codes permit, use a 1/2" or 1/2" x 1/2" flexible stainless steel tubing gas connector, designed by CSA to connect the cooktop to the rigid gas supply line.




A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.

Do not kink or damage the flexible metal tubing when moving the cooktop.

Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To cooktop

¹TEFLO[®] is a registered trademark of E.I. Du Pont de Nemours and Company.

ELECTRICAL REQUIREMENTS

A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.


Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

PRODUCT DIMENSIONS

207111


QR 513

KCGS550ESS and KCGS950ESS Models

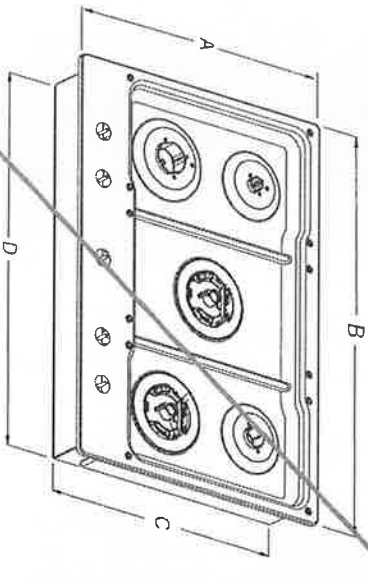


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 19 1/2" (49.2 cm)
- D. 28 1/2" (72.1 cm)
- E. 3 1/8" (9.2 cm)
- F. 4 1/2" (11.6 cm)
- G. 1 1/2" (3.4 cm)

KCGS556ESS and KCGS956ESS Models

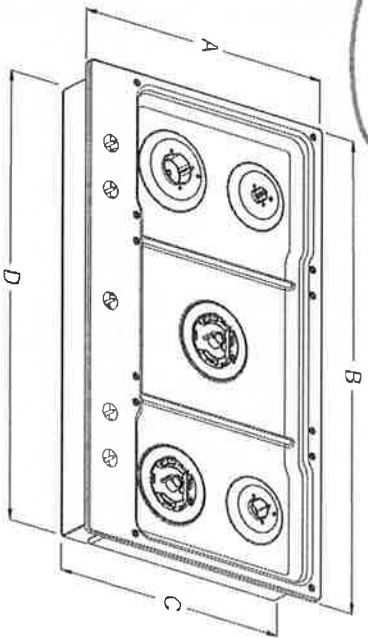


- A. 21" (53.3 cm)
- B. 36 1/2" (92.0 cm)
- C. 19 1/2" (49.2 cm)
- D. 34 1/2" (88.1 cm)
- E. 3 1/8" (9.2 cm)
- F. 4 1/2" (11.6 cm)
- G. 1 1/2" (3.6 cm)

All Other 30" (76.2 cm) Models

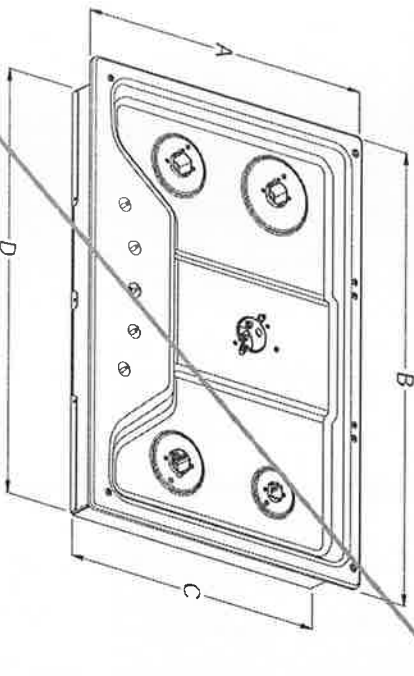

- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 18 1/2" (48.0 cm)
- D. 28 1/2" (72.1 cm)
- E. 3 1/8" (8.6 cm)
- F. 4 1/2" (10.5 cm)
- G. 1 1/2" (3.8 cm)

All Other 36" (91.4 cm) Models

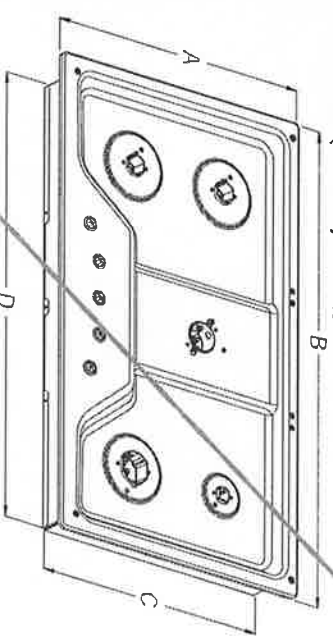

- A. 21" (53.3 cm)
- B. 36" (91.4 cm)
- C. 18 1/2" (48.0 cm)
- D. 33 1/2" (85.7 cm)
- E. 3 1/8" (8.6 cm)
- F. 4 1/2" (10.5 cm)
- G. 1 1/2" (3.8 cm)


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597144B
8/10/15

201111


DR. SB

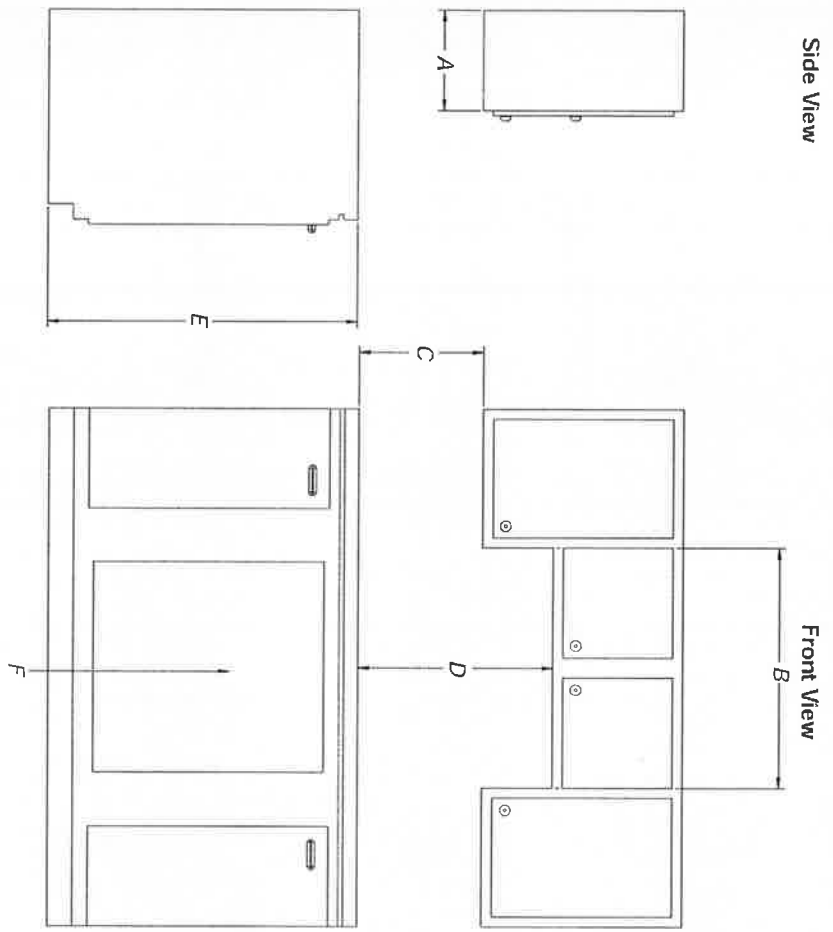

- A. 13" (33.0 cm) recommended upper cabinet depth.
- B. 30" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
- C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop.
- D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet. 24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}$ " [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper
- E. 36" (91.4 cm) top of countertop to floor.
- F. Gas line opening - Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

201111

DR. SB

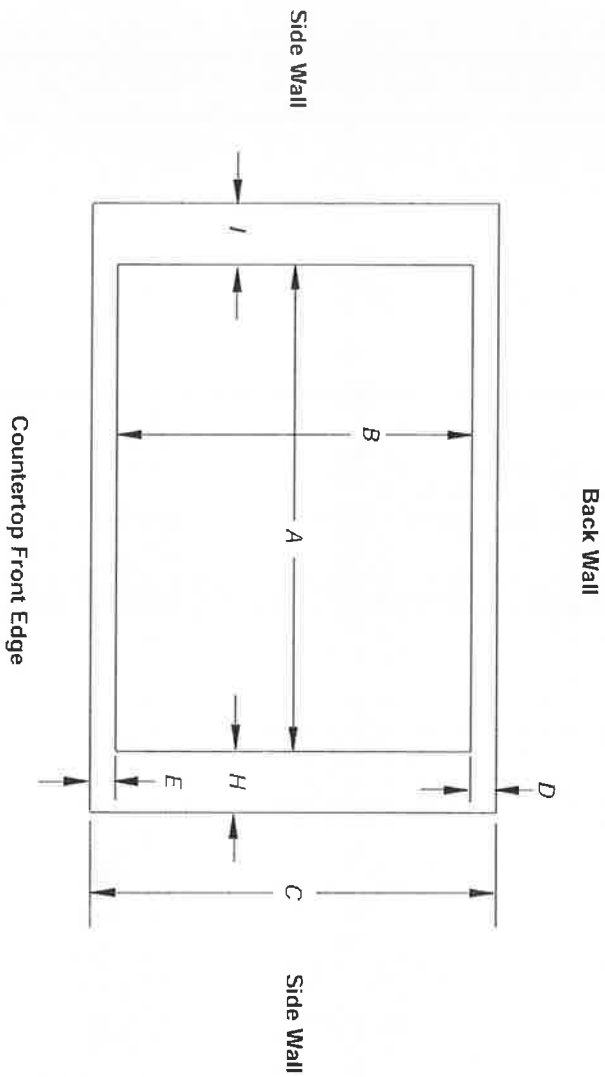

Cutout (Product Opening) Dimensions						
30" (76.2 cm) Models						
Models	A			B		
	Min	Recommended	Max	Min	Recommended	Max
KCGS550 and KCGS950 All Other 30" (76.2 cm) Models	28 3/4" (72.4 cm) 28 3/4" (72.4 cm)	28 3/4" (73.4 cm) 28 3/4" (73.4 cm)	29 3/4" (74.3 cm) 29 3/4" (74.3 cm)	19 3/4" (49.5 cm) 19" (48.3 cm)	19 3/4" (50.2 cm) 19 3/4" (49.5 cm)	20" (50.8 cm) 20" (50.8 cm)
KCGS556 and KCGS956 All Other 36" (91.4 cm) Models	34 3/4" (88.4 cm) 33 3/4" (86.0 cm)	35 3/4" (89.4 cm) 34 3/4" (87.0 cm)	35 3/4" (90.3 cm) 35 3/4" (89.5 cm)	19 3/4" (49.5 cm) 19" (48.3 cm)	19 3/4" (50.2 cm) 19 3/4" (49.5 cm)	20" (50.8 cm) 20" (50.8 cm)

Side Walls (Combustible Surfaces)	
Models	H and I
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).
KCGS350, KCGS356, MGC9536, WCG97US0, WCG97US6	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).
All Other Models	Both have to be 8" (20.3 cm) or more.

Back Wall and Countertop Front Dimensions			
Models	C	D	E
KCGS550 and KCGS950	25" (63.5 cm)	2 3/4" (7.3 cm)	2 3/4" (6.9 cm)
All Other Models			3 3/4" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.


287111 Dr. S13

Prepared by

Ali Taher

ataher@appliancecana.com (905) 660-2424 2352

Appliance Canada
For Your Home, For Your Life

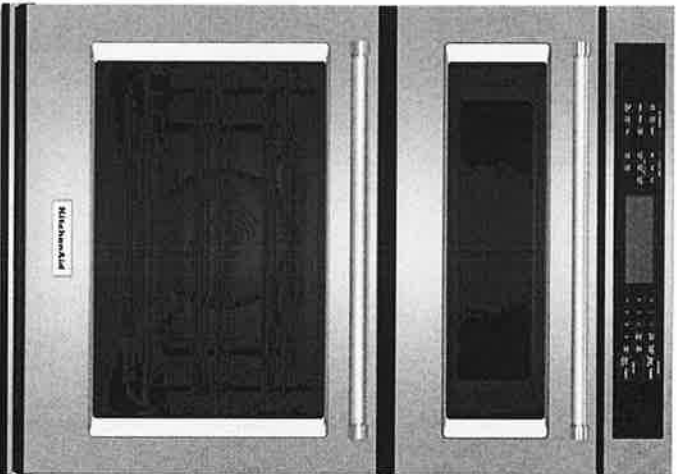

KitchenAid® 30" Combination Wall Oven with Even-Heat™ True Convection (Lower Oven)

KOCE500ESS

Available Finishes/Colours

- ☒ KOCE500EBL Black
☐ KOCE500EWH White

KOCE500ESS
Stainless Steel

Dimensions	
Depth	27 1/8
Height	42 1/2
Width	30
Cutout Height	41 5/16
Cutout Width	28 1/2
Microwave Details	
Door Release	Handle
Door Swing	Drop Down
Grill Wattage	1600
Interior Light	Halogen
Turntable	Yes
Turntable Diameter Size	14 1/8

Configuration and Overview

Fuel Type	Electric
Oven Type	Combination
Oven Cooking System	Convection
Sensor Cooking	Yes - Microwave

Oven Features

Self-Cleaning	Adjustable Self Cleaning
---------------	--------------------------

Oven Controls

Convection Functions	Bake, Broil, Roast
----------------------	--------------------

Display Color	White
---------------	-------

Microwave Details

Cooking Power Wattage	900
Convection	Yes
Convection Power Wattage	1600

This 30" Combination Wall Oven with Even-Heat™ True Convection provides consistent heating and even cooking. A unique bow-tie shaped design and convection fan helps ensure there are no burnt edges or under cooked centers. Its upper Microwave Convection Cooking Oven combines a 900 watt microwave with a 1600 watt convection element for high speed cooking. Bold design details are the perfect balance of elegance and functionality.

Top Features

Even-Heat™ True Convection Oven (lower oven)

Microwave Convection Cooking (upper oven)

Professionally-Inspired Design (VBL Light)

Manuals & Literature:

- Use and Care Dimension Guide
 Installation Instructions Warranty

KitchenAid®

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

27. SB
207 111

KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309E KOCE500E KOCE507E

ELECTRICAL CONNECTION

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

1. Connect a section of solid copper wire to the pigtail leads.
2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.


Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600

*Amperage values noted above are for information purposes only: the units are rated in watts.

Because Whirlpool Corporation includes a continues commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10725593B
2/10/75

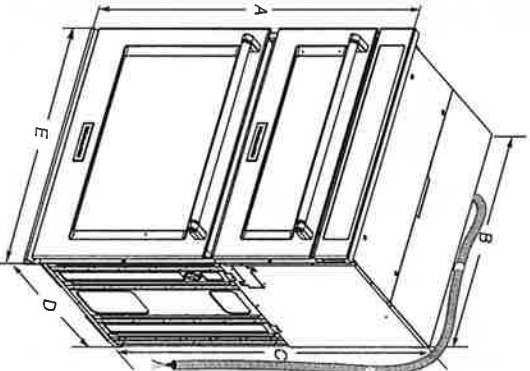

Cabinet Dimensions

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
C. 19 1/2" (48.9 cm) bottom of cutout to floor is recommended.
4"-19 1/4" (10.2-48.9 cm) bottom of cutout, no floor is acceptable.

- D. 25 1/2" (64.8 cm) cutout width
E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
F. 4 1/8" (10.5 cm)* recommended cutout height
G. 24" (60.7 cm) cutout depth

30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
B. 1" (2.5 cm) top of cutout to bottom
C. 19 1/2" (48.9 cm) bottom of cutout to floor is recommended.
4"-19 1/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable.

- D. 28 1/2" (72.4 cm) cutout width
E. 1 5/8" (3.8 cm) min. bottom of cutout
F. 4 1/8" (10.5 cm)* recommended cutout
G. 24" (60.7 cm) cutout depth

* NOTE: The cabinet height can be between 41" (104.1 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.

FOLLOW NEXT PAGES FOR FLUSH OPENING DIMENSIONS

207111 DR 513

INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC MICROWAVE/OVEN COMBINATION

FLUSH INSTALLATION KIT

INSTRUCTIONS D'INSTALLATION POUR TROUSSE D'INSTALLATION EN AFFLEUREMENT D'UN ENSEMBLE FOUR À MICRO-ONDES ÉLECTRIQUE/FOUR DE 27" (68,6 CM) ET 30" (76,2 CM)

Flush Installation Kit Part Number Ensemble d'installation en affleurement référence	Size and Color Dimensions et couleur	UL Listed for Model Numbers Homologation UL pour les modèles numéro
W10752695	27" (68.6 cm), black 27" (66,6 cm), noir	KOCE507EBL
W10752694	27" (68.6 cm), white 27" (68,6 cm), blanc	KOCE507EWH
W10752696	27" (68.6 cm), stainless steel 27" (68,6 cm), acier inoxydable	KOCE507ESS
W10752688	30" (76.2 cm), black 30" (76,2 cm), noir	KOCE500EBL
W10752691	30" (76.2 cm), black stainless 30" (76,2 cm), noir inoxydable	KOCE500EBS
W10752687	30" (76.2 cm), white 30" (76,2 cm), blanc	KOCE500EWH
W10752693	30" (76.2 cm), stainless steel 30" (76,2 cm), acier inoxydable	KOCE500ESS

Table of Contents/Table des matières

BUILT-IN OVEN SAFETY	2	SÉCURITÉ DU FOUR ENCASTRÉ	9
INSTALLATION REQUIREMENTS	2	EXIGENCES D'INSTALLATION	9
Tools and Parts	2	Outillage et pièces	9
Location Requirements	2	Exigences d'emplacement	9
INSTALLATION INSTRUCTIONS	4	INSTRUCTIONS D'INSTALLATION	11
Prepare Built-In Microwave/Oven Combination	4	Préparation de l'ensemble des fours encastrés (micro-ondes/four)	11
Remove Oven Door	4	Dépose de la porte(s) du four	11
Replace Oven Door	4	Réinstallation de la porte(s) du four	12
Positioning Oven Feet	5	Positionnement des pieds du four	13
Replace Plastic Spacers	6	Remplacement des cales d'espacement en plastique	14
Install Oven	7	Installation du four	14
Install Deflector Bracket	7	Installation du support de la trousse du déflecteur	15
Complete Installation	8	Achever l'installation	15

IMPORTANT:

Save for local electrical inspector's use.

IMPORTANT :

À conserver pour consultation par l'inspecteur local des installations électriques.

W10720346A

207111 DR. 902

BUILT-IN OVEN SAFETY

Your safety and the safety of others are very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the safety alert symbol.

This symbol alerts you to potential hazards that can kill or hurt you and others.

All safety messages will follow the safety alert symbol and either the word "DANGER" or "WARNING." These words mean:

⚠ DANGER

You can be killed or seriously injured if you don't immediately follow instructions.

⚠ WARNING

You can be killed or seriously injured if you don't follow instructions.

All safety messages will tell you what the potential hazard is, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.

INSTALLATION REQUIREMENTS

Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools Needed

- Phillips screwdriver
- Measuring tape
- Drill (for wall cabinet installations)
- 1/8" (3 mm) drill bit (for wall cabinet installations)
- Level
- Flat-blade screwdriver

Parts Needed

- (4) #8-14 x 1" screws
- (2) #8-18 x 3/8" screws - bottom vent included with built-in oven
- Bottom vent included with built-in oven

Parts Supplied

- Deflector bracket



- (2) Plastic spacers



- #8-18 x 1/4" screws - (2) for 27" (68.6 cm) models; (4) for 30" (76.2 cm) models - deflector bracket
- (4) #8-18 x 3/8" screws - oven feet
- (2) feet
- (2) front feet

2

Location Requirements


IMPORTANT: Observe all governing codes and ordinances.

NOTE: Refer to the following "Location Requirements" and the "Location Requirements" section of the Installation Instructions provided with your built-in oven.

- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance for the oven.
- The recessed installation area must provide complete enclosure around the recessed portion of the oven.
- The oven support surface must be solid, level and flush with the bottom of the cabinet cutout.
- The floor must be able to support a total weight (microwave and built-in oven) of 208 lbs (95 kg) for 27" (68.6 cm) models or 249 lbs (113 kg) for 30" (76.2 cm) models.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Deflector Bracket Dimensions

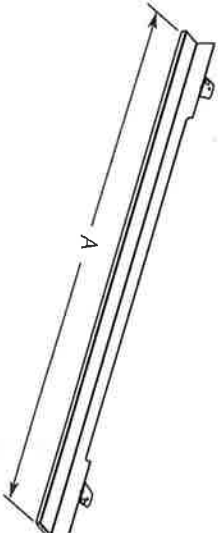

27" (68.6 cm) Models 30" (76.2 cm) Models
A. 26 5/16" (68.4 cm) overall width A. 29 5/16" (76.0 cm) overall width

207111



DR. SB

Cabinet Dimensions - Flush Installations

A 25 $\frac{3}{8}$ " (64.4 cm) minimum cutout depth is required.

These dimensions will result in a $\frac{1}{4}$ " (6 mm) reveal on the top, a $\frac{1}{4}$ " (6 mm) reveal on the sides, and a $\frac{1}{8}$ " (3 mm) reveal on the bottom of the wall oven.

The front face of the cleats and platform will be visible and should be treated as a finished surface.

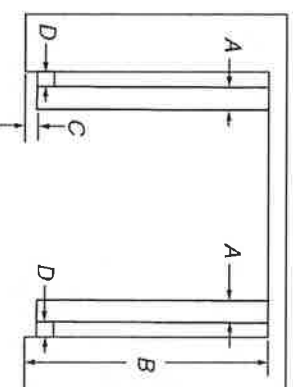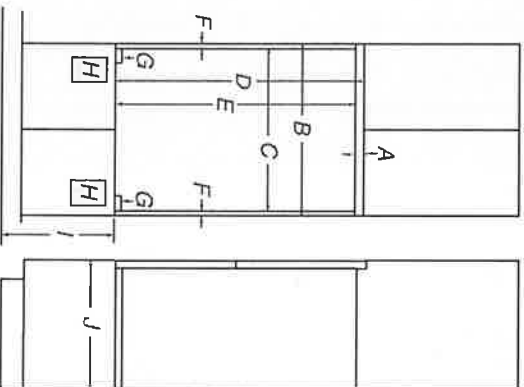

Top View

27" (68.6 cm) Models	30" (76.2 cm) Models
A. $\frac{1}{4}$ " x 2" (13 mm x 5.1 cm) spacer the entire depth of the cutout*	A. $\frac{1}{2}$ " x 2" (13 mm x 5.1 cm) spacer the entire depth of the cutout*
B. 25 $\frac{3}{8}$ " (64.4 cm) depth of cutout	B. 25 $\frac{3}{8}$ " (64.4 cm) depth of cutout
C. 1 $\frac{3}{8}$ " (3.5 cm) recess from front of cabinet	C. 1 $\frac{3}{8}$ " (3.5 cm) recess from front of cabinet
D. 1 $\frac{1}{8}$ " (17 mm) side cleat*	D. 1 $\frac{1}{8}$ " (17 mm) side cleat*

*Cleats and spacers must be recessed 1 $\frac{3}{8}$ " (3.5 cm) from the front of the cabinet.

27" (68.6 cm) Models	30" (76.2 cm) Models
A. $\frac{5}{8}$ " (16 mm) top cleat*	A. $\frac{5}{8}$ " (16 mm) top cleat*
B. 27 $\frac{1}{2}$ " (69.2 cm) minimum width of flush inset cutout	B. 30 $\frac{1}{2}$ " (76.8 cm) minimum width of flush inset cutout
C. 25 $\frac{3}{8}$ " (65.7 cm) minimum width of opening	C. 28 $\frac{3}{8}$ " (73.3 cm) minimum width of opening
D. 43 $\frac{1}{8}$ " (109.5 cm) minimum height of flush inset cutout	D. 43 $\frac{1}{8}$ " (109.5 cm) minimum height of flush inset cutout
E. 42 $\frac{1}{2}$ " (107.9 cm) recommended cutout height	E. 42 $\frac{1}{2}$ " (107.9 cm) recommended cutout height
F. 1 $\frac{1}{8}$ " (17 mm) side cleat*	F. 1 $\frac{1}{8}$ " (17 mm) side cleat*
G. $\frac{1}{2}$ " x 2" (13 mm x 5.1 cm) spacer the entire depth of the cutout*	G. $\frac{1}{2}$ " x 2" (13 mm x 5.1 cm) spacer the entire depth of the cutout*
H. Recommended junction box location	H. Recommended junction box location
I. 4 $\frac{5}{8}$ " - 19 $\frac{1}{4}$ " (11.7 - 48.9 cm) bottom of cutout to floor	I. 4 $\frac{5}{8}$ " - 19 $\frac{1}{4}$ " (11.7 - 48.9 cm) bottom of cutout to floor
J. 25 $\frac{3}{8}$ " (64.4 cm) minimum depth of cutout	J. 25 $\frac{3}{8}$ " (64.4 cm) minimum depth of cutout

*Cleats and spacers must be recessed 1 $\frac{3}{8}$ " (3.5 cm) from the front of the cabinet.


Lot 111 Q2. 508

Prepared by

Ali Taher

ataher@appliancescanada.com (905) 660-2424 2352

Appliance Canada
For Your Home, For Your Life

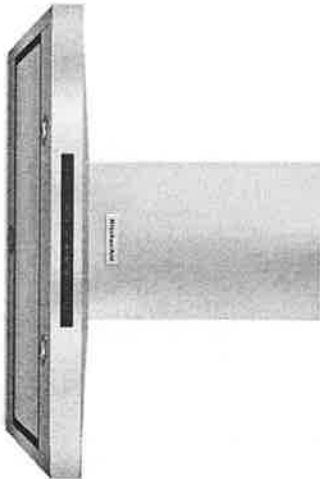

KitchenAid® 36" Wall-Mount, 3-Speed Canopy Hood

KVWB606DSS

Available Finishes/Colours

KVWB606DSS
Stainless Steel

Dimensions

Depth	19 11/16
Height	24 5/8
Width	36

Configuration and Overview

Hood Type	Wall Mount
Fan CFM	600
Venting Type	Exterior or Recirculating

The power of this 36-inch vent hood effectively vents most cooking surfaces. One of the premium features of this vent hood is auto speed sensing that adjusts fan speed to help protect cabinets from potentially harmful steam, grease, and odors. The sharp, glass-touch display showcases easy-to-use touch controls.

Top Features

600 CFM/65K BTU Threshold

Perimeter Ventilation

Auto Speed Setting

Manuals & Literature:

- Use and Care
- Dimension Guide
- Installation Instructions
- Warranty

Controls

Number of Speeds	3
Night Light	Halogen
Task Light	LED

KitchenAid®

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

PRODUCT MODEL NUMBERS

KVWB600D

KVWB606D

Electrical: A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Roof Venting Wall Venting Non-Vented (Recirculating)

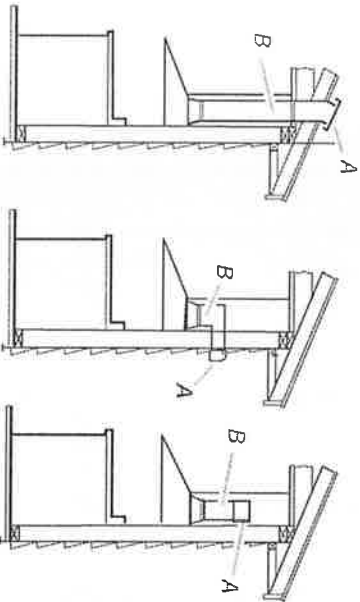

A. Roof cap
B. 6" (15.2 cm) round vent

A. Wall cap
B. 6" (15.2 cm) round vent

A. Diverter
B. 6" (15.2 cm) round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece 6" (15.2 cm) Round

45° elbow 2.5 ft (0.8 m)


90° elbow

5.0 ft (1.5 m)



Maximum equivalent vent length is 35 ft (10.7 m).


Example Vent System

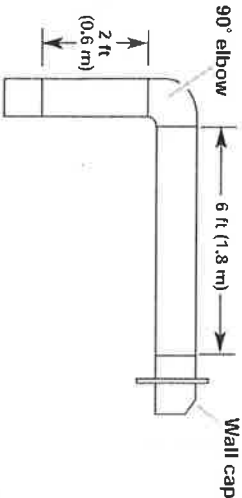

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow = 5.0 ft (1.5 m)
1 - wall cap = 0.0 ft (0.0 m)
8 ft (2.4 m) straight = 8.0 ft (2.4 m)
Length of system = 13.0 ft (3.9 m)

PRODUCT DIMENSIONS

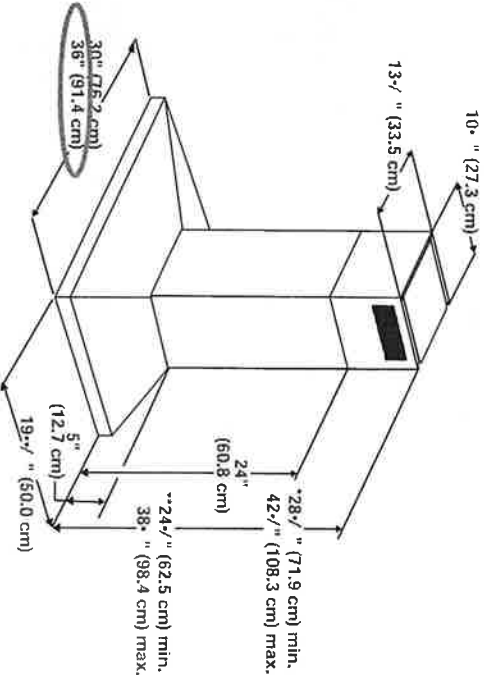


*For non-vented (recirculating) installations

**For vented installations

Set 111

Dr. 503

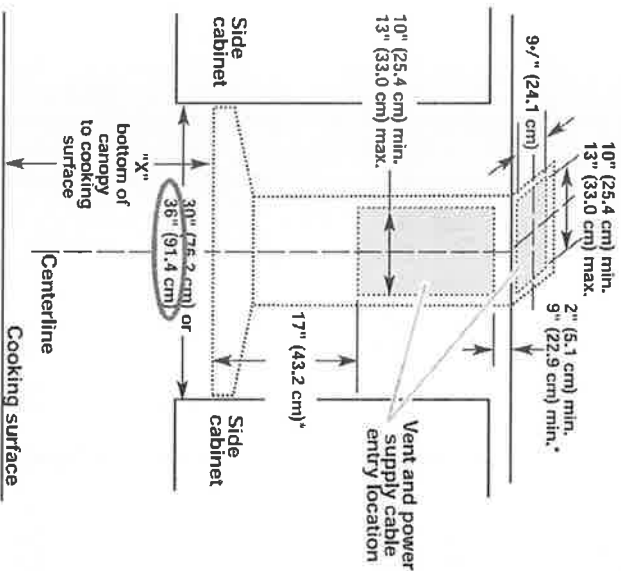

*For non-vented (recirculating) installations

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)

***NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.