

RECEIVED

NOV 22 2019

Lot 149




U-LINE

024BEV

Beverage Center • 1000 Series

FEATURES & BENEFITS

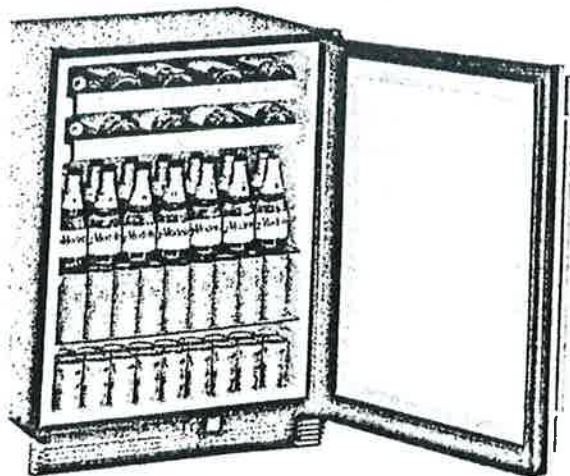


PERFORMANCE

- Overall volume of 5.4 cu ft holds up to 85 bottles (12 oz) or 105 cans (12 oz) and 16 wine bottles (750 ml)
- Mechanical Dial Control is conveniently located on the grille
- Approximate temperature range: 34°F - 45°F
- Passive cooling system

INTERIOR/EXTERIOR

- White interior is illuminated with recessed incandescent lighting that automatically turns off when the door is closed
- Three-quarter extension zinc coated wine racks allow for easy access
- Wine racks accommodate a variety of bottle shapes and sizes
- Two adjustable tempered glass shelves
- LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV light
- Stainless steel handle (1/2" diameter)
- Door swing is field reversible, and is shipped right-hand hinged



STAINLESS
FRAME

INTEGRATION

- Unit is designed to be built-in or can be freestanding with the freestanding accessory kit
- Solid natural beech wood fronts on wine racks can easily be stained to match surrounding cabinetry
- Four independently adjustable levelling legs provide a precise undercounter fit

DETAILS

| | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-------|------------|-----------------------|-----------------|-----------------|
| 5-00B | 115 / 60 | Field Reversible Door | Stainless Frame | 126 lb |

ORIES


| | Description | Finish | Shipping Weight |
|-----|------------------|--------|-----------------|
| ND8 | Freestanding Kit | Black | 3 lb |




1024BEV

1000 Series • 24" Beverage Center

DIMENSIONS

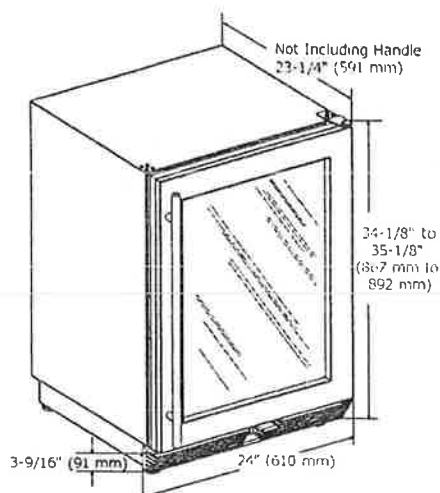

CABINET CUT-OUT

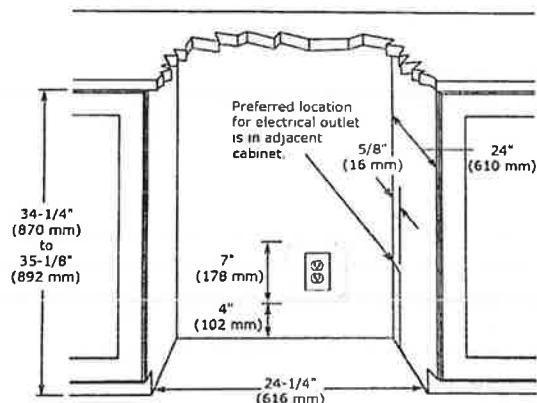

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

SPECIFICATIONS

| | |
|-----------------------------------|------------------|
| Model | 1024BEV |
| Amps: Running | 1.2 |
| Capacity: Bottle (12 oz) | 85 |
| Capacity: Can (12 oz) | 105 |
| Capacity: Volume (cu ft) | 5.4 |
| Capacity: Wine Bottle (750 ml) | 16 |
| Control Type | Mechanical Dial |
| Dimensions: Product Depth | 23 1/4" / 591 mm |
| Dimensions: Product Height | 34 1/8" / 867 mm |
| Dimensions: Product Width | 24" / 610 mm |
| Energy Consumption: Avg. Per Year | 395 kWh |
| ENERGY STAR | No |
| Product Weight: Max | 116 lb |
| Refrigerant Type | R600a |
| Sabbath (Star K Certified) | No |
| Temperature Range | 34°F - 45°F |

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



plus 1

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com