

North Oakville - 146 - 1 - WILLOW VALLEY (43-02) ELEV A

Registere Plan Number: Municipal Address: Closing: 9-Jul-20

CABINETRY

Inv. 34 20 Line 472 29Oct19 / 1Nov19	1 - KITCHEN: DELETE CABINETS ABOVE STOVE TO ACCOMODATE PURCHASER'S CHIMNEY HOOD FAN. SEE SPECS ATTACHED Note:
Inv. 34 21 Line 473 29Oct19 / 1Nov19	1 - KITCHEN: DEEP FRIDGE UPPERS (03-H). SEE SKETCH FOR LOCATION Note:
Inv. 34 22 Line 477 29Oct19 / 1Nov19	1 - KITCHEN: INSTALL CROWN MOULDING ON KITCHEN CABINETS Note:
Inv. 34 23 Line 478 29Oct19 / 1Nov19	1 - KITCHEN: INSTALL VALANCE UNDER KITCHEN CABINETS ***NOTE: DOES NOT INCLUDE ANY ELECTRICAL*** Note:
Inv. 34 17 Line 469 29Oct19 / 1Nov19	1 - KITCHEN: INSTALL WALL OVEN UNIT (18-H). SEE SKETCH FOR LOCATION Note:
Inv. 34 18 Line 470 29Oct19 / 1Nov19	1 - KITCHEN: INSTALL 36" COOKTOP CABINET (24-H). SEE SKETCH FOR LOCATION Note:

CERAMIC TILE

Inv. 34 24 Line 474 29Oct19 / 1Nov19	1 - KITCHEN: INSTALL 6TH UPGRADE FLOOR TILE IN KITCHEN/BREAKFAST AREA IN LIEU OF HARDWOOD Note:
Inv. 34 25 Line 475 29Oct19 / 1Nov19	1 - ENTRY/ POWDER ROOM: INSTALL 6TH UPGRADE FLOOR TILE IN ENTRY/ POWDER ROOM Note:
Inv. 34 26 Line 476 29Oct19 / 1Nov19	1 - KITCHEN: DO NOT INSTALL ANY BACKSPLASH IN KITCHEN. PURCHASER DOES NOT WANT IT AND UNDERSTANDS THERE IS NO CASH VALUE Note:

COUNTERTOP

Inv. 34 19 Line 471 29Oct19 / 1Nov19	1 - KITCHEN: GRANITE CUT-OUT FOR 36" COOKTOP Note:
---	---

ELECTRICAL

CONSTRUCTION SUMMARY

North Oakville - 146 - 1 - WILLOW VALLEY (43-02) ELEV A

Registere Plan Number: Municipal Address: Closing: **9-Jul-20**

Inv.16 11	1 - MASTER BEDROOM: INSTALL WALL SCONE ROUGH IN - COMPLETE WITH 1 SWITCH
Line 149	**TO GO 2' FROM EACH END OF END WALLS AND 5' OFF THE FINISHED FLOOR. SEE FLOOR PLAN FOR LOCATION Note:
11Jul19 / 23Aug19	
Inv.16 12	1 - MASTER BEDROOM: INSTALL CEILING LIGHT ROUGH IN - FOR 1 SCONE, ON EXISTING SWITCH OF OTHER SCONE ROUGH-IN. (DOES NOT INCLUDE FIXTURE). SEE SKETCH FOR LOCATIONS
Line 150	**TO GO 2' FROM EACH END OF END WALLS AND 5' OFF FINISHED FLOOR Note:
11Jul19 / 23Aug19	
Inv.16 13	1 - LIVING ROOM: INSTALL CEILING LIGHT ROUGH IN - FOR 1 CEILING LIGHT - ON SEPARATE SWITCH (DOES NOT INCLUDE FIXTURE). LOCATIONS MAY VARY DUE TO JOIST LOCATIONS
Line 151	Note:
11Jul19 / 23Aug19	
Inv.16 14	1 - KITCHEN: INSTALL CEILING FIXTURE - RELOCATE STANDARD CEILING FIXTURE- TO GO ABOVE KITCHEN ISLAND. SEE SKETCH. LOCATIONS MAY VARY DUE TO JOIST LOCATIONS
Line 152	Note:
11Jul19 / 23Aug19	
Inv.16 1	1 - TELEPHONE AD CABLE LOCATION SKETCH. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS
Line 139	Note:
11Jul19 / 23Aug19	
Inv.16 3	1 - KITCHEN: INSTALL ELECTRICAL - ROUGH-IN FOR 30 - 40 AMP BUILT-IN WALL OVEN OR COOK TOP
Line 141	Note:
11Jul19 / 23Aug19	
Inv.16 4	1 - KITCHEN: INSTALL ELECTRICAL - ROUGH-IN FOR 20 AMP BUILT-IN MICROWAVE
Line 142	Note:
11Jul19 / 23Aug19	
Inv.16 6	1 - KITCHEN: INSTALL RECEPTACLES - ADDITIONAL 15 AMP 120 VOLT RECEPTABLE- FOR GAS STOVE
Line 144	Note:
11Jul19 / 23Aug19	
Inv.16 9	1 - GREAT ROOM: INSTALL RECEPTACLES - DEDICATED 15 AMP 120 VOLT RECEPTABLE, ABOVE FIREPLACE
Line 147	Note:
11Jul19 / 23Aug19	

HARDWOOD FLOORING

Inv.34 27	1 - GREAT ROOM: INSTALL LEVEL 2 HARDWOOD THROUGHOUT GREAT ROOM
Line 479	Note:
29Oct19 / 1Nov19	
Inv.34 28	1 - LIVING/DINING ROOM: INSTALL LEVEL 2 HARDWOOD THROUGHOUT LIVING/ DINING ROOM
Line 480	Note:
29Oct19 / 1Nov19	

North Oakville - 146 - 1 - WILLOW VALLEY (43-02) ELEV A

Registere Plan Number: Municipal Address: Closing: 9-Jul-20

Inv. 34 29 Line 481 29Oct19 / 1Nov19	1 - MAIN HALL; INSTALL LEVEL 2 HARDWOOD THROUGHOUT MAIN HALL Note:
Inv. 34 30 Line 482 29Oct19 / 1Nov19	1 - LIBRARY; INSTALL LEVEL 2 HARDWOOD THROUGHOUT LIBRARY Note:
Inv. 34 31 Line 483 29Oct19 / 1Nov19	1 - LANDINGS; INSTALL SANDED RED OAK LANDINGS Note:

HVAC

Inv. 16 5 Line 143 11Jul19 / 23Aug19	1 - KITCHEN; INSTALL GAS PIPING AND OTHER - GAS LINE R/I FOR MAIN FLOOR - STOVE - UP TO 3/4 INCH LINE Note:
---	--

MISCELLANEOUS

Inv. 16 15 Line 153 11Jul19 / 23Aug19	1 - Purchaser has attended a Structural appointment at the Decor Centre & has DECLINED any additional upgrades and accepts and acknowledges that there will be no further structural changes/additions/deletions to be made upon signing on July 11, 2019 Note:
Inv. 16 16 Line 154 11Jul19 / 23Aug19	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers Extra Form are subject to a minimum administration fee Note:
Inv. 34 33 Line 485 29Oct19 / 1Nov19	1 - BONUS PACKAGE: WORTH OF UPGRADES FROM VALERYHOMES DECOR CENTRE IS BEING APPLIED TOWARD THE COLOUR APPOINTMENT Note:
Inv. 34 34 Line 486 29Oct19 / 1Nov19	1 - Purchaser has attended a Colour appointment at the Decor Centre & has DECLINED any additional upgrades and accepts and acknowledges that there will be no further structural changes/additions/deletions to be made upon signing on October 29, 2019 Note:
Inv. 34 35 Line 487 29Oct19 / 1Nov19	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers Extra Form are subject to a minimum administration fee Note:

PAINT

Inv. 34 32 Line 484 29Oct19 / 1Nov19	1 - STAIRCASE; STAIN STAIRS TO GREY KARMA Note: NOTE: COLOUR ON RED OAK WILL SHOW DIFFERENTLY ON A WHITE OAK
---	---

PLUMBING

North Oakville - 146 - 1 - WILLOW VALLEY (43-02) ELEV A

Register Plan Number: Municipal Address: Closing: 9-Jul-20


Inv. 16 2	1 - KITCHEN: RELOCATE SINK AND DISHWASHER FROM THE ISLAND, TO THE BACK WALL OF KITCHEN, BESIDE STOVE. SEE SKETCH	
Line 140	**PURCHASER WAS ADVISED AGAINST THIS OPTION**	
	Note:	
11Jul19 / 23Aug19		
Inv. 16 10	1 - KITCHEN: INSTALL EXTRA ROUGH-IN LINE FOR FRIDGE ICE MAKER WITH SHUT-OFF	
Line 148	Note:	
11Jul19 / 23Aug19		

VACCUM/BELL


Inv. 16 7	1 - WIRELESS ACCESS POINT PACKAGE - 2-CAT6 NETWORK CABLES AND 2-UBIQUITI AC LITE ACCESS POINTS	
Line 145	Note:	
11Jul19 / 23Aug19		
Inv. 16 8	1 - GREAT ROOM: INSTALL CONDUIT - 1 1/4" ORANGE FLEX CONDUIT APPROX. 35FT FOR FIREPLACE	
Line 146	Note:	
11Jul19 / 23Aug19		

- Ⓣ — Telephone
- Ⓢ — Cable
- ⓔ — Electrical


Lot 146
 July 11, 2019

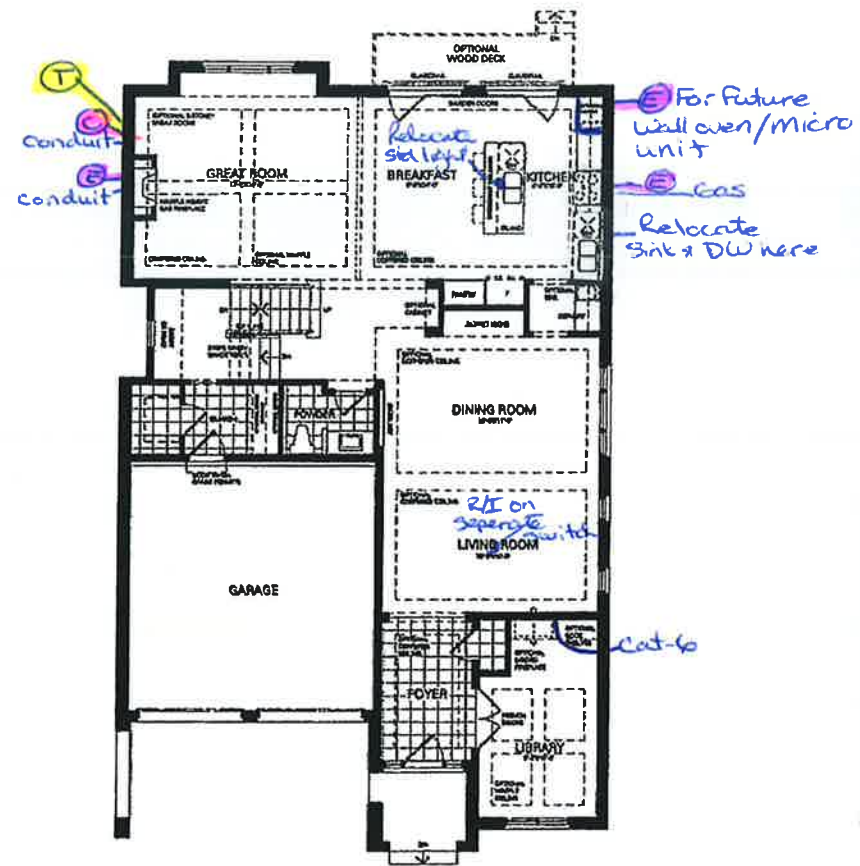


GROUND FLOOR A

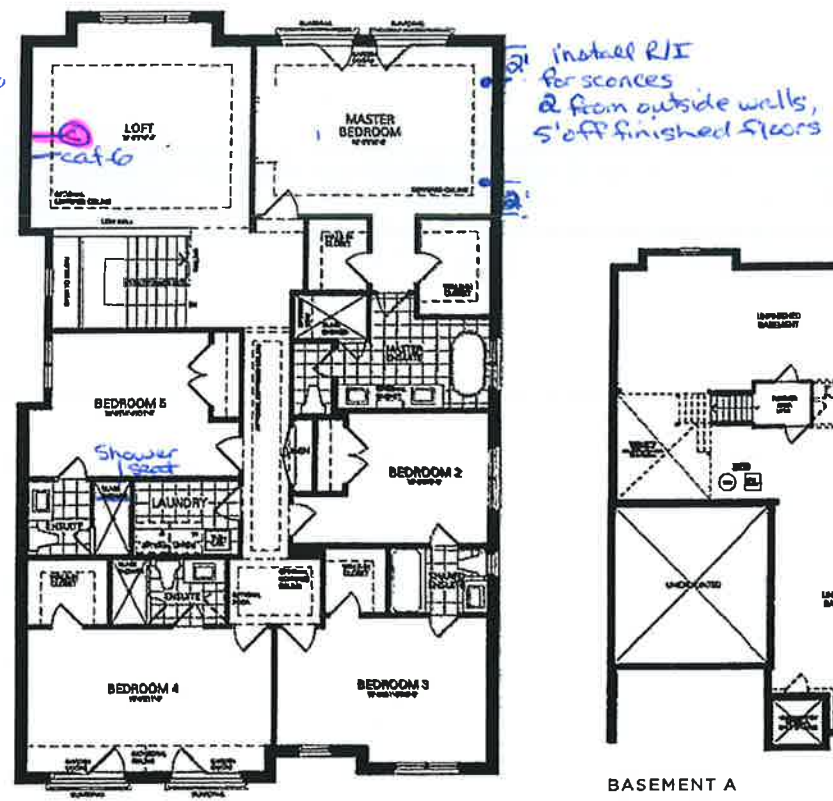


SECOND FLOOR A

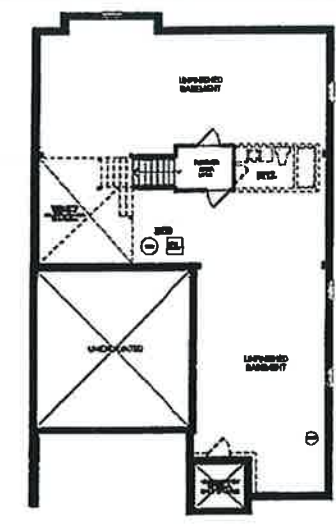


BASEMENT A

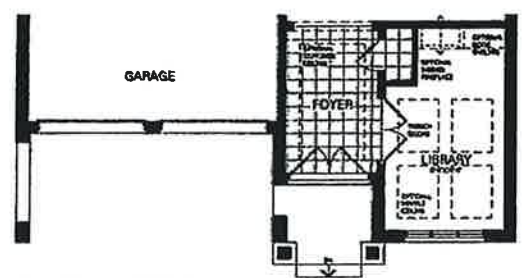

GROUND FLOOR B

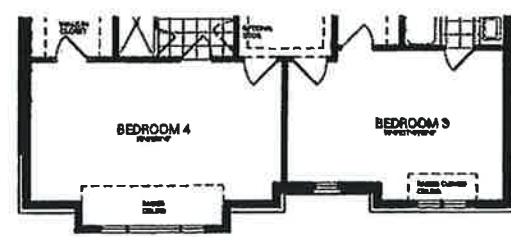

SECOND FLOOR B

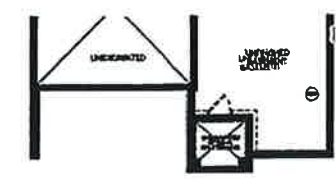

BASEMENT B

Willow Valley

Elevation A
 3,623 Sq.ft.

Includes 47 Sq.ft. of Finished Basement

MSA

Elevation B
 3,628 Sq.ft.

Includes 47 Sq.ft. of Finished Basement

Disclaimer: All dimensions are approximate and subject to normal construction variances. Dimensions may exceed the useable floor area. Sizes and specifications subject to change without notice. Furniture is displayed for illustration purposes only and does not necessarily reflect the electrical plan for the suite. Suites are sold unfurnished. Balcony and façade variations may apply, contact a sales representative for further details E&O.E. ©Valery Homes 2018. All rights reserved.



FRIGIDAIRE GALLERY


FGEW3066U F/D

SA SK

Lot 146

July 15, 2019

SINGLE WALL OVEN
30" ELECTRIC

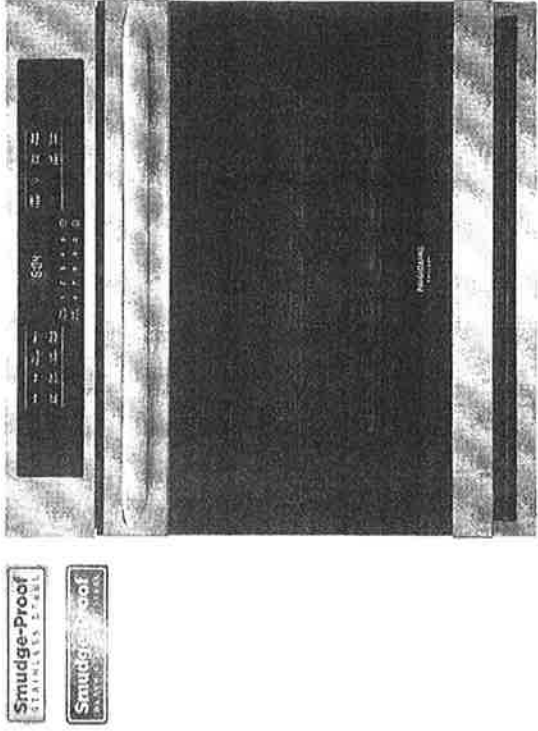

Smudge-Proof
STAINLESS STEEL

Smudge-Proof
BLACK STAINLESS

AVAILABLE
COLORS

D
Black
Stainless

F
Black
Stainless

SIGNATURE FEATURES




Faster, More Even Baking Results with True Convection

Get faster, more even multi-rack baking with a powerful convection fan and third heating element that evenly circulates hot air throughout the oven.



Effortless™ Temperature Probe

The Effortless™ Temperature Probe detects and alerts when the desired finished cooking temperature has been reached and automatically switches to the keep warm setting.

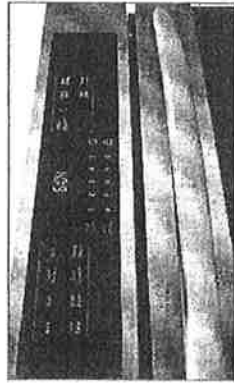

Quick Preheat

Preheat in just a few minutes.*

FRIGIDAIRE FIT PROMISE

Frigidaire Fit Promise

We promise that your new 27" or 30" Frigidaire® single or double wall oven will fit your existing cabinet cutout of the same width and configuration, or we will reimburse you for installation costs up to \$300.*

PRODUCT DIMENSIONS

Height (Max.)	29"
Width	30"
Depth (Incl. Handle)	27-1/8"

MORE EASY-TO-USE FEATURES

Cleanup is Easy with Hidden Bake
Lower heating elements are beneath the oven floor, making for a smooth surface that is easy to clean.

Smudge-Proof® Stainless Steel
Resists fingerprints and cleans easily. Available in Stainless Steel and Black Stainless Steel finishes.

Our Largest Capacity Oven
Cook more at once with 51 cubic feet of oven capacity.

Easily Access Dishes with our Glide Rack
Rack easily glides in and out allowing you to access dishes from your oven.

Oven Rack Handles
Oven racks are designed with space for you to easily pull out the racks, even when wearing an oven mitt.

Easy to Clean with Self-Cleaning
Your oven cleans itself - so you don't have to. Self clean options available in 2, 3, and 4-hour cycles.

Even Baking Technology
Our Even Baking Technology ensures even baking every time.

CERTIFICATIONS

Star-K® Certified (Sabbath Mode)

* Via mail-in rebate. See Frigidaire.com/FitPromise for additional information.

† Based on single rack cooking performance, not set temperature, using Quick Preheat.

FGEW3066U D/F
SINGLE WALL OVEN
30" ELECTRIC

lot 146

FRIGIDAIRE
GALLERY

FEATURES

Control/Timing System	Express-Select® Controls
Window	Extra-Large
Exterior Door Finish	Spudge-Proof® Stainless Steel (F) Spudge-Proof® Black Stainless (D)
Handle Design	Stainless Steel (F) Black Stainless (D)
Oven Cleaning System	Self-Clean w/ Steam Clean Option

OVEN CONTROLS

Bake/Broil	Yes / Variable (400 - 550 °F)
Effortless™ Convection Conversion	Yes
Convection Bake / Broil / Roast	Yes / Yes / Yes
Oven Preheat	Quick
My Favorite	
Slow Cook	
Effortless™ Temperature Probe	Yes
Keep Warm	Yes
Adrina-Minute	Yes
Delay Start	Yes
Self-Clean / Clean Options	Yes/2, 3, 4 Hours
Steam Clean	Yes
Delay Clean	Yes
Kitchen Timer	Yes
Timed Cook Option	Yes
Control Lock	Yes
Auto Oven Shut-Off	Yes
Oven Lock-Out	Yes

OVEN FEATURES

Capacity (Cu.Ft.)	5.1
Convection System	True Convection
Oven Light	2 Halogen
Hidden Bake Element	Yes
Rack Configuration	2 Heavy Duty, 1 Offset Rack
Baking System	Even Baking Technology
Broiling System	Power Broil
Bake / Broil Element (Watts)	2,200 / 4,000

OPTIONAL ACCESSORIES

3" High Bottom Trim - Black Stainless (D) / Stainless Steel (F)	(D) PN# 5304520624 (F) PN # 5304520627
10' Long Armored Power Cable	PN # 903056-9010

CERTIFICATIONS

A.D.A. Compliant	Yes
Star-K® Certified (Sabbath Mode)	Yes

SPECIFICATIONS


Oven Interior (H x W x D)	18 5/8" x 24 1/8" x 19 1/2"
Power Supply Connection Location	Left Bottom Rear
Voltage Rating	240V / 208V / 60Hz
Connected Load (kW Rating) @ 240 / 208 Volts ¹	4.5 / 3.4
Amps @ 240 / 208 Volts	18.8 / 16.3
Minimum Circuit Required (Amps)	20
Approved for Under-Counter Installation	Yes
Shipping Weight (Approx.)	145 Lbs.

PRODUCT DIMENSIONS

A - Height (Max.)	29"
B - Width	30"
C - Depth (incl. Handle)	27 1/8"
D - Height (Wrapper)	27 3/16"
E - Width (Wrapper)	24-5/8"
Depth with Door Open 90°	45 3/4"

CABINET CUTOUT DIMENSIONS

Height (Min.) / (Max.)	27 1/4" / 28 5/8"
Width (Min.) / (Max.)	28 1/8" / 29"
Depth (Min.)	24"

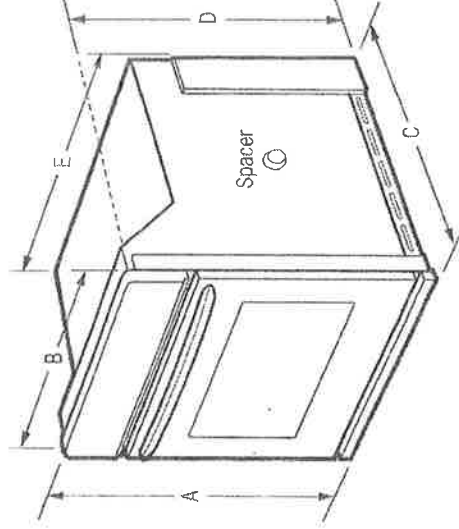

¹ When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.
2 Single phase 3- or 4-wire cable, 120 / 240 or 120 / 208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes required on separate circuit fused on both sides of line. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com / frigidaire.ca](http://frigidaire.com/frigidaire.ca)


Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGEW3066 03/19
© 2019 Electrolux Home Products, Inc.

Quick Guide to Operation *(continued)*

Feature	How to Operate
To use as a Kitchen Timer (→page 23)	 →  →  Press once. To set time. Press once.
To set Stand Time (→page 23)	 →  →  →  Press once. To set time. Press once.
To Use Delay Time (→page 23)	 →  →  →  Press once. To set time. Press once.

Microwave Spec

SA SK


Lot 146

July 15, 2019



Specifications

Model Number	NN-SD973S NN-SD773S NN-SD763S
Power Source:	120 V 60 Hz
Power Consumption :	12.7 A 1500 W
Cooking Power:*	1200 W
Outside Dimensions (W x H x D):	23 ²⁷ / ₃₂ " x 14" x 20" (606 mm x 356 mm x 506 mm)
Overall Oven Cavity Dimensions (W x H x D):	18 ¹⁷ / ₃₂ " x 11" x 18 ¹⁷ / ₃₂ " (470 mm x 278 mm x 469 mm)
Operating Frequency:	2450 MHz
Net Weight:	Approx. 16.7 kg (36.8 lbs.)
	Approx. 14.3 kg (31.5 lbs.)

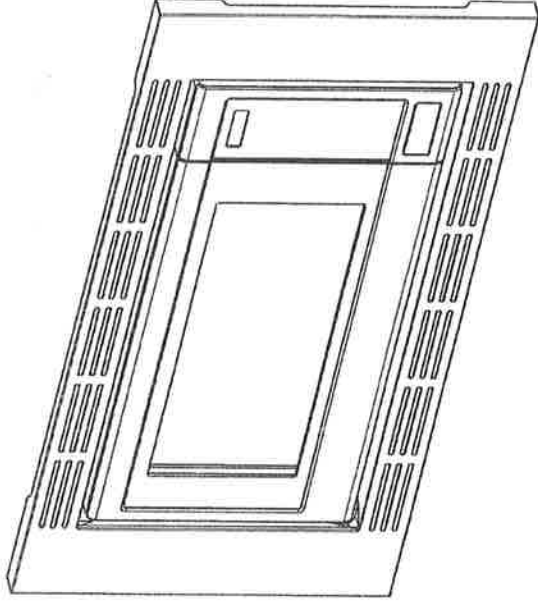

Trim kit

Installation Instructions

Notice d'installation


Instrucciones para la instalación

Cabinet Armoire Gabinete	Trim kit Nécessaire d'encastrement Juego de acabados
30" (762 mm) 30 po (762 mm) 30" (762 mm)	NN-TK932S NN-TK732S
27" (686 mm) 27 po (686 mm) 27" (686 mm)	NN-TK922S NN-TK722S

Read carefully and keep these installation instructions.
Lisez attentivement et conservez cette notice d'installation.
Lea cuidadosamente y guarde este instructivo de
instalación para su referencia.

Lot 146

- 2. Installation Diagram
- 2. Schéma d'installation
- 2. Diagrama de instalación

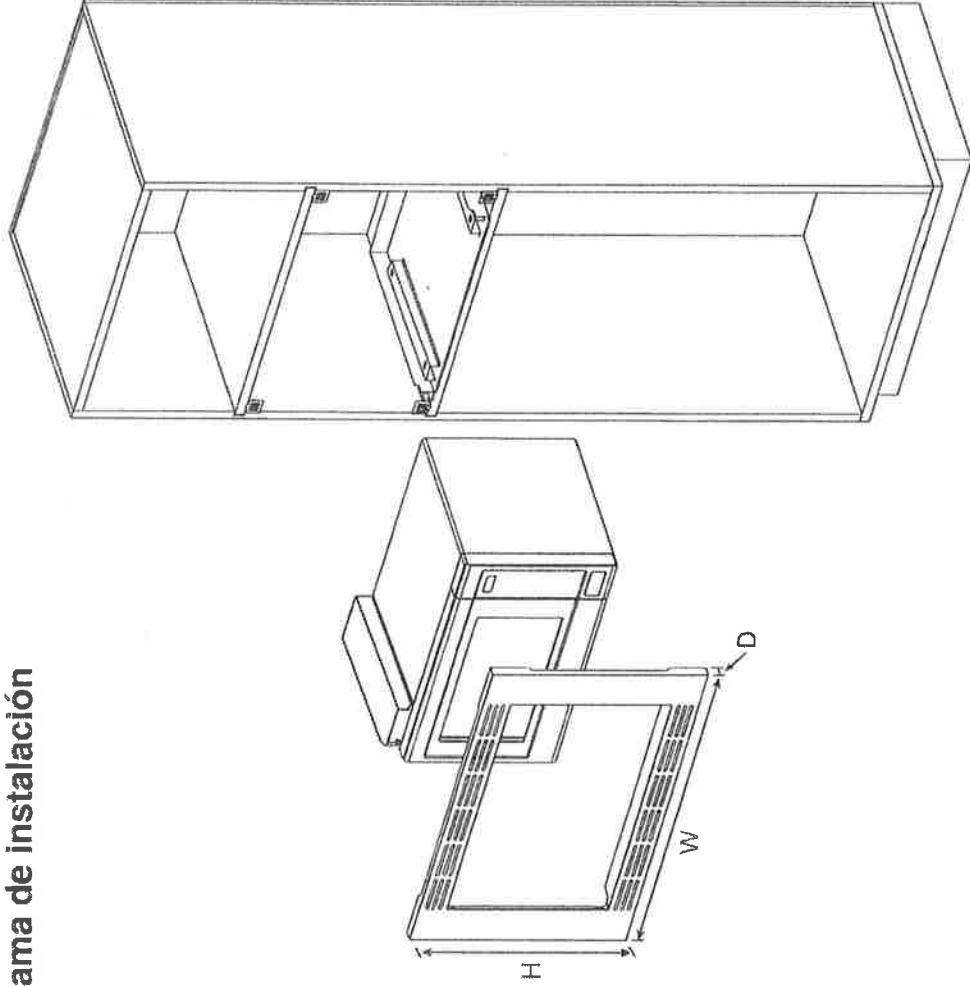

Rim Kit Dimensions			
	TK932S	TK922S	TK732S
Width	30" (760 mm)	27" (684 mm)	30" (760 mm)
Height	18 9/16" (472 mm)	18 9/16" (472 mm)	16 1/2" (419 mm)
Depth (Thickness)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)


Dimensions du nécessaire d'encastrement			
	TK932S	TK922S	TK732S
Largeur	760 mm (30 po)	684 mm (27 po)	760 mm (30 po)
Hauteur	472 mm (18 9/16 po)	472 mm (18 9/16 po)	419 mm (16 1/2 po)
Profondeur (épaisseur)	20 mm (3/4 po)	20 mm (3/4 po)	20 mm (3/4 po)

Dimensiones del juego de acabados			
	TK932S	TK922S	TK732S
Ancho	30" (760 mm)	27" (684 mm)	30" (760 mm)
Altura	18 9/16" (472 mm)	18 9/16" (472 mm)	16 1/2" (419 mm)
Profundidad (grosor)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)

3-1. Cabinet Diagram and Dimensions (For TK932S)

3-1. Schéma de l'armoire et dimensions (Pour TK932S)

3-1. Dimensiones y diagrama del gabinete (Para TK932S)

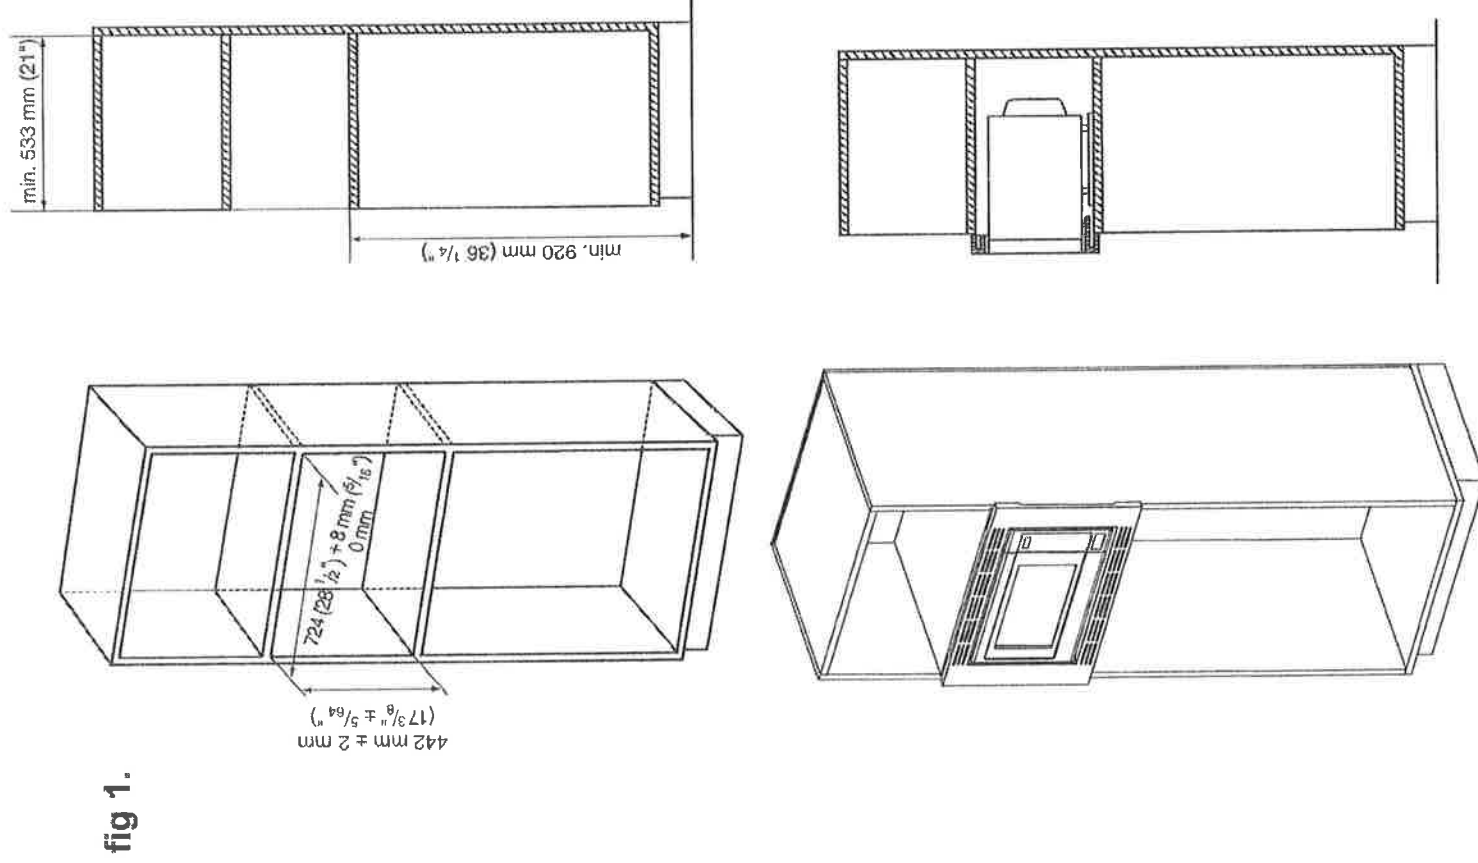

Built-In Cooktops

FGGC3645Q S/W/B

36" Gas

Product Dimensions

Width	36"
Depth	21-3/4"
Height	4-1/4"

More Easy-To-Use Features

Electronic Pilotless Ignition

LP Gas Conversion Option

A.D.A. Compliant


When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.




Available in:

Stainless (S)	White (W)	Black (B)

Signature Features




Express-Select® Controls
Easily go from warm to boil.




Continuous Corner-To-Corner Grates

Continuous grates make it easy to move heavy pots and pans between burners without lifting.



Approved Over Frigidaire® Electric Wall Ovens

Cooktops are approved for installation above any of our Single Electric Wall Ovens.



Low Simmer Burner


Perfect for delicate foods and sauces.

Lot 146

Features	
Controls	Express-Select®
Surface Type	Stainless Steel Recessed (S), Color-Coordinated Recessed (W/B)
Sealed Gas Burners	Yes
Grates	Continuous Corner-To-Corner Cast Iron w/Black Matte Finish
Right Front Burner (BTU)	12,000
Right Rear Burner (BTU)	5,000
Left Front Burner (BTU)	9,500
Left Rear Burner (BTU)	9,500
Center Burner (BTU)	750 - 18,000
Control Location	Front
Knob Color	Stainless (S), Color-Coordinated (W/B)
Knob Type	Cast Metal (S), Plastic (W/B)
Certifications	
A.D.A. Compliant	Yes
Specifications	
Power Supply Connection Location	Right Rear
Gas Supply Connection Location	Right Rear
L.P. Gas Conversion Kit	Included
Voltage Rating	120V / 60 Hz / 15A
Amps @ 120 Volts	10
Minimum Circuit Required (Amps)	15
Approved for Electric Single Wall Oven Combination Installation*	Yes
Shipping Weight (Approx.)	60 Lbs.

*When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

*Cooktops are approved for installation above any of our Electric Single Wall Ovens.

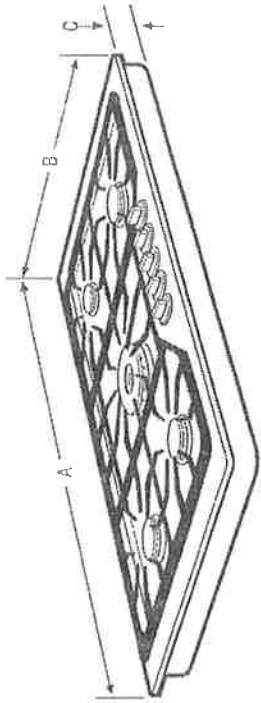

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

Product Dimensions		Cutout Dimensions	
A - Width	36"	Width (Min.) / (Max.)	33-7/8" / 34-1/4"
B - Depth	21-3/4"	Depth (Min.) / (Max.)	19-3/8" / 19-3/4"
C - Height	4-1/4"	Height	8"

Granite Countertop
Installation Kit available.

FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGGC3645Q 08/15

© 2015 Electrolux Home Products, Inc.

Accessories information available
on the web at frigidaire.com

Specifications
subject to change

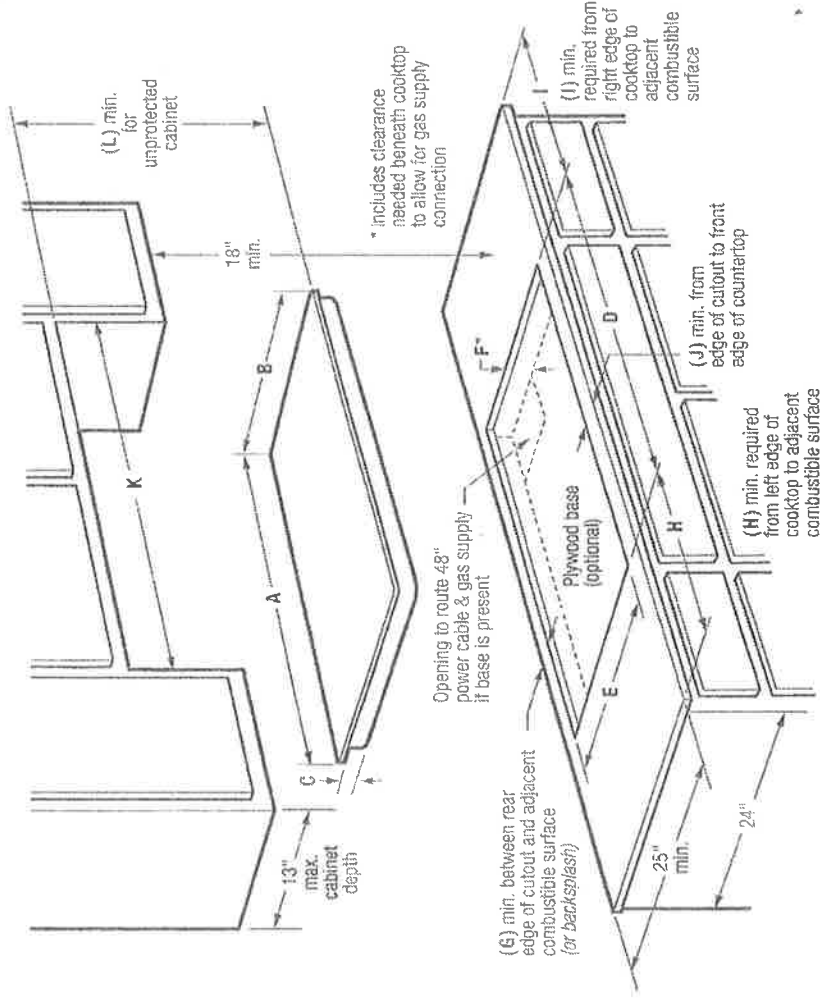

Product Dimensions			Required Clearances			
A - Width	B - Depth	C - Height	G (min.)	H (min.)	I (min.)	J (min.)
36"	21-3/4"	4-1/4"	2"	12"	12"	2-1/4"
Product Cutout Dimensions			K - Cabinet Opening Width (min.)	L - For Unprotected Cabinet (min.)	Utility Connection Locations	
D - Width (min. - max.)	E - Depth (min. - max.)	F - Height (min.)*			Power Supply	Gas Supply
33-7/8" - 34-1/2"	19-3/8" - 19-3/4"	8"	36"	34"	Right Rear	Right Rear

Built-In Cooktop Specifications

- Product Shipping Weight (approx.) – 60 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.
- Amps @ 120 Volts = 1.0 Amps
- Always consult local and national electric and gas codes.
- Cooktop cutout height includes clearance needed beneath cooktop to allow for gas supply connection. Recommended location for positioned 120V outlet is on rear wall in an 8" wide by 10"-high area, positioned 22" above floor surface and 4" from right side of cooktop centerline. Access to underside of cooktop and junction box must be provided for inspection and service.
- Cooktop snips with 3/4" factory regulator.
- LP Gas conversion kit supplied.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 36".
- Allow 34" minimum clearance between top of cooktop platform and bottom of unprotected wood or metal overhead cabinet.
- Allow 2" minimum distance between rear edge of cutout and adjacent combustible surface (or *backsplash*).

- Allow 12" minimum required clearance from left edge of cooktop to adjacent combustible surface and 12" minimum from right edge of cooktop to adjacent combustible surface.
- Installation of drawer beneath cooktop requires 6-1/2" minimum clearance beneath countertop surface, and assured clearance for gas and electrical connections.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Gas Built-In Cooktop model FGC63645Q is approved to be used over any Frigidaire® Electric Single Wall Oven. (Refer to Gas Cooktop installation over 50" / 27" Electric Single Wall Oven Specifications page on web.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

- * Granite Countertop Installation kit - (PN # 903103-9010).

FRIGIDAIRE

USA: 1-800 David Taylor Drive • Charlotte, NC 28261 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA: 5855 Terry Fox Way, Mississauga, ON L5V 3E4 • 1-800-265-8552 • frigidaire.ca

© 2015 Electrolux Home Products, Inc.



Accessories information available
on the web at fridgairs.com

Species of Interest

Quick Guide to Operation *(continued)*

Feature	How to Operate
To use as a Kitchen Timer (☛page 23)	Timer/ Clock → Time Dial → Start Press once. To set time. Press once.
To set Stand Time (☛page 23)	Input up to 2-stage cook- ing programs. → Timer/ Clock → Time Dial → Start Press once. To set time. Press once.
To Use Delay Time (☛page 23)	Timer/ Clock → Time Dial → Input up to 2-stage cook- ing programs. → Start Press once. To set time. Press once.

Microwave



Specifications

Model Number	NN-SD973S	NN-SD773S NN-SD763S
Power Source:	120 V 60 Hz	
Power Consumption :	12.7 A 1500 W	
Cooking Power:*	1200 W	
Outside Dimensions (W x H x D):	23 ²⁷ / ₃₂ " x 14" x 20" (606 mm x 356 mm x 506 mm)	21 ²⁷ / ₃₂ " x 12" x 20" (555 mm x 304 mm x 506 mm)
Overall Oven Cavity Dimensions (W x H x D):	18 ¹ / ₂ " x 11" x 18 ¹⁵ / ₃₂ " (470 mm x 278 mm x 469 mm)	18 ¹ / ₂ " x 9" x 16 ²⁹ / ₆₄ " (470 mm x 228 mm x 418 mm)
Operating Frequency:	2450 MHz	
Net Weight:	Approx. 16.7 kg (36.8 lbs.)	Approx. 14.3 kg (31.5 lbs.)



Specifications (continued)

Trim Kit for 27" Cabinet:

Model Number:	NN-SD973S	NN-SD773S	NN-SD763S
	NN-TK922S	NN-TK722S	
Outside Dimensions (W x H):	684 mm x 472 mm (27" x 18 5/8")	684 mm x 419 mm (27" x 16 1/2")	
Cabinet Opening (W x D x H):	648 mm x 533 mm x 422 mm (25 1/2" x 21" x 17 3/8")	648 mm x 533 mm x 389 mm (25 1/2" x 21" x 15 5/16")	

Trim Kit for 30" Cabinet:

Model Number:	NN-SD973S	NN-SD773S	NN-SD763S
	NN-TK932S	NN-TK732S	
Outside Dimensions (W x H):	760 mm x 472 mm (30" x 18 5/8")	760 mm x 419 mm (30" x 16 1/2")	
Cabinet Opening (W x D x H):	724 mm x 533 mm x 422 mm (28 1/2" x 21" x 17 3/8")	724 mm x 533 mm x 389 mm (28 1/2" x 21" x 15 5/16")	

*IEC Test procedure

Specifications subject to change without notice.

SA SK

Lot 146

July 15, 2019

User's Record

The serial number of this product may be found on the back side of the oven or on the left side of the control panel.

You should note the model number and the serial number of this oven in the space provided and retain this book as a permanent record of your purchase for future reference.

Model No. _____

Serial No. _____

Date of Purchase _____

FRIGIDAIRE

SA SK

Lot 146


July 15, 2019




Glass Canopy Wall-Mount Hood

FHWCS650LS

36" Stainless Steel

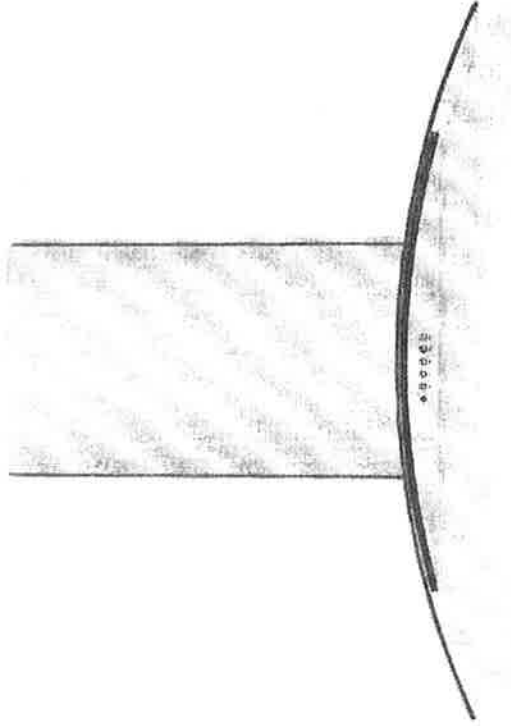


Signature Features




Glass Canopy Design

Glass and stainless steel construction is as attractive as it is functional.



Washable Filters

Dishwasher safe for easy cleaning. The aluminum filter provides strength and durability not found in foam filters.



Centrifugal Fan

Move air quietly and efficiently — up to 400 cu. ft. of air per minute.



Halogen Lighting

For bright illumination of the cooktop surface.

Features

Nominal Width	36"
Installation Type	Wall Mount
Style	Stainless Steel/ Glass Canopy
Air Discharge	Vertical
Air Delivery (CFM)	400
Blower Type	Centrifugal
Controls	Electronic Push Button
Fan Speeds	3
Sound Level (dBA)	67.1
Dual Halogen Lights	Yes
Dishwasher-Safe Filter*	Yes
Exhaust Duct	Convertible*
Duct Required	6" Round

Optional Accessories

Duct-Free Kit	PN# FHWRT60LS
10' Flue Extension Kit	PN# FHWDX60LS

Specifications

Product Dimensions -	
Height (With One Cover)	22-11/16" min.
(With Flue Extension)	26-1/2" min. 43-29/32" max
Width	35-11/32"
Depth	19-11/16"
Voltage Rating	120V/60Hz/15A
Amps @ 120 Volts	4.0
Connected Load (kW Rating) @ 120 Volts†	0.516
Shipping Weight (Approx.)	54 Lbs.
Sones Rating	6.5

*Ventilation is convertible to be either ducted outside, or recirculated inside requiring no ducting. (Recirculated option requires use of optional Duct-Free Kit)
†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.


Specifications subject to change.

Available in:

Stainless
(S)

frigidaire.com

Lot 146

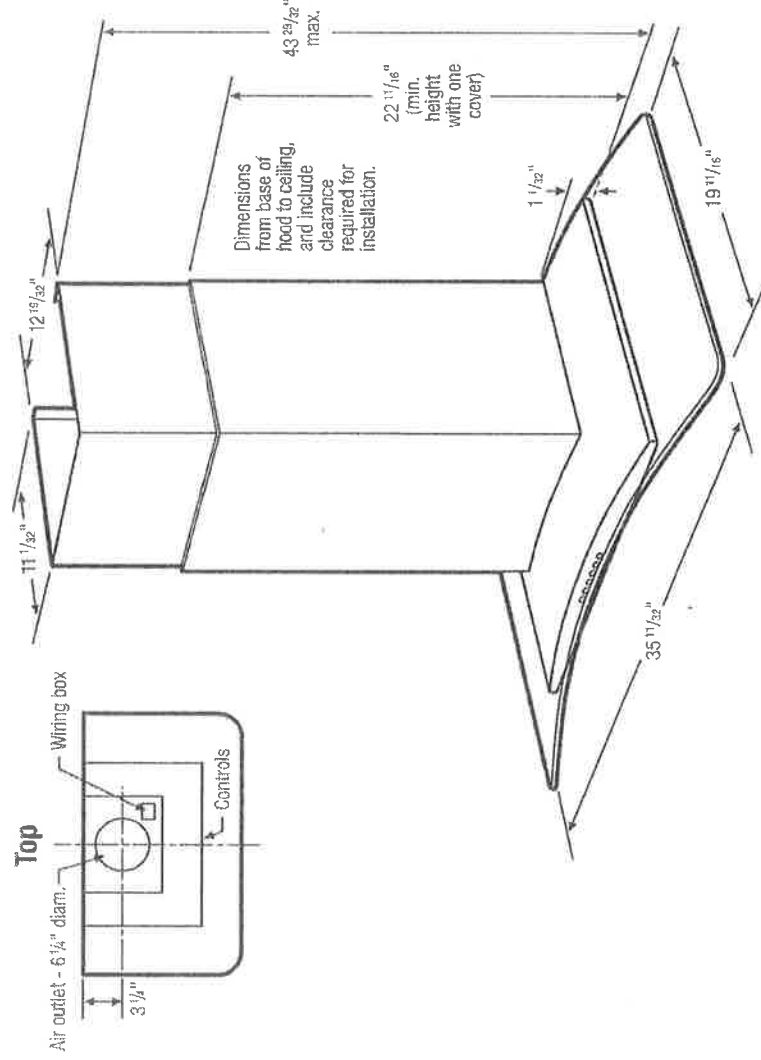

Glass Canopy Wall-Mount Hood Specifications

- Product Shipping Weight (approx.) – 54 Lbs.
- Wall-Mount Installation
- Ventilation system is preset to exhaust air outside. If outside ducting is not possible, optional Duct-Free Recirculation Kit (PN # FHWRTK60LS) is available to convert ventilation to allow air to recirculate inside. (Refer to Ducted Option Specifications for outside ventilation.)
- Sonex Rating – 6.5
- Voltage Rating – 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @120 Volts = 0.516kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 4 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Minimum installation height allowed from bottom of hood to standard 36" high electric or gas cooking surface is 26" - 35". (NOT more than 32" recommended.) For detailed instructions regarding install heights in 8', 9' and 10' ceiling applications, refer to installation guide on web.
- To prepare mounting surface, adequate structure and support must be provided, capable of supporting 100 lbs.

Ducted Option Specifications

- For outside ventilation.
- Exhaust Duct Required – 6" round
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code).
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper installed.
- Refer to installation instructions on web for detailed exhaust duct preparation and converging vent blower system for recirculating inside.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Duct-Free Recirculation Kit – (PN # FHWRTK60LS).
- 10' Flue Extension Kit – (PN # FHW10X60LS).

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-3352 • frigidaire.ca

FHWC3660L 02/12

© 2012 Electrolux Home Products, Inc.

Accessories information available
on the web at frigidaire.com



Specifications
subject to change.