

CONSTRUCTION SUMMARY

North Oakville - 54 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: **30-Jul-20**

CABINETRY

Inv. 31 17 Line 517 22Oct19 / 21Nov19	1 - KITCHEN: DEEPEN THE CABINETS ON THE WALL BACKING ONTO DINING ROOM FROM 18" TO 24" TO ACCOMODATE A WALL OVEN UNIT. Note:
Inv. 31 18 Line 518 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL WALL OVEN UNIT (18H).SEE SKETCH FOR LOCATION Note:
Inv. 31 19 Line 519 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL 36" COOKTOP CABINETS WITH POT DRAWERS BELOW (24H). SEE SKETCH FOR LOCATION Note:
Inv. 31 21 Line 521 22Oct19 / 21Nov19	1 - KITCHEN: DELETE UPPER CABINETS ABOVE STOVE TO ACCOMODATE FOR FUTURE 36" CHIMNEY FAN Note:
Inv. 31 22 Line 522 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL VALANCE UNDER CABINETS Note: PAID FOR AT STRUCTURAL APPOINTMENT
Inv. 31 23 Line 523 22Oct19 / 21Nov19	20 - KITCHEN: INSTALL STACKED CABINETRY . SEE SKETCH FOR DIMENTIONS. INCLUDES ADDITIONAL CABINETRY Note:
Inv. 31 25 Line 525 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL DEEP FRIDGE ENCLOSURE WITH 1 GABLE (04H). Note:
Inv. 31 24 Line 526 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL CROWN MOULDING ON STACKED CABINETS, INCLUDES ADDITIONAL CABINETRY Note:
Inv. 31 14 Line 514 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL ADDITIONAL UPPER CABINETRY DUE TO DELETION OF SERVERY WALL AND MOVING KITCHEN WALL INTO THE DINING ROOM BY 1' Note:
Inv. 31 15 Line 515 22Oct19 / 21Nov19	1 - KITCHEN: INSTALL ADDITIONAL BASE CABINETRY DUE TO DELETION OF SERVERY WALL AND MOVING KITCHEN WALL INTO THE DINING ROOM BY 1' Note:
Inv. 44 40 Line 748 29Nov19 / 29Nov19	1 - KITCHEN: INSTALL 60CM FRIDGE GABLE BETWEEN FRIDGE AND WALL (02H) Note:

CERAMIC TILE

Inv. 31 32 Line 533 22Oct19 / 21Nov19	1 - ENTRY/ POWDER ROOM: INSTALL 5TH UPGRADE TILE THROUGHOUT ENTRY AND POWDER ROOM. Note:
--	---



CONSTRUCTION SUMMARY

North Oakville - 54 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

Inv. 31	1 - KITCHEN: INSTALL 5TH UPGRADE TILE THROUGHOUT KITCHEN, IN LIEU OF
33	STANDARD HARDWOOD
Line 534	Note:
22Oct19 / 21Nov19	

CONSTRUCTION

Inv. 20	1 - STAIRCASE: CLOSE OFF OPEN TO BELOW AREA ONLY AT STAIRS. FROM MAIN FLOOR
10	TO BASEMENT. SEE SKETCH
Line 262	Note:
8Aug19 / 12Aug19	
Inv. 20	1 - KITCHEN: DELETE WALL BETWEEN KITCHEN CABINETS AND SERVERY. ADD
3	ADDITIONAL CABINETRY / GRANITE AS NEEDED
Line 255	Note:
8Aug19 / 12Aug19	
Inv. 20	1 - KITCHEN: MOVE WALL BETWEEN THE KITCHEN AND DINING ROOM INTO THE DINING
4	ROOM BY APPROX. ONE (1) FOOT. WALL SHOULD NOW ALIGN WITH THE WALL OF THE
	LIBRARY. SEE SKETCH
Line 256	Note:
8Aug19 / 12Aug19	
Inv. 31	1 - KITCHEN: INSTALL ADDITIONAL STANDARD GRANITE DUE TO DELETION OF SERVERY
16	WALL AND MOVING KITCHEN WALL INTO THE DINING ROOM BY 1'
Line 516	Note:
22Oct19 / 21Nov19	

COUNTERTOP

Inv. 31	1 - KITCHEN: GRANITE CUTOFF FOR 36" COOKTOP.
20	
Line 520	Note:
22Oct19 / 21Nov19	

ELECTRICAL

Inv. 20	1 - KITCHEN: INSTALL VALANCE LIGHTING - UNDER CABINET - DOES NOT INCLUDE
5	LIGHTING
Line 257	Note:
8Aug19 / 12Aug19	
Inv. 20	1 - KITCHEN: INSTALL CABINET LIGHTING - UNDERMOUNT T-5 LED VALANCE LIGHT (\$200
6	PER LIGHT)
Line 258	Note:
8Aug19 / 12Aug19	
Inv. 20	1 - BELL AND CABLE LOCATION SKETCH. LOCATIONS MAY VARY SLIGHTLY DUE TO
1	JOIST LOCATIONS.
Line 253	Note:
8Aug19 / 12Aug19	
Inv. 20	1 - KITCHEN: INSTALL RECEPTACLES - ADDITIONAL 15 AMP 120 VOLT RECEPTABLE- FOR
8	GAS STOVE
Line 260	Note:
8Aug19 / 12Aug19	

HARDWOOD FLOORING

Inv. 31	1 - GREAT ROOM: INSTALL LEVEL 3 HARDWOOD IN GREAT ROOM
26	
Line 527	Note:
22Oct19 / 21Nov19	



CONSTRUCTION SUMMARY

North Oakville - 54 - 1 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

Inv.31 27 Line 528 22Oct19 / 21Nov19	1 - DINING ROOM: INSTALL LEVEL 3 HARDWOOD IN DINING ROOM Note:
Inv.31 28 Line 529 22Oct19 / 21Nov19	1 - MAIN HALL: INSTALL LEVEL 3 HARDWOOD IN MAIN HALL Note:
Inv.31 29 Line 530 22Oct19 / 21Nov19	1 - LIBRARY: INSTALL LEVEL 3 HARDWOOD IN LIBRARY Note:
Inv.31 30 Line 531 22Oct19 / 21Nov19	1 - STAIRCASE:INSTALL SANDED OAK LANDINGS ON STAIRCASE Note:

HVAC

Inv.20 7 Line 259 8Aug19 / 12Aug19	1 - KITCHEN: INSTALL GAS PIPING AND OTHER - GAS LINE R/I FOR BASEMENT OR MAIN FLOOR - STOVE - UP TO 3/4 INCH LINE Note:
---	--

INTERIOR DOORS & TRIM

Inv.31 36 Line 537 22Oct19 / 21Nov19	2 - LIBRARY: INSTALL TWO (2) 1 PANEL SHAKER FRENCH DOORS Note:
---	---

MISCELLANEOUS

Inv.31 37 Line 538 22Oct19 / 21Nov19	1 - BONUS PACKAGE: \$7500.00 WORTH OF UPGRADES FROM VALERYHOMES DECOR CENTRE IS BEING APPLIED TOWARD THE COLOUR APPOINTMENT Note:
Inv.31 38 Line 539 22Oct19 / 21Nov19	1 - Purchaser has attended a Colour appointment at the Decor Centre & has DECLINED any additional upgrades and accepts and acknowledges that there will be no further structural changes/additions/deletions to be made Note:
Inv.31 39 Line 540 22Oct19 / 21Nov19	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers Extra Form are subject to a minimum administration fee of \$500. PLUS a 10% holdback fee. Note:
Inv.20 11 Line 268 8Aug19 / 12Aug19	1 - Purchaser has attended a Structural appointment at the Decor Centre & has DECLINED any additional upgrades and accepts and acknowledges that there will be no further structural changes/additions/deletions to be made upon signing on August 8, 2019 Note:
Inv.20 12 Line 269 8Aug19 / 12Aug19	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers Extra Form are subject to a minimum administration fee of \$500. PLUS a 10% holdback fee Note:



CONSTRUCTION SUMMARY

North Oakville - 54 - 1 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

PAINT

Inv.31	2 - STAIRCASE: STAIN STAIRS TO MOCHACCINO
31	
Line 532	**NOTE: PURCHASER IS AWARE THAT THE STAIN ON THE MAPLE FLOORS SELECTED CAN NEVER BE EXACTLY MATCHED ON A RED OAK STAIRCASE
	Note:
22Oct19 / 21Nov19	

PLUMBING

Inv.31	1 - KITCHEN: INSTALL UPGRADED KITCHEN FAUCET;
34	
Line 535	MOEN ARBOR SINGLE HANDLE PULLDOWN #7594C
	Note:
22Oct19 / 21Nov19	
Inv.31	1 - KITCHEN: INSTALL UPGRADE KITCHEN SINK;
35	
Line 536	KOHLER STRIVE: K-5285
	Note:
22Oct19 / 21Nov19	
Inv.20	1 - KITCHEN: INSTALL EXTRA ROUGH-IN LINE FOR FRIDGE ICE MAKER WITH SHUT-OFF
2	
Line 254	
	Note:
8Aug19 / 12Aug19	

RAILING







Inv.31	1 - STAIRCASE: INSTALL *DISPLAY 3A KNUCKLE SERIES, 1/2" METAL SINGLE
13	
Line 437	KNUCKLE/DBL KNUCKLE, TEXTURED BLACK, ELORA POST
	Note:
22Oct19 / 21Nov19	

VACCUM/BELL

Inv.20	1 - FOYER: INSTALL INTERCOM WIRING - CAT-5E NETWORK CABLE
9	
Line 261	
	Note:
8Aug19 / 12Aug19	

Lot 54

Electrical—(E)
 Cable—(C)
 Telephone—(T)

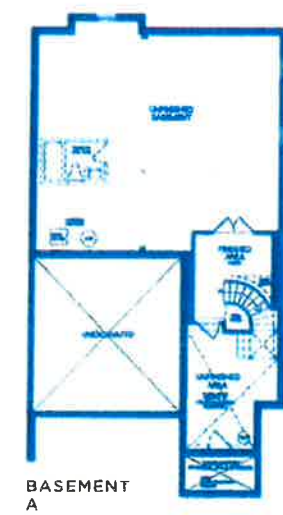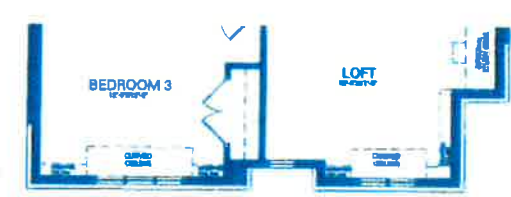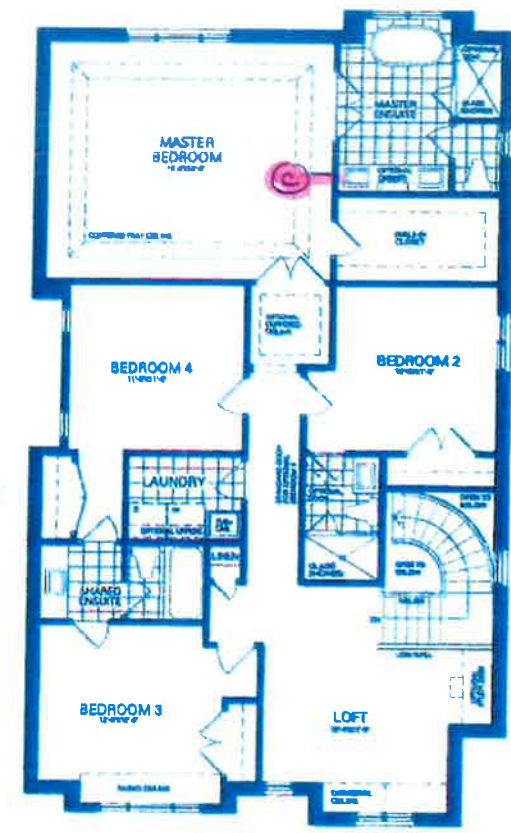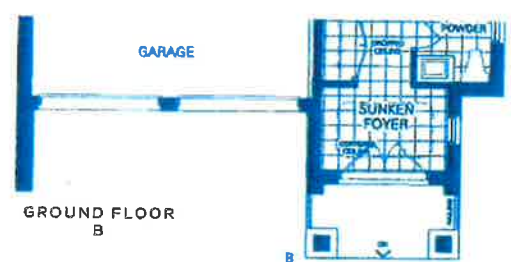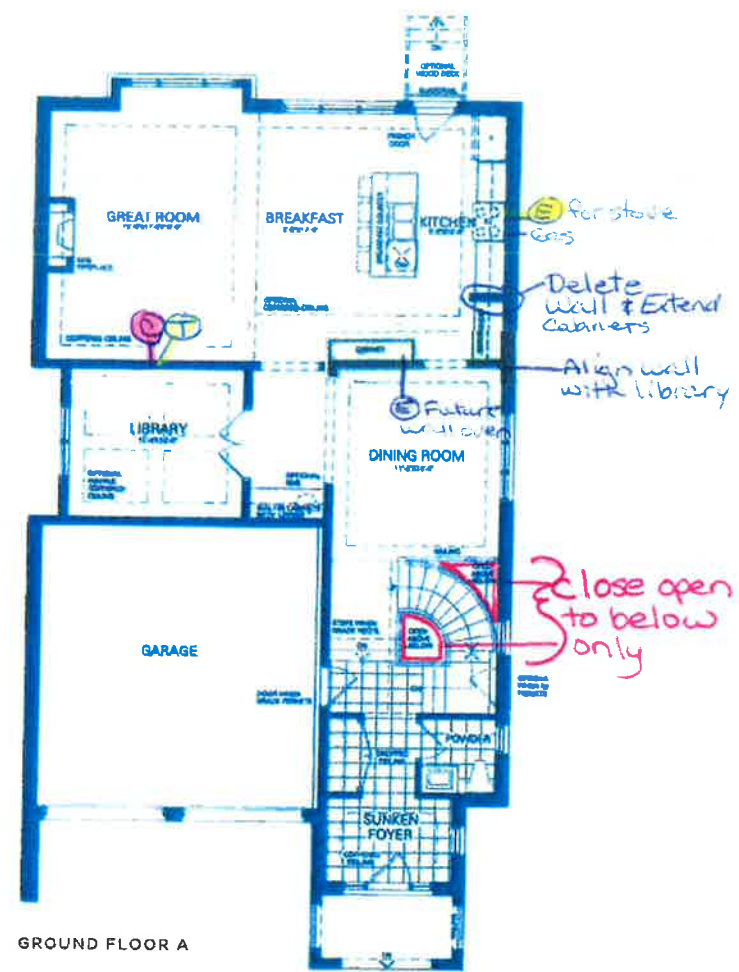

Peachtree

Elevation A
 2,917 Sq.ft.
 Includes 110 Sq.ft. of Finished Basement

Elevation B
 2,933 Sq.ft.
 Includes 110 Sq.ft. of Finished Basement

Disclaimer: All dimensions are approximate and subject to normal construction variances. Dimensions may exceed the useable floor area. Sizes and specifications subject to change without notice. Furniture is displayed for illustration purposes only and does not necessarily reflect the electrical plan for the suite. Suites are sold unfurnished. Balcony and facade variations may apply, contact a sales representative for further details. E&O.E. ©Valery Homes 2018. All rights reserved.



Electrical: A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible Vent is not recommended. Flexible Vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Roof Venting Wall Venting Non-Vented (Recirculating)

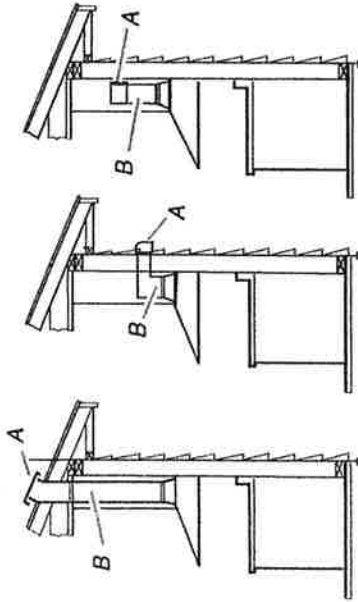

A. Roof cap
B. 6" (15.2 cm)
round vent

A. Wall cap
B. 6" (15.2 cm)
round vent

A. Diverter
B. 6" (15.2 cm)
round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece 6" (15.2 cm) Round

45° elbow

2.5 ft
(0.8 m)



90° elbow


5.0 ft
(1.5 m)



Maximum equivalent vent length is 35 ft (10.7 m).

Lot 54


Example Vent System

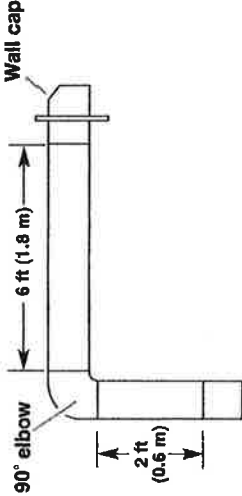

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).


1 - 90° elbow = 5.0 ft (1.5 m)
1 - wall cap = 0.0 ft (0.0 m)
8 ft (2.4 m) straight = 8.0 ft (2.4 m)
Length of system = 13.0 ft (3.9 m)

PRODUCT DIMENSIONS

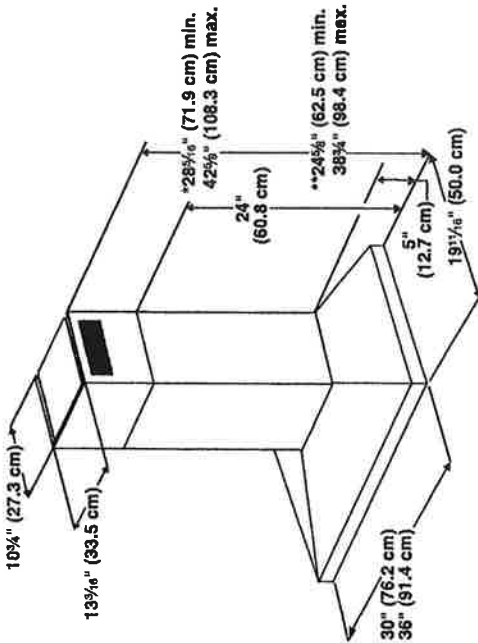

*For non-vented (recirculating) installations
**For vented installations

CABINET DIMENSIONS

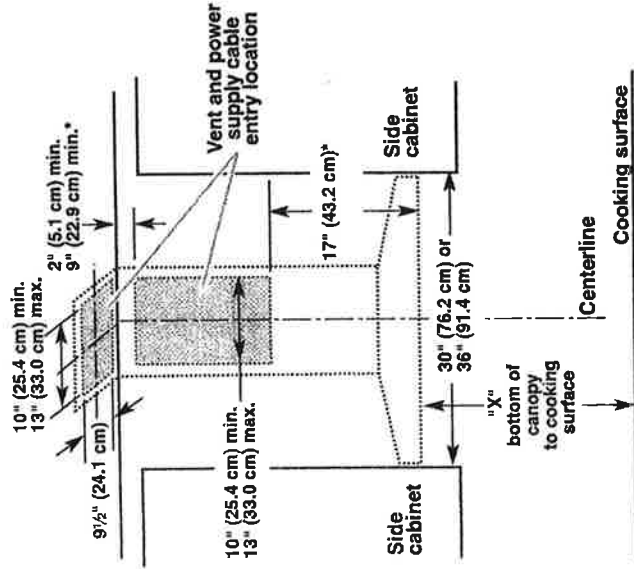

*For non-vented (recirculating) installations

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations			
	Min. ceiling height	Max. ceiling height	
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)	
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)	
Non-vented (recirculating) installations			
	Min. ceiling height	Max. ceiling height	
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)	
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)	

***NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

201-15167416

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

PRODUCT MODEL NUMBERS

KCGS350E	KCGS950E	MGC9530D	WCG75US0D
KCGS356E	KCGS956E	MGC9536D	WCG97US0D
KCGS550E	MGC7430D	WCG51US0D	WCG97US6D
KCGS556E	MGC7536D	WCG51US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas
Natural Gas:

- This cooktop is factory set for use with Natural gas. If converting to LP gas, see the "LP Gas Conversion" instructions provided in the package containing literature. The model/serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion Instructions provided in the package containing literature.

Gas Supply Line

- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON[®] tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.

Flexible metal appliance connector:


- If local codes permit, use a 1/2" or 3/4" I.D. flexible stainless steel tubing gas connector, designed by CSA to connect the cooktop to the rigid gas supply line.



- A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.

- Do not kink or damage the flexible metal tubing when moving the cooktop.

- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To cooktop

[®]TEFLON is a registered trademark of E.I. Du Pont De Nemours and Company.

ELECTRICAL REQUIREMENTS

- A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.


Handwritten notes: "1.5" and "#1" with a circled "A" and a checkmark.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


PRODUCT DIMENSIONS

KCGS550ESS and KCGS950ESS Models

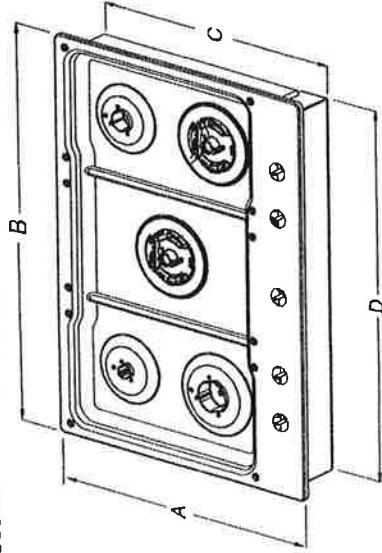


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 19 3/8" (49.2 cm)
- D. 28 3/8" (72.1 cm)

- E. 3 5/8" (9.2 cm)
- F. 4 9/16" (11.6 cm)
- G. 1 3/8" (3.4 cm)




KCGS556ESS and KCGS956ESS Models

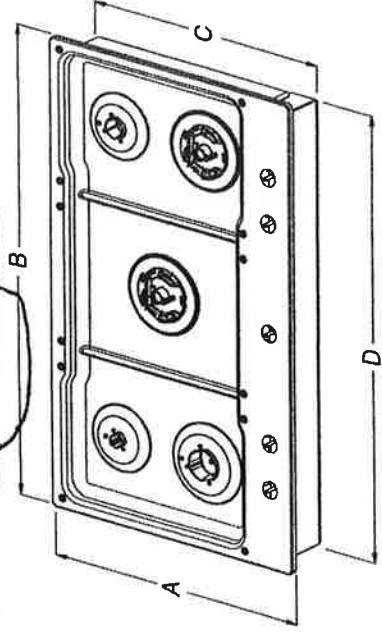

- A. 21" (53.3 cm)
 - B. 36 1/4" (92.0 cm)
 - C. 19 3/8" (49.2 cm)
 - D. 34 3/8" (88.1 cm)
- E. 3 3/8" (8.2 cm)
 - F. 4 5/8" (11.6 cm)
 - G. 1 1/8" (3.6 cm)



All Other 30" (76.2 cm) Models

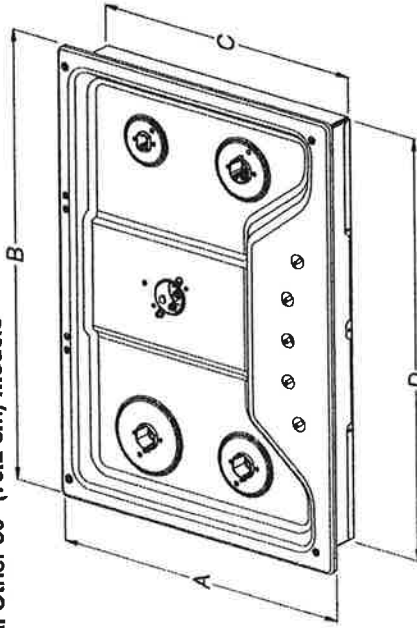


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 18 7/8" (48.0 cm)
- D. 28 3/8" (72.1 cm)


- E. 3 3/8" (8.6 cm)
- F. 4 1/8" (10.5 cm)
- G. 1 1/2" (3.8 cm)



All Other 36" (91.4 cm) Models

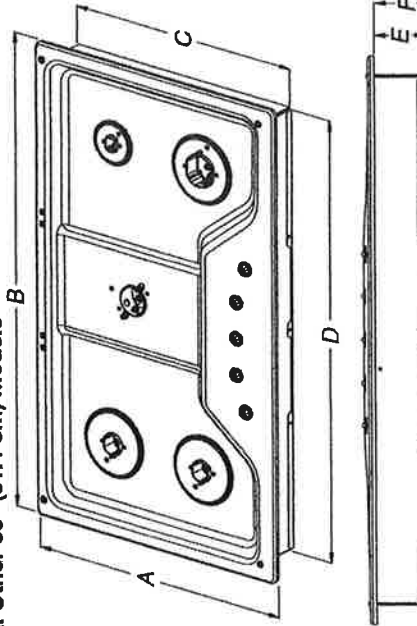


- A. 21" (53.3 cm)
 - B. 36" (91.4 cm)
 - C. 18 7/8" (48.0 cm)
 - D. 33 3/4" (85.7 cm)
- E. 3 3/8" (8.6 cm)
 - F. 4 1/8" (10.5 cm)
 - G. 1 1/2" (3.8 cm)




161 #101

CABINET DIMENSIONS

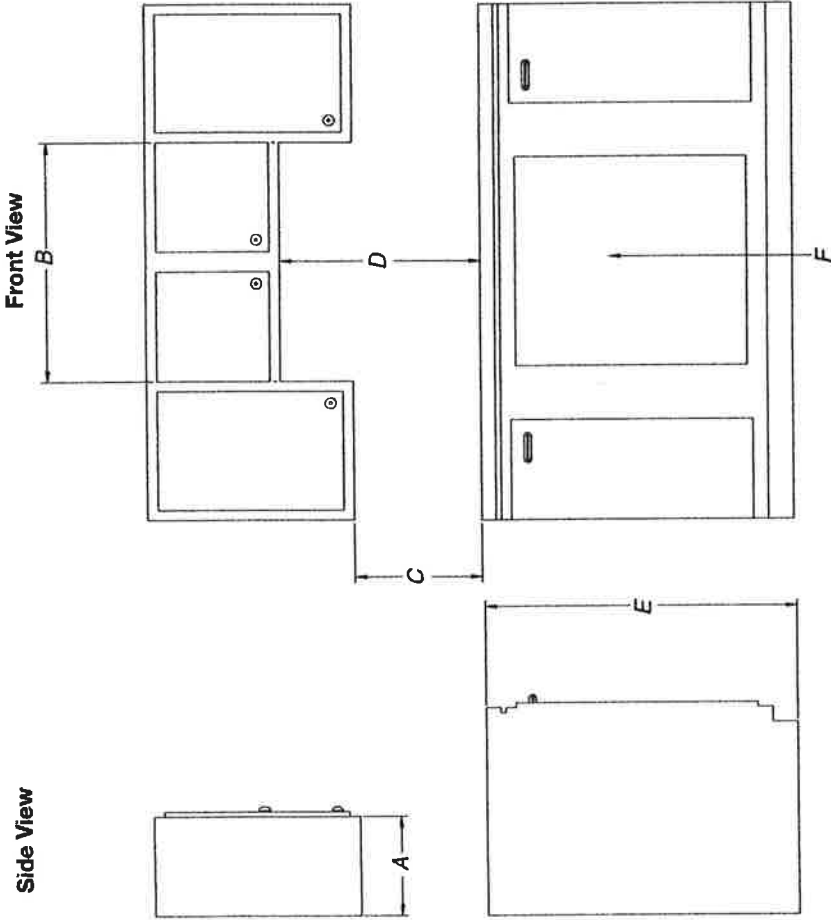

- A. 13" (33.0 cm) recommended upper cabinet depth.
- B. 30" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
- C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop.
- D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet. 24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper.
- E. 36" (91.4 cm) top of countertop to floor.
- F. Gas line opening - Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

Back Wall

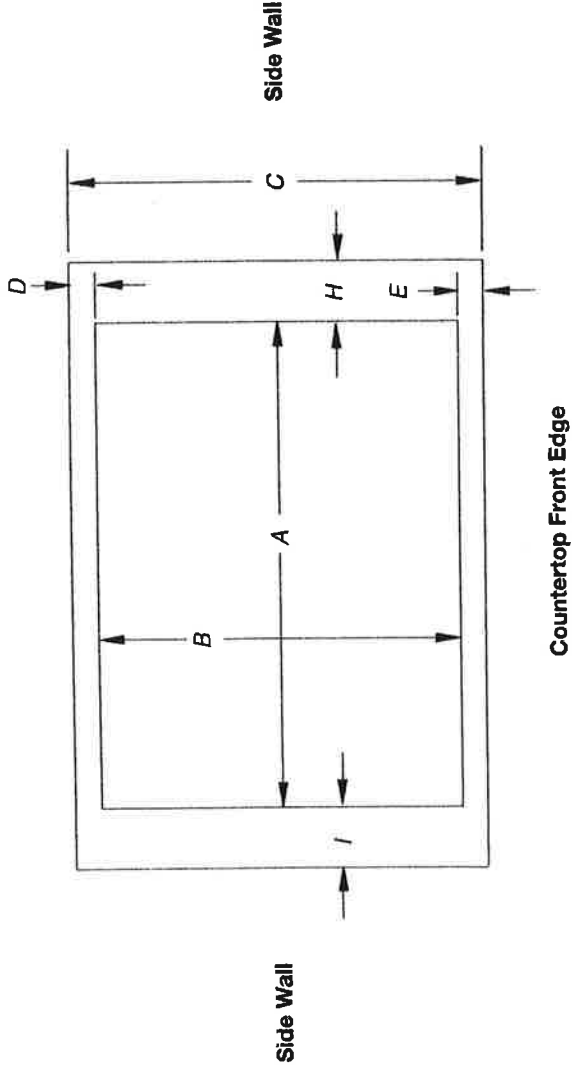

Cutout (Product Opening) Dimensions						
30" (76.2 cm) Models						
Models	A			B		
	Min	Recommended	Max	Min	Recommended	Max
KCGS550 and KCGS950 All Other 30" (76.2 cm) Models	28 1/2" (72.4 cm)	28 7/8" (73.4 cm)	29 3/16" (74.3 cm)	19 1/2" (49.5 cm)	19 3/16" (50.2 cm)	20" (50.8 cm)
	28 1/2" (72.4 cm)	28 7/8" (73.4 cm)	29 3/16" (74.3 cm)	19" (48.3 cm)	19 1/2" (49.5 cm)	20" (50.8 cm)
36" (91.4 cm) Models						
KCGS556 and KCGS956 All Other 36" (91.4 cm) Models	34 7/8" (88.4 cm)	35 3/16" (89.4 cm)	35 5/8" (90.3 cm)	19 1/2" (49.5 cm)	19 19/16" (50.2 cm)	20" (50.8 cm)
	33 7/8" (86.0 cm)	34 3/16" (87.0 cm)	35 1/4" (89.5 cm)	19" (48.3 cm)	19 1/2" (49.5 cm)	20" (50.8 cm)

Side Walls (Combustible Surfaces)	
Models	H and I
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).
KCGS350, KCGS356, MGC9536, WCG97US0, WCG97US6	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).
All Other Models	Both have to be 8" (20.3 cm) or more.

Back Wall and Countertop Front Dimensions		
Models	C	D
KCGS550 and KCGS950	25" (63.5 cm)	2 3/4" (6.9 cm)
All Other Models		3 1/8" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.

KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309E

KOCE500E

KOCE507E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 - Connect a section of solid copper wire to the pigtail leads.
 - Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage	Amperage (L1)*	Amperage (L2)*	Amperage Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600


*Amperage values noted above are for information purposes only: the units are rated in watts.

Because Whirlpool Corporation includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


Ref. W10725663B
2/10/15

PRODUCT DIMENSIONS

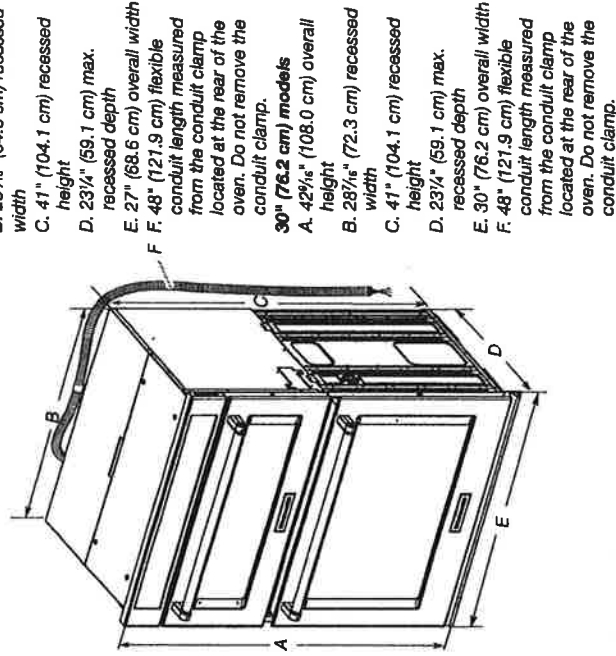

- 27" (68.6 cm) models**
- A. 42⁹/₁₆" (108.0 cm) overall height
 - B. 25⁵/₁₆" (64.6 cm) recessed width
 - C. 41" (104.1 cm) recessed height
 - D. 23¹/₄" (59.1 cm) max. recessed depth
 - E. 27" (68.6 cm) overall width
 - F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.
- 30" (76.2 cm) models**
- A. 42⁹/₁₆" (108.0 cm) overall height
 - B. 28⁷/₁₆" (72.3 cm) recessed width
 - C. 41" (104.1 cm) recessed height
 - D. 23¹/₄" (59.1 cm) max. recessed depth
 - E. 30" (76.2 cm) overall width
 - F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions

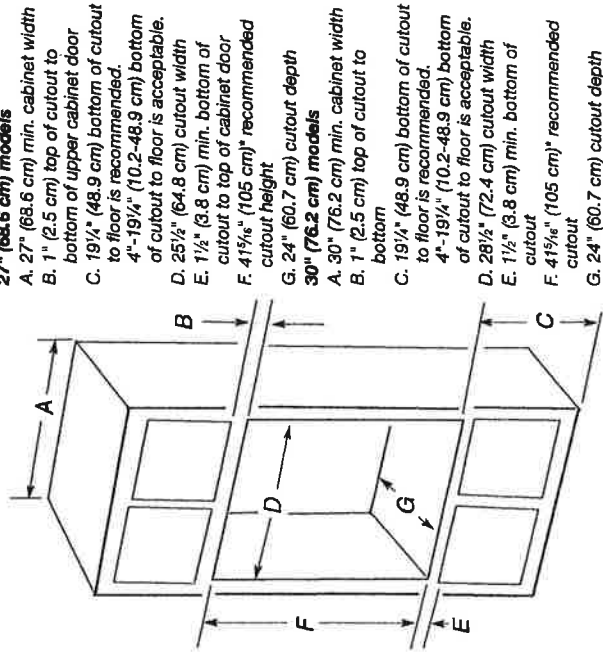

- 27" (68.6 cm) models**
- A. 27" (68.6 cm) min. cabinet width
 - B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
 - C. 19¹/₄" (48.9 cm) bottom of cutout to floor is recommended. 4"-19¹/₄" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
 - D. 25¹/₂" (64.8 cm) cutout width
 - E. 1¹/₂" (3.8 cm) min. bottom of cutout to top of cabinet door
 - F. 41⁵/₁₆" (105 cm)* recommended cutout height
 - G. 24" (60.7 cm) cutout depth
- 30" (76.2 cm) models**
- A. 30" (76.2 cm) min. cabinet width
 - B. 1" (2.5 cm) top of cutout to bottom
 - C. 19¹/₄" (48.9 cm) bottom of cutout to floor is recommended. 4"-19¹/₄" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
 - D. 28¹/₂" (72.4 cm) cutout width
 - E. 1¹/₂" (3.8 cm) min. bottom of cutout
 - F. 41⁵/₁₆" (105 cm)* recommended cutout
 - G. 24" (60.7 cm) cutout depth

* NOTE: The cabinet height can be between 41" (104.1 cm) and 41¹/₂" (105.6 cm) for microwave/oven combination.