


Lot 1
Serway



INSTRUCTION MANUAL

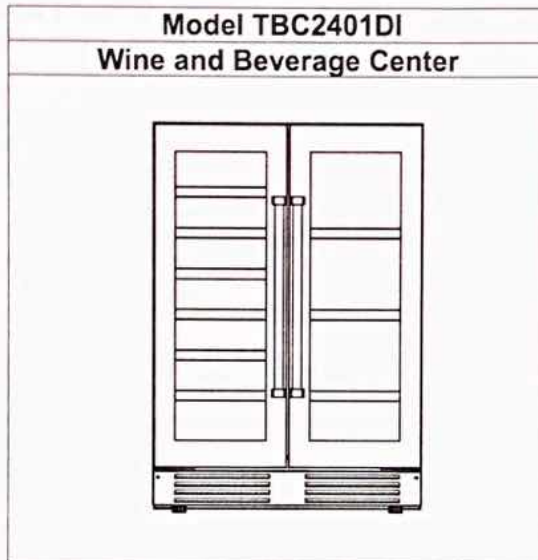

BEFORE USE, PLEASE READ AND FOLLOW ALL SAFETY RULES
AND OPERATING INSTRUCTIONS.

INSTALLATION INSTRUCTIONS

➤ BEFORE USING YOUR APPLIANCE

- Remove the exterior and interior packing.
- Check to be sure you have all of the following parts:

Model TBC2401DI	
1	Instruction Manual
6	Wooden Shelves with Rolling Slideways
3	Black Wire Shelves
2	Door Handles

- Before connecting this appliance to the power source, let it stand upright for approximately 2 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
- Clean the interior surface with lukewarm water using a soft cloth.


➤ INSTALLATION OF YOUR APPLIANCE

- This appliance is designed for free standing installation or built-in (fully recessed).
- Place your appliance on a floor that is strong enough to support it when it is fully loaded. To level your appliance, adjust the front leveling legs at the bottom of the appliance.
- Locate the appliance away from direct sunlight and sources of heat (stove, heater, radiator, etc.). Direct sunlight may affect the acrylic coating and heat sources may increase electrical consumption. Extreme cold ambient temperatures may also cause the unit not to perform properly.
- Avoid locating the unit in moist areas.
- Plug the appliance into an exclusive, properly installed-grounded wall outlet. Do not under any circumstances cut or remove the third (ground) prong from the power cord. Any questions concerning power and/or grounding should be directed toward a certified electrician or a service center authorized by Thor Group.

➤ BUILT-IN CABINET INSTRUCTIONS

This unit is designed for both built-in or free standing installation. If you plan to use this unit in a built-in application, please follow the requirements shown below.

Cabinet Opening Dimensions		
	IN (min)	CM (min)
Width	23 ¹ / ₄ "	60.5 cm
Depth	24"	61.0 cm
Height	34 ¹ / ₂ "	87.6 cm

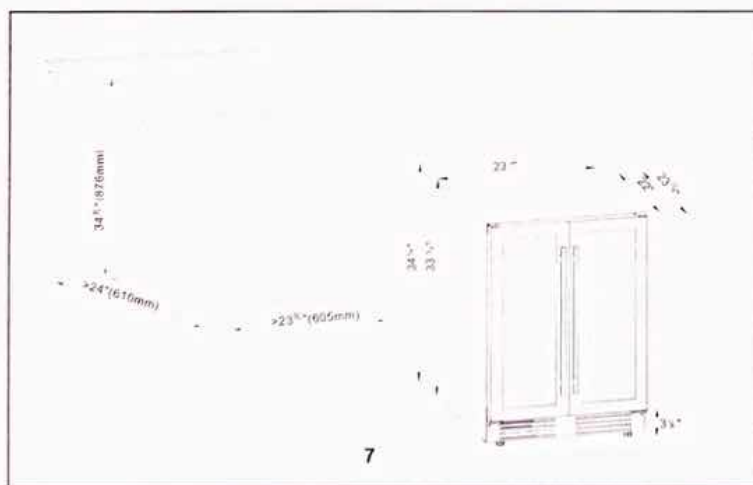

T36IR900SP

36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY

Thermador 



FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermoFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

Refrigerator	36°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	30°F (-1°C) to 38°F (3°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	43°F (6°C)

GENERAL PROPERTIES

Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes*
SoftClose® Drawers	Yes
Carbon Air Filter	Yes
Lighting	LED Sidewall and Theater Lighting
Refrigerator Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
General Use Drawer	1
Humidity Managed Drawer	1
Temperature Controlled Drawer	1
Door Bins	2
Gallon Door Bins	1
Delicate Produce Bins	1 Small, 2 Large
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY

Total Capacity (cu. ft.)	20.6 cu. ft.
--------------------------	--------------

PERFORMANCE

Dedicated Evaporator & Compressor System	Yes
FreeFlow® Cold Air System	Yes
SuperCool	Yes

TECHNICAL DETAILS

Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT

Appliance Dimensions (H x W x D) (in.)	83 3/4"*** x 35 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
Net / Gross Weight (lbs)	406 / 449 lbs

EFFICIENCY

ENERGY STAR® Qualified	Yes
Annual Energy Consumption	313 kWh

*To verify if you have a refrigerator unit with Soft Close capability please contact our customer team by calling 1-800-735-4138.
**Height adjustable - 1 / 1/2" (1 / 12 mm)

T36IR900SP

36-INCH BUILT-IN FRESH FOOD COLUMN


FREEDOM® COLLECTION, PANEL-READY




WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*, Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*, Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing.

CUTOUT DIMENSIONS

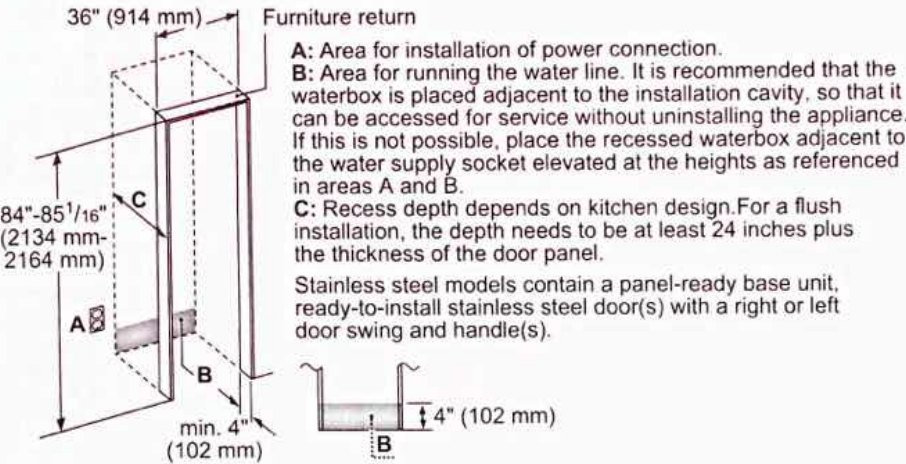

TOP VIEW CLEARANCE

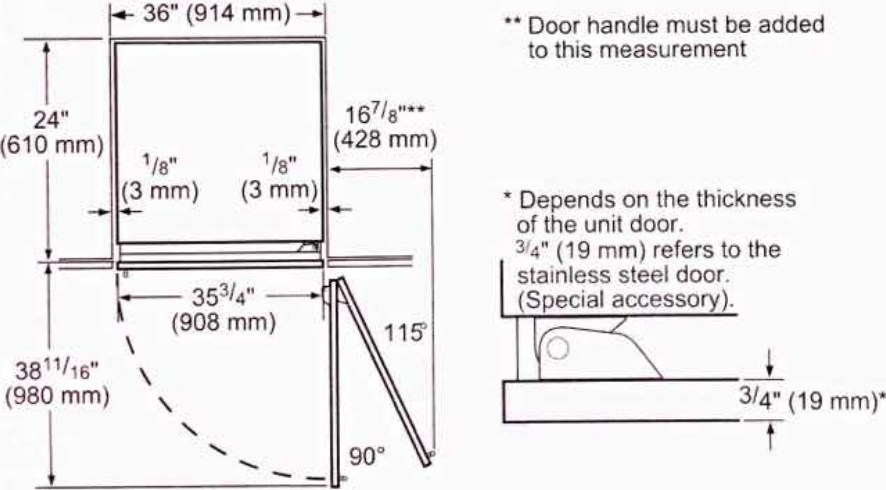


T36IR900SP

36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

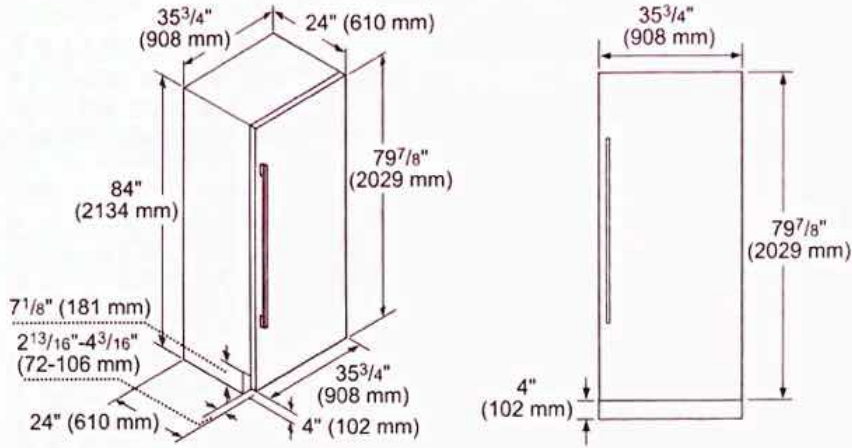

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel



*Available Summer 2019

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

STORAGE



SPRODBIN10
Small Produce Bin




LPRODBIN10
Large Produce Bin



36PRODRAIL
36-Inch Produce Railing



36HFGALBIN
36-Inch Half Gallon Bin



HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit
When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

HANDLES

Choose between two options:



PR36HNDL20
36-Inch Professional Series Handle

or



MS36HNDL20
36-Inch Masterpiece® Series Handle

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions that accompany product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or redesign without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1-800-735-4328 | USA.THERMADOR.COM | CANADA.THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED

T36IF900SP

36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY

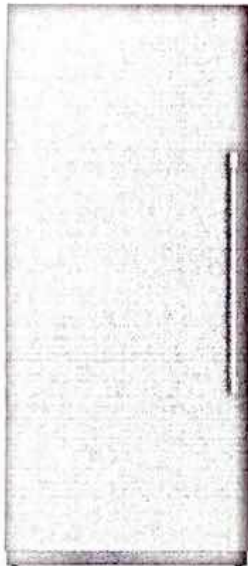

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES

Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

GENERAL PROPERTIES

Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes*
SoftClose® Drawers	Yes
Lighting	LED Sidewall and Theater Lighting
Freezer Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
General Use Drawer	2
Door Bins	3
External LED Proximity Sensor	No
Oversized Dispenser Opening	No
Chilled Water, Crushed and Cubed Ice	No
Rapid Water Replenishment System	No
Ice Maker with Diamond Ice System	Yes
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY

Total Capacity (cu. ft.)	19.4 cu. ft.
--------------------------	--------------

PERFORMANCE

Dedicated Evaporator & Compressor System	Yes
SuperFreeze®	Yes
Defrost Process	Frost Free

TECHNICAL DETAILS

Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT

Appliance Dimensions (H x W x D) (in.)	83 3/4"*** x 35 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
Net / Gross Weight (lbs)	395 / 437 lbs

EFFICIENCY

ENERGY STAR® Qualified	Yes
Annual Energy Consumption	543 kWh

*To verify if you have a refrigeration unit with SoftClose capability please contact our customer team by calling 1-800-735-4328
**Height adjustable + / - 1/2" (+ / - 13 mm)

T36IF900SP

36-INCH BUILT-IN FREEZER COLUMN WITH

INTERNAL ICE MAKER


FREEDOM® COLLECTION, PANEL-READY




WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS

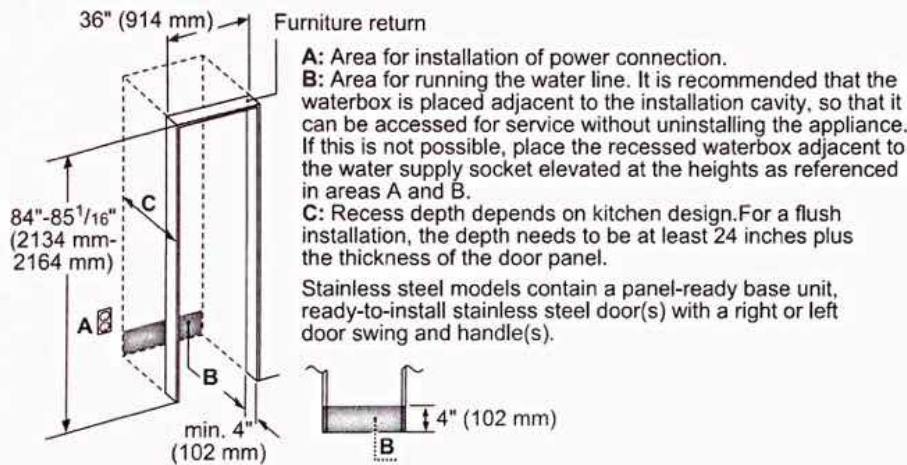

TOP VIEW CLEARANCE

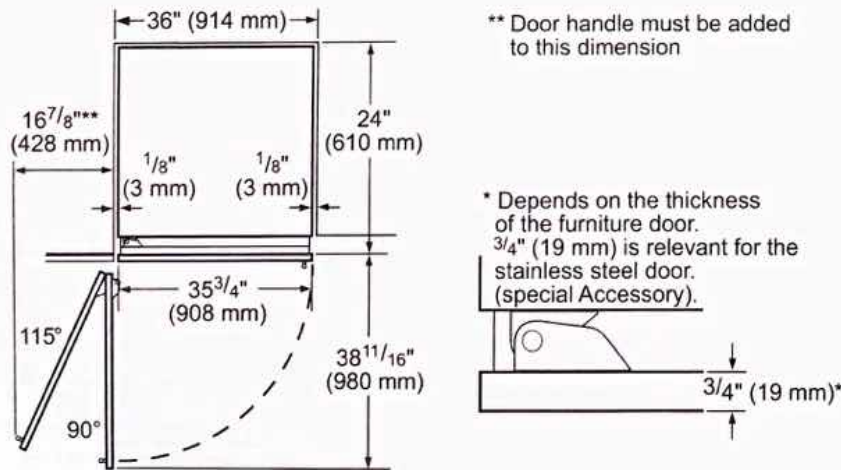


T36IF900SP

36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

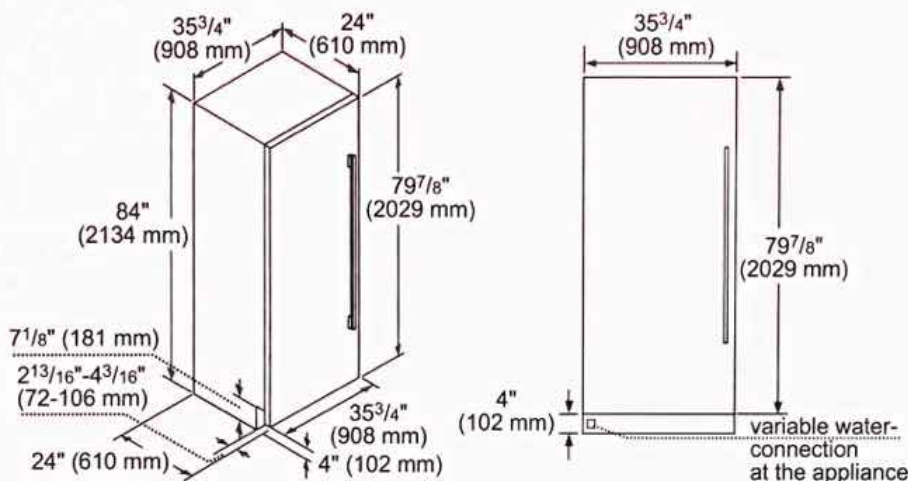

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel
Without Dispenser



TFL36IR900
For use with Handle
TFL36IR905*
Handleless

*Available Summer 2019

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

- PR36HNDL20
36-Inch Professional Series Handle
- PR30HNDL20
30-Inch Professional Series Handle
- MS36HNDL20
36-Inch Masterpiece® Series Handle
- MS30HNDL20
30-Inch Masterpiece® Series Handle

FILTERS



REPLFLTR10
Freedom® Water Filter
Replacement water filter for use in all freezer and bottom freezer models




SCRNFLTR10
By-Pass Filter for use with existing in-home water filtration systems in all freezers and bottom freezer models

STORAGE



ICEBUCKETL
Large Ice Bucket



HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED

PCG486WL

48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE

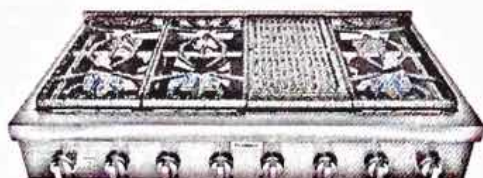

FEATURES & BENEFITS

- ★ Patented Pedestal Star® Burner with QuickClean Base® designed for easy surface cleaning and superior heat spread for any size pan
- ★ Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow® Simmer burners
- ★ LED Downlighting—hidden discreetly above the control panel provides functional and stylish illumination
- ★ Pro Indoor Grill features 2 independent zones, ceramic briquettes and removable grates for easy cleaning
 - Superior grill results—1,630 Watt indoor thermostatically controlled grill

GENERAL PROPERTIES

Controls	Metal Knobs
Sealed Burners	Yes
Grate Material	Cast Iron

BURNER PERFORMANCE

Total Number of Cooktop Burners	6 + Grill
Power of Front Left Burner (NG)	18,000 and XLO (NG)
Power of Back Left Burner (NG)	15,000 and XLO (NG)
Power of Back Center Burner (NG)	15,000 (NG)
Power of Front Center Burner (NG)	18,000 (NG)
Power of Center 12" Electric Griddle (W)	N/A
Power of Center 12" Electric Grill (W)	1,630 W
Power of Back Right Burner (NG)	15,000 (NG)
Power of Front Right Burner (NG)	18,000 (NG)

TECHNICAL DETAILS

Circuit Breaker (A)	20 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type / Receptacle	120V-3 Prong NEMA 5-20
Power Cord Length (in)	65"
Energy Source	Gas
Gas Type	Natural Gas 6" Water Column (14.9 mb) Min. (USA)
Alternative Gas Type	LP 11" Water Column (27.4 mb) Min. (USA)
Convertible To LP (Kit Required)	Yes

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in)	8 1/16" x 47 15/16" x 25 13/16"
Required Cutout Size (HxWxD) (in)	7 11/16" x 46 1/4" x 22 13/16"
Minimum Distance From Rear Wall (in)	6" Min. to Combustible Surface with Flush Island Trim
Net Weight (lbs)	172 lbs

ACCESSORIES (INCLUDED)

1 x Island Trim

WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

★ THERMADOR® EXCLUSIVE


PCG486WL
48-INCH GAS RANGETOP WITH GRILL
 PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



ACCESSORIES (OPTIONAL)

	PAGRIDDEW 12" Pro Griddle Plate with Fusion Coating		PAGRIDDE Griddle Sits on Top of Grates Over 2 Star Burners		PA12LCVRW 12" Pro Grill Cover
	PA12CHPBLK 12" Cutting Board		PWOKRINGHC Wok Ring		PA48WLBC 10" Low Backguard
	PAKNOBLUWR Metallic Blue Knob Kit		PABRICKBKW Flat Ceramic Briquettes with Basket		PABRICKW Flat Ceramic Briquettes without Basket
	PALPKITHW LP Conversion Kit, Pro Rangetops (4 & 6 Burners)				

48" RANGETOP SIDE VIEW

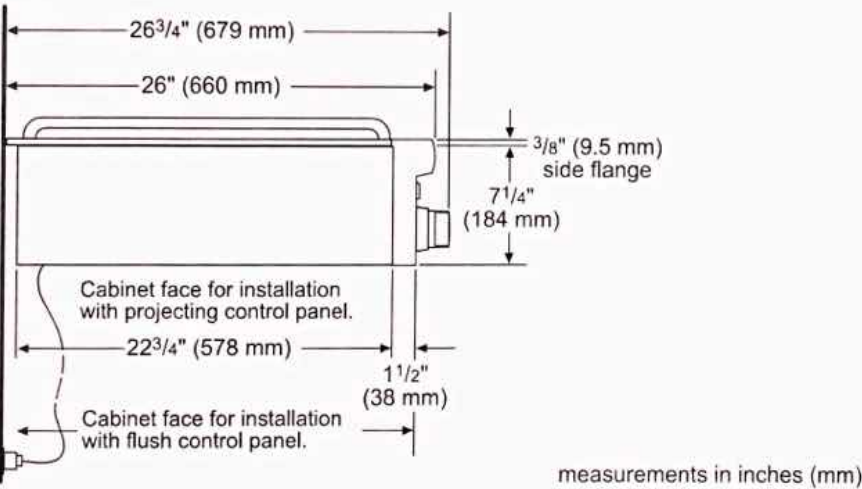

PCG486WL


48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



48-INCH RANGETOP CUTOUT DIMENSIONS

* Minimum recommended hood width equals that of the range or cooktop.

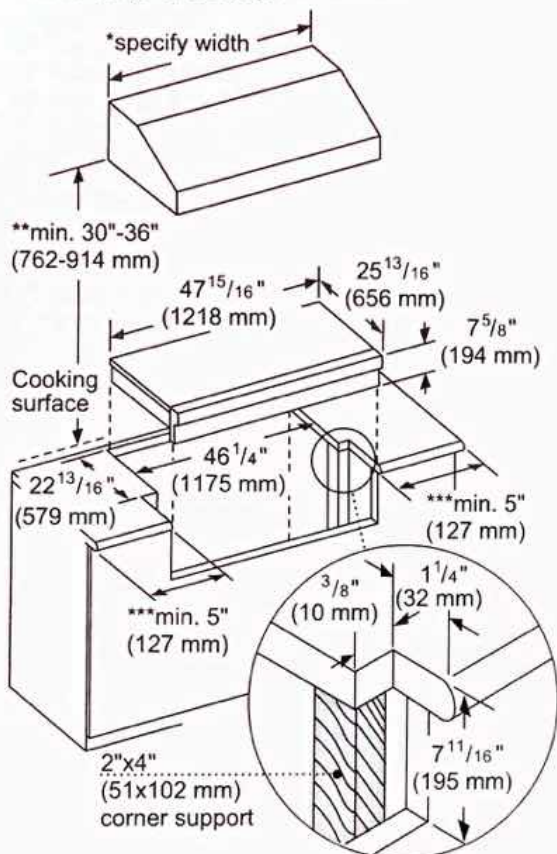

** 36" minimum clearance from cooking surface to combustible surfaces.

*** 5" minimum clearance from cooking surface to combustible side wall.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches (mm)

PCG486WL

48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



48-INCH RANGETOP GAS LOCATION

The gas and electrical supply must be located in an area that is accessible without requiring removal of the rangetop. The appliance electrical power cord and gas pipe connection are located on the left rear underside of the rangetop.

The junction box must be located within 3 feet (~900 mm) of the rangetop connection.

30" Rangetop: 6³/₈" (162 mm)
 36" Rangetop: 11" (279 mm)
 48" Rangetop: 11" (279 mm)

30" Rangetop:
 3¹/₄" (83 mm)

36" and 48"
 Rangetop:
 2" (51 mm)

1/2" (12.7 mm) NPT

3/4" (19 mm) flex line

A manual valve must be installed to the appliance, in an accessible location from the front, for the purpose of shutting off the gas supply.

measurements in inches (mm)

NATURAL GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)

Supply Pressure: 6" min. to 14" max. water column (14.9 mb to 34.9 mb)

Manifold Pressure: 5" water column (12.5 mb)

PROPANE GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)

Supply Pressure: 11" min. to 14" max. water column (27.4 mb to 34.9 mb)

Manifold Pressure: 10" water column (24.9 mb)

ELECTRICAL SUPPLY

IMPORTANT: The cord supplied with gas rangetops having an electric griddle or grill requires a NEMA 5-20 receptacle as shown here. Local codes may require a different wiring method.

NEMA 5-20
 RECEPTACLE



PLUG



WARNING: This appliance is equipped with a three-prong grounding plug for protection against shock hazard and should be plugged directly into a properly grounded receptacle. DO NOT cut or remove the grounding prong from this plug. DO NOT ALTER THIS PLUG.


PCG486WL

48-INCH GAS RANGETOP WITH GRILL

PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



48-INCH RANGETOP CLEARANCES

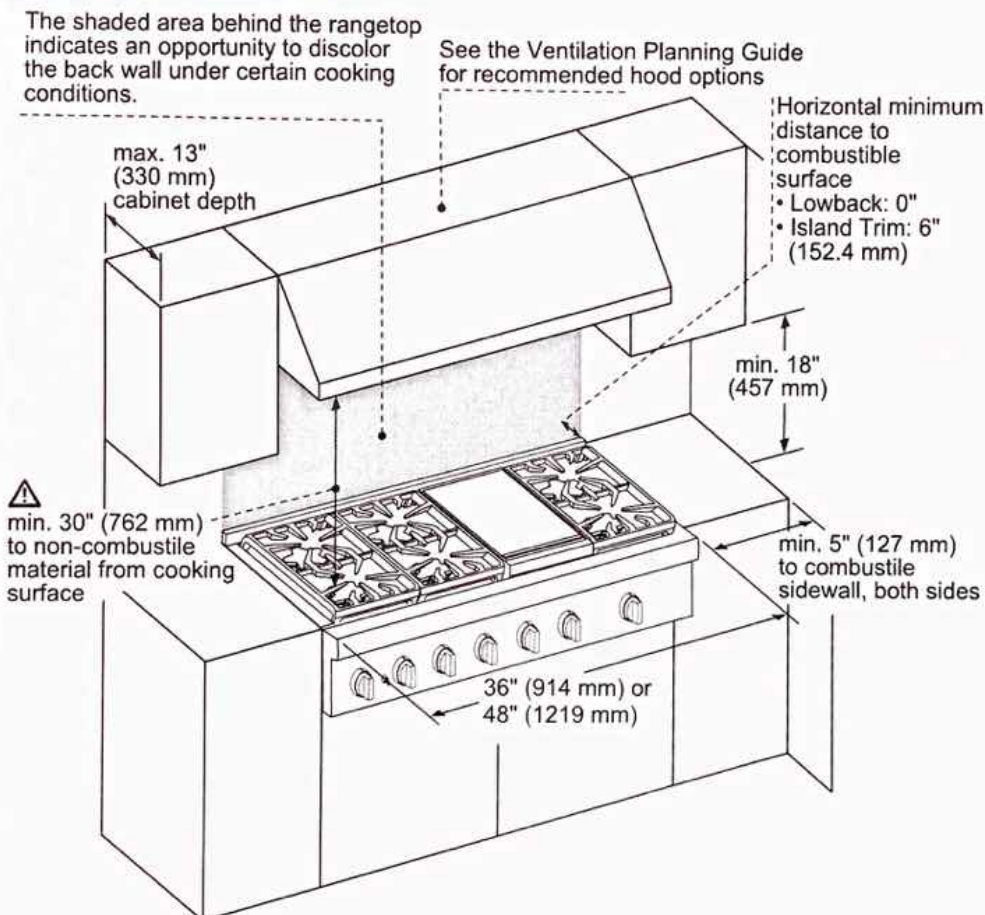

⚠ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances must be approved by the local codes and/or by the local authority having jurisdiction.

measurements in inches (mm)

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA.THERMADOR.COM | CANADA.THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

PODS302W

30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH STEAM CONVECTION

PROFESSIONAL SERIES

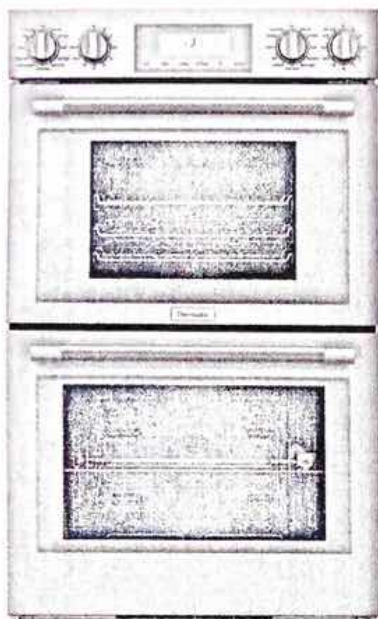

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Steam and Convection Cooking provides unrivaled taste and quality—food stays moist on the inside and is perfect on the outside
- Steam and Convection Oven offers passionate cooks more cooking solutions - Broil, Steam, True Convection, Steam and Convection
- Large commercial style rotisserie with 12 pound capacity

ACCESSORIES (INCLUDED)

Upper Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Broil Pan, 1 Large Perforated Pan, 1 Small Pan, 1 Small Perforated Pan; Lower Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Max Broil Pan, Rotisserie

WARRANTY

Limited Warranty Parts and Labor 2 Year

GENERAL PROPERTIES

Heating Modes – Upper Cavity

(17) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Steam Convection, Defrost, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Steam, Reheat, Steam Auto Programs

Heating Modes – Lower Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Sabbath	Yes
Cleaning Type	Upper Cavity Easy Clean, Ecolytic Clean Lower Cavity Easy Clean and Self Clean
Telescopic Rack(s)	6
Illumination Type	Upper Cavity LED Lower Cavity Halogen
Interior Lights	Upper Cavity 3 – 1 Top, 2-Sides Lower Cavity 2 – Sides with 2 Bulbs Each
Home Connect (Wi-Fi Enabled)	Yes, Upper & Lower

OVEN PERFORMANCE

Bake / Broil Element	Upper Cavity 1,420 W / 3,050 W Lower Cavity 2,400 / 1,000 / 3,800 W
Convection Element	Upper Cavity 2,300 W Lower Cavity 2,000 W

TECHNICAL DETAILS

Watts	9,200 W
Circuit Breaker	40 A
Volts; Frequency	240 / 208 V; 60 Hz
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	48 7/8" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)	3/8" to 1 5/16" – 9/16" – 0"
Required Cutout Size (HxWxD) – Standard	47 3/8" - 48 1/8" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush	49" x 30" x 24 1/2"
Steam Convection Oven Capacity	2.8 cu. ft.
Oven Capacity	4.5 cu. ft.
Overall Oven Interior Dimensions (HxWxD)	Upper Cavity 14 1/2" x 18 7/8" x 17 3/8" Lower Cavity 17 3/4" x 24" x 17 7/8"
Usable Oven Interior Dimensions (HxWxD)	Upper Cavity 11 1/2" x 15 1/2" x 15 5/8" Lower Cavity 13 1/2" x 21 5/8" x 16 1/4"
Net Weight	333 lbs

PODS302W


30-INCH DOUBLE COMBINATION BUILT-IN OVEN

WITH STEAM CONVECTION

PROFESSIONAL SERIES

Thermador

30-INCH DOUBLE COMBINATION OVEN

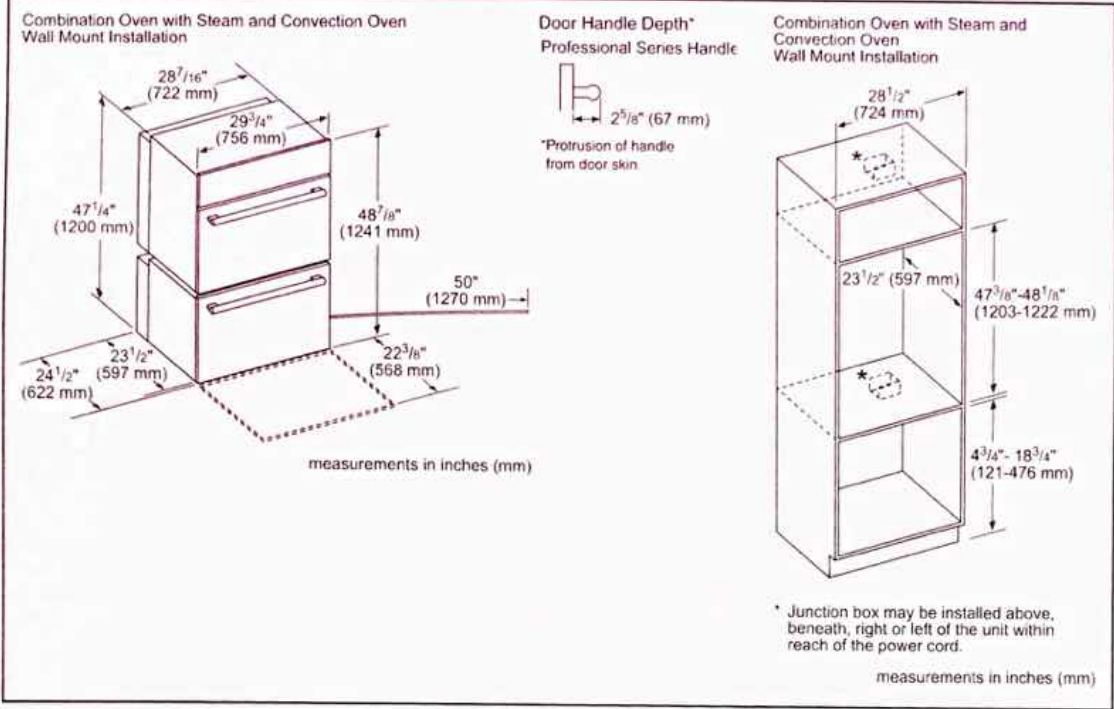

PODS302W
30-INCH DOUBLE COMBINATION BUILT-IN OVEN
WITH STEAM CONVECTION
PROFESSIONAL SERIES



INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

* Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.

** Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

Minimum 3/4" (18 mm) required between cut-outs.

Single oven, double oven or combo oven cut-out height

28 1/2" (724 mm)

23 1/2" (597 mm)

9 1/4" (235 mm)

min. 4 3/4" (121 mm) max. 18" (457 mm)

measurements in inches (mm)

Flush installation
Double or combo oven over storage or warming drawer

*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum 1/2" (13 mm) required between cut-out*

Warming drawer

** For WD30W, the installed dimension may differ. This is based on 3/4" (19 mm) thick custom panel.

Double or combo oven cut-out height

1" (25 mm)

9 9/16" (243 mm) flush cut-out height

24 1/2" (622 mm)


Cleats

measurements in inches (mm)

These guidelines give you specific legal rights and you may have other rights that vary from state to state. For warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making a quarter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

MD30WS
30-INCH MICRODRAWER® MICROWAVE
MASTERPIECE® & PROFESSIONAL SERIES

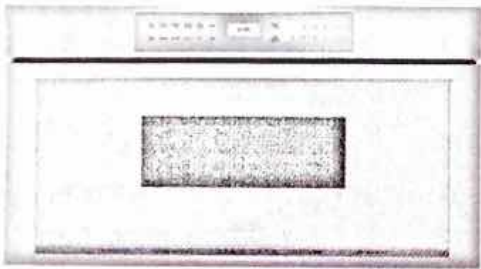

FEATURES & BENEFITS

- Spacious 1.2 cu. ft. interior fits a 20 oz. cup or a 13" x 9" pan
- Achieve a perfectly flush installation in any standard depth cabinetry
- Our MicroDrawer® includes a special sensor mode that controls humidity and automatically adjusts cooking level and time
- 10 cooking modes that include melt, warm and soften
- Touch "open" and "close" eliminates the need for a handle

GENERAL PROPERTIES

Cavity Color	White
Microwave Power (W)	950 W

CAPACITY

Cavity Capacity (cu. ft.)	1.2 cu. ft.
---------------------------	-------------

TECHNICAL DETAILS

Watts (W)	1,500 W
Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	120V-3 Prong
Power Cord Length (in.)	48"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in.)	16 5/16" x 30" x 23 3/8"
Required Cutout Size (HxWxD) (in) – Standard Install	14 13/16" x 28 1/4" x 23 1/2"
Required Cutout Size (HxWxD) (in) – Flush Install	16 5/8" x 30 5/16" x 23 1/2"
Net Weight (lbs)	82 lbs.

ACCESSORIES (INCLUDED)

N/A


WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

MD30WS
30-INCH MICRODRAWER® MICROWAVE
MASTERPIECE® & PROFESSIONAL SERIES




PRODUCT DIMENSIONS

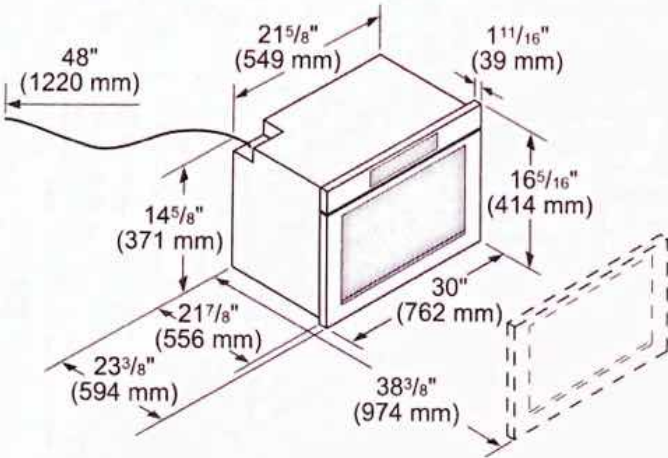


MD30WS
30-INCH MICRODRAWER® MICROWAVE
MASTERPIECE® & PROFESSIONAL SERIES



STANDARD INSTALLATION

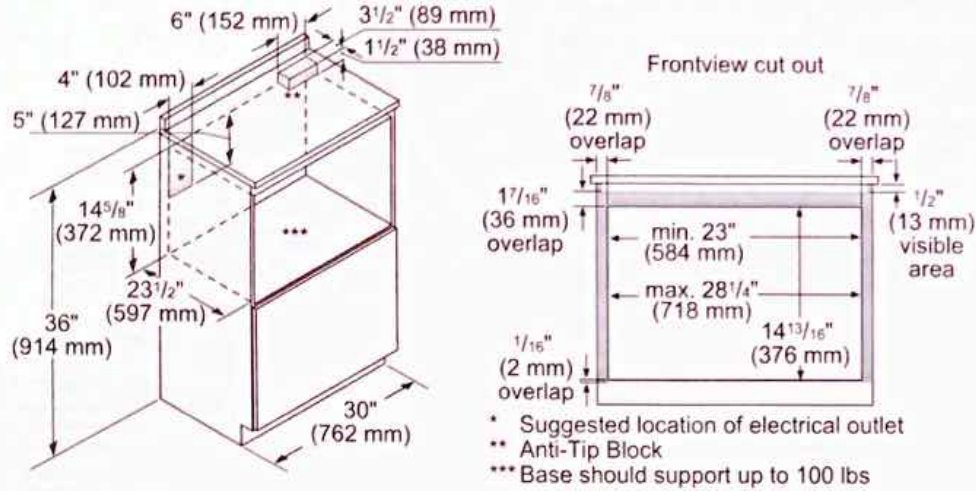

FLUSH INSTALLATION

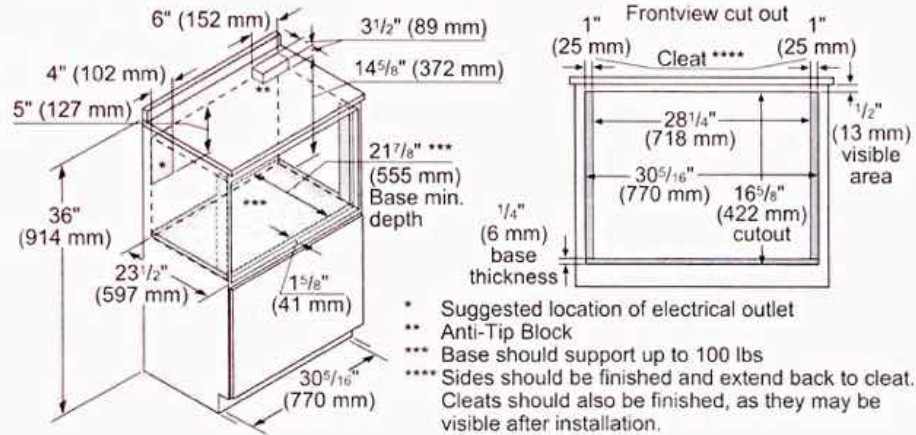


These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1-800-33-4328 | USA.THERMADOR.COM | CANADA.THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED

HPCN48WS
48-INCH CHIMNEY WALL HOOD
PROFESSIONAL® SERIES

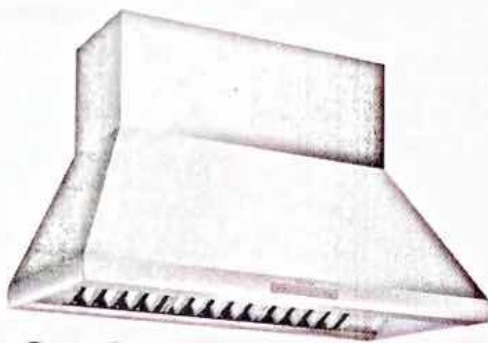

FEATURES & BENEFITS

- Professional® Series chimney wall hoods create a crafted, sculpted focal point
- Designed to complete the ultimate cooking system with Thermador ranges
- Powerfully Quiet® system accepts integral, inline, and remote blowers
- Dishwasher-safe stainless steel, commercial-style baffle filters
- Beautiful illumination with multi-level, vivid LED lights

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VT1610W, VT11010W

Roofplates


RFPLT600P - For use with 600 CFM remote blower VTR630W

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

6" Tall Duct Cover, 48" Wide	CHMHP486W
18" - 35" Tall Duct Cover, 48" Wide	CHMHP48TW
42" - 59" Tall Duct Cover, 48" Wide	CHMHP48XTW

Remote Control Panel

REMCPW - Ability to vertically install on cabinetry or wall to control hood in a convenient location.



GENERAL PROPERTIES

Features

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

Operating Mode	Ducted
Maximum CFM	Blower Sold Separately
Number of Speed Settings	4-Stage
Motor Location	Integral / Inline/ Remote
Number of Lights	4
Bulb Type	LED
Total Power of the Lamps (W)	4.8 W
Damper Included	Yes
Grease Filter Material	Washable Stainless Steel
Grease Filter Type	Stainless-Steel Commercial Style Baffle Filter
Home Connect™ (Wi-Fi Enabled)	No

TECHNICAL DETAILS

Watts (W)	See Chart on Page 3
Current (A)	See Chart on Page 3
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	Fixed Connection, No Plug

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	18" x 47 15/16" x 24"
Height of the Chimney (in)	Duct Covers Sold Separately
Minimum Required Distance Above Gas / Electric Cooking Surface	30" / 30"
Diameter of Air Duct (in) Top	10"
Net Weight (lbs)	68 lbs

BLOWER OPTIONS

Remote Blower (Mounted to Roof or External Wall)	VTR630W - 600 CFM VTR1030W - 1000 CFM VTR1330W - 1300 CFM
Inline Blower (Mounted Between Kitchen and External Wall)	VT1610W - 600 CFM VT11010W - 1000 CFM
Integrated Blower (Mounted in Hood)	VTN630W - 600 CFM VTN1090R - 1000 CFM


WARRANTY

Limited Warranty Parts and Labor	2 Year
----------------------------------	--------

HPCN48WS
48-INCH CHIMNEY WALL HOOD
PROFESSIONAL® SERIES




HOOD DIMENSIONS

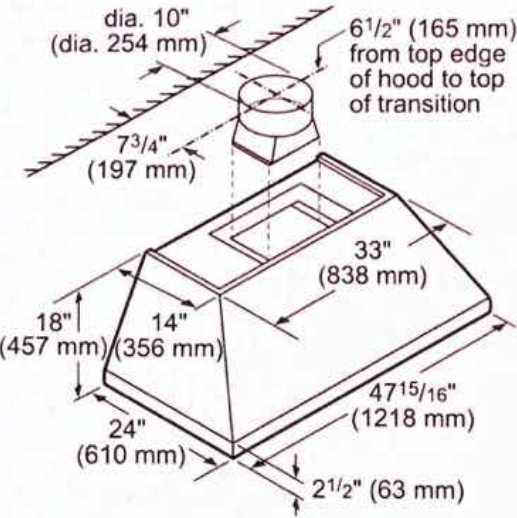

OPTIONAL ACCESSORIES

6" TALL DUCT COVER
CHMHP486W

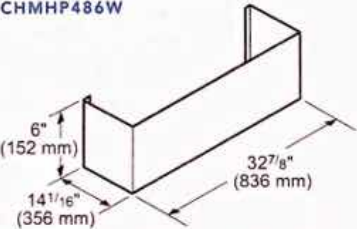

Standard duct cover for up to 8-foot ceiling heights



18" – 35" TALL
TELESCOPING
DUCT COVER
CHMHP48TW

Telescoping design for extension up to 9-foot to 10-foot ceiling heights



42" – 59" TALL
TELESCOPING
DUCT COVER
CHMHP48XTW

Telescoping design for extension up to 11-foot to 12-foot ceiling heights

REMOTE CONTROL PANEL
REMC PW



Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot.


HPCN48WS
48-INCH CHIMNEY WALL HOOD
PROFESSIONAL® SERIES



MODEL	DESCRIPTION		ELECTRIC LOAD						
			VTN630W	VTN1090R	VTI610W	VTI1010W	VTR630W	VTR1030W	VTR1330W
HPCN48WS	48" Chimney Wall Hood	Amps	4.6	8.0	6.5	8.4	6.5	8.4	11.9
		Watts	552	960	780	1,008	780	1,008	1,428


REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

VTR630W-600 CFM

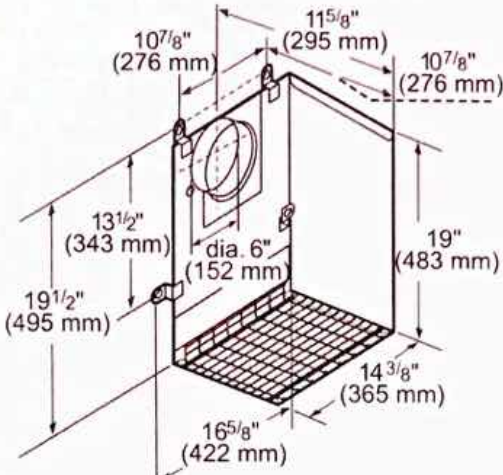


measurements in inches and mm

VTR1030W-1000 CFM

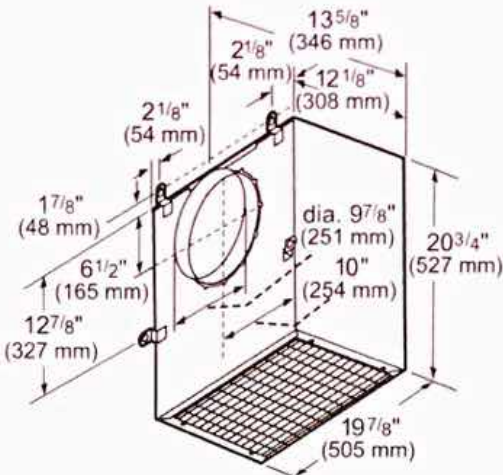

measurements in inches and mm

VTR1330W-1300 CFM

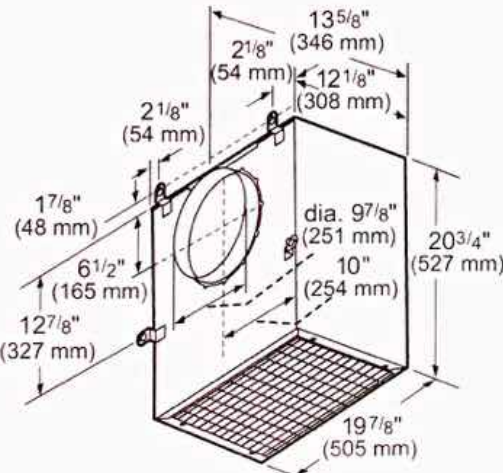


measurements in inches and mm

HPCN48WS
48-INCH CHIMNEY WALL HOOD
PROFESSIONAL® SERIES




INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI610W-600 CFM

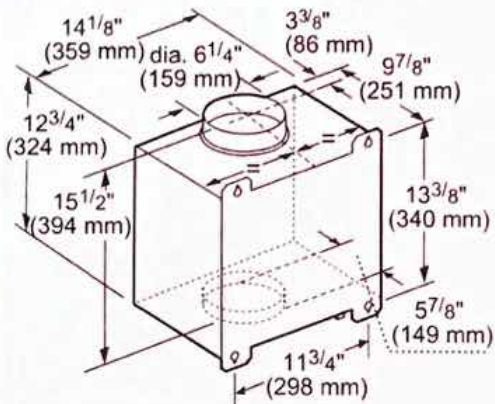

measurements in inches and mm


VTI1010W-1000 CFM

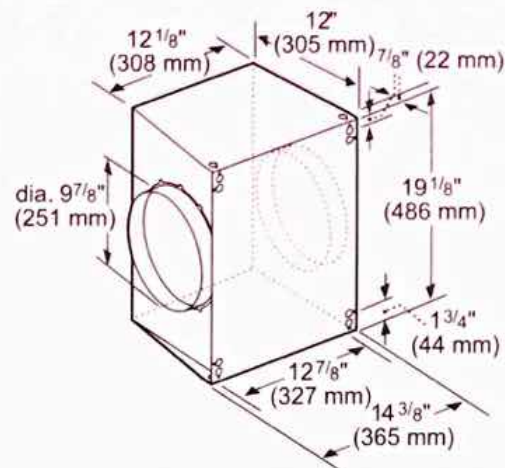

measurements in inches and mm


INTEGRATED BLOWERS (MOUNTED IN HOOD)

VTN630W-600 CFM

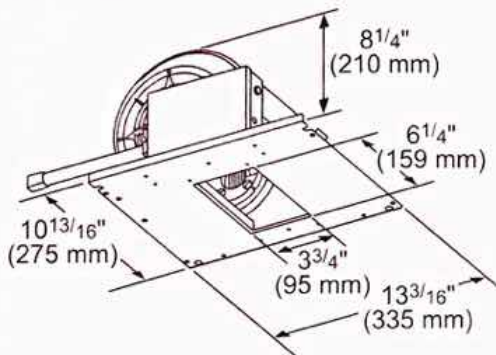

measurements in inches (mm)

VTN1090R-1000 CFM

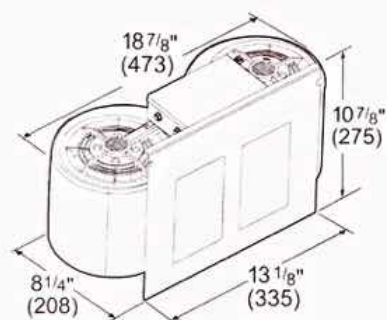


measurements in inches and mm

HPCN48WS
48-INCH CHIMNEY WALL HOOD
PROFESSIONAL® SERIES




REMOTE BLOWER ACCESSORIES

ROOFPLATE-RFPLT600P

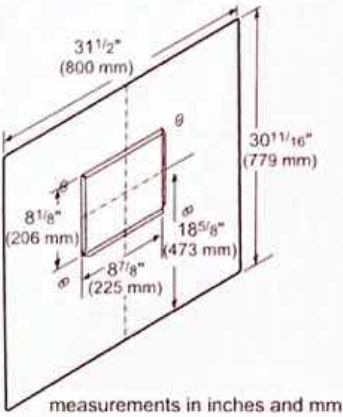

ROOFPLATE-RFPLT1000P

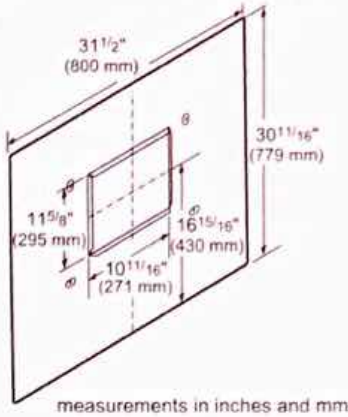

EXTNCB25W

For use with the following Inline and Remote Blowers: VTR630W, VTR1030W, VTR1330W, VT1610W, VT11010W

These warranties give you specific legal rights and you may have other rights that vary from state to state. All warranties are voided without warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your independent supplier for local building code requirements. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions or a accompanying product or write to Thermador, indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1-800-735-6328 | USA.THERMADOR.COM | CANADA.THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED

Lot 1 Pantry 1 of 2
Fridges

Whirlpool 21 Cu. Ft. Side-by-Side Refrigerator - WRS321SDHZ | The Brick

Page 1 of 4

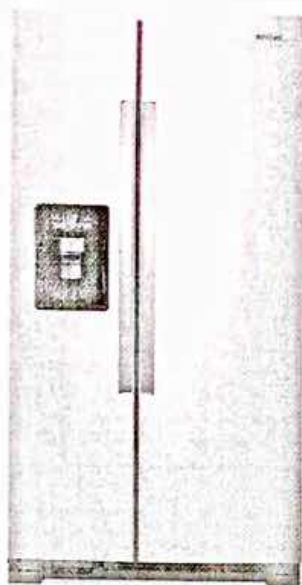

WHIRLPOOL 21 CU. FT. SIDE-BY- SIDE REFRIGERATOR - WRS321SDHZ

\$ 1,399.00

SKU: WRS321DZ VSN: WRS321SDHZ

Dimensions

Width: 33.12" (84.1 cm)

Height: 66.62" (169.2 cm)

Depth: 33.62" (85.4 cm)

Give your family the ease and access of this Whirlpool wide side-by-side refrigerator that was created specifically to serve you and your busy lifestyle. With 21 cubic feet inside, this Whirlpool fridge is packed with unique storage features that make unloading the groceries a simple task. Use the deli drawer to store your favourite meats and cheeses, and then fill the can caddy with your ideal beverages to free up even more shelf space. Thirsty? Pour yourself a glass of filtered water and ice from the exterior dispenser and enjoy the seamless outside look thanks to hidden hinges.

 **Whirlpool**

Lot 1 

Unique Features

Can Caddy:

Free up shelf space and get more flexibility using this in-door can caddy that holds cans and bottles.

Frameless Glass Shelves:

Make the most of each shelf with wall-to-wall frameless glass shelves, which offer greater storage flexibility.

Adjustable Gallon Door Bins:

Move these adjustable bins anywhere in the door for increased loading flexibility when and where you need it.

Deli Drawer:

Store plenty of meat and cheese with a deli drawer designed to keep your favourite snacks at an optimal temperature.

LED Interior Lighting:

Light is cast inside the refrigerator to eliminate dark corners and to make your food look good.

Exterior Ice and Water Dispenser with EveryDrop™ Filtration

Access fresh filtered water and ice without ever opening the refrigerator door using dual pad dispensers.

Tap Touch Controls:

Clean these controls as easily as you use them.

Hidden Hinges:

Get a seamless look with door hinges that stay out of sight.

Electronic Temperature Controls:

Choose the ideal temperature for whatever foods you're storing with convenient, up-front controls.

Fingerprint Resistant Stainless Steel:

Resist fingerprints and smudges with steel that easily wipes clean and looks sleek.

Factory-Installed Ice Maker:

Forget about refilling ice trays with this pre-installed ice maker that ensures you always have plenty of ice on hand.

Adaptive Defrost:

Adaptive defrost automatically monitors the freezer environment and runs the cycle only when necessary, saving time and energy.

LED Dispenser Night Light:

Easily find water and ice at night when you turn on the dispenser night light.

General Details

VSN	WRS321SDHZ
UPC/GTIN	883049435039

**General Details**

Appliance Features	Child Lock, Fingerprint-Resistant
Refrigeration Features	Exterior Water Dispenser, Exterior Ice Dispenser, Ice Maker, Frost-Free
Refrigerator Type	Side-by-Side
Finish Colour	Fingerprint Resistant Stainless Steel
Control Panel	Electronic Touch
Lighting	LED
Ice Maker	Factory Installed
Water Dispenser	<ul style="list-style-type: none">▪ Filtered Water▪ Ice Dispenser Lock▪ Measured/Metered Fill▪ Night Light
Energy Consumption	120 V
Door	Side-by-Side

Refrigerator Details

Refrigerator Bins	1 Dairy, 1 Fixed Full-Width, 3 Adjustable Gallon
Refrigerator Shelves	4

Freezer Details

Freezer Shelves	3 Adjustable Full-Width Glass
-----------------	-------------------------------

Installation Details

Installation Requirements	https://api.whirlpoolcentral.ca/_resources/documents/WRS321SDHV_use_and_care_en.pdf
---------------------------	---

Lot 1



General Details

Instruction	Instruction Manual
Manual URL	(https://api.whirlpoolcentral.ca/_resources/documents/WRS321SDHZ_installation_instruction_en.pdf)

Additional Details

Safety Details	See Owner's Manual
----------------	--------------------

Additional Dimensions

Refrigerator
Capacity (cu.
ft.)

14.63

Freezer
Capacity (cu.
ft.)

6.77

Total
Capacity (cu.
ft.)

21.4

Depth with
Door Open
90 degrees
(in.)


49.3125

Other
Dimensions

- Height To Top Of Cabinet: 65.625
- Depth Excluding Handles: 31.625
- Depth Closed Including Handles: 33.625

Lot 1
(1 of 2)

PRODUCT DIMENSIONS

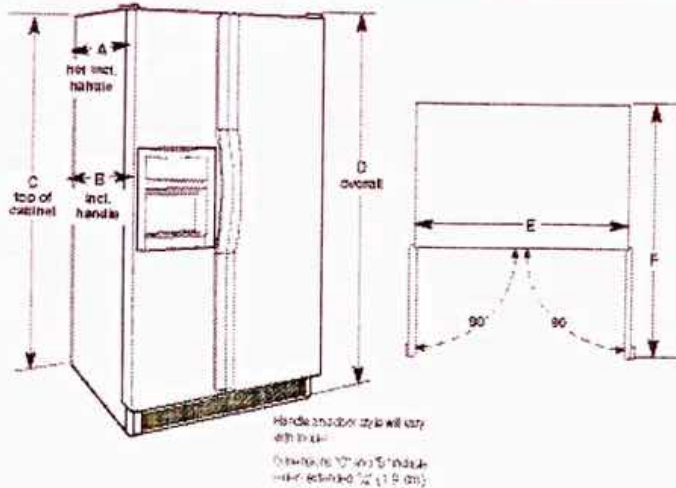

Model Number/ Capacity	Depth Without Handles "A"	Depth With Handles "B"	Height to top of Cabinet "C"	Overall height "D"	Cabinet Width "E"	Depth with Doors Open 90° "F"
WRS315SDH* 24.57 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	68 1/8" (174.31 cm)	69 1/8" (176.85 cm)	35 7/8" (90.11 cm)	49 1/8" (125.25 cm)
WRS315SNH* 25.1 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	68 1/8" (174.31 cm)	69 1/8" (176.85 cm)	35 7/8" (90.11 cm)	49 1/8" (125.25 cm)
WRS312SNH* 21.55 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	65 1/8" (174.31 cm)	66 1/8" (169.23 cm)	32 3/4" (84.12 cm)	49 1/8" (125.25 cm)
WRS335SDH* 24.54 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	66 1/8" (169.23 cm)	69 1/8" (176.85 cm)	35 7/8" (90.11 cm)	49 1/8" (125.25 cm)
WRS311SDH* 21.42 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	65 1/8" (174.31 cm)	66 1/8" (169.23 cm)	32 3/4" (84.12 cm)	49 1/8" (125.25 cm)
WRS321SDH* 21.40 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	65 1/8" (174.31 cm)	66 1/8" (169.23 cm)	32 3/4" (84.12 cm)	49 1/8" (125.25 cm)
WRS555SIH* 24.51 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	68 1/8" (174.31 cm)	69 1/8" (176.85 cm)	35 7/8" (90.18 cm)	49 1/8" (125.25 cm)
WRS415SNH* 25.1 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	68 1/8" (174.31 cm)	69 1/8" (176.85 cm)	35 7/8" (90.11 cm)	49 1/8" (125.25 cm)
WRS331SDH* 21.42 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	65 1/8" (174.31 cm)	66 1/8" (169.23 cm)	32 3/4" (84.12 cm)	49 1/8" (125.25 cm)
WRS325SDH* 22.50 cu. ft.	31 1/8" (80.33 cm)	33 1/8" (85.41 cm)	68 1/8" (174.31 cm)	69 1/8" (176.85 cm)	35 7/8" (90.11 cm)	49 1/8" (125.25 cm)


Lot 1 ○
Pantry 2 of 2 Fridges

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS

WRS315SDH*	WRS315SNH*
WRS312SNH*	WRS335SDH*
WRS331SDH*	WRS311SDH*
WRS321SDH*	WRS555SIH*
WRS15SNH*	WRS325SDH*

LOCATION REQUIREMENTS



Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

To ensure proper ventilation for your refrigerator, allow for $\frac{1}{2}$ " (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cutout width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.