

Lot 395



KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

Model NOCE500E NOCE500E NOCE500E

ELECTRICAL CONNECTION


If cable panel and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrician whether a year are not run the oven is properly grounded.

The oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-04, Canadian Electrical Code, Part 1 and C22.2 No. 0-1001-1 latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Oven must be connected to the proper electrical voltage and frequency as specified on the model/series/rating plate. See the following illustration.



A. Main wiring panel

- Models rated from 7.2 to 9.6 kW at 240 volts (6.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.5 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 20-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the bus disconnected (or circuit breaker box) through fuses, circuit breakers or nonfuses (aluminum copper cable with grounding wire). See "Wiring Electrical Connections" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for removability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below.

1. Connect a section of solid copper wire to the rigid bus.
2. Connect the aluminum wiring to the rigid section of copper wire using rigid copper connectors and/or code designed and UL listed for joining copper to aluminum.

Follow the electrical contractor manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage	Amperage @ 17	Amperage @ 27	Rating (W)
KUJES07/NOCE500E	120/240	32	30	6000
KUJES07/NOCE500E	120/240	30	28	6000

Amperage values listed above are for information purposes only. The units are listed in watts.

Always consult local codes and a qualified electrician to ensure proper installation. Always use proper wiring practices and follow all safety instructions.

PRODUCT DIMENSIONS

27" (68.6 cm) model

A. 27" (68.6 cm) height

B. 23 1/2" (59.7 cm) width

C. 23 1/2" (59.7 cm) depth

D. 27 1/2" (70.2 cm) height

E. 27 1/2" (70.2 cm) height

F. 27 1/2" (70.2 cm) height

G. 27 1/2" (70.2 cm) height

H. 27 1/2" (70.2 cm) height

I. 27 1/2" (70.2 cm) height

J. 27 1/2" (70.2 cm) height

K. 27 1/2" (70.2 cm) height

L. 27 1/2" (70.2 cm) height

M. 27 1/2" (70.2 cm) height

N. 27 1/2" (70.2 cm) height

O. 27 1/2" (70.2 cm) height

P. 27 1/2" (70.2 cm) height

Q. 27 1/2" (70.2 cm) height

R. 27 1/2" (70.2 cm) height

S. 27 1/2" (70.2 cm) height

T. 27 1/2" (70.2 cm) height

U. 27 1/2" (70.2 cm) height

V. 27 1/2" (70.2 cm) height

W. 27 1/2" (70.2 cm) height

X. 27 1/2" (70.2 cm) height

Y. 27 1/2" (70.2 cm) height

Z. 27 1/2" (70.2 cm) height

AA. 27 1/2" (70.2 cm) height

AB. 27 1/2" (70.2 cm) height

AC. 27 1/2" (70.2 cm) height

AD. 27 1/2" (70.2 cm) height

AE. 27 1/2" (70.2 cm) height

AF. 27 1/2" (70.2 cm) height

AG. 27 1/2" (70.2 cm) height

AH. 27 1/2" (70.2 cm) height

AI. 27 1/2" (70.2 cm) height

AJ. 27 1/2" (70.2 cm) height

AK. 27 1/2" (70.2 cm) height

AL. 27 1/2" (70.2 cm) height

AM. 27 1/2" (70.2 cm) height

AN. 27 1/2" (70.2 cm) height

AO. 27 1/2" (70.2 cm) height

AP. 27 1/2" (70.2 cm) height

AQ. 27 1/2" (70.2 cm) height

AR. 27 1/2" (70.2 cm) height

AS. 27 1/2" (70.2 cm) height

AT. 27 1/2" (70.2 cm) height

AU. 27 1/2" (70.2 cm) height

AV. 27 1/2" (70.2 cm) height

AW. 27 1/2" (70.2 cm) height

AX. 27 1/2" (70.2 cm) height

AY. 27 1/2" (70.2 cm) height

AZ. 27 1/2" (70.2 cm) height

BA. 27 1/2" (70.2 cm) height

BB. 27 1/2" (70.2 cm) height

BC. 27 1/2" (70.2 cm) height

BD. 27 1/2" (70.2 cm) height

BE. 27 1/2" (70.2 cm) height

BF. 27 1/2" (70.2 cm) height

BG. 27 1/2" (70.2 cm) height

BH. 27 1/2" (70.2 cm) height

BI. 27 1/2" (70.2 cm) height

BJ. 27 1/2" (70.2 cm) height

BK. 27 1/2" (70.2 cm) height

BL. 27 1/2" (70.2 cm) height

BM. 27 1/2" (70.2 cm) height

BN. 27 1/2" (70.2 cm) height

BO. 27 1/2" (70.2 cm) height

BP. 27 1/2" (70.2 cm) height

BQ. 27 1/2" (70.2 cm) height

BR. 27 1/2" (70.2 cm) height

RECEIVED

DEC 20 2020

M.H. V.M.


- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

- Oven support surface must be solid, level and flush with bottom of cabinet cutout. Floor must be able to support a total weight (microwave and built-in oven) of 708 lbs (32 kg) for 27" (68.6 cm) models or 748 lbs (113 kg) for 30" (76.2 cm) models.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 184°F (80°C).

Product Dimensions

27" and 30" (68.6 cm and 76.2 cm) Ovens

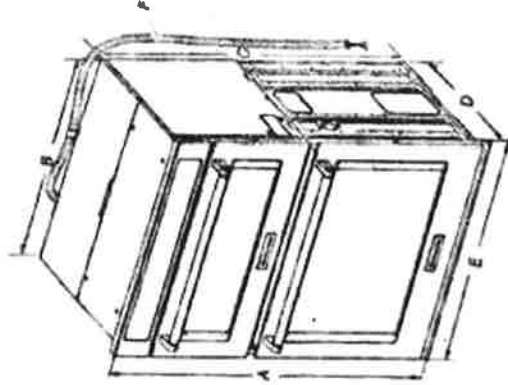


27" (68.6 cm) models
 A: 42 1/4" (108.0 cm) overall height
 B: 25 1/4" (64.6 cm) recessed width
 C: 41" (104.1 cm) recessed height
 D: 22 1/2" (56.7 cm) recessed depth
 E: 27" (68.6 cm) overall width
 F: 48" (121.9 cm) overall depth (measured from the bottom flange located at the rear of the oven. Do not measure the conduit clamp.)

30" (76.2 cm) models
 A: 42 1/4" (108.0 cm) overall height
 B: 26 1/4" (67.2 cm) recessed width
 C: 41" (104.1 cm) recessed height
 D: 22 1/2" (56.7 cm) recessed depth
 E: 30" (76.2 cm) overall width
 F: 48" (121.9 cm) overall depth (measured from the bottom flange located at the rear of the oven. Do not measure the conduit clamp.)

Cabinet Dimensions

27" and 30" (68.6 cm and 76.2 cm) Ovens

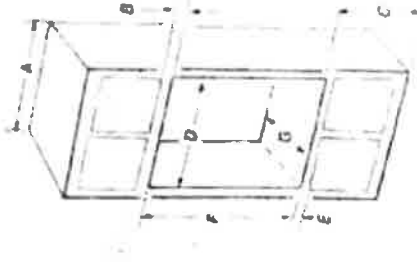

27" (68.6 cm) models
 A: 27" (68.6 cm) min. cabinet height
 B: 1" (2.5 cm) top of cabinet to bottom of upper cabinet door cutout
 C: 19 1/4" (49.0 cm) bottom of cabinet to floor (recommended)
 D: 25 1/4" (64.6 cm) overall width
 E: 1 1/4" (3.2 cm) min. bottom of cabinet to top of cabinet door cutout
 F: 41 1/4" (105.1 cm) recessed height
 G: 24" (60.7 cm) overall depth

30" (76.2 cm) models
 A: 30" (76.2 cm) min. cabinet height
 B: 1" (2.5 cm) top of cabinet to bottom of upper cabinet door cutout
 C: 19 1/4" (49.0 cm) bottom of cabinet to floor (recommended)
 D: 26 1/4" (67.2 cm) overall width
 E: 1 1/4" (3.2 cm) min. bottom of cabinet to top of cabinet door cutout
 F: 41 1/4" (105.1 cm) recessed height
 G: 24" (60.7 cm) overall depth

***NOTE:** The overall height can be between 41" and 41 1/4" (104.1 cm and 105.1 cm) for microwave-oven combination.

Electrical Requirements

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-label edition or CSA Standards C22.1-04, Canadian Electrical Code, Part I and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association

1 Batterymarch Park

Quincy, MA 02269-7471

CSA International

8501 East Pleasant Valley Road

Cleveland, OH 44131-4575

M.H. VDA

RECEIVED


DEC 2 0 2020

Lot 395
WV VA

NA36N7755TS

36" Gas Cooktop

SAMSUNG

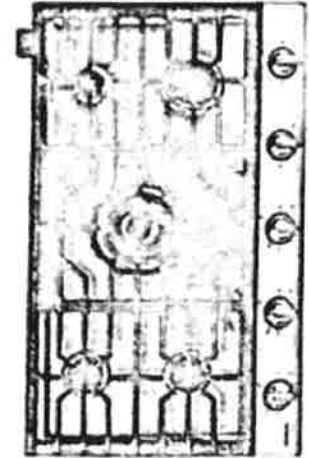

Signature Features

- 22K True Dual-Power Burner
 - Two independent heating burners offer precise heat and precise control to quickly boil water or simmer chocolate
- Analogue Controls with Digital Wi-Fi and Bluetooth® Technology
 - The ultimate combination of analogue control and digital technology delivers exceptional cooking performance

Cast Iron Griddle

- Cook steaks, grill sandwiches, or sauté vegetables on the removable griddle



22K True Dual-Power Burner



Cast Iron Griddle

Available Colors

- Stainless Steel (shown)
- Fingerprint Resistant Black Stainless Steel

Features

- Bluetooth® Connected to Hood
- Blue LED Lights
- Wi-Fi Connectivity
- Powerful Cooktop
 - Right Front: 13K BTU
 - Left Front: 9.5K BTU
 - Right Rear: 5K BTU
 - Left Rear: 9.5K BTU
 - Center: True Dual, 22K BTU (Boast)

Convenience

- Cast Iron 1-Piece Grates
- Sealed Burners
- Burner On/Off Monitoring
- ADA Compliant
- Wok Grate
- LP Conversion Kit



M.H. V.M.



RECEIVED
DEC 20 2020

HA 1/2


NA36N7755TS 36" Gas Cooktop

SAMSUNG

Installation Requirements (Minimum top cut out and minimum clearance dimensions)

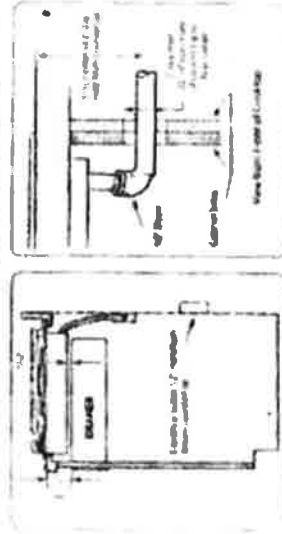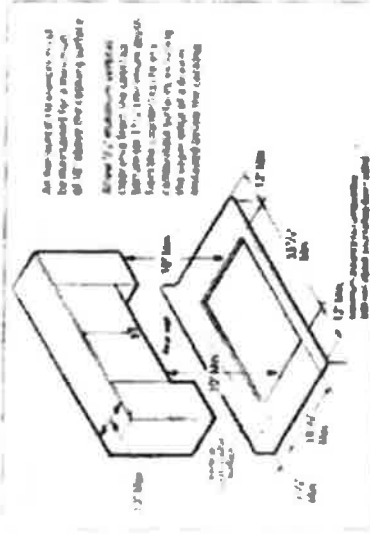

Installing Over a Single Oven

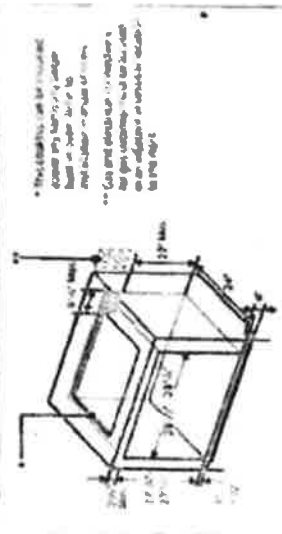

Total Power (BTU)

304

Power Source

120V / 60 Hz / 1A

Gas Cooktop (BTU)

- Right Front: 5.5K
- Left Front: 9.5K
- Right Rear: 5K Summer
- Left Rear: 9.5K
- Center: 22K (True Dual)

Warranty

One (1) Year All Parts and Labor

Product Dimensions & Weight (WxHxD)

Outside (WxH): Cooktop Dimensions
36" x 55 1/2" x 23 1/4"

Cooktop Cut-Out Dimensions

33 1/2" x 51 1/2" x 19 1/8"

Weight: 87.7 lbs (68.4 lbs Finger-Print Resistant Black Stainless Steel)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 40 1/2" x 10 1/2" x 25 1/2"

Weight: 95.9 lbs (97.2 lbs Finger-Print Resistant Black Stainless Steel)

Color

Stainless Steel

Model

NA36N7755TS

UPC Code

887276181700


Finger-Print Resistant

Black Stainless Steel

NA36N7755TS

887276181700

Cooktop Dimensions

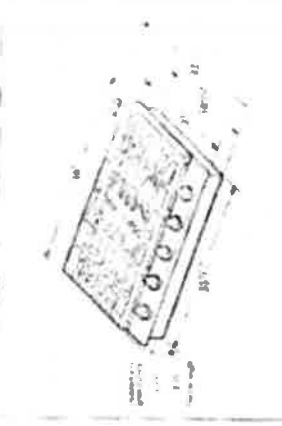

© 2020 Samsung Electronics America, Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics America, Inc. All other trademarks are the property of their respective owners.

M.H. 1/2

RECEIVED
DEC 20 2020

Installation Requirements

Electrical Requirements

WARNING

Observe all grounding codes and standards.

It is the customer's responsibility.

To contact a qualified electrical installer.

To ensure that the electrical installation is complete and in

conformance with National Electrical Code, ANSI/NFPA 70

— "National Electrical Code" or CSA Standard C22.1-04, Canadian

Electrical Code, Part 1 and C22.2 (No. 0409) - "New edition" and all local

codes and standards.

If codes permit and a separate ground wire is used, it is recommended

that a qualified electrician determine that the ground path is adequate.

A copy of the above code standards can be obtained from:

National Fire Protection Association

1 Batterymarch Park

Quincy, MA 01901-7471

USA International

8901 East Pleasant Valley Road

Cleveland, OH 44131-4675

- A 120 volt, 60 Hz AC only, 15-amp rated electrical circuit is required.

- If the installer has aluminum wiring, follow the procedure below:

1. Connect a section of solid copper wire to the pigtail leads.
2. Connect the aluminum wiring to the solid section of copper wire using splicing connectors and/or lugs designed and UL listed for joining copper to aluminum.

- Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connector must conform with local codes and industry accepted wiring practices.

- Also note and connections must conform with the rating of the appliance as specified on the manufacturer's rating plate.

The maximum panel rating is limited to the rating of the main

panel of the range hood.

- Also note that the requirements of the National Electrical Code, ANSI/NFPA 70 (latest edition), or CSA Standard C22.1-04, Canadian Electrical Code, Part 1 and C22.2 (No. 0409) (latest edition and all local codes and standards).

Venting Requirements

- Vent system must terminate outdoors.
- Do not terminate the vent system in an attic or other enclosed area.
- Do not use a 4" x 10.2 cm, laundry-type wall cap.
- Use metal roof only rigid metal vent is recommended. Plastic or metal foil vent is not recommended.
- The length of the vent system and the number of elbows should be kept to a minimum to provide efficient performance.

For the model efficiency and quiet operation

- Use no more than three 90° elbows.
- Make sure there is a minimum of 24" (61 cm) of straight vent between the elbows. If more than 1 elbow is used:
- Do not exceed 2 elbows together.
- Use clamps, a seal at joints in the vent system.
- The vent system must have a damper in the roof or wall cap has a damper. Do not use the damper supplied with the range hood.
- Use caulk to seal the exterior wall or roof opening around the cap.
- The size of the vent should be uniform.

Venting Installation

The canopy hood is factory set for venting through the roof. If wall, A-6 (15.2 cm) square vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE


If duct vent is not recommended. First is vent through the exterior wall or air handling that greatly reduces performance. The vent system is designed to vent through the roof or wall. To vent through a wall, a damper is needed.

Minimum Height

Subs is required height between a minimum of 24" (61 cm) for the exterior cooking surface, a minimum of 30" (76.2 cm) for a gas cooking surface, and a suggested minimum of 36" (91.4 cm) above the bottom of the hood.

Clearance

A 30" (76.2 cm) clearance is required between the hood and

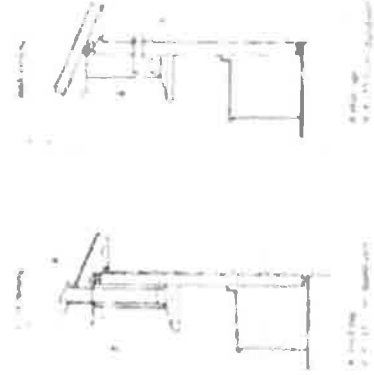

RECEIVED
DEC 20 2020