

Ld 128
○○

KitchenAid®

FOR THE WAY IT'S MADE.

90" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVWB600D KVWB605D

Electrical: A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.


Example Vent System

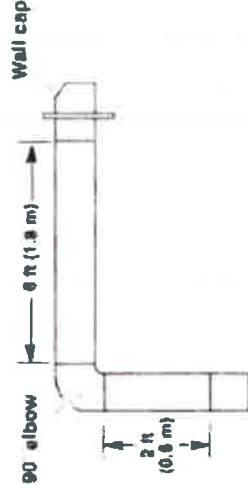

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow = 5.0 ft (1.5 m)
1 - wall cap = 0.0 ft (0.0 m)
8 ft (2.4 m) straight = 8.0 ft (2.4 m)
Length of system = 13.0 ft (3.9 m)


PRODUCT DIMENSIONS

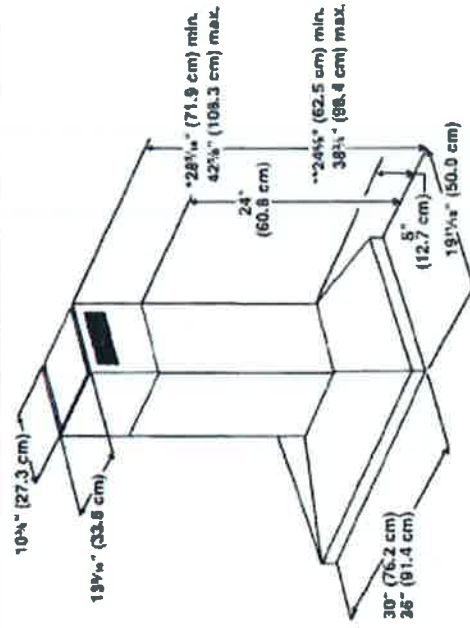

*For non-vented (recirculating) installations

**For vented installations

Roof Venting Wall Venting Non-Vented (Recirculating)

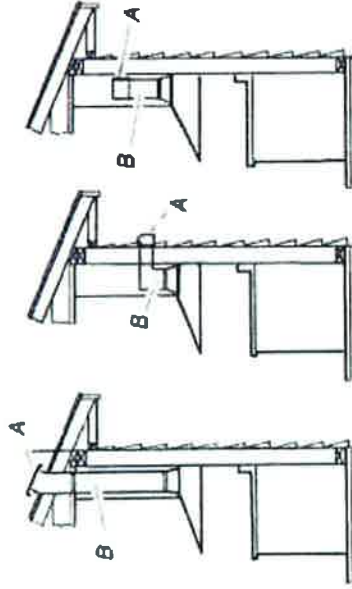

A Roof cap
B 6" (15.2 cm) round vent

A Diverter
B 6" (15.2 cm) round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece 6" (15.2 cm) Round

15° elbow

2.5 ft (0.8 m)



90° elbow

5.0 ft (1.5 m)


Maximum equivalent vent length is 35 ft (10.7 m).

Exhaust Hood Hood Corporation policy includes a continuous commitment to improve our products. We reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

RECEIVED
JAN 02 2021

CABINET DIMENSIONS

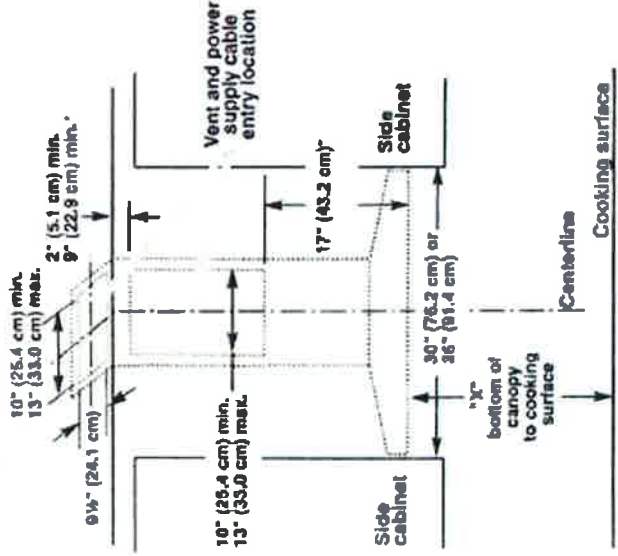

*For non-vented (recirculating) installations

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart

Vented Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)

*NOTE: The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section

RECEIVED
JAN 02 2021

KitchenAid®

27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KOCE500E ✓ KOCE500E

ELECTRICAL CONNECTION

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.


Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70:latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91:latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

• Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 1. Connect a section of solid copper wire to the pigtail leads.
 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507B/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	8600


*Amperage values noted above are for information purposes only: the units are rated in watts.

Shawne Whipple Corporation includes a connector recommended to improve our products. We reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see instructions. Instructions published with product. Specifications subject to change without notice.


Rev. W107563/19 2/12/15

27" (68.6 cm) models
A. 43 3/4" (108.0 cm) overall height
B. 23 1/4" (59.1 cm) recessed width
C. 41" (104.1 cm) recessed height
D. 23 1/2" (59.1 cm) max. recessed depth
E. 27" (68.6 cm) overall width
F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

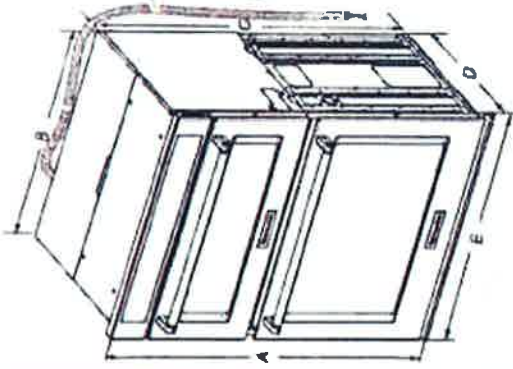

30" (76.2 cm) models
A. 47 1/4" (108.0 cm) overall height
B. 28 1/4" (72.3 cm) recessed width
C. 41" (104.1 cm) recessed height
D. 23 1/2" (59.1 cm) max. recessed depth
E. 30" (76.2 cm) overall width
F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions

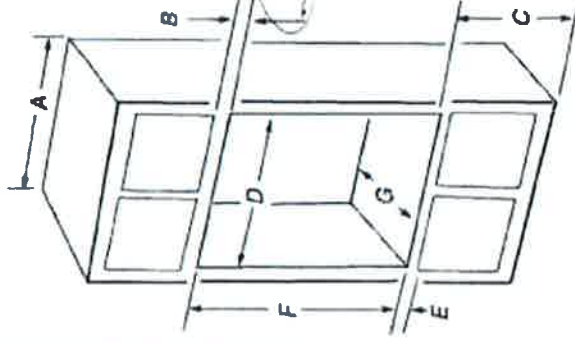

27" (68.6 cm) models
A. 27" (68.6 cm) min. cabinet width
B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
C. 19 1/4" (48.9 cm) bottom of cutout to floor is recommended
D. 25 1/2" (64.9 cm) cutout width
E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
F. 41 1/4" (105 cm) recommended cutout height
G. 24" (60.7 cm) cutout depth
30" (76.2 cm) models
A. 30" (76.2 cm) min. cabinet width
B. 1" (2.5 cm) top of cutout to bottom
C. 19 1/4" (48.9 cm) bottom of cutout to floor is recommended
D. 25 1/2" (64.9 cm) cutout width
E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
F. 41 1/4" (105 cm) recommended cutout height
G. 24" (60.7 cm) cutout depth

• NOTE: The cabinet height can be between 41" (104.1 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.

RECEIVED

JAN 02 2021

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

PRODUCT MODEL NUMBERS

6CGS350E	KCG8660E	MGC9500D	WGG74US0D
KCGS366E	KCGS956E	MGC9536D	WGG97US6D
KGG5550E	MGE7430D	WCG64US0D	WCG97US6D
KGG6566E	MGC7636D	WCG64US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas

Natural Gas

This cooktop is design-certified by CSA International for use with natural gas or after proper conversion for use with LP gas.

- This cooktop is factory set for use with natural gas. If converting to LP gas, see the LP Gas Conversion instructions provided in the package containing literature. The model serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion

Conversion must be done by a qualified service technician.

An attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion instructions provided in the package containing literature.

Gas Supply Line

- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEF-LONE[®] tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.

Flexible metal appliance connector

- If local codes permit, use a 1/2" or 3/4" I.D. flexible stainless steel tubing gas connector designed by CSA to connect the cooktop to the rigid gas supply line.



- A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the cooktop.

- Must include a shut-off valve.

The supply line must be equipped with a manual shut-off valve. The valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shut-off valve. The valve is for turning on or shutting off gas to the cooktop.



- A Gas supply line
- B Shut-off valve "open" position
- C To cooktop

* Test (W) is a registered trademark of E.I. Du Pont de Nemours and Company.


ELECTRICAL REQUIREMENTS

- A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

RECEIVED


JAN 02 2021

Lot 128




PRODUCT DIMENSIONS


KCGS550ESS and KCGS950ESS Models

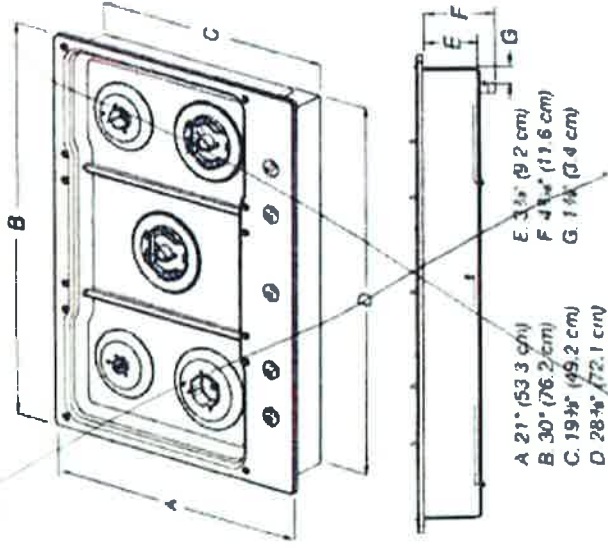


KCGS556ESS and KCGS956ESS Models

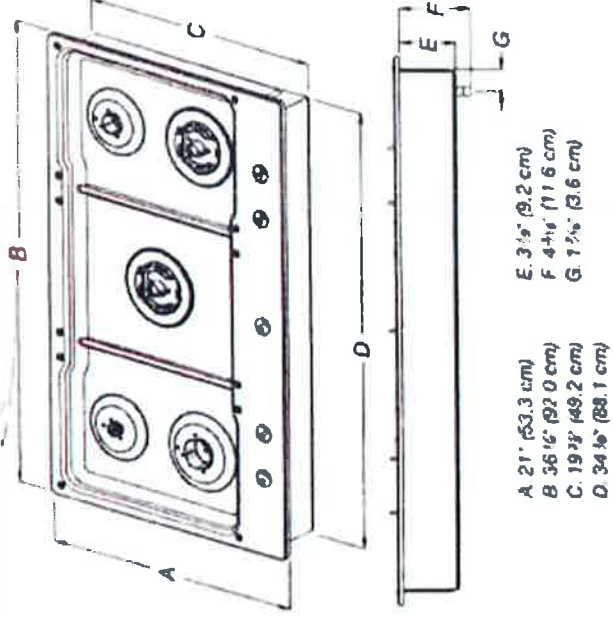

All Other 30" (76.2 cm) Models

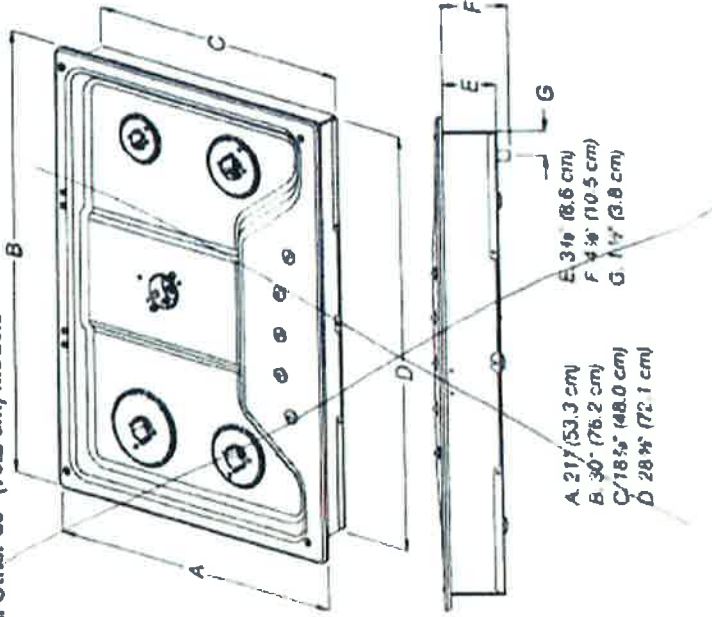

All Other 36" (91.4 cm) Models

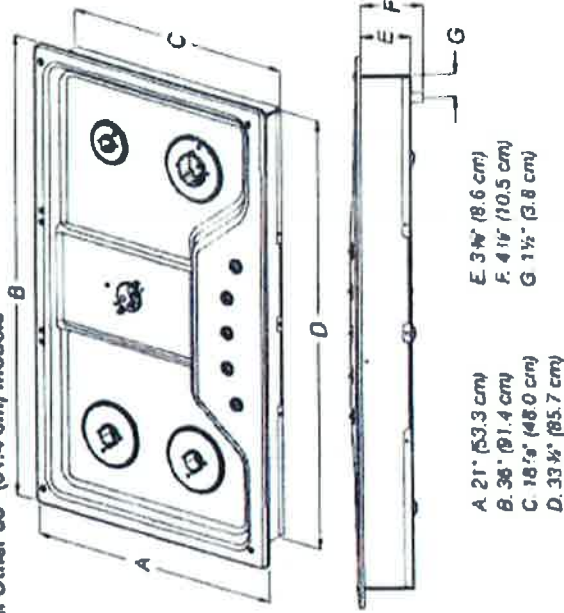


RECEIVED

JAN 02 2021

00


CABINET DIMENSIONS

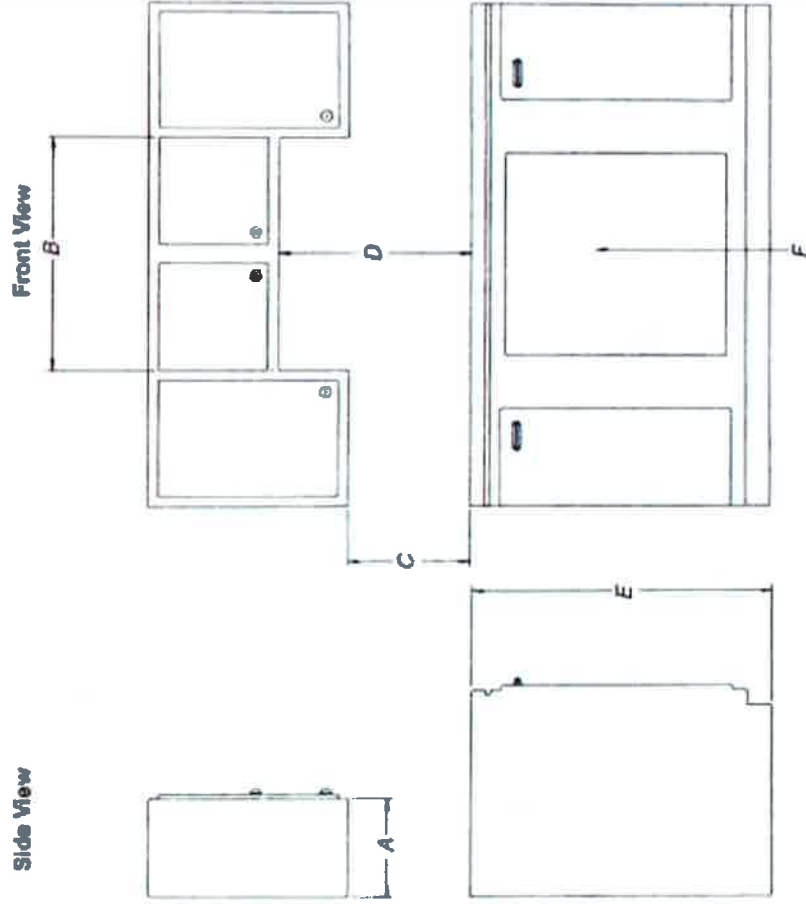

- A. 13" (33.0 cm) recommended upper cabinet depth.
- B. 30" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
- C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop.
- D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet. 24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel. 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper.
- E. 36" (91.4 cm) top of countertop to floor.
- F. Gas line opening - Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

RECEIVED
JAN 02 2021

CABINET DIMENSIONS (cont.)

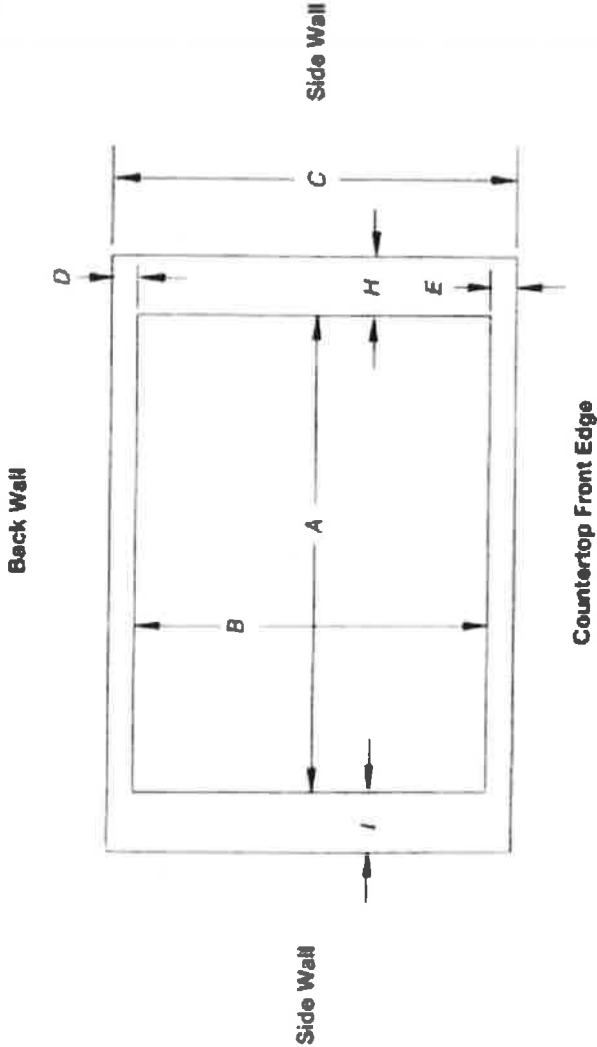

Cutout (Product Opening) Dimensions					
30" (76.2 cm) Models					
Models	A			B	
	Min	Recommended	Max	Min	Recommended Max
KCGS550 and KCGS950 All Other 30" (76.2 cm) Models	28 1/2" (72.4 cm)	28 5/8" (73.4 cm)	29 5/8" (74.3 cm)	19 1/2" (49.5 cm)	19 1/4" (50.2 cm)
	28 3/4" (72.4 cm)	28 3/8" (73.4 cm)	29 5/8" (74.3 cm)	19" (48.3 cm)	19 1/8" (49.5 cm)
36" (91.4 cm) Models					
KCGS556 and KCGS956 All Other 36" (91.4 cm) Models	34 1/2" (88.4 cm)	35 1/4" (89.4 cm)	35 3/4" (90.3 cm)	19 1/2" (49.5 cm)	19 1/4" (50.2 cm)
	33 3/4" (86.0 cm)	34 1/2" (87.0 cm)	35 1/2" (89.5 cm)	19" (48.3 cm)	19 5/8" (49.5 cm)

Side Walls (Combustible Surfaces)	
Models	H and I
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).
KCGS350, KCGS358, MCG9636, WCG97US0, WCG97US6	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).
All Other Models	Both have to be 8" (20.3 cm) or more

Back Wall and Countertop Front Dimensions			
Models	C	D	E
KCGS550 and KCGS950	25" (63.5 cm)	2 3/4" (7.3 cm)	2 1/4" (6.9 cm)
All Other Models			3 1/2" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If Cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.

RECEIVED

JAN 02 2021

Lot 128

KitchenAid[®]

FOR THE WAY ITS MADE.[®]

Side By Side Built-In Refrigerator

PRODUCT MODEL NUMBERS

KBSD602E KBSD606E KBSD608E KBSN602E KBSN608E
KBSD612E KBSD618E

Electrical: A 115 volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


IMPORTANT:

- It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.
- Do not install in a location where the temperature will fall below 55°F (13°C).
- Floor must support the refrigerator weight, more than 600 lbs (272 kg), door panels and contents of the refrigerator.

PRODUCT DIMENSIONS

- The depth from the front of the top grille to the back of the refrigerator cabinet is 5 1/8" (64.5 cm).
- The power cord is 84" (213 cm) long.
- Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.

SIDE VIEW

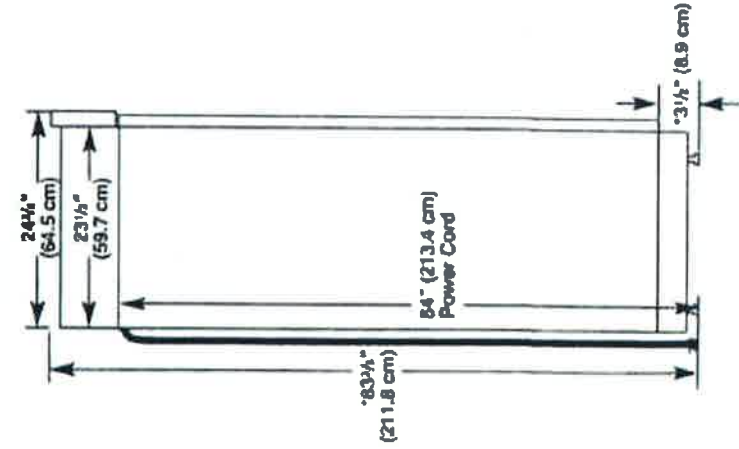


*When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers, add 1 1/4" (3.2 cm) to the height dimensions.

Because KitchenAid Corporation policy includes a commitment to improve our products, we reserve the right to change materials and specifications without notice.

OPENING DIMENSIONS

To avoid tipping during use, the solid soffit must be within 1" (2.5 cm) maximum above the refrigerator. If the solid soffit is higher than 1" (2.5 cm) or one is not available, then the refrigerator must be braced. If the anti-tip boards are needed, they must be attached to the rear wall studs 80" to 90" (203 cm to 229 cm) above the floor. See "Install Anti-Tip Boards" for more information.

NOTE: A clearance of 1/2" (1.3 cm) above the top grille must be maintained in order for the top grille to be removed.

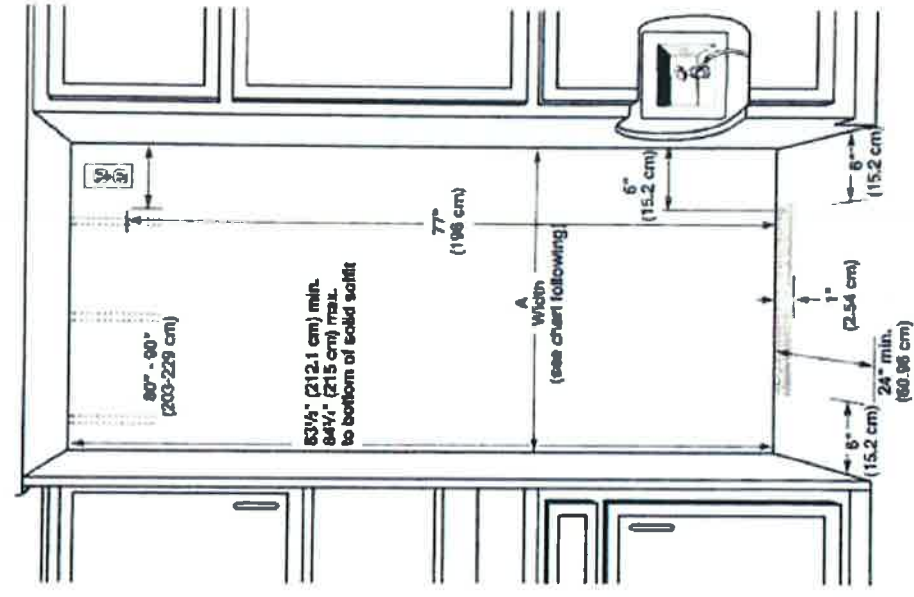


Model	Width A (as shown above)	Dimension B (as shown above)
46	36 1/2" (92.7 cm) to 38 1/2" (97.8 cm)	4" (10.2 cm)
42	41 1/2" (105.4 cm) to 43 1/2" (110.5 cm)	7 1/2" (19.1 cm)
48	47 1/2" (120.7 cm) to 49 1/2" (124.1 cm)	13 1/2" (34.3 cm)


NOTE: Recessing under refrigerator must be at same level as the room. Face of cabinet must be flush.

RECEIVED

JAN 02 2021




TOP VIEW

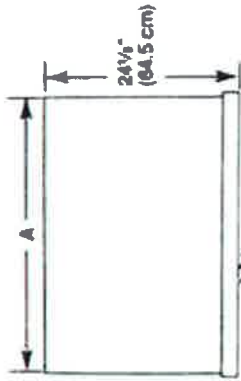

Model	Width A
36	35 1/2" (90.5 cm)
42	41" (104.1 cm)
48	47" (119.4 cm)

FRONT VIEW

- Width dimensions were measured from trim edge to trim edge
- Height dimensions are shown with leveling legs extended 1/4" (3 mm) below the rollers.

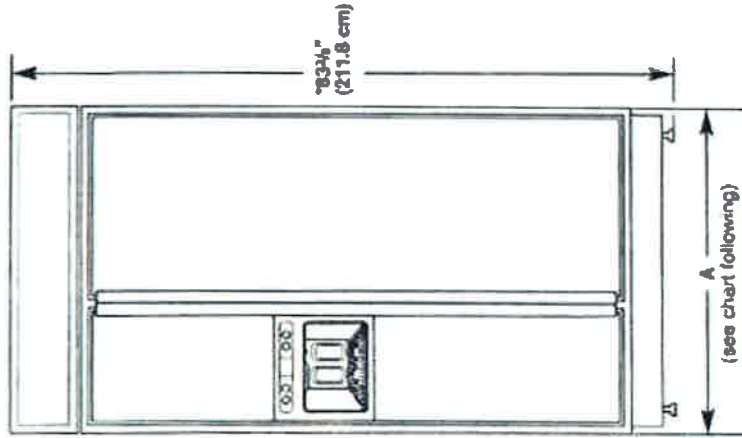

Model	Width A (Trim edge to trim edge)
36	36 1/2" (92.3 cm)
42	42 1/2" (107.5 cm)
48	48 1/2" (122.8 cm)

*When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers add 1 1/4" (2.9 cm) to the height dimensions.


DOOR SWING DIMENSIONS

The location must permit both doors to open to a minimum of 90°. Allow 5" (12.7 cm) minimum space between the side of the refrigerator and a corner wall.


NOTE: More clearance may be required if you are using overlay panels, custom handles, or extended handles on a Classic model.

To adjust the door swings, see 'Adjust Doors'.


36" (91.4 cm) Models

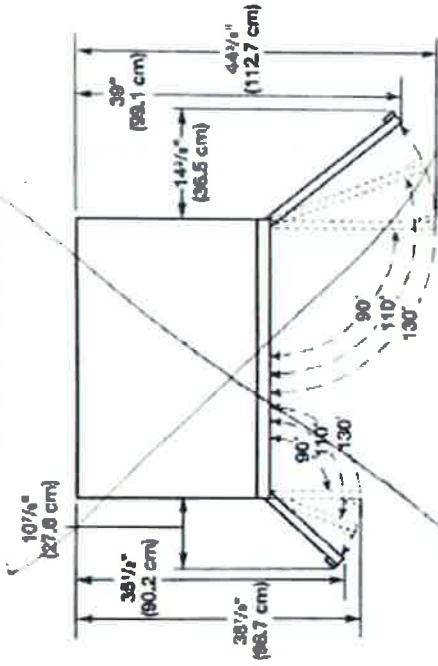

42" (106.7 cm) Models

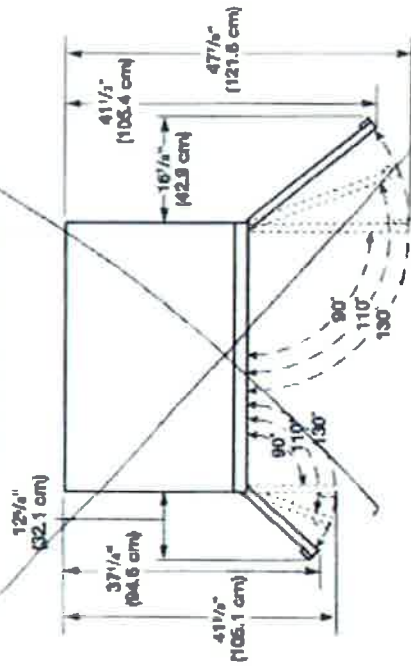


48" (121.9 cm) Models

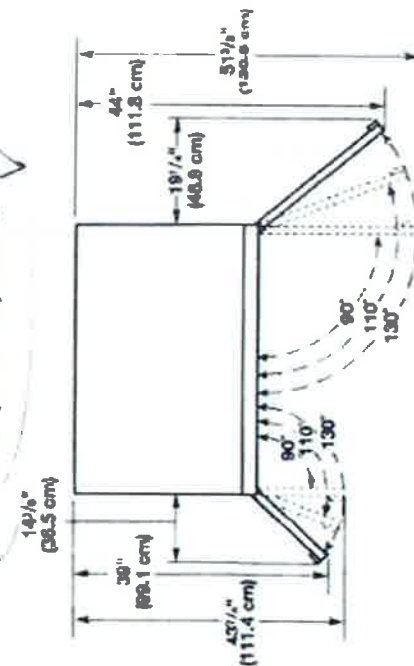

RECEIVED
JAN 02 2021

Lot 128



11/29/2020

Frigidaire Gallery 5.3 Cu. Ft. Built-In Beverage Center



FGBC5334VS

Frigidaire Gallery 5.3 Cu.
Ft. Built-In Beverage
Center

SIGNATURE FEATURES



165 Twelve-Ounce Can Storage Capacity
Keep your favorite refreshments at just the right temperature without sacrificing refrigerator space with this 5.3 cubic foot built-in beverage center that has an easy fill capacity of 165 twelve-ounce cans and a maximum fit capacity of up to 185 twelve-ounce cans.



Precision Temperature Controls with LED Display Can Chill Beverages Down to 34°F
Keep your drinks at the perfect temperature with LED temperature controls and display which can be easily adjusted from 34°F to 50°F with the touch of a button.



Sleekly Designed Stainless Steel Door with Tinted Glass Window and Adjustable Glass Shelving
Enjoy the sleek look of a contemporary Frigidaire stainless steel door with tinted glass window and adjustable end-to-end glass shelving with stainless steel trim on this elegant beverage center.



Built-In or Freestanding Installation
Conveniently place this beverage center in the optimal location for your home with our front venting cooling system that enables built-in or freestanding installation and leg levelers for customizing to your height needs.

AVAILABLE COLORS

MORE EASY-TO-USE FEATURES

- Door Alarm**
Monitor the door's position with respect to your drinks and avoid lukewarm beverages with our audible door alarm that alerts you if the door is inappropriately left open.
- LED Interior Lighting**
Showcase your beverages with bright or keep it discreet with bright LED interior lighting which can be turned on or off according to your preference.
- Reversible Door Swing**
Door can be installed to open left or right based on your needs.

CERTIFICATIONS

CSA Certified

RECEIVED
JAN 02 2021

11/29/2020

Frigidaire Gallery 5.3 Cu. Ft. Built-In Beverage Center

FGBC5334VS
Frigidaire Gallery 5.3 Cu. Ft.
Built-In Beverage Center

FRIGIDAIRE
GALLERY

General Product Features

Construction Type	Dynamic
Leveling Legs	Yes
Product Weight	110.2 lbs
Shut-Off Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year
Power Type	Electric
S.E.F.	5
Installation Type	Built-In or Freestanding
Collection	Frigidaire Gallery
Refrigerator	
Interior Lighting	LED
Number of Adjustable Shelves	3
Dimensions and Volume	
Height Without Hinge	85
Width	23 1/8"
Depth of Cabinet	23 1/4"
Depth With Door 90° Open	45 1/4"
Total Capacity	5.3 Cu. Ft.

Details

Digital Display	Yes
Door Ajar Alarm	Yes
External Control Lock	No
Power Failure Alarm	Yes
Door On/Off Indication	Yes
Power Cord Length	63"
Number of Specifications	
Minimum Cutout Required	15 Amps
Exterior	
Exterior Finish	Smudge-Proof Stainless Steel
Cabinet Finish	Smooth
Lock	No
Safety Certification & Approvals	
CSA Listed	Yes
ENERGY STAR Certified	No

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com / frigidaire.ca](http://frigidaire.com/frigidaire.ca). Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca.

FRIGIDAIRE

USA • 10700 Davis Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5433 Terry Fox Way • Mississauga, ON L5V 3P4 • 1-800-765-8357 • frigidaire.ca

© 2017 Everenham Home Products, Inc. FGBC5334VS

RECEIVED

JAN 02 2021

<https://www.frigidaire.ca/en-CA/models/product/printview/FGBC5334VS>