

CLIENT: VALECRAFT (DEERFIELD VILLAGE)

ADDR.: UNIT 5311, ,

SL #: 1075539

Phone: Mobile:

Email :

LOT:DEER-T33

OUT BY: ABBY LOOV

DATE: 09/05/22

DEER-T33



* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes.
* Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions.
* Appliances in elevations and plans are generic templates and may not reflect actual selections.

PG#
1 of 3

Sheet 1



potvin
KITCHENS & CABINETRY

PA, Builder's Valecraft, Production/DEERFIELD VILLAGE/DEER-T33, 5311/DEER-T33, UNIT 5311, Pot

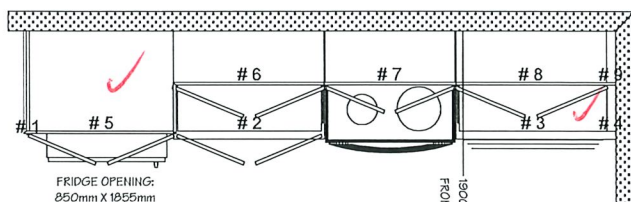

FRIDGE OPENING:
850mm X 1855mm

KITCHEN
1067mm UPPERS

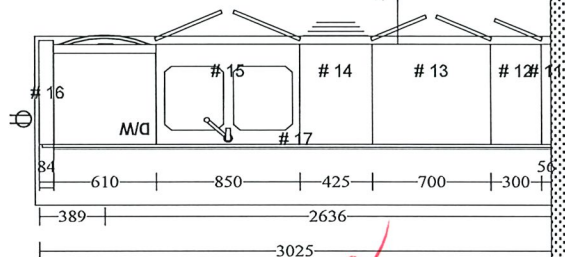


Room Name	
KITCHEN	
COUNTERTOPS	
QUARTZ BY OTHERS	
FINISH	
B10R ✓ 2109	
HANDLES	
B1091-142 ✓	
DOOR STYLE	
basedoor:PM-164Y	B10R ✓
UpperDoor:PM-164Y	B10R ✓
Drawer:PM-164Y DRAWER Slab	B10R ✓
DRAWER GUIDE	
AXIAL Richelieu	
DOOR HINGE STYLE	
SOFTCLOSE HINGES ✓	
Construction	
(A)Potvin 32mm	
CROWN MLDG	
Finished BulkHead 152	B10R
LIGHT VALANCE	
NO VALANCE B10R	

All Cabinets				
No	Name	Width	Height	Depth
0	Refrigerator LH	711	1695.5	800
0	Electric range	762	1118	716
0	DISHWASHER	610	883	587
0	Double W/Faucet/gray	762	101.5	457
1	FGABLE	16.5	2445	609
2	LC 850	850	883	587
3	LC 875 PP 6-12-12	875	883	587
4	Lc Filler	52	883	587
5	UC850/590/587 Fridge	850	590	587
6	UC900/1067	900	1067	302
7	UC762/648 Stove w/Duct Box	762	648	302
8	UC900/1067	900	1067	302
9	UC Filler	52	1067	302
10	DW FILLER T1S	711	102	19
11	Lc Filler	56	883	587
12	LC 300	300	883	587
13	LC 700	700	883	587
14	LC425D	425	883	587
15	LC 850 SK USB	850	883	587
16	DW PLUG Right Std	84	883	864
17	ISLPANEL Horizontal	3008.5	883	16.5

AS PER PLAN Cabinet Production

Valecraft approves this plan for production.
Valecraft guarantees site dimensions (walls/ windows / height / Clearances) and all plumbing, mechanical and electrical placements will suit this cabinet plan. Any cost associated with cabinet rework due to fitment issues will be Valecraft's responsibility.

AB- 08/26/22
Valecraft's approval date

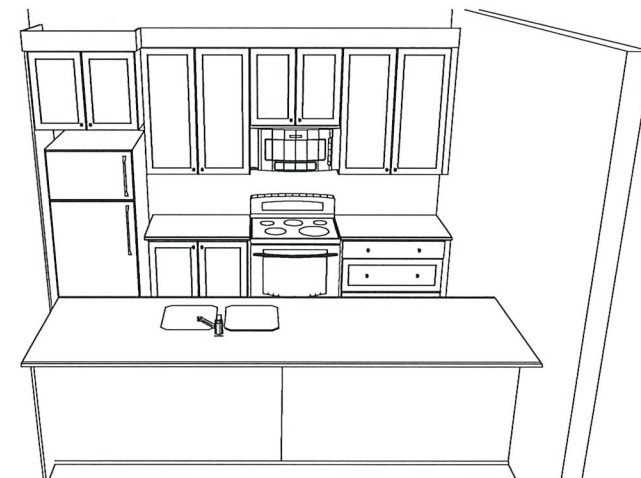

CLIENT: VALECRAFT (DEERFIELD VILLAGE)

ADDR.: UNIT 5311, ,

SL #: 1075539

Phone:Mobile:

Email :

LOT:DEER-T33

OUT BY: ABBY LOOVDATE: 09/05/22

DEER-T33

* These plans are intended for production of cabinets ONLY. Potvin is not liable if they are used for other purposes.

* Construction lines on plans are subjective and are drawn for representation only. Their dimensions are approximate and may vary due to site conditions.

* Appliances in elevations and plans are generic templates and may not reflect actual selections.

PG#

2 of 3

Sheet 2

potvin

KITCHENS & CABINETS

PSA Builder: VALECRAFT Production: DEERFIELD VILLAGE: DEER-BLOCK 1 (RENTALS) DEER-T33, 5311DEER-T33, UNIT 5311, P-04

900

2582550

VAN 01

#18#19

Room Name

MAIN BATH

COUNTERTOPS

(A)P394-VL

FINISH

B10R

HANDLES

81091-142

DOOR STYLE

basedoor:PM-164YB10R

UpperDoor:PM-164YB10R

Drawer:PM-164Y DRAWER SlabB10R

DRAWER GUIDE

AXIAL Richelieu

DOOR HINGE STYLE

SOFTCLOSE HINGES

Construction

(A)Potvin 32mm

All Cabinets

No	Name	Width	Height	Depth
0	Single W/Faucet	508	51	432
18	V 825 SK	825	819	524
19	V Filler	50	819	524



900

2582550

VAN 02

#20#21

Room Name

ENSUITE

COUNTERTOPS

(A)P394-VL

FINISH

B10R

HANDLES

81091-142

DOOR STYLE

basedoor:PM-164YB10R

UpperDoor:PM-164YB10R

Drawer:PM-164Y DRAWER SlabB10R

DRAWER GUIDE

AXIAL Richelieu

DOOR HINGE STYLE

SOFTCLOSE HINGES

Construction

(A)Potvin 32mm

All Cabinets

No	Name	Width	Height	Depth
0	Single W/Faucet	508	51	432
20	V 825 SK	825	819	524
21	V Filler	50	819	524

