

Customer Service

From: Terri (Decor Centre)
Sent: Wednesday, February 24, 2021 11:19 AM
To: Nicole Grant; Customer Service
Subject: FW: LOT 72 - Eagle - Fahd Agha - Appliance Specifications
Attachments: Wolf 48 Inch Rangetop srt484cg-quick-reference-guide.pdf; Wolf M Series Speed Oven spo30tm-fi.pdf; Wolf M Series Oven so30tm-quick-reference-guide-fi.pdf; Wolf Configuration For Speed Oven & Oven.pdf; Fahd Agha - FULL SPECS.pdf

Importance: High

Hi,

Please find attached the appliance specs for Lot 72. Thank you.

Terri Parisani
Décor Centre Manager
680 Tradewind Drive, Ancaster, ON
   VALERYHOMES.COM

Showroom hours, by appointment only



We build homes, you furnish them with love.

CONFIDENTIALITY: This e-mail message (including attachments, if any) is confidential and is intended only for the addressee. Any unauthorized use or disclosure is strictly prohibited. Disclosure of this e-mail to anyone other than the intended addressee does not constitute waiver of privilege. If you have received this communication in error, please notify us immediately and delete this. Thank you for your cooperation.

CONFIDENTIALITE: Ce message courriel (y compris les pièces jointes, le cas échéant) est confidentiel et destine uniquement à la personne ou à l'entité à qui il est adressé. Toute utilisation ou divulgation non permise est strictement interdite. L'obligation de confidentialité et de secret professionnel demeure malgré toute divulgation. Si vous avez reçu le présent courriel et ses annexes par erreur, veuillez nous en informer immédiatement et le détruire. Nous vous remercions de votre collaboration.

48" SEALED BURNER RANGETOP - 4 BURNERS, INFRARED CHARBROILER AND INFRARED GRIDDLE



SRT484CG

FEATURES

Maintain control with four dual-stacked burners that go from 20,000 Btu down to a mere breath of flame

Simmer and melt sauces, soups, and marinades easily with the lower tier of the dual-stacked burner

Match other Sub-Zero, Wolf, and Cove products with heavy-gauge stainless steel and signature red infinite control knobs

Sear with a 16,000 Btu infrared charbroiler

Sear in seconds with the additional 15,000 Btu infrared griddle

Cleanup is a snap as sealed, seamless burner pans contain sloshes and spills

Move pots and pans effortlessly across the continuous cast-iron grates

Reignites flame automatically with spark ignition system

ACCESSORIES

11" Cutting Board

2-Burner Wok Grate

Filler Trim

Griddle Cleaning Kit

Griddle Cleaning Pads

Griddle Cleaning Solution

S-Grates

Stainless steel, brass or chrome bezels

High altitude conversion kits available

5" and 10" stainless steel risers, and 20" riser with shelf

Signature red, black or stainless steel control knobs


Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

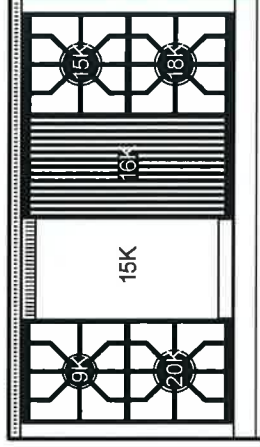

RANGETOP SPECIFICATIONS

- Stainless-steel island trim (included)
- Stainless-steel bezels
 - 1 - 9,200 Btu burner
 - 1 - 15,000 Btu burner
 - 1 - 18,000 Btu burner
 - 1 - 20,000 Btu burner
- 1-Infrared 16,000 Btu charcoal
- 1-Infrared 15,000 Btu (13,000 Btu LP) grill

RECEIVED
FEB 24 2021


48" SEALED BURNER RANGETOP - 4 BURNERS, INFRARED CHARBROILER AND INFRARED GRIDDLE




PRODUCT SPECIFICATIONS

Model	SRT484CG	
Dimensions	47 7/8"W x 8 1/2"H x 28 1/2"D	
Electrical Supply	120 VAC, 60 Hz	
Electrical Service	15 amp dedicated circuit	
Gas Supply	3/4" ID line	
Gas Inlet	1/2" NPT female	
Receptacle	3-prong grounding-type	

ELECTRICAL




GAS




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

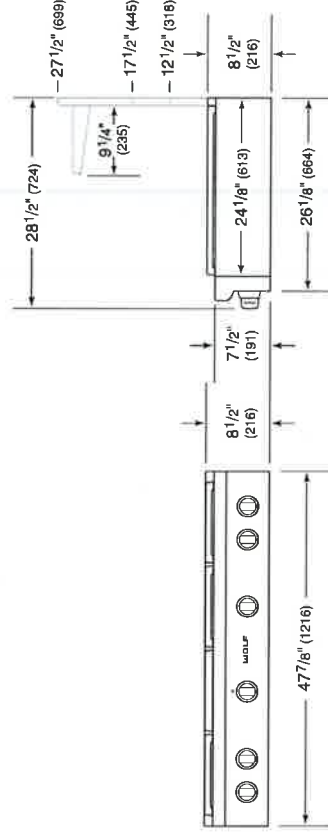

STANDARD INSTALLATION

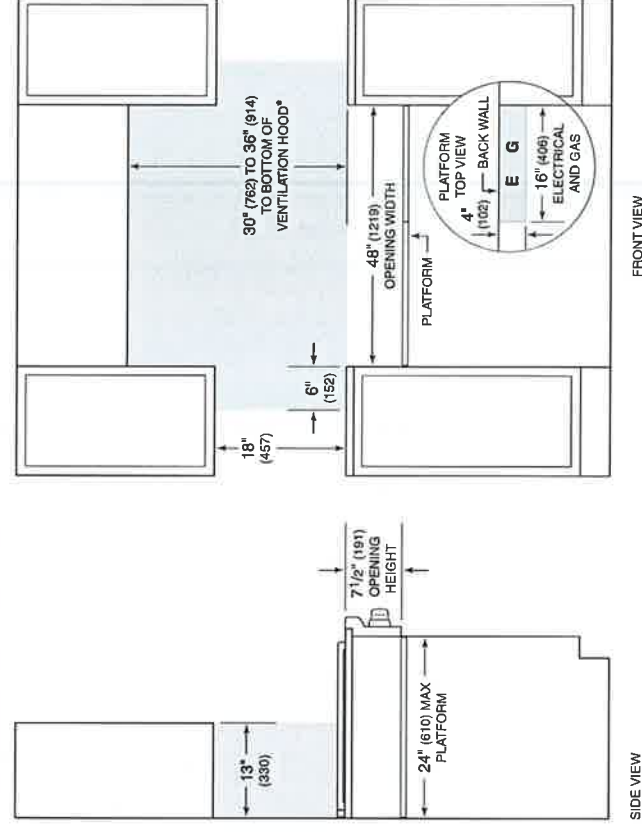

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charcoal.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Combustible materials cannot be located within this area.
Electrical and gas supply located through bottom of platform.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

Specifications are subject to change without notice. This information was generated on October 14, 2020. Verify specifications prior to finalizing your cabinetry/enclosures.

RECEIVED

FEB 24 2021

30" M SERIES TRANSITIONAL SPEED OVEN



SPO30TM/STH

FEATURES

- Combines microwave, convection, and broil technologies to provide all-in-one oven versatility
- Provides more cooking power than a traditional microwave with the help of convection and broil
- Assures predictably delicious results with 10 microwave power levels, convenient quick-start modes, and an intuitive Gourmet mode
- Fits a 9-by-13 pan in the 1.6 cubic feet, stainless-steel interior
- Micro Bake and Micro Roast modes reduce or completely eliminate preheat times
- Frees up counter space with efficient drop-down door design
- Coordinates with other Wolf built-in ovens and appliances with various handle and trim options
- Master your technique with tips and recipes from the Mastering the Speed Oven guide

Specifications are subject to change without notice. This information was generated on October 14, 2020. Verify specifications prior to finalizing your cabinetry/enclosures.

RECEIVED
FEB 24 2021


30" M SERIES TRANSITIONAL SPEED OVEN

WOLF

PRODUCT SPECIFICATIONS


Model	SPO30TMS/TH		
Dimensions	29 7/8"W x 17 7/8"H x 21 1/2"D		
Capacity	1.6 cu. ft.		
Door Clearance	14 3/16"		
Weight	82 lbs		
Electrical Supply	grounded, 240/208 VAC, 60 Hz		
Electrical Service	15 amp dedicated circuit		
Power Cord Length	6 Feet		
Receptacle	NEMA 6-20R grounding type		

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

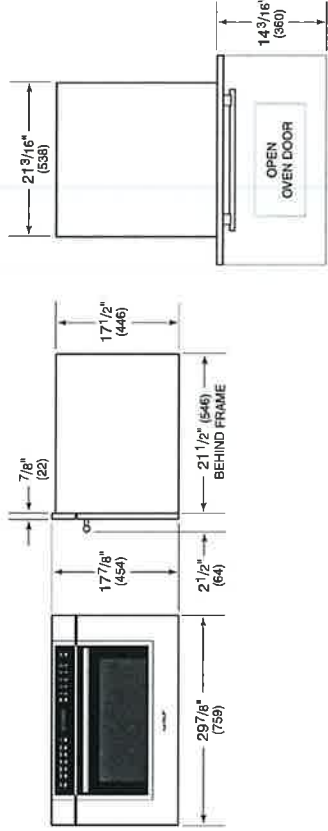

FLUSH INSTALLATION

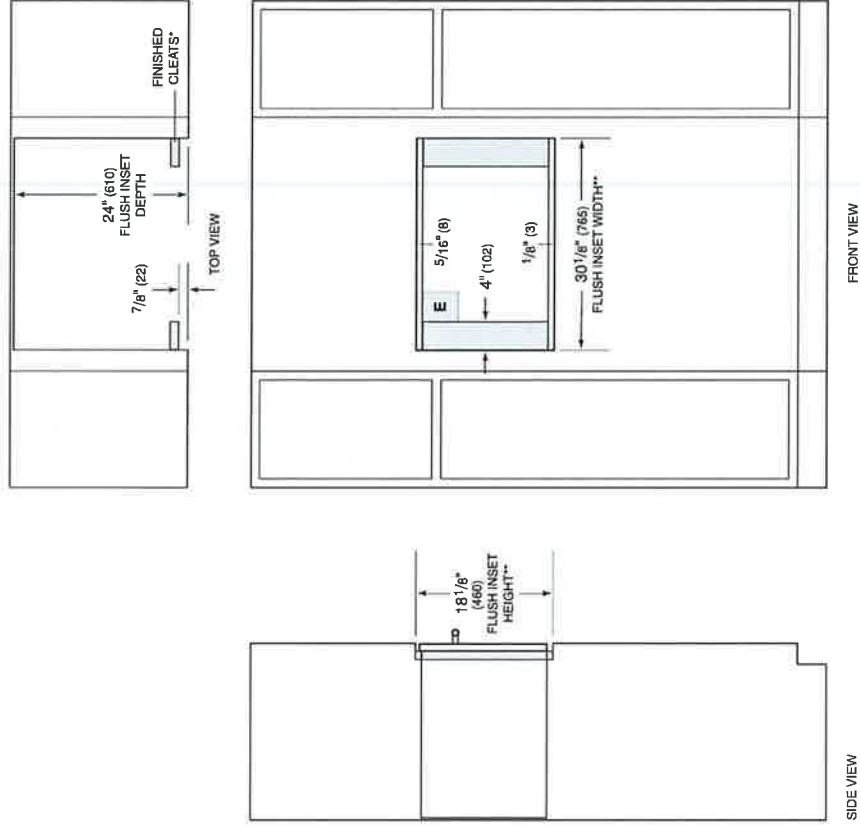

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.

30" M SERIES TRANSITIONAL BUILT-IN SINGLE OVEN



SO30TM/S/TH

FEATURES

- Preheats faster and cooks more consistently across all racks due to its advanced Dual VertiCross™ convection system
- Assures predictably delicious results with a variety of modes, including Convection Roast, Proof, and Dehydrate
- Prepares 50 popular dishes with the Gourmet feature that automatically adjusts cook times and temperatures
- Handles multiple dishes simultaneously with our largest capacity oven (13 percent larger)
- Insert a temperature probe to tell you exactly when it is done—and in gourmet mode, it will alert you the moment the dish is ready
- Uncomplicate cooking with innovative, interactive color touchscreen controls
- Complements any kitchen with its design versatility
- Integrates beautifully into surrounding cabinetry with flush installation
- Ensures excellent visibility via three bright halogen lights and large, triple-panel-glass door windows
- Master your technique with tips and recipes from the Mastering the M series oven guide

ACCESSORIES

- 30" Broiler Pan
- 30" Premier Baking Sheet
- 30" Standard Oven Rack
- Bake Stone Kit
- Dehydration Kit
- Dual Installation Kit
- Full-Extension Ball Bearing Rack
- Multi-Function Pan
- Oven Rack
- Oven Rack Set (3)
- Temperature Probe

Accessories available through an authorized dealer. For local dealer information, visit subzero-wolf.com/localor.



Specifications are subject to change without notice. This information was generated on October 14, 2020. Verify specifications prior to finalizing your cabinetry/enclosures.

RECEIVED
FEB 24 2021


30" M SERIES TRANSITIONAL BUILT-IN SINGLE OVEN



PRODUCT SPECIFICATIONS


Model	SO30TMI/S/TH		
Dimensions	29 7/8"W x 28 1/2"H x 23"D		
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 19 7/8"D		
Overall Capacity	5.1 cu. ft.		
Usable Capacity	3.3 cu. ft.		
Door Clearance	21 3/8"		
Electrical Supply	240/208 VAC, 60 Hz		
Electrical Service	30 amp dedicated circuit		
Conduit Length	4 Feet		

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

FLUSH INSTALLATION

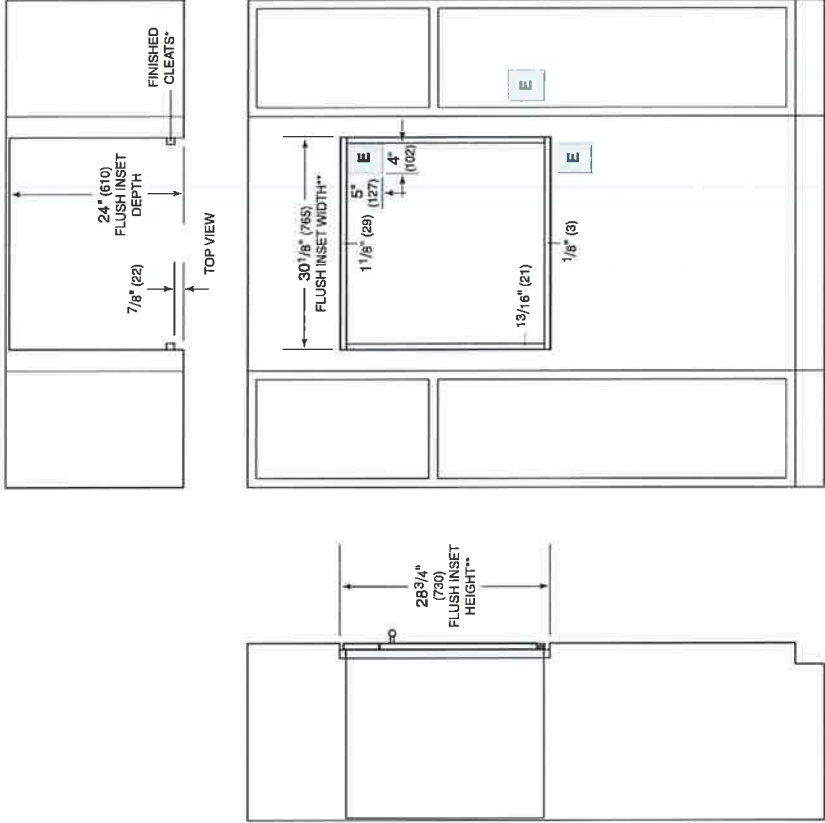

*1" (25) minimum depth. Shaded areas will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
NOTE: Location of electrical supply within opening may require additional cabinet depth.

RECEIVED
FEB 24 2021



My Reveal Project

For help with questions about the specifications provided for your configuration, call us toll-free between 8am-5pm CST at [866-689-9653](tel:866-689-9653).

Disclaimer: We strongly recommend saving all Reveal configurations to "My Sub-Zero Account" to ensure the most up-to-date specification information is reflected on your shared documents as product specifications are subject to change without notice. Otherwise, we suggest that this configuration be recreated prior to finalizing your cabinetry enclosures. The reveal listed in this configuration is the minimum reveal suggested by the manufacturer. After extensive research, Sub-Zero simplified the naming of our refrigeration product lines to be more descriptive and distinct for our consumers. Built-In is now referred to as Classic, and Integrated is now referred to as Designer. Model numbers currently remain unchanged.

RECEIVED
FEB 24 2021

Group 1: Flush Inset Installation

Specifications:

- Specifications Summary
- Planning Notes
- Front View
- Side View
- Top View
- SO30TM/S/TH Additional Requirements
- SPO30TM/S/TH Additional Requirements



SPO30TM/S/TH
30" M Series Transitional Speed Oven



SO30TM/S/TH
30" M Series Transitional Built-In Single Oven

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

RECEIVED
FEB 24 2021

Specifications Summary

Group 1

SECTION A

MODEL	OVERALL DIMENSIONS	OPENING DIMENSIONS	CLEAT DEPTH	TRIM OVERLAP	BASE SUPPORT
SPO30TM/S/TH	29 7/8" W	30 1/8" W	7/8"	3/16" Top	125 lbs
3D Studio Max (3DS)	17 7/8" H	18 1/8" H		0" Bottom	
2D AutoCad (DWG)	21 1/2" D	24" D		3 7/8" Sides	
3D AutoCad (DWG)					
AutoCad (DXF)					
ArchiCad (GSM)					
3D Studio Max (MAX)					
Wavefront 3D (OBJ)					
Revit Files (RFA)					
SketchUp (SKP)					
QR SHEET					
Wolf Design Guide					
Model Detail					
SO30TM/S/TH	29 7/8" W	30 1/8" W	7/8"	1" Top	250 lbs
3D Studio Max (3DS)	28 1/2" H	28 3/4" H		0" Bottom	
3D AutoCad (DWG)	23" D	24" D		11/16" Sides	
2D AutoCad (DWG)					
AutoCad (DXF)					
ArchiCad (GSM)					
3D Studio Max (MAX)					
Wavefront 3D (OBJ)					
Revit Files (RFA)					
SketchUp (SKP)					
QR SHEET					
Wolf Design Guide					
Model Detail					

Planning Notes

Group 1

Cleats will be visible and should be finished to match the cabinetry.

If two products with different reveals are specified, the larger reveal must be used.

Dimensions provided assume minimum allowable reveals.

Speed Ovens

A minimum 1/8" (3) reveal is required on all sides.

RECEIVED
FEB 24 2021

M Series Built-In Ovens


If a cooktop is being installed above an oven, a minimum of 1/4" (6) is required between units.

A minimum 1/8" (3) reveal is required on all sides.

Front View

Group 1


SECTION A

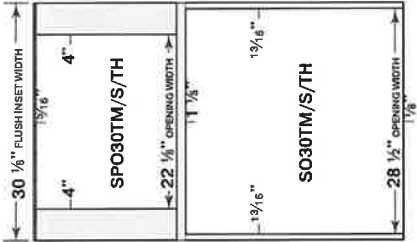

Top View

Group 1

SECTION A



RECEIVED
FEB 24 2021


REVEAL

WOLF SUB ZERO COVE

Side View

Group 1


SECTION A

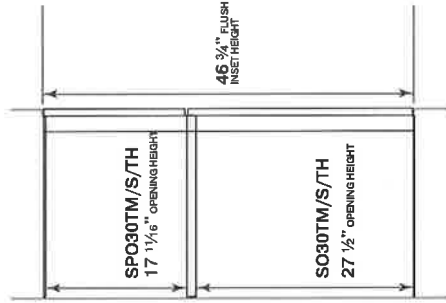

RECEIVED
FEB 24 2021

SO30TM/S/TH Overall Dimensions

Group 1

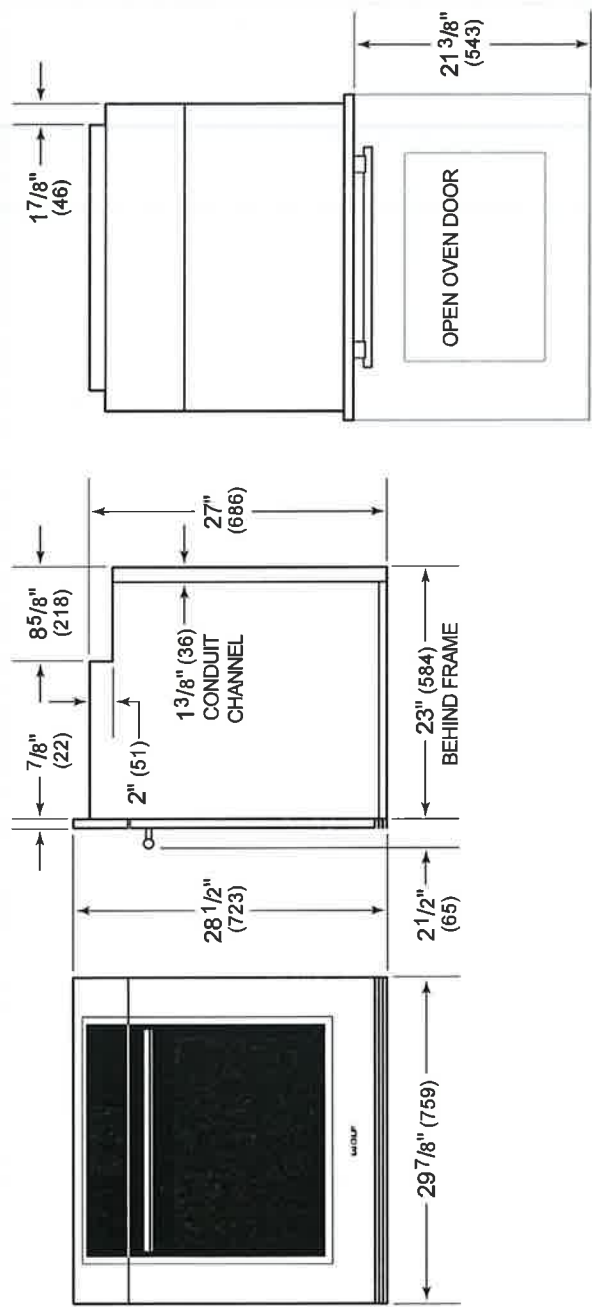

SO30TM/S/TH Electrical

Group 1

5" (127)

E

4" (102)

E

ELECTRICAL SUPPLY MAY BE LOCATED IN ADJACENT CABINET — PLACEMENT WITHIN OPENING MAY REQUIRE ADDITIONAL CABINET DEPTH

>

Electrical Supply	grounded, 240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Conduit Length	4 Feet

⚠

WARNING

Installation must comply with all applicable electrical codes.


Performance may be compromised if the electrical supply is less than 240 volts.

The oven is supplied with a conduit consisting of two insulated hot lead conductors and a bare ground conductor. The wiring diagram covering the control circuit is provided with the oven.

RECEIVED
FEB 24 2021


SPO30TM/S/TH Overall Dimensions

Group 1

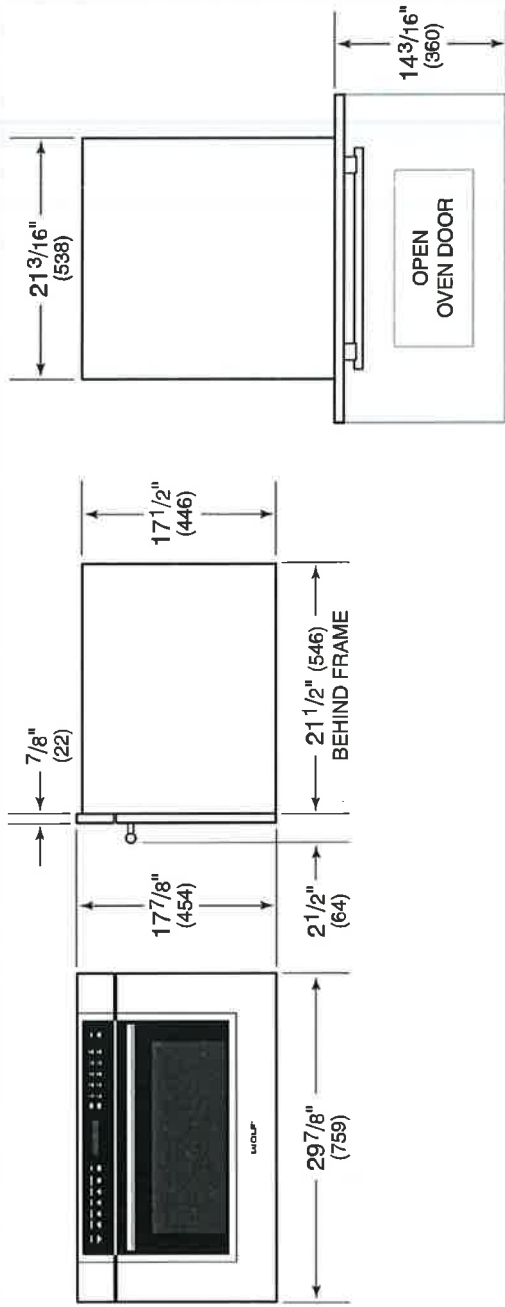

SPO30TM/S/TH Electrical

Group 1

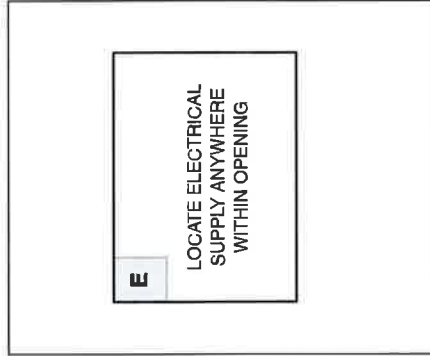

>

Electrical Supply	grounded, grounded, 240/208 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	6 Feet
Receptacle	NEMA 6-20R grounding type



WARNING

Installation must comply with all applicable electrical codes.

RECEIVED
FEB 24 2021



PROJECT PARTNER:	SHIP TO: AHMAD, RAZI 1069 FARMSTEAD DRIVE MILTON, ON XX
------------------	--

REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances to share all the attached specifications with their cabinet provider, contractor, or any other tradesperson so they have the information required to complete their work accurately. Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.

Tasco Appliances assumes no liability for product specifications.

RECEIVED
FEB 24 2021

Full Spec Package

AHMAD, RAZI

1069 FARMSTEAD DRIVE
MILTON, ON XX

<i>Models</i>	<i>Pages</i>
JS48NXFXDE Jenn-Air Refrigeration	3-13
SHV89PW73N Bosch Dishwasher	14-16
WV60M9900AV/A5 Samsung Washer	17-18
DVE60M9900V/AC Samsung Dryer	19-22
SU90946X Sirius Ventilation	23-24
SHE3AR75UC Bosch Dishwasher	25-27



Tasco Appliances
tascoappliance.ca

BOBBY NANDWANI
4163009545

Quote **QT00206444**
Version 1.1

Wed, Oct 14, 2020
4:50 PM EDT



steelcod.com/sp/tascv345lGWU

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

RECEIVED

FEB 24 2021



48" FULLY INTEGRATED BUILT-IN SIDE-BY-SIDE REFRIGERATOR

Signature Features

OBSIDIAN INTERIOR	FULLY INTEGRATED AND FLUSH DESIGN WITH ARTICULATING HINGE	PRECISION TEMPERATURE MANAGEMENT™ SYSTEM
Showcases food items throughout the refrigerator, and provides a sharper contrast than white interiors. Includes coordinating crisper drawers and freezer.	Blends into custom cabinetry with a truly seamless appearance that ensures the opened door remains within the plane of surrounding cabinetry.	A sensor-controlled system that uses a variable-speed compressor with an independent sensor in each compartment to monitor and adjust temperatures.

Feature Listing

PERFORMANCE FEATURES	Four-Point Front Leveling
Precision Temperature Management™ System	OPTIONAL ACCESSORIES
Capacitive Touch Controls with LED Display	48" Built-In Side By Side Panel RISE - JS48NXFXDE – JBSFS48NHL
Pulsed Defrost	Full Height Panel Kit (Euro-Style Stainless) – JBSFS48NHS
Quiet Operation	Full Height Panel Kit (Pro-Style® Stainless) – JBSFS48NHHP
Sabbath Mode	Pro-Style® Stainless Handle Kit – W10250643
Star-K Certified	Euro-Style Stainless Steel Handle Kit – W10250640

CONTROL FEATURES	48" Armoire-Style Door Panel Kit – W10663565
Max Cold Option	Handle Kit-JA,RISE,BIR,SxS (Qty=2 handles) – W11231243
Over Temp Alarm	Handle Kit-JA,NOIR,BIR,SxS (Qty=2 handles) – W11194770
Door Open Alarm	EveryDrop® Filter by Whirlpool Water (Replacement Filter Cartridge) – EDR3RXD1
Water Filter with Replace Filter Indicator	Produce Preserver Keep Fresh Packet Refill – P1KC6R1
REFRIGERATOR FEATURES	Affresh™ Stainless Steel Cleaner, 16 oz. – W10355016
Produce Preserver	48" Built-In Side By Side Panel NOIR - JS48NXFXDE – JBSFS48NHIM
Advanced Climate Control Drawer	
Soft, Auto-Close Crisper Drawers	
Gallon Door Storage Bin	
Adjustable Elegance Shelving	
Adjustable Door Bins with Metal Accents	

FREEZER FEATURES	
Automatic Ice Maker with Storage Bin	
Adjustable Door Bins with Metal Accents	

DESIGN FEATURES	Shipping Weight (lbs) 649
Obsidian Interior	Volts 115
Fully Integrated and Flush Design with Articulating Hinge	Amps 15-20
Multi-Point LED Theater Lighting	Total Capacity (Cu. Ft. AHAM) 29.2
Removable Base-Grille Water Filter	Refrigerator Capacity (Cu. Ft. AHAM) 18.7
90°/110° Door Stop Position	Freezer Capacity (Cu. Ft. AHAM) 10.5

Dimensions

JS48NXFXDE



Style Options

RISE™	JS48NXFXDE with JBSFS48NHL Kit
EURO-STYLE	JS48NXFXDE with JBSFS48NHS Kit
BASE UNIT	JS48NXFXDE
PRO-STYLE®	JS48NXFXDE with JBSFS48NHHP Kit
NOIR™	JS48NXFXDE with JBSFS48NHIM Kit

Specifications

Shipping Weight (lbs)	649
Volts	115
Amps	15-20
Total Capacity (Cu. Ft. AHAM)	29.2
Refrigerator Capacity (Cu. Ft. AHAM)	18.7
Freezer Capacity (Cu. Ft. AHAM)	10.5

RECEIVED

FEB 24 2021

Overall Dimensions 47(3/4)" x 83(1/8)" x 24"
Opening / Clearance Dimensions (Standard
Flush Installation) 48" x 84" x 25"
Opening / Clearance Dimensions (Retrofit
Installation) 48" x 84" x 24"

Do not make any cutouts based on this information



Bold = Top Features

JENNAIR®

RECEIVED
FEB 24 2021

48" FULLY INTEGRATED
SIDE-BY-SIDE REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE
(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM
PANELS AND HANDLES)
J548NXFXDE – 47 3/4" (W) x 83 1/8" (H) x 24" (depth without door panels/handles)

BASE UNIT + FULL HEIGHT PANEL KIT = FINISHED REFRIGERATOR

Easily transform these overlay refrigerators into one of our signature kitchen suite designs with one of our suite-coordinating stainless steel panel kits. To do so, you must order one of the overlay base units (left column) and one of the suite-coordinating panel kits. The kits include refrigerator and freezer door panels, air grille and pre-installed handles.

Base Unit Model Number	Coordinating Stainless Full Height Panel Kits	
	RISE™ Stainless	NOIR™ Stainless
Side-by-Side J548NXFXDE	JBSFS48NHL 	JBSFS48NHM 

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS



ARMOIRE-STYLE DOOR PANEL KIT

W10663565 – 48" – Obsidian Interior

- For use with fully integrated and flush refrigerators
- Enables installation and proper venting of full height custom door panels (not included) that hide the top panel
- Includes left and right grille brackets and machine compartment cover

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

W11356555C



RISE™ STAINLESS HANDLE KIT

W11231243 – 48" Side-by-Side

- For use with Custom Overlay fully integrated built-in refrigerators



NOIR™ STAINLESS HANDLE KIT

W11194770 – 48" Side-by-Side

- For use with Custom Overlay fully integrated built-in refrigerators

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

48" FULLY INTEGRATED

SIDE-BY-SIDE REFRIGERATOR


JENNAIR®

DETAILED PLANNING DIMENSIONS GUIDE


(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JS48NXFXDE – 47¾" (W) x 83⅞" (H) x 24" (depth without door panels/handles)

PRODUCT DIMENSIONS (INCLUDING STAINLESS STEEL DOOR PANEL KIT DIMENSIONS)

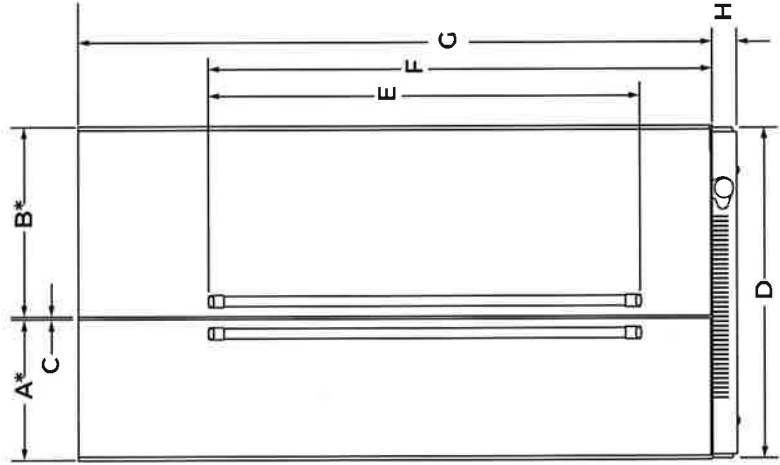

FRONT VIEW

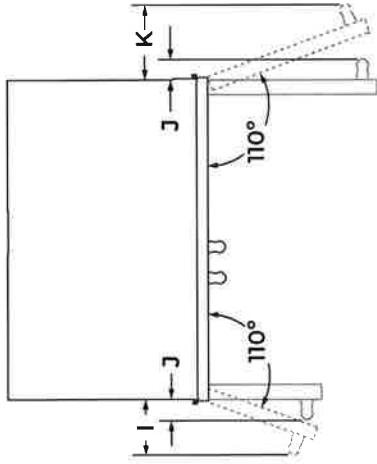

TOP VIEW

DIMENSION	DESCRIPTION	JS48NXFXDE
A*	Width of freezer door	20⅝" (51.6 cm)
B*	Width of refrigerator door	27⅝" (69.4 cm)
C	Space between doors	1/8" (0.3 cm)
D	Overall width (including vinyl side trim)	47¾" (121.3 cm)
E	Height of door handle	
	RISE™ Stainless	58" (147.3 cm)
	NOIR™ Stainless	40⅞" (103.2 cm)
F	Height to top of door handle	
	RISE™ Stainless	71⅜" (182.1 cm)
	NOIR™ Stainless	69⅜" (177.3 cm)
G	Height of door	81" (205.7 cm)
H	Height of bottom grille	3" (7.6 cm)
I	Width from side of refrigerator to freezer door handle – door fully open 110°	
	RISE™ Stainless	8⅜" (20.7 cm)
	NOIR™ Stainless	7⅝" (19.3 cm)
J	Width from side of refrigerator to handle – door open 90°	
	RISE™ Stainless	2⅜" (6.1 cm)
	NOIR™ Stainless	1⅝" (4.1 cm)
K	Width from side of refrigerator to refrigerator door handle – door fully open 110°	
	RISE™ Stainless	10⅞" (26.8 cm)
	NOIR™ Stainless	10⅜" (25.5 cm)

*Door width dimensions are for stainless steel panel kit only.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

RECEIVED
FEB 24 2021




JENNAIR®

48" FULLY INTEGRATED
SIDE-BY-SIDE REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM
PANELS AND HANDLES)

JS48NXFXDE – 47¾" (W) x 83⅞" (H) x 24" (depth without door panels/handles)

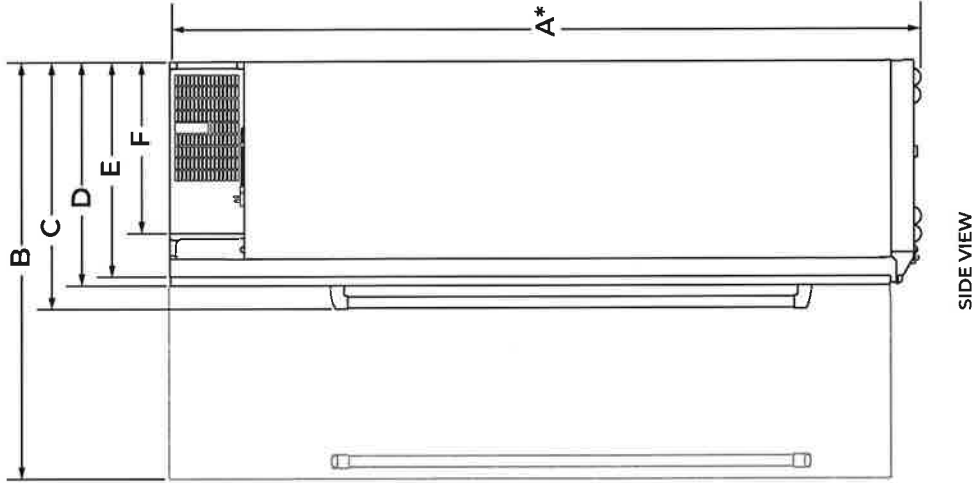

SIDE VIEW

DIMENSION	DESCRIPTION	JS48NXFXDE
A*	Height of recessed refrigerator (min.)	83⅞" (211.1 cm)
B	Depth with refrigerator door open 90° (min.)	50¾" (128.8 cm)
C	Depth with handles (min.)	
		27⅞" (70.2 cm)
D	Depth with doors (min.)	
		26⅞" (68.2 cm)
E	Depth with doors (min.)	
		24¾" (62.8 cm)
F	Depth without door panel kit (min.)	
		24¾" (62.8 cm)
F	Depth of compressor cover (min.)	
		19⅞" (50.5 cm)

*Add 1¼" (3.2 cm) to the height dimension when leveling legs are fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.





JENNAIR® 48" FULLY INTEGRATED SIDE-BY-SIDE REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE (BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)


J548NXXFXDE – 47 3/4" (W) x 83 1/8" (H) x 24" (depth without door panels/handles)

AIRFLOW VENTING RECOMMENDATIONS CLOSED SOFFIT CABINET OPEN TO CEILING OR SOFFIT CABINET

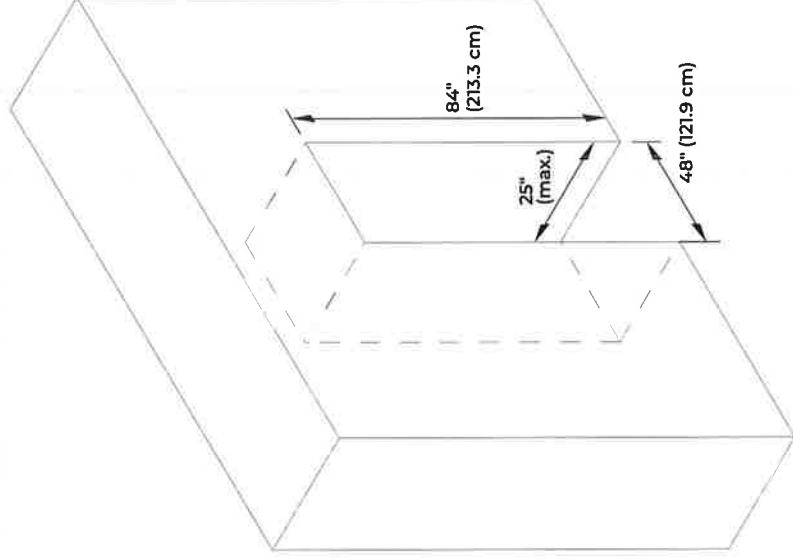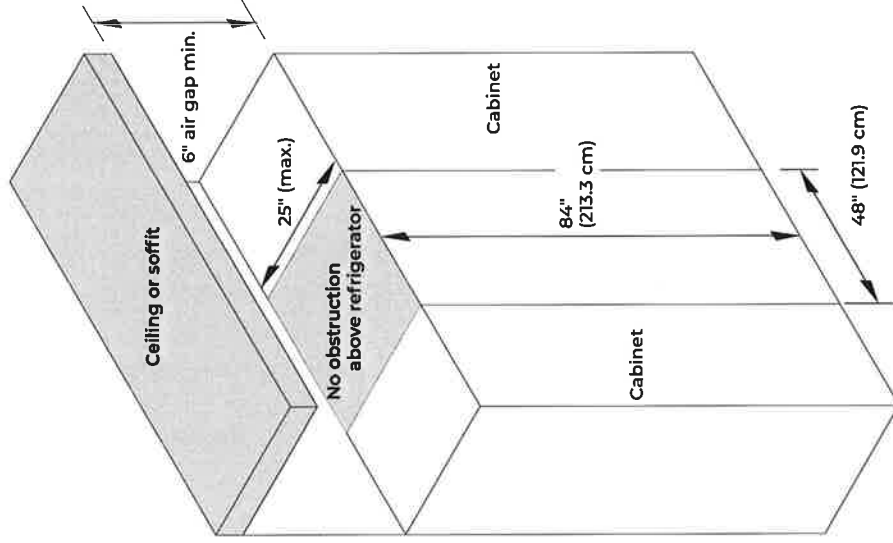

- These type of installations require a minimum of 6" (15.24 cm) of open space above the refrigerator. This space must not be blocked in any way, including soffits.
- Depth of cabinet must be less than 25" (63.5 cm).
- If your opening does not meet these requirements, you will need to make modifications.

- Depth of cabinet must be less than 25" (63.5 cm).
- Height of soffit must not exceed 84" (213.3 cm).
- Following illustrations explain the cabinet construction (soffit and rear wall positions) required for optimum ventilation and airflow.

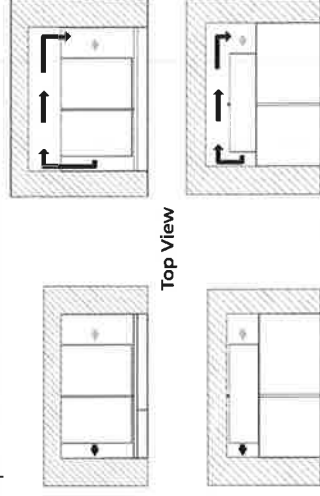

Top View

Front View

Grey arrow = ambient air;

Cabinet depth 25" and soffit located at 84",

provides proper airflow/ventilation to the

refrigerator. Efficient cooling is achieved.

Black arrow = warm air

Cabinet depth more than 25" and/or soffit

located at more than 84", causes air gap at back

and/or top of the refrigerator. Air gap allows

warm air recirculation causing loss in cooling

efficiency.

- If your opening does not meet these requirements, you will need to make modifications.


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

48" FULLY INTEGRATED
SIDE-BY-SIDE REFRIGERATOR


DETAILED PLANNING DIMENSIONS GUIDE
(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM
PANELS AND HANDLES)
JS48NXFXDE – 47 3/4" (W) x 83 1/8" (H) x 24" (depth without door panels/handles)

CLEARANCE DIMENSIONS

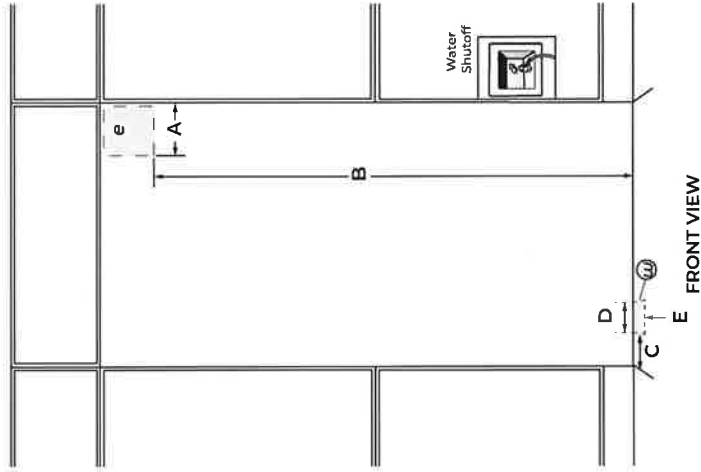

DIMENSION	DESCRIPTION	JS48NXFXDE
A	Width of recommended electrical location	7 1/2" (19.1 cm)
B	Height to recommended electrical location	77" (195.6 cm)
C	Distance from side of cabinet to recommended water connection location	6 1/2" (16.5 cm)
D	Width of recommended water location	1 1/2" (3.81 cm)
E	Depth of recommended water connection location (max.)	2" (5 cm)
e	Recommended electrical connection location	
w	Recommended water connection location	

*A minimum 2" (5.1 cm) furniture return must extend behind the face of the cabinet on all sides.

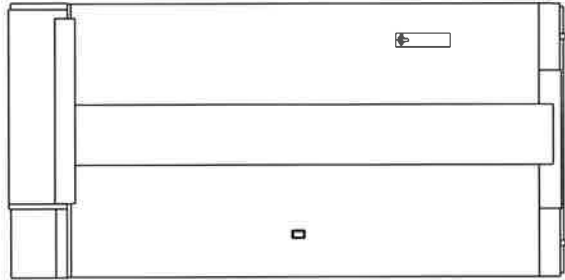

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

115 V, 60 Hz, AC only, 15 A or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 psi and 120 psi (207 kPa and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 psi and 120 psi (207 kPa and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

LOCATION REQUIREMENTS

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

SITE PREPARATION
INSTALLATION REQUIREMENTS

PLAN THE INSTALLATION

IMPORTANT:

- Install the handles on the panels prior to panel installation. Follow the instructions received with handle kit to install the handles.
 - Plan your installation using these instructions in conjunction with the installation instructions provided with the refrigerator. Modifications must be made to the refrigerator to accommodate the Armoire-style door panels.
- Required parts
- One of the following built-in refrigerator models:

- 42" Side-by-Side: JS42NXFXDE
- 48" Side-by-Side: JS48NXFXDE
- 36" Bottom Mount: JB36NXFXLE, JB36NXFXRE
- 36" French Door Bottom Mount: JF36NXFXDE
- 42" French Door Bottom Mount: JF42NXFXDE

- Accessory Armoire-Style Door Panel Kit which includes (Grille Assembly and Grille Bracket Assembly)
- Custom Panels

NOTE: The required thickness for all panels is 3/4" (1.91 cm).

OPENING REQUIREMENTS


IMPORTANT:

- The width of the opening, from side to side, must be as specified for your model, for at least 3" (7.62 cm) back from the face of the cabinet. If your opening does not meet this requirement, you will need to make modifications.
- The depth of the opening from the front of the cabinet to the back wall must be 25" (63.5 cm) minimum to achieve a flush installation.

CABINET AND PANEL INSTALLATION
OPTIONS


Cabinet Depth - 25" (63.5 cm)

Grille Bracket - Top View

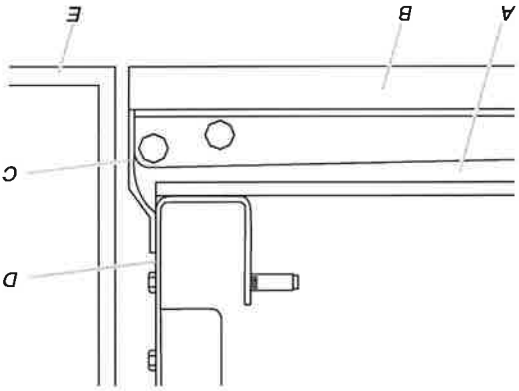

- A. Refrigerator door
- B. Armoire-style door panel
- C. Side trim
- D. Grille bracket
- E. Adjacent cabinet

Grille Bracket - Side View

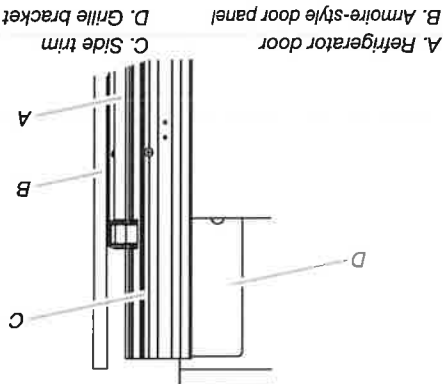

- A. Refrigerator door
- B. Armoire-style door panel
- C. Side trim
- D. Grille bracket


SITE PREPARATION CABINET CUTOUT OPTIONS

AIRFLOW VENTING RECOMMENDATIONS


IMPORTANT:

- Armoire-style installations recommends a minimum of 1/8" (3.2 mm) of open space above the refrigerator. It is recommended that this space not be blocked in any way, including soffits.
- Models may be installed using either Option 1, Option 2 or option 3.


Option 1 - Open to Ceiling

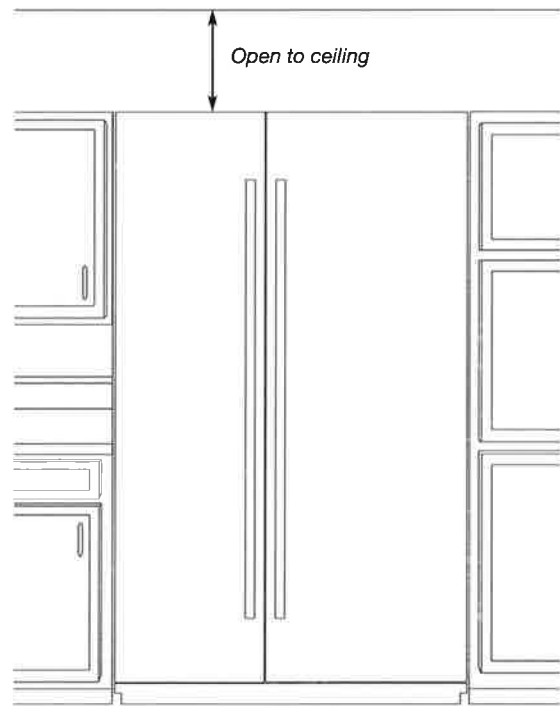

Option 2 - False Front (cabinet face only)

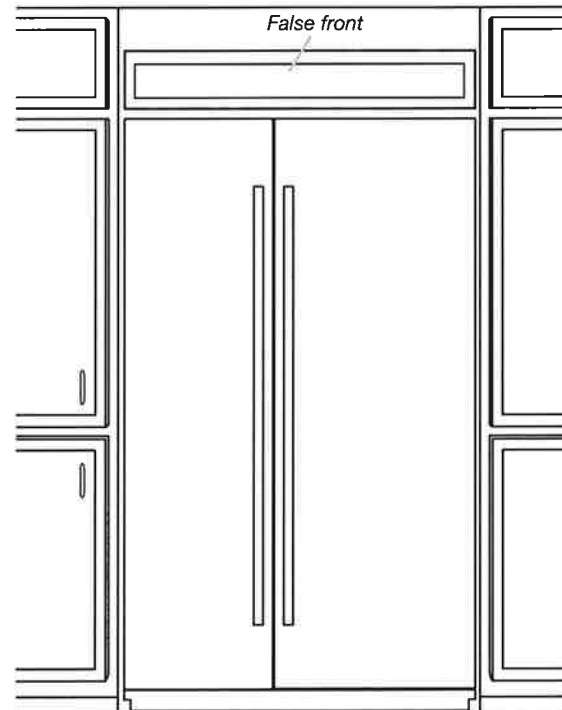

Option 3 - Closed Soffit

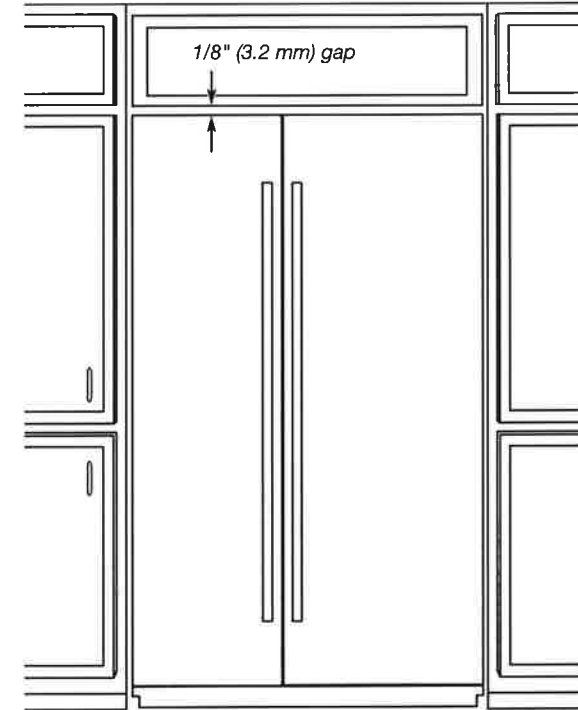

SITE PREPARATION


PANEL DIMENSIONS

BOTTOM MOUNT MODEL

!

Maximum allowable weights:

- Door panel - 60 lbs (27.2 kg)
- Drawer panel - 25 lbs (11.3 kg)

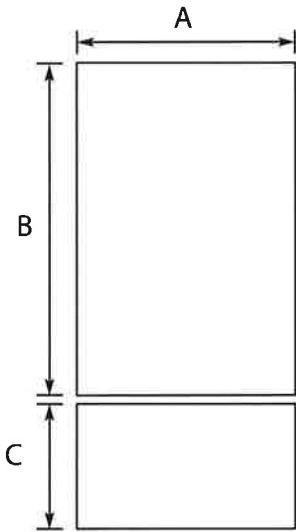


Legend	Model	Dimension
A	36"	35 ³ / ₄ " (90.81 cm)
B	36"	59 ¹ / ₈ " (150.2 cm)
C	36"	20 ¹ / ₂ " (52.07 cm)

FRENCH DOOR BOTTOM MOUNT MODELS

!

Maximum allowable weights:

- Door panel - 38 lbs (17.2 kg)
- Drawer panel (36" model) - 25 lbs (11.3 kg)
- Drawer panel (42" model) - 30 lbs (13.6 kg)

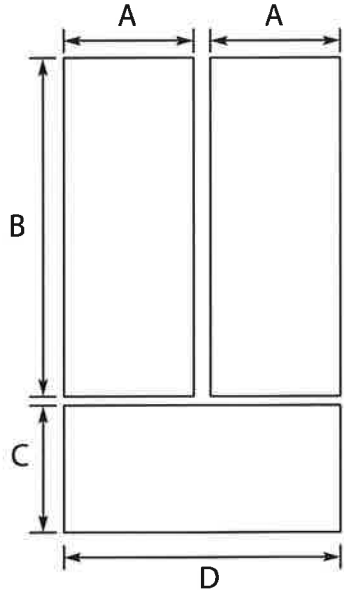

Legend	Model	Dimension
A	36"	17 ³ / ₄ " (45.24 cm)
B		59 ¹ / ₈ " (150.2 cm)
C		20 ¹ / ₂ " (52.07 cm)
D		35 ³ / ₄ " (90.81 cm)
A	42"	20 ³ / ₄ " (52.86 cm)
B		59 ¹ / ₈ " (150.2 cm)
C		20 ¹ / ₂ " (52.07 cm)
D		41 ³ / ₄ " (106.05 cm)

SIDE BY SIDE MODELS


!

Maximum allowable weights (42" models):

- Refrigerator Door panel - 65 lbs (29.5 kg)
- Freezer Door panel - 49 lbs (22.2 kg)

Maximum allowable weights (48" models):

- Refrigerator Door panel - 66 lbs (29.9 kg)
- Freezer Door panel - 50 lbs (23 kg)

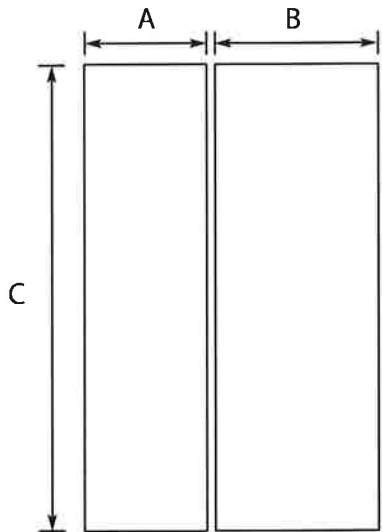

Legend	Model	Dimension
A	42"	17 ³ / ₄ " (45.24 cm)
B		23 ³ / ₄ " (60.48 cm)
C		81" (205.7 cm)
A	48"	20 ¹ / ₄ " (51.59 cm)
B		27 ¹ / ₄ " (69.37 cm)
C		81" (205.7 cm)

SITE PREPARATION

RECEIVED

FEB 24 2021

24" Custom Panel Dishwasher

Benchmark Series – Custom Panel SHV89PW73N



SHV89PW73N
Custom Panel

The flexible 3rd rack allows you to accommodate deeper items, while adjustable tines let you customize the rack's loading space.

Features & Benefits

- 39 dBA: Quietest dishwasher brand in North America.*
- A flexible 3rd rack with folding tines adds 30% more loading area.
- A clean white light illuminates the interior when open.
- Telescopic Rails provide a smooth glide for easier unloading and loading on all 3 levels.
- Water Softener ensure optimally spot-free and shiny dishes.

* Based on an average of sound ratings of 24" Full Size Stainless Steel Tub dishwashers contained in major brands US & Canadian websites. Major brands defined as TraOnline Top 5 Market Share (US & Canada) December 2016.



General Properties	
Number of wash cycles	7
Number of options	7
dBA	39
Third rack	Flexible Third Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	TFT Touch Control
Concealed heating element	Yes
Leak protection system	24/7 AquaStop® Plus
Water softener	Yes
Five-level wash	Yes
ChildLock	No
Special features	Telescopic Glides on all 3 levels, Stainless Steel Toekick

Efficiency	
Water usage per cycle	2.9
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5

Capacity	
Number of place settings	15
Technical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	N/A
Minimum water pressure (lb/sin)	7
Length inlet hose (in)	55"
Length outlet hose (in)	63"
Dimensions & Weight	
Overall appliance dimensions (HxWxD)(in)	34 1/16" x 23 9/16" x 21 5/8"
Required cutout size (HxWxD)(in)	34 1/8" x 24" x 24"
Adjustable feet	Yes
Net weight (lbs)	118 lbs
Accessories–Optional	
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Softener Salt (4.4 lbs)	SGZ9091UC
Stainless Steel Door with Stainless Steel Straight Bosch Bar Handle	SHZ1008UC
Stainless Steel Straight Bosch Bar Handle	SMZ1007UC
Anti-Tarnish Silverware Cassette	SMZ5002UC
Power Cord with Cold Plug	SMZPC002UC



For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

05/17

RECEIVED

FEB 24 2021


24" Custom Panel Dishwasher

Benchmark Series – Custom Panel SHV89PW73N



BOSCH
Invented for life

Installation Details

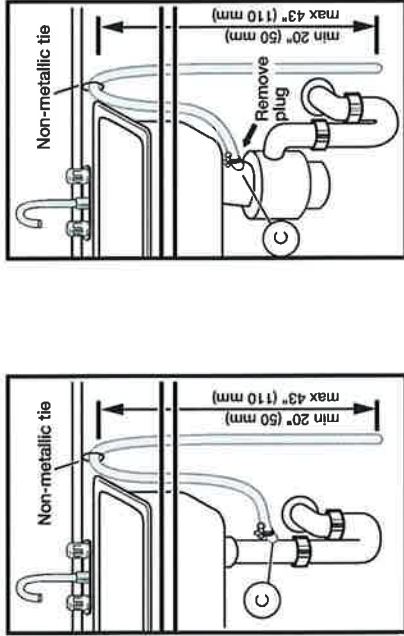

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 88 5/8" (225 cm) and can be extended to a maximum of 165 3/8" (420 cm). Always use the approved drain hose extension kit (SGZ1010UC). Ensure a portion of the drain hose is raised between min. 20" (50 cm) and max. 43" (110 cm) above the cabinet floor.

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

05/17

RECEIVED
FEB 24 2021

WW60M9900AV

Samsung FlexWash™ Washer

5.0 + 1.0 cu. ft. Total Capacity DOE

SAMSUNG



Signature Features

FlexWash™

- Two washers in one lets you wash separate loads at the same time.

6.0 cu. ft. Total Capacity

- 5.0 + 1.0 cu. ft. upper and lower washers mean fewer washes, less time in the laundry room.

Super Speed (Lower Washer)

- Wash a full load in as little as 30 minutes – 45% faster.*

*Normal 59-minute wash can now be completed in as little as up to 30 minutes as compared to WF42H5200 washer without Super Speed. Based on DOE standard's average of 7.5 loads per week.

Available Colors



Black Stainless Steel (shown)



White



FlexWash™



5.0 cu. ft. + 1.0 cu. ft. Capacity

Lower Wash Features

- Super Speed
- Steam Wash
- Wi-Fi Connectivity
- PowerFoam™
- VRT Plus™ Technology
- Self Clean+
- Smart Care
- Swirl Drum Design

- Touch Controls
- 1300 RPM Maximum Spin Speed
- Direct Drive Motor

Convenience

- Child Lock
- Door Lock
- Drum Light
- Dispenser Trays: Main Wash, Softener, Bleach

Upper Wash Features

- VRT™– Vibration Reduction Technology
- Wi-Fi Connectivity
- Self Clean
- Smart Care
- 800 RPM Maximum Spin Speed
- Stainless Steel Tub
- Direct Drive Motor
- Touch Controls

Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Softener, Bleach
- Aqua Pebble Detergent Pod

RECEIVED

FEB 24 2021

WV60M9900AV

Samsung FlexWash™ Washer

5.0 + 1.0 cu. ft. Total Capacity DOE


SAMSUNG

Installation Specifications


If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch.² Your washer alone does not require a specific air opening.

Alcove or closet installation


Minimum Clearance for Closet and Alcove Installations:

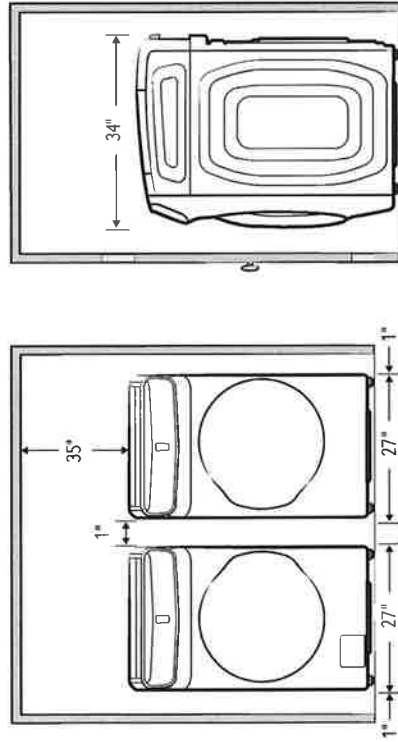

Installation with pedestal

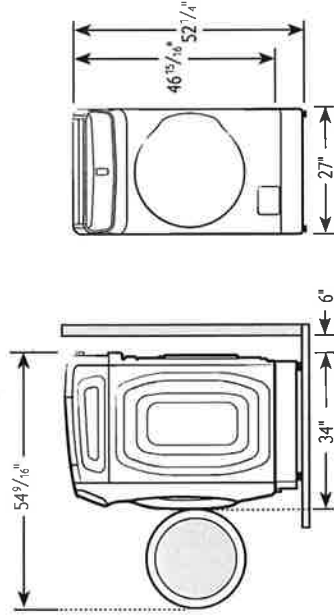

Dimensions

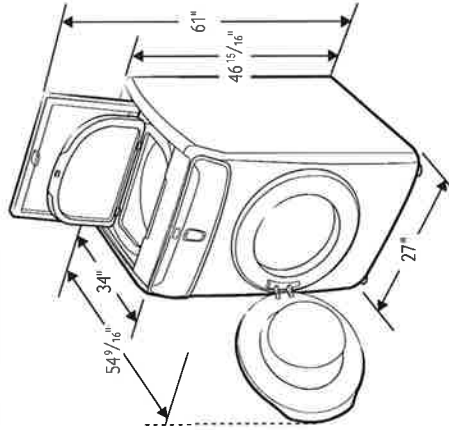

5.0 cu. ft. Capacity Lower Washer

12 Preset Wash Cycles:

Eco Cold, Normal, Heavy Duty, Permanent Press, Sanitize, Towels, Bedding, Whites, Active Wear, Delicates, Quick Wash, Rinse + Spin

11 Options:

Super Speed, Steam, Self Clean+, Delay End, Pre Soak, Spin Only, Smart Control, Smart Care, Drum Light, Child Lock, Sound

5 Temperature Settings:

Extra Hot, Hot, Warm, Cool, Cold

5 Spin Settings:

Extra High, High, Medium, Low, No Spin

5 Soil Settings:

Extra Heavy, Heavy, Normal, Light, Extra Light

Dispenser Trays: Main Wash, Softener, Bleach

1.0 cu. ft. Capacity Upper Washer

5 Preset Wash Cycles:

Normal, Active Wear, Delicates, Rinse + Spin, Spin Only

7 Options:

Cold/Warm Water Temp, Extra Rinse, Self Clean, Smart Control, Sound, Child Lock, Smart Care

Dispenser Trays: Softener, Bleach

Warranty

One (1) Year Parts and Labor

Three (3) Years Stainless Steel Drum (Part Only)

Ten (10) Years Direct Drive Motor (Part Only)

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 46¹⁵/₁₆" x 34"

Weight: 308 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29⁹/₁₆" x 52" x 36¹/₄"

Weight: 319 lbs

Color	Model #	UPC Code
Black Stainless Steel	WV60M9900AV	887276196947
White	WV60M9900AW	887276196954

Matching Dryer (Electric/Gas)

Black Stainless Steel	DVE60M9900V	887276197562
White	DVE60M9900W	887276197586
Black Stainless Steel	DVG60M9900V	887276197616
White	DVG60M9900W	887276197623

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.
©2017 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.

RECEIVED

FEB 24 2021

DVE60M9900V/AC



Dryer with FlexSystem | 7.5 cu.ft.

www.samsung.com/ca



- Cycle time (min) 75 min
- Energy Star Certification
- Energy Consumption (annual) 607 kWh/year
- DOE Energy Factor 3.94 lb/kWh
- Interior Drum Light
- Smart Control
- Smart Care
- Reversible Door
- Child Lock
- Filter Check Indicator
- Mixed Load Bell
- Steam
- Vent Exhaust (Electric/Gas) 4 ways
- Wrinkle Prevent
- Drum Material Stainless Steel
- Refresh | Wrinkle Away | Steam Sanitize
- Normal | Heavy Duty | Towels
- Perm Press | Active wear | Bedding
- Delicates | Time Dry | Air Fluff
- Adjust Time (Up) | Adjust Time (Down) | Anti Static
- Mixed Load Bell | Smart Control / Monitor
- Smart Care | Drum Light | Child Lock
- Sound | Wrinkle Prevent

Color
Black Stainless

Dimensions

Width	27"
Height	47"
Depth	32.5"

Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections with the installation

®Registered trademark/™ Trademark of Samsung Electronics Canada Inc. © Samsung Electronics Canada Inc. All Rights Reserved.
All other trademarks are owned by their respective companies.
Because Samsung Electronics Canada Inc. policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

RECEIVED

FEB 24 2021

Installation

Alcove or closet installations


⚠️ WARNING

- The dryer must be exhausted to the outside to reduce the risk of fire when installed in an alcove or closet.
- No other fuel-burning appliance should be installed in the same closet as the dryer.

Minimum clearances between the dryer and adjacent walls or other surfaces:


Sides	1 in. (25 mm)	Rear	6 in. (152 mm)
Top	21 in. (533 mm)	Closet front	2 in. (51 mm)

Installation with pedestal

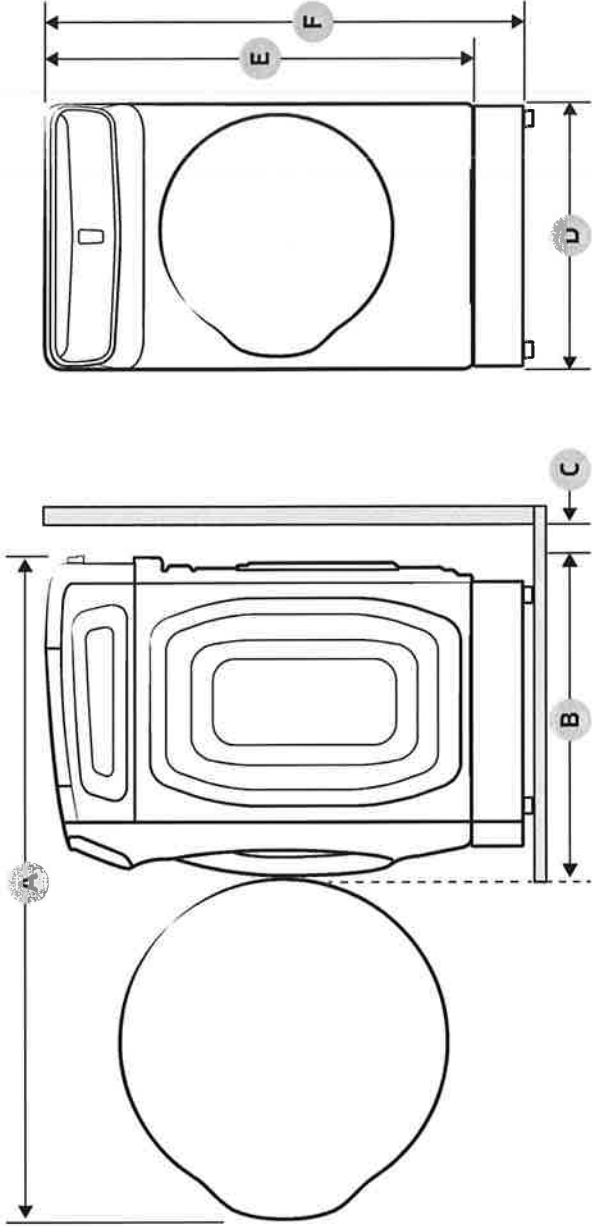


A	53.7 in. (1365 mm)	D	27 in. (686 mm)
B	32.5 in. (825 mm)	E	46.9 in. (1192 mm)
C	6 in. (152 mm)	F	52.2 in. (1326 mm)

Side by side installation

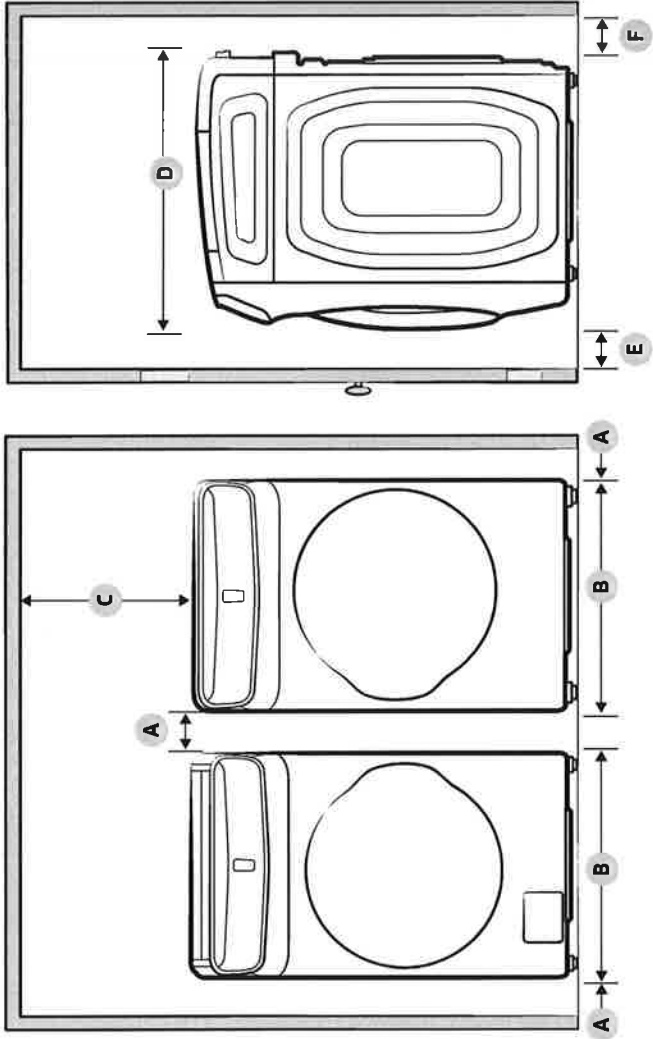

A	1 in. (25 mm)	D	32.5 in. (825 mm)
B	27 in. (686 mm)	E	2 in. (50 mm)
C	21 in. (533 mm)	F	6 in. (152 mm)

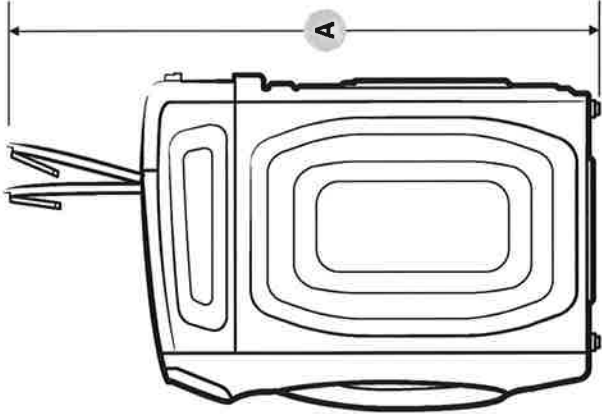


A	61 in. (1550 mm)
----------	------------------

RECEIVED
FEB 24 2021

Installation

Ducting requirements

	Recommended		Use only for short-run installation
Weather hood type	  4" (10.2 cm)		 2.5" (6.4 cm)
No. of 90° elbows	Rigid	Metallic flexible*	Rigid
0	80 ft. (24.4 m)	41 ft. (12.4 m)	74 ft. (22.6 m)
1	68 ft. (20.7 m)	37 ft. (11.2 m)	62 ft. (18.9 m)
2	57 ft. (17.4 m)	33 ft. (10.1 m)	51 ft. (15.5 m)
3	47 ft. (14.3 m)	29 ft. (8.8 m)	41 ft. (12.5 m)
			Metallic flexible*
			33 ft. (10.1 m)
			29 ft. (8.8 m)
			25 ft. (7.6 m)
			21 ft. (6.5 m)

NOTE

* Use a 4-inch (10.2 cm) diameter rigid aluminum or galvanized steel duct.

If you integrate the dryer's vent system with an existing exhaust system:

- Make sure the exhaust system meets all applicable local, state, and national regulations.
- Verify you are not using flexible plastic duct.
- Make sure to check for and remove all lint buildup from inside the existing ducts.
- Confirm the duct is not kinked or crushed.
- Make sure the exhaust hood damper opens and closes freely.

Manometer measurements


The static pressure in any exhaust system must not exceed 0.83 inches of water column or be less than 0. Note that these values are measured with the dryer running with a manometer presented to the exhaust duct that connects to the dryer. The dryer drum must be empty and lint filter clean.



RECEIVED
FEB 24 2021

SU90934X
SU90946X
SU90955X

SU 909
stainless steel AISI 430

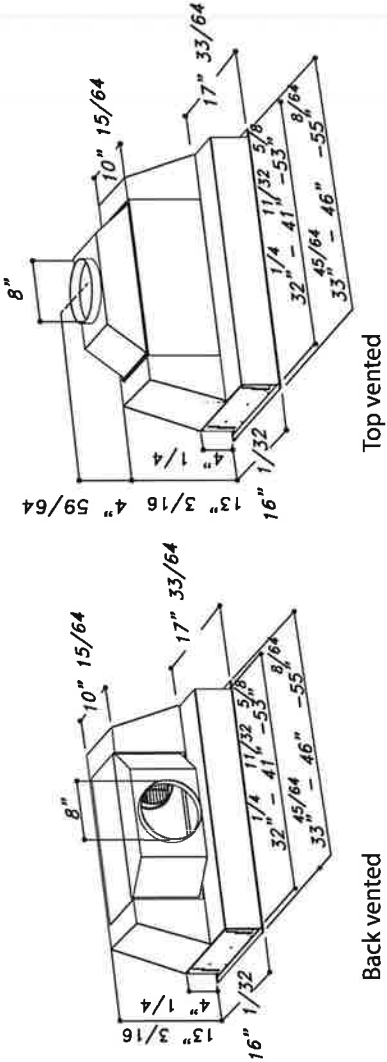

MOTOR	Dual Motor Aluminium die-cast housing 1100 CFM Pressure: 800 Pa Noise level: 66 dBA/5.1 sones
LIGHTING	2x1W Led spot for 34" and 46" 4x1W Led spot for 55"
CONTROL PANEL	Chromed push button 4 Speeds + timer + light
GREASE FILTER	Commercial style baffle filters
AIR OUTLET	8"
DISCHARGE	Vertical and horizontal
CUT OUT	32" 15/32 x 16" 1/8 SU909 34" version 44" 23/32 x 16" 1/8 SU909 46" version 53" 3/4 x 16" 1/8 SU909 55" version
ACCESSORIES	Charcoal filters: KF7 (Order 2 pcs for SU909 34" version) KF7 (Order 3 pcs for SU909 46"/55" version) Cod. 60080477002

24" Recessed Handle Dishwasher

Ascenta® Series – Stainless Steel SHE3AR75UC



SHE3AR75UC

Stainless Steel

Also available in:

- White SHE3AR72UC
- Black SHE3AR76UC

Bosch dishwashers incorporate 18 unique sound-reducing technologies, to make Bosch the quietest dishwasher brand in the US.

Features & Benefits

50 dBA: Quietest dishwasher brand.

Height adjustment upper rack.

Stainless steel tall tub with polypropylene bottom delivers durability.

Sanitize option eliminates bacteria and enhances drying results.

24/7 Overflow Protection System® helps prevent water leaks.

General Properties	
Number of wash cycles	6
Number of options	2
dBA	50
Third rack	No
Rack adjustability	Manual
Tub material	Stainless steel/polypropylene
Control type	Buttons
Concealed heating element	Yes
Leak protection system	24/7 Overflow Protection
Water softener	No
Five-level wash	Yes
ChildLock	Yes
Special features	N/A
Efficiency	
Water usage per cycle	3.2
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	688
Capacity	
Number of place settings	14



Technical Details	
Watts (W)	1400 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	N/A
Minimum water pressure (lb/sin)	15
Length inlet hose (in)	N/A
Length outlet hose (in)	90 1/2"
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight (lbs)	69 lbs
Accessories—Optional	
Dishwasher Drain Hose Extension 76 3/4"	SGZ1010UC
Dishwasher 3-Prong Power Cord 55 1/4"	SGZPC001UC
Dishwasher Accessory Kit	SGZ1052UC
DoubleFlex Silverware Basket	SMZ4000UC



For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage to the finish) of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

08/16






RECEIVED
FEB 24 2021

24" Recessed Handle Dishwasher

Ascenta® Series – Stainless Steel SHE3AR75UC



Installation Details

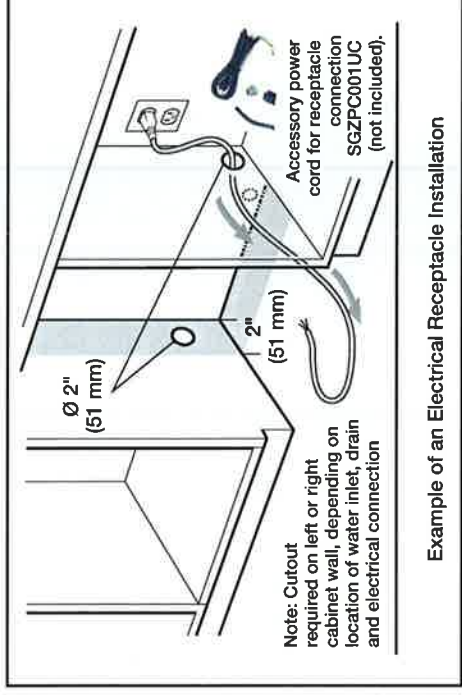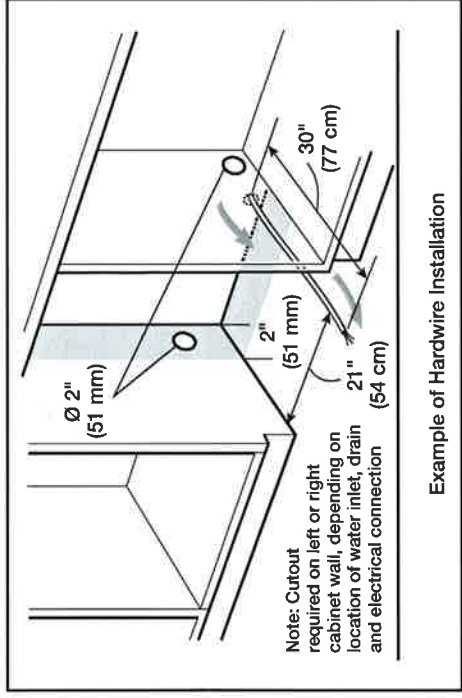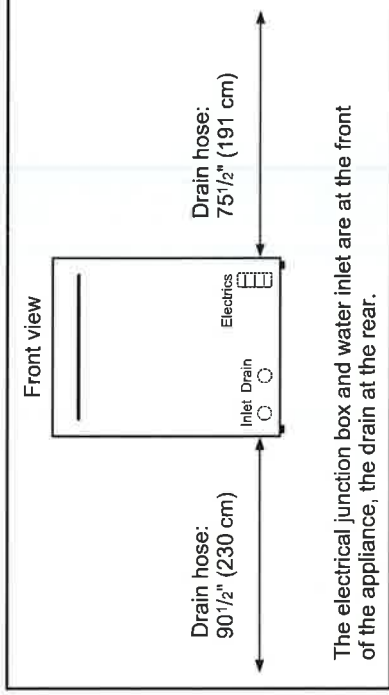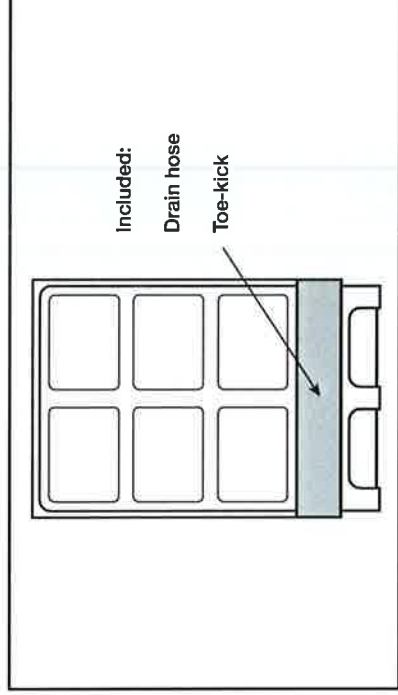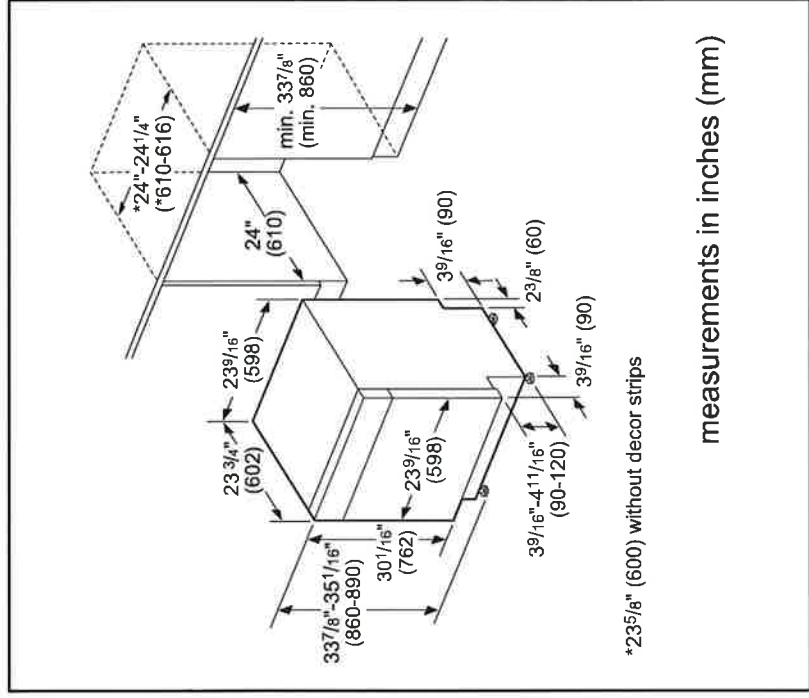

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage to the finish) of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

08/16

RECEIVED

FEB 24 2021



24" Recessed Handle Dishwasher

Ascenta® Series – Stainless Steel SHE3AR75UC



BOSCH
Invented for life

Installation Details

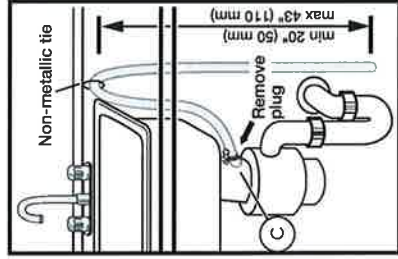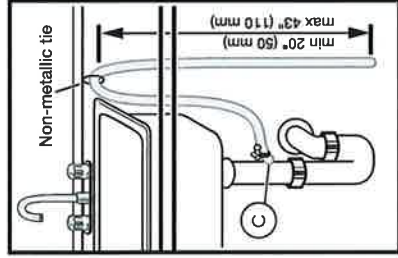

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 90 1/2" (230 cm) and can be extended to a maximum of 168 1/2" (428 cm). Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 20" (50 cm) and max. 43" (110 cm) above the cabinet floor.

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage to the finish) of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

08/16

RECEIVED
FEB 24 2021