


Prepared by
HARVINDER KANG
hkang@appliancescanada.com



Lot 61

Appliance Canada
For your home, for your life



NOIR™ 30" Single Wall Oven with MultiMode® Convection System

JJW2430IM

Available Finishes/Colours



JJW2430IM
Floating Glass Black

Dimensions		Exterior
Depth	23 1/4	Handle Material Stainless Steel
Height	28 7/8	Oven Door Metal & Glass
Width	30	Flush Installation Approved Yes
		Installable Under Cooktop Yes
		Handle Color Stainless Steel

Configuration and Overview

Oven Type	Single
Fuel Type	Electric
Size (IN, inches)	30
Installable Under Cooktop	Yes
LP Convertible	No
	Will Call Yes
	Accessory Relationships Yes
	Home Delivery Yes
	Will Call Yes

Beyond a veil of dark glass, the power of the MultiMode® Convection system caresses every morsel with even heat. With curated recipe presets and full-color images, an intuitive, guided culinary experience awaits your touch.

Top Features

4.3-inch Full Color LCD Display

Cinematic Lighting

Seamless Touches

Manuals & Literature:

-  CAD Image
-  Dimension Guide
-  Installation Guide
-  Use and Care Guide
-  Warranty Information

Compatibility		Appearance
Connectivity	No	Oven Door Metal & Glass
		Handle Material Stainless Steel
		Flush Installation Approved Yes

Controls

Control Type	Tap Touch
Electronic Display Type	LCD Screen

Exterior

Door Lock	Yes
-----------	-----



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


RECEIVED

DEC 09 2020

SINGLE WALL OVENS

JW24271 - 27" x 29-7/8" x 25-5/16"

JW24301 JW34301 - 30" x 29-7/8" x 25-5/16"

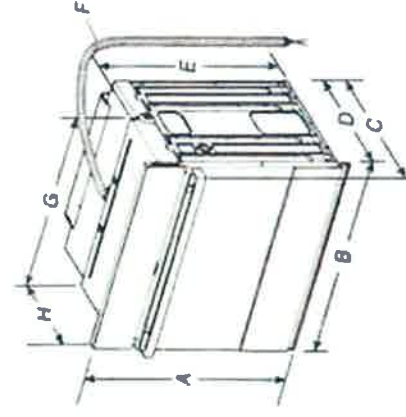

PRODUCT DIMENSIONS SINGLE OVENS

27" (68.6 CM) MODELS

- A 29-7/8" (75.8 cm) max. overall height
- B 27" (68.6 cm) overall width
- C JW24271M - 26-3/8" (67 cm)
JW24271L - 27-3/16" (69 cm)
- D 23-1/4" (59.1 cm) max. recessed depth
- E 27-3/16" (69 cm) recessed height
- F 48" (121.9 cm) flexible conduit length
- G 25-7/16" (64.6 cm) max. recessed width
- H 12" (30.5 cm) from back of control panel to start of strain relief


30" (76.2 CM) MODELS

- A 29-7/8" (75.8 cm) max. overall height
- B 30" (76.2 cm) overall width
- C JW24301M - 26-3/8" (67 cm)
JW24301L - 27-3/16" (69 cm)
JW34301M - 26-3/8" (67 cm)
JW34301L - 27-3/16" (69 cm)
- D 23-1/4" (59.1 cm) max. recessed depth
- E 27-3/16" (69 cm)
- F 48" (121.9 cm) flexible conduit length
- G 28-7/16" (72.2 cm) max. recessed width
- H 12" (30.5 cm) from back of control panel to start of strain relief

UNDERCOUNTER CABINET DIMENSIONS SINGLE OVENS

27" (68.6 CM) MODELS

- A 27" (68.6 cm) min. cabinet width
- B 1-1/2" (3.8 cm) min. top of cutout to underside of countertop
- C 5-1/4" (13.3 cm) bottom of cutout to floor
- D 25-1/2" (64.8 cm) cutout width
- E 28" (71.2 cm) min. cutout height




30" (76.2 CM) MODELS

- A 30" (76.2 cm) min. cabinet width
- B 1-1/2" (3.8 cm) min. top of cutout to underside of countertop
- C 5-1/4" (13.3 cm) bottom of cutout to floor
- D 28-1/2" (72.4 cm) cutout width
- E 28" (71.2 cm) min. cutout height

SINGLE OVENS INSTALLED IN CABINET

27" (68.6 CM) MODELS

- A 27" (68.6 cm) min. cabinet width
- B 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C 32" (81.3 cm) bottom of cutout to floor
- D 25-1/2" (64.8 cm) cutout width
- E 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F 28" (71.2 cm) recommended cutout height
- G 24" (60.7 cm) cutout depth

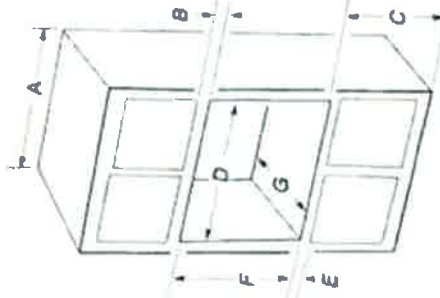

- *NOTE: The cutout height can be between 27-1/4" (69.2 cm) and 28-7/16" (74.8 cm) for 27" single ovens.

30" (76.2 CM) MODELS

- A 30" (76.2 cm) min. cabinet width
- B 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C 32" (81.3 cm) bottom of cutout to floor
- D 28-1/2" (72.4 cm) cutout width
- E 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F 28" (71.2 cm) recommended cutout height
- G 24" (60.7 cm) cutout depth

- *NOTE: The cutout height can be between 27-1/4" (69.2 cm) and 29-7/16" (74.8 cm) for 30" single ovens.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, ETL or CSA approved.

©/™ © 2018 JennAir. All rights reserved. JEN 25280-006



RECEIVED

DEC 09 2020

Prepared by
HARVINDER KANG
hkang@appliancescanada.com

Lot 61

Appliance Canada

For Your Home For Your Life



NOIR™ 30" BUILT-IN MICROWAVE OVEN WITH SPEED-COOK

JMC2430IM

Available Finishes/Colours



JMC2430IM
Floating Glass Black



Dimensions

Depth	24 3/4
Height	19 7/8
Width	29 3/4

Microwave Details

Convection Power (watts)	1200
Grill	Yes

Grill Power(W,watts)	1600
Grill Power (watts)	1600

Configuration and Overview

Microwave Type	Built-In
Size (IN,Inches)	30

Interior Light	No
Number of Racks	1

Let your appetite run wild with microwave and convection energy. With curated recipes and full-color doneness images, an intelligent culinary experience awaits your touch.

Turntable	Stoppable
-----------	-----------

Turntable Diameter Size(IN,Inches)	14 1/8
------------------------------------	--------

Microwave Details

Microwave Type	Built-In
----------------	----------

Turntable Diameter Size (in)	14 1/8
-------------------------------	--------

Top Features

4.3-Inch Full Colour LCD Display

Seamless Touches

Stainless Steel Microwave Interior

Compatibility

Connectivity	No
--------------	----

Manuals & Literature:



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

RECEIVED

DEC 09 2020

SINGLE WALL OVENS

JW24271 - 27" x 29-7/8" x 25-5/16"

JW24301, JW34301 - 30" x 29-7/8" x 25-5/16"

ELECTRICAL REQUIREMENTS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471
CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575

ELECTRICAL CONNECTION

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serializing plate is located under the control panel on single ovens. See the following illustration.



A. Model/Serial/Rating Plate

- Models rated from 7.3 to 9.6 kW at 240 V (5.4 to 7.4 kW at 208 V) require a separate 40 A circuit. Models rated at 4.8 kW and below at 240 V (3.6 kW and below at 208 V) require a separate 20 A circuit.
- A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored, or nonmetallic sheathed copper cable (with grounding wire).
- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below. Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum. Follow the electrical connector manufacturer's recommended procedure. Aluminum-copper connection must conform with local codes and industry accepted wiring practices.

For power requirements for models JW24271, JW24301 and JW34301, refer to the following table.

240 VAC		208 VAC	
MODEL	kW		kW
JW24271	4.1		3.1
JW24301	4.1		3.1
JW34301	4.5		3.4

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide BEFORE selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

©/TM © 2018 JennAir. All rights reserved. JEN 25280-006.



RECEIVED
DEC 09 2020

Prepared by
HARVINDER KANG
hkang@appliancescanada.com

20761

Appliance Canada
The Most Trusted For Your Life



JennAir, 30-inch, 1.5 cu. ft. Capacity Warming Drawer

JJD3030IM

Available Finishes/Colours



JJD3030IM
Stainless Steel

Dimensions

Depth 26

Height 10 1/4

Width 28 3/4

Exterior

Drawer Front Stainless

Front Frame Stainless

Handle Material Aluminum

Handle Color Stainless Steel

Offering an array of options for cooking and entertaining, this warming drawer provides a convenient alternative to an oven for bread proofing, slow-roasting, plate-warming and keeping completed dishes warm before serving. This warming drawer pairs beautifully with appliances in our NOIR suite

Top Features

Sensor Temperature Control

Slow Roast Function

Bread Proofing Function

Manuals & Literature:



CAD Image



Installation Guide



Use and Care Guide



Warranty Information

More

Wet Call Yes

Appearance

Handle Material Aluminum

Controls

Control Type Knobs

Knob Color Black

Humidity Control Type Moist & Dry Selections

Control Location

Right Side

Sensor Temperature Management

Yes

Temperature Range

90 - 250

Details

Removable Drawer Yes



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

RECEIVED

DEC 09 2020

Prepared by
HARVINDER KANG
hkang@appliancecanada.com

Lot 61



Har



25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

KRMF706ESS

Available Finishes/Colours



KRMF706EBS
Black Stainless Steel with PrintShield™ Finish



KRMF706ESS
Stainless Steel

Dimensions

Depth	38 1/4
Height	70 1/8
Width	36

Details

Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
-------------------------	--

AHAM Volumes And Shelf Area

Freezer Volume (Cu Ft)	7.61
------------------------	------

Counter Depth

No

Door Style

Flat

Refrigerator Volume (Cu Ft)	18.15
-----------------------------	-------

Compatibility

No

Configuration and Overview

Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
-------------------------	--

Connectivity

No

Works With

No

Top Features

Preserva® Food Care System

5-Door Configuration

2 Soft-Close Drawers

Control Type

Electronic

Counter Depth	No
---------------	----

Air Filter Indicator/Reset

Yes

Number of Doors	5
-----------------	---

Automatic Defrost

Yes

Details

Cooling Type

Dual Evaporator

Verrouillage des commandes

Yes

LCD Touch Screen

No

Manuals & Literature:

- Dimension Guide
- Energy Guide
- Use and Care Guide
- Warranty Information

KitchenAid®

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

RECEIVED

DEC 09 2020

KitchenAid®

FOR THE WAY IT'S MADE:™

PRODUCT MODEL NUMBERS

KRMF608E KRMF706E

Electrical: A 115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

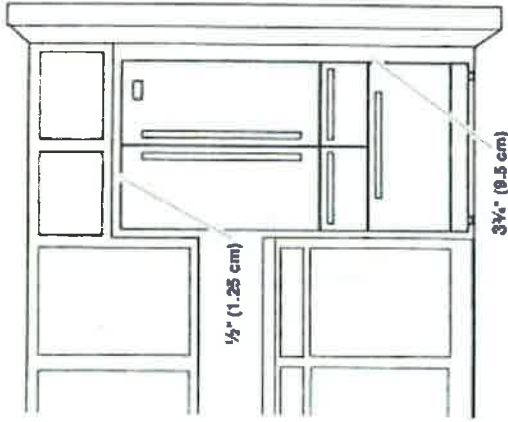

IMPORTANT: This refrigerator is designed for indoor, household use only.


To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3/4" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.



Bottom Mount Refrigerator

PRODUCT DIMENSIONS

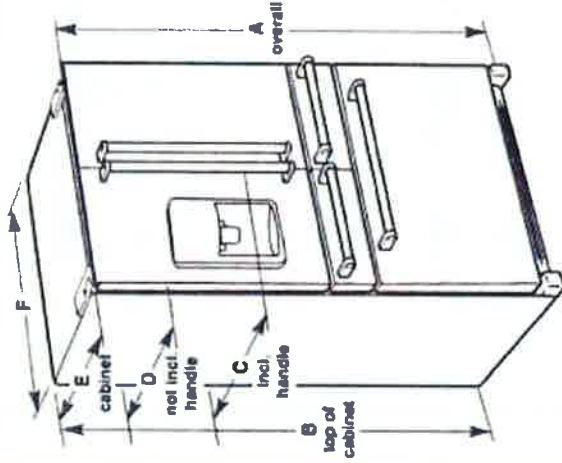

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - With Handles "C"	Depth - Without Handles "D"	Depth - Cabinet Only "E"	Width - Cabinet "F"
25.8	70 1/4" (178.1 cm)	68 1/4" (173.7 cm)	36 1/2" (92.3 cm)	34 1/2" (87.7 cm)	29" (73.7 cm)	35 1/2" (90.5 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions provided with product. Specifications subject to change without notice.

Ref. WH0709-28
9.15


RECEIVED
DEC 09 2020

Lot 61

Har

AVO-368CS OREGON

Model	
Name	OREGON
Model #	AVO-368CS
Type	Professional Style Wall-mounted Hood
Features	
Dimensions of unit (W x D x H)	36" x 19 3/4" x 10 2/5"
Evacuation	Vertical
Controls	Soft touch controls with LED screen
Power / Speeds	860 CFM / 6 speeds
Noise level (Sones)	1.5 to 5.0 (lowest to highest speed)
Output(s)	6" ROUND - top exhaust
Maximum ceiling height	9 feet
Lighting	2 LED (2W)
Filter(s)	2 SS Baffle filters with handles
Appearance (Finish)	
Stainless Steel - 201SS	
Specifications	
Volts, Hertz, Amps	120V / 60Hz / 2.7 Amps
Weight - Gross / Net	69.9 lbs (31.7 kg) / 57.3 lbs (26 kg)
Quantity per box	1 unit
Number of boxes	1
Dimensions of box (W x D x H)	39 1/8" x 21 5/8" x 26"
UPC code	0646437667562
Warranty	
Warranty of 1 year (parts and labor)	Complete unit, parts and labor

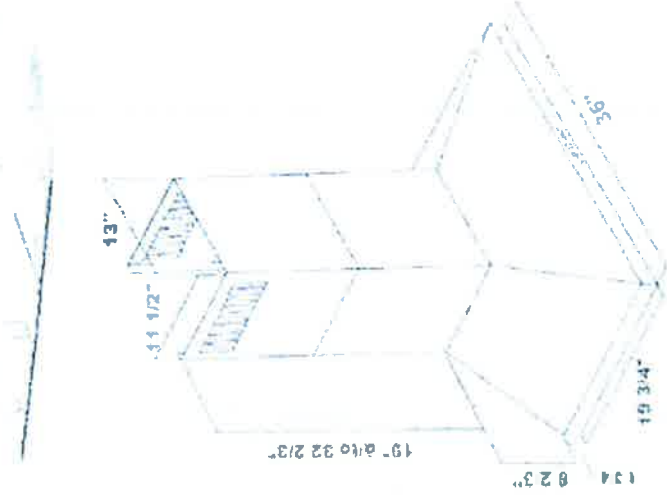

RECEIVED

DEC 09 2020

Lot 61



Prepared by
HARVINDER KANG
hkang@appliancecanada.com

36" NOIR™ Gas Professional-Style Rangetop with Chrome-Infused Griddle

JGCP536HM



Available Finishes & Colors

JGCP536HL
Stainless Steel

JGCP536HM
Floating Glass Black

Dimensions		Control	
Depth	27 1/2	Knob Color	Stainless Steel
Height	7 7/16	Knob Type	Metal
Width	35 3/4		

Configuration and Overview

Cooktop Type	Rangetop	Accessory Relationships	Yes
Fuel Type	Gas	Home Delivery	Yes
Size (inches)	36	Will Call	Yes
Installs Over Built-In Oven	No		
LP Convertible	Yes - Kit Included		No
Power Boost	No		No

Sealed brass burners. Precise, dual flames. Unmistakable firepower erupting through cast-iron grates. Turn on the heat without the click-click clamor, and sear and simmer to satisfy your deepest hunger.

Top Features

14 Rangetop Configurations

Halb-Effect Knobs

Dual-Stacked PowerBurners

Manuals & Literature:

- CAD Image
- Dimension Guide
- Installation Guide
- Use and Care Guide
- Warranty Information

Controls

Control Location	Front	Hot Surface Indicator Light	No
------------------	-------	-----------------------------	----

Control Type	Knobs
--------------	-------

Infinite Heat Controls	No
------------------------	----



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details see installation instructions packaged with product. Specifications subject to change without notice.

RECEIVED
DEC 09 2020


DIMENSIONS

JENNAIR® RANGETOPS

PRODUCT



	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP48H
Overall Width	29-3/4" (75.6 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)
Overall Depth	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
Overall Height	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)	23-3/4" (59.1 cm)
Front Panel Height	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)
Front Panel Depth	29-1/8" (74 cm)	29-1/8" (74 cm)	29-1/8" (74 cm)
Front Panel Weight	29" (73.7 cm)	29" (73.7 cm)	29" (73.7 cm)

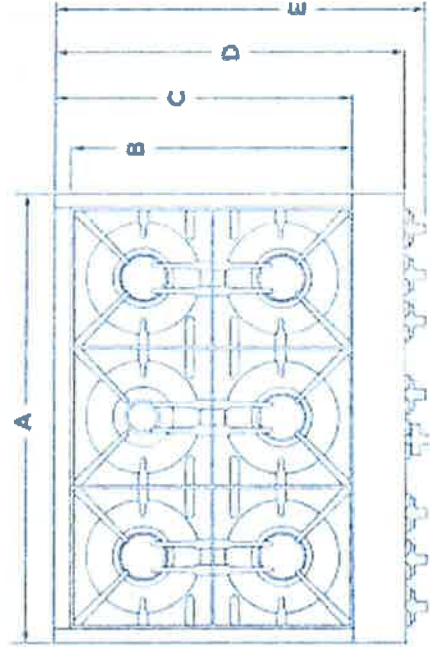

TOP VIEW



W11358024A

RECEIVED
DEC 09 2020

DIMENSIONS


JENNAIR® RANGETOPS

PRODUCT



	30" RANGETOP JOCPR30H	36" RANGETOP JOCPR36H	48" RANGETOP JOCPR48H
Overall Depth	27-7/16" (69.7 cm)	33" (83.8 cm)	44-5/8" (112.7 cm)
Overall Width	10-5/4" (27.3 cm)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)
Overall Height	11" (27.9 cm)	14-1/8" (35.9 cm)	19-5/8" (49.8 cm)
Back Panel Width	29-1/8" (74 cm)	35" (88.9 cm)	47-1/2" (120 cm)

Dimensions shown are approximate and may vary.

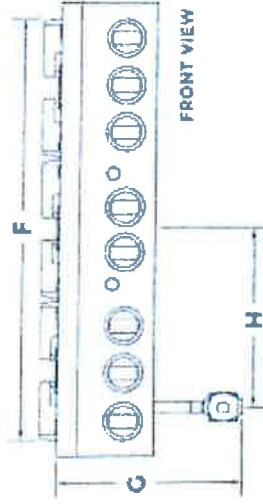

FRONT VIEW



BACK VIEW


DIMENSIONS

JENNAIR® RANGETOPS

PRODUCT



	30" RANGETOP JGCP430H	35" RANGETOP JGCP435H	48" RANGETOP JGCP548H
Overall Depth (D)	9" (22.9 cm)	9" (22.9 cm)	9" (22.9 cm)
Overall Width (L)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)
Overall Height (K)	7" (17.8 cm)	7" (17.8 cm)	7" (17.8 cm)
Overall Height (M)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)
Overall Height (N)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
Overall Height (O)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)

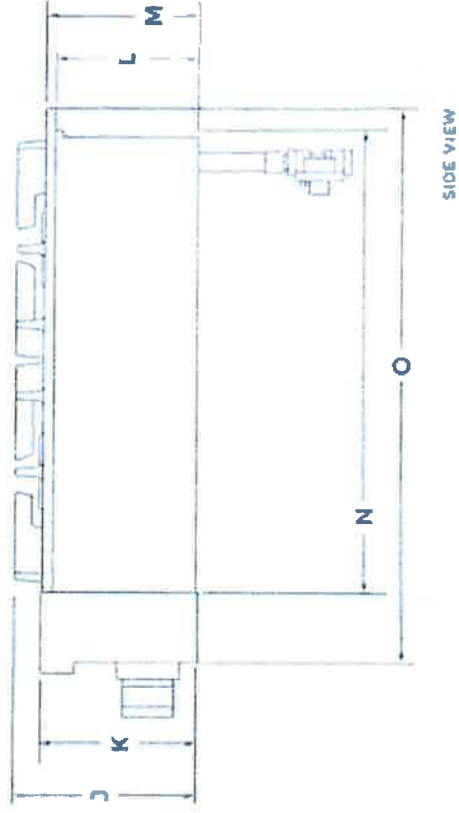

SIDE VIEW



DIMENSIONS


JENNAIR® RANGETOPS

OPENING AND CLEARANCE




	30" RANGETOP JGCPS430H	36" RANGETOP JGCPS436H	48" RANGETOP JGCPS48H
Minimum opening height	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Minimum opening width	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Minimum opening depth	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Minimum opening area	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.

Minimum opening height is 15.2 cm when bottom of hood is installed in position 1 (Fig. 1) and 17.8 cm when hood is installed in position 2 (Fig. 2). Minimum opening width is 101.6 cm when hood is installed in position 1 (Fig. 1) and 127 cm when hood is installed in position 2 (Fig. 2). Minimum opening depth is 45.7 cm when hood is installed in position 1 (Fig. 1) and 60.9 cm when hood is installed in position 2 (Fig. 2). Minimum opening area is 1.8 m² when hood is installed in position 1 (Fig. 1) and 2.4 m² when hood is installed in position 2 (Fig. 2).

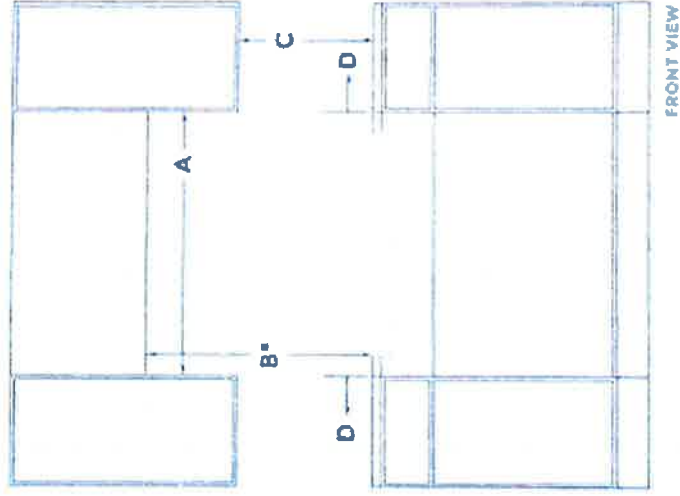

DIMENSIONS


JENNAIR® RANGETOPS

CLEARING AND CLEARANCE

Handwritten initials and a circled "HAR" are present at the top of the page.

	30" RANGE TOP JCCRA304	36" RANGE TOP JCCRA36H	48" RANGE TOP JCCRA48H
Minimum height for 15" (38.1 cm) range top	15" (38.1 cm)	15" (38.1 cm)	15" (38.1 cm)
Minimum height for 18" (45.7 cm) range top	1 1/2" (3.8 cm) min	1 1/2" (3.8 cm) min	1 1/2" (3.8 cm) min
Minimum height for 24" (61 cm) range top	7 1/4" (18.4 cm)	7 1/4" (18.4 cm)	7 1/4" (18.4 cm)
Minimum height for 30" (76.2 cm) range top	24" (61 cm)	24" (61 cm)	24" (61 cm)

Notes: 1. All dimensions are minimums. 2. All dimensions are in inches and centimeters. 3. All dimensions are for the range top only. 4. All dimensions are for the range top only. 5. All dimensions are for the range top only.

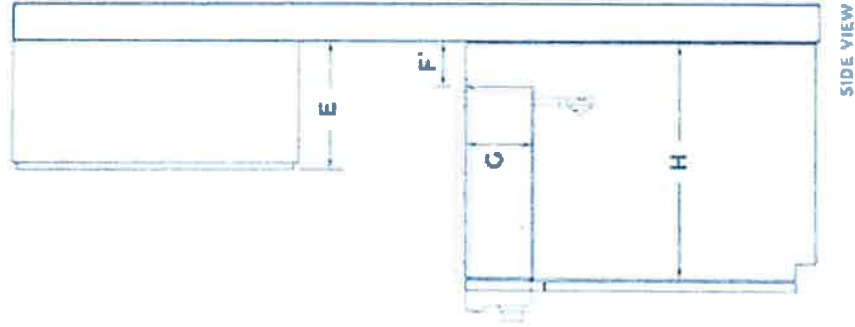


RECEIVED
DEC 09 2020

DIMENSIONS **JENNAIR® RANGETOPS** **OPENING AND CLEARANCE**



	30" RANGETOP JGC9430H	36" RANGETOP JGC9436H	48" RANGETOP JGC948H
Overall Depth	29-1/4" (74.3 cm)	35-1/4" (89.5 cm)	47-3/8" (120.3 cm)
Overall Width	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)
Overall Height	5/16" (0.8 cm)	5/16" (0.8 cm)	5/16" (0.8 cm)
Clearance	29-7/8" (75.9 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)

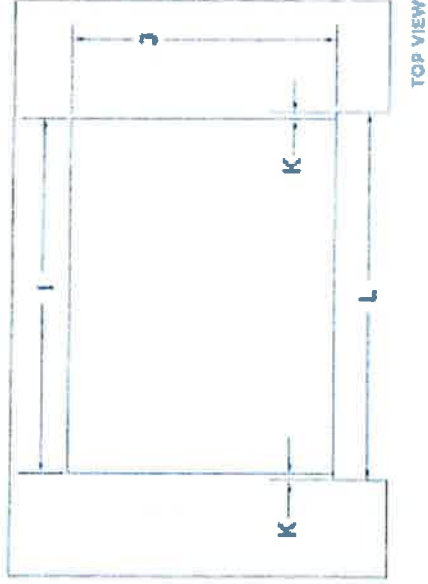

DIMENSIONS

JENNAIR® RANGETOPS

ELECTRICAL REQUIREMENTS

ELECTRIC REQUIREMENTS CHECKLIST

- ☐ A 120 volt, 60 Hz AC only, 15-amp fused electrical circuit is required
- ☐ A dedicated circuit is recommended

RECOMMENDED ELECTRICAL OUTLET ZONE



FRONT VIEW



IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY,
CALL A LICENSED QUALIFIED ELECTRICIAN


RECEIVED

DEC 09 2020

DIMENSIONS

JENNAIR® RANGETOPS

Clearance Requirements




RECOMMENDED GAS SUPPLY LOCATION



TOP VIEW

Do not install a gas supply line in a wall or ceiling that is not rated for gas. Do not install a gas supply line in a wall or ceiling that is not rated for gas. Do not install a gas supply line in a wall or ceiling that is not rated for gas.

GAS SUPPLY ZONE

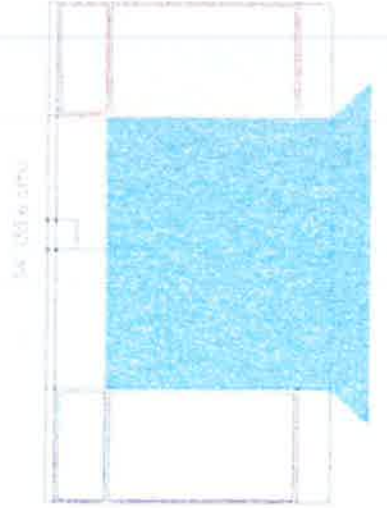

FRONT VIEW

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED QUALIFIED SERVICE TECHNICIAN.

W11358024A

© 2019 Jennair. All rights reserved.

RECEIVED
DEC 09 2020