


Lot 66
AS: EV
On Jan. 23, 21

SAMSUNG

NY63T8751SS

6.3 cu. ft. Dual Fuel Range with Flex Duo™

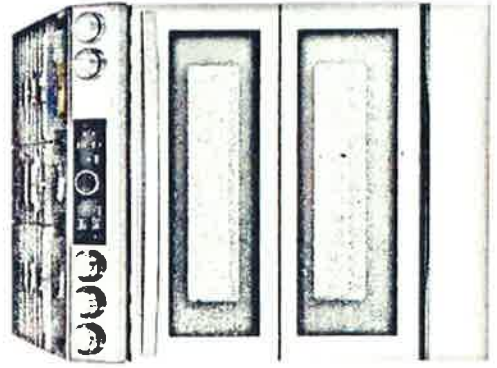

Signature Features

Flex Duo™

- Upper and lower cooking zones that work either independently or together so you can cook a variety of foods using different temperatures and time settings or use the whole oven for large dishes

Powerful, Flexible Cooktop

- Cook fast with 5 specialized burners, a 16K BTU Power Burner and one 5K Simmer Burner

Wi-Fi Connectivity

- Monitor and control the oven using the SmartThings App. And control the oven with your voice using a voice assistant such as Samsung Bixby®, Amazon Alexa or Google Assistant.

True Convection

- A heated fan distributes heat all around the oven and keeps the temperature constant so dishes are cooked quickly and thoroughly

Available Colours



Fingerprint Resistant
Stainless Steel



Features

- Intelligent User Experience
- Air Fry with included Air Fry Rack
- True Convection
- Wi-Fi Connectivity
- Flexible Cooktop
- Voice Control
- Fingerprint Resistant Finish

Convenience

- Self & Steam Clean
- 2 Chrome Racks
- Auto Oven Light
- Sabbath Mode
- Kitchen Timer
- Delay Start
- Auto Shut-Off Option
- Child Safety Lock

- Large Capacity – 6.3 cu. ft.
- 5 Gas Burners
- 5K Simmer Burner
- Reversible Cast Iron Grate
- Storage Drawer
- Gliding Rack

Available in black and gold and US models. A Wi-Fi connection and a Samsung account are required. A fingerprint sensor is required. Safety: Samsung Bixby is an artificial intelligence. A Samsung account is required.

RECEIVED

MAR 24 2021

Lot 66
ASEW
Mfr. 23,2

NY63T8751SS


6.3 cu. ft. Dual Fuel Range with Flex Duo™

SAMSUNG

Installation Specifications

BEFORE YOU BEGIN to install this appliance, refer to the following information, dimensions, and clearances. **Do not locate the range where it may be subject to strong drafts.** Provide adequate clearances between the range and adjacent combustible surfaces. These dimensions must be met for safe use of the range. The location of the electrical outlet and gas piping may be adjusted to meet the following dimensions and clearances. **For installation in Canada, a free-standing range is not to be installed closer than 4.7 in (12 cm) from any adjacent surface.**


*50% clearance above cooking surface to any objects, i.e., wall

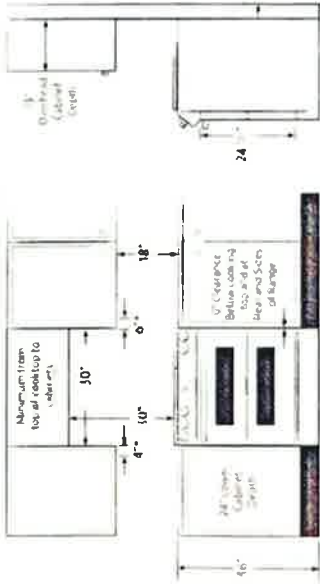

Dimensions

CAUTION: This range has been designed to comply with the maximum allowable working cabinet temperature of 194°F (90°C). Make sure the wall, covering, counter tops, and cabinets around the range can withstand the heat (up to 194°F (90°C)) generated by the range. If not, discoloration, delamination, or melting may occur.

SLIDE-IN CUTOUT

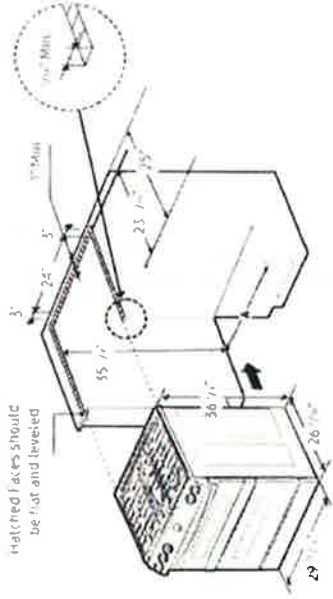

A: Cabinet opening 16" (40.7)

IMPORTANT: If your cabinet has a height over 36 inches, the range cannot be installed without supporting the back and base.

All dimensions are in inches. Design specifications and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. © 2019 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd. used with permission.

Total Power
63.5K BTU

Power Source
240V/60Hz/40A

5-Burner Cooktop

- Right Front: 23K BTU
- Left Front: 16K BTU
- Right Rear: 5K BTU
- Left Rear: 9.5K BTU
- Centre (Oval): 10K BTU

Oven: 6.3 cu. ft. Capacity

- Bake: 175°F–550°F
- Bake Burner: 18K BTU
- Broil Burner: 16.5K BTU
- Variable Broil: Low/High (375°F–480°F)
- Sabbath Mode

Storage Drawer

- Capacity: 1.0 cu. ft.

Warranty

One (1) Year Parts and Labour

Product Dimensions & Weight (WxHxD)


Outside Net Dimensions: 29 1/8" x 36 1/8" x 37" x 28"
Weight: 236.3 lbs (107.2 Kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 33 1/8" x 41 1/8" x 30 1/8"
Weight: 262 lbs (118.9 Kg)

Colour	Model #	UPC Code
Stainless Steel	NX60T871SS	8872764 5277

Recommended Locations for Gas Piping and Electrical Outlets

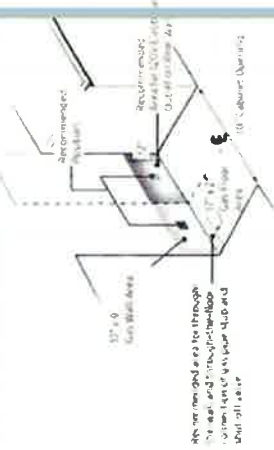

RECEIVED

MAR 24 2021

Lot 66
AS: EM
Mon. 23, 21

RF28R7551SR

28 cu. ft. 4-Door French Door Refrigerator
with 21.5" Connected Touchscreen Family Hub™

SAMSUNG



Signature Features

Food

- See inside your refrigerator from anywhere, with 3 built-in cameras.
- Create and share shopping lists, plan meals based on the food inside your refrigerator and automatically set expiration dates

Family

- Create your own home screen with Family Board, by adding personalized pictures, stickers and handwritten notes.
- Customize your screen saver with picture slide show, weather and animations

Fun

- Stream your favorite music directly on your Family Hub™ screen
- Mirror your Samsung TV or Samsung phone, right on your Family Hub™

Your Home

- Access your smart devices and Samsung appliances from your Family Hub screen, set lights, hear and speak to someone at your front door, monitor your baby's room and receive laundry end-of-cycle notifications
- Receive Wi-Fi updates so your fridge stays up to date with the latest features and apps

Bixby Voice 2.0

- Intelligent voice assistant allows hands-free navigation.
- Recognizes user's voice and provides a personalized experience.

Available Colors



Fingerprint Resistant
Stainless Steel (shown)



Fingerprint Resistant
Black Stainless Steel



Fingerprint Resistant
Tuscan Stainless Steel



Family Hub



FlexZone™ Drawer

Convenience

- FlexZone™ Drawer with 4 Temperature Settings and Smart Divider
- Wi-Fi and Bixby Enabled
- Adjustable Shelves for Tall Oversized Items
- Auto Pull-Out Upper Freezer Drawer
- Water Filter Indicator

Design

- Fingerprint Resistant Finish
- Modern External Filtered Water and Ice Dispenser
- High Efficiency LED Lighting
- EZ-Open Handle™ on Freezer Door and FlexZone™ Drawer
- Tempered Glass Spill-Proof Shelves
- Gallon Door Bins
- Dispenser Light

Performance

- Twin Cooling Plus™
- Metal Cooling
- 25W Built-In Speaker
- Ice Max - Stores up to 4.2 lbs of Ice
- ENERGY STAR® Compliant
- Power Freeze and Power Cool Options
- Two Humidity-Controlled Crispers
- CoolTight Door
- Door Alarm

Rating



ENERGY STAR® rated:
755 kWh/yr

RECEIVED

MAR 24 2021

Lot 66
AS:EM
On Jan. 23, 201

RF28R7551SR


28 cu. ft. 4-Door French Door Refrigerator with 21.5" Connected Touchscreen Family Hub™

SAMSUNG


Installation Specifications

- 1 Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring)
 - 2 Refer to illustration below to determine dimensions
 - 3 Allow 2 1/2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact
 - 4 Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation
 - 5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.
- For optimal usage and to be able to open refrigerator doors completely, do not install next to a wall

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product, or download manual online at samsung.com

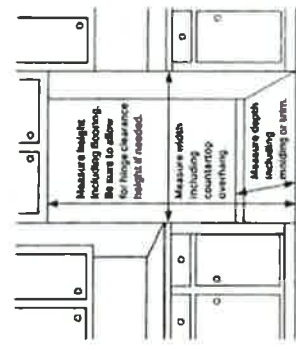

Dimensions

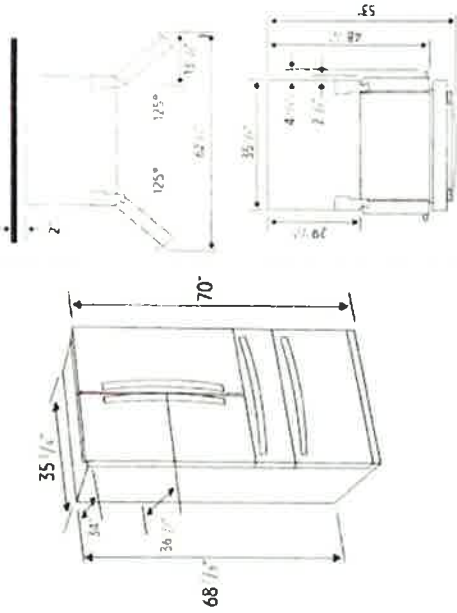

- Total Capacity: 27.7 cu. ft.**
- Refrigerator: 15.6 cu. ft.
 - 2 Humidity-Controlled Crispers
 - 5 Tempered Glass Spill-Proof Shelves
 - 1 Slide-In
 - 1 Slide-Out
 - 1 Foldable Half
 - 2 Fixed
 - 6 Door Bins
 - Right Door: 3 Door Bins
 - Left Door: 3 Regular Bins
 - Metal Cooling
 - High Efficiency LED Lighting
 - FlexZone™ Drawer: 3.8 cu. ft.**
 - 4 Temperature Zones with Smart Divider
 - Meat/Fish (29°F)
 - Cold Drinks (33°F)
 - Deli/Snacks (37°F)
 - Wine/Party Dishes (42°F)
 - Freezer: 8.3 cu. ft.**
 - EZ-Open Handle™
 - Take Out Box
 - 1 Drawer Divider
 - High Efficiency LED Lighting
- Warranty**
- One (1) Year Parts and Labor on Refrigerator
- Five (5) Years Parts and Labor on Sealed Refrigeration System Only*
- Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor
- *Limited to manufacturer's recommended use and components
- Product Dimensions & Weight**
- Dimensions (WxHxD with hinges, handles and doors): 35 1/8" x 70" x 36 1/8"
- Dimensions (WxHxD without hinges and door): 35 1/8" x 68 1/8" x 29 1/8"
- Dimensions (WxHxD with hinge and door, no handle): 35 1/8" x 70" x 34"
- Weight: 346 lbs
- Shipping Dimensions & Weight (WxHxD)**
- Dimensions: 38 1/4" x 75 1/2" x 36 1/4"
- Weight: 368 lbs
- | Color | Model # | UPC Code |
|--|-------------|--------------|
| Fingerprint Resistant Stainless Steel | RF28R7551SR | 8872763 5321 |
| Fingerprint Resistant Black Stainless Steel | RF28R7551SG | 8872763 5314 |
| Fingerprint Resistant Tuscan Stainless Steel | RF28R7551DT | 8872763 5307 |

Actual Size may vary. Design specifications and color availability are subject to change without notice. Item photo, weights and measurements are approximate. © 2016 Samsung Electronics America, Inc. All Other registered trademarks are the property of their respective owners. Samsung Electronics Co., Ltd.

RECEIVED
MAR 24 2021


Let 66
 (R) EM
 Mar. 23, 21

KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Convection Microwave Oven

PRODUCT MODEL NUMBERS
 KMBP100E KMBP107E

ELECTRICAL CONNECTION

- Microwave oven must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial/ating plate is located underneath the control panel, along the oven vent.



A. Model/serial/rating plate

- The microwave oven rated 120/240 volt, 20-amp, has 4 wires (L1, L2, N and G) in the flex conduit and should be connected to a 20-amp maximum rated circuit, overcurrent protected on both the L1 and L2 circuits
- A time-delay fuse or circuit breaker is recommended

PRODUCT DIMENSIONS


27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens



27" (68.6 cm) models

- A 25" (64.5 cm)
- B 18" (47.3 cm) overall height
- C 26" (67.9 cm) overall width
- D 21" (54.6 cm)
- E 17" (44.1 cm)

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit



27" (68.6 cm) models

- A 26" (67.9 cm) overall width


NOTE: The microwave oven spacer kit will allow the microwave oven to be installed in a 17 1/2" (44.1 cm) maximum cutout height. A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19" (48.3 cm) maximum cutout height. Match the oven size to the following kits.

- 27" (68.6 cm) Stainless Steel - Model W10469901
- 30" (76.2 cm) Stainless Steel - Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

Because Whirlpool Corporation includes a copyright agreement to improve our products, we reserve the right to change material and specifications without notice.

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

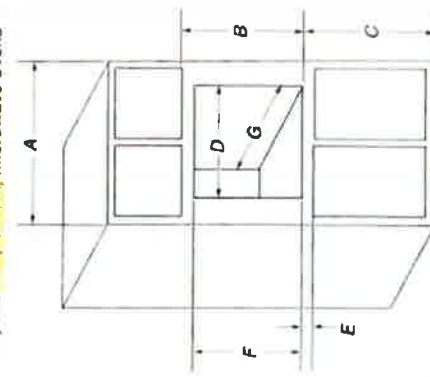


27" (68.6 cm) models

- A 27" (68.6 cm) min. cabinet width
- B 18" (47.3 cm) min. cabinet width to bottom of upper cabinet door
- C 40" (101.6 cm) bottom of cutout to floor (recommended)
- D 25" (64.8 cm) cutout width
- E 17" (44.1 cm) min. bottom of cutout to top of cabinet door
- F 17" (44.1 cm) recommended cutout height (wall to cutout height from floor)
- G 21" (54.6 cm) min. cutout depth

MINIMUM INSTALLATION CLEARANCES

For proper installation, the following minimum clearances must exist above and below the cabinet opening.

Installation Above Single Built-In Oven

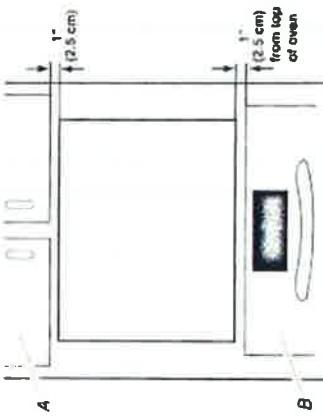

- A Upper cabinet
- B Lower single oven

Approved models: KMBP100E and KMBP107E

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref: W107247-01
 2/14/19

RECEIVED
 MAR 24 2021

KitchenAid®

FOR THE WAY IT'S MADE.™

30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVW7B61QD KVM606D

Electrical: A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance. Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.

Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations


If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.



The following example falls within the maximum recommended vent length of 35 ft (10.7 m).


1 - 90° elbow = 5.0 ft (1.5 m)
1 - wall cap = 0.0 ft (0.0 m)
8 ft (2.4 m) straight = 8.0 ft (2.4 m)
Length of system = 13.0 ft (3.9 m)

PRODUCT DIMENSIONS

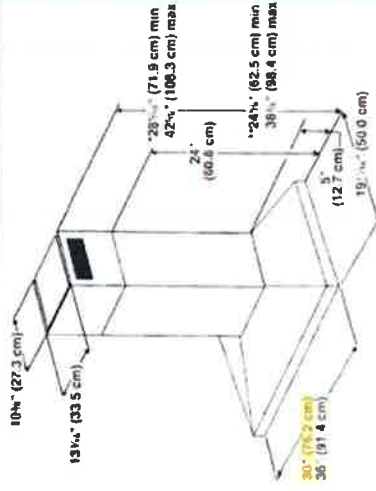

*For non-vented (recirculating) installations

**For vented installations

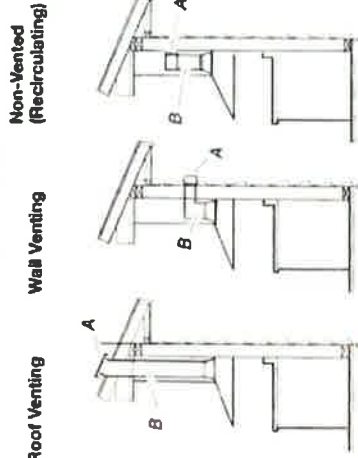

A Roof cap
B 6" (15.2 cm) round vent

A Wall cap
B 6" (15.2 cm) round vent

A Diverter
B 6" (15.2 cm) round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece	6" (15.2 cm) Round
45° elbow	2.5 ft (0.8 m)
90° elbow	5.0 ft (1.5 m)

Maximum equivalent vent length is 35 ft (10.7 m)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Page 1 of 2
Ref: WH36-118
1/14

RECEIVED

MAR 24 2021

