

GE Profile™ 30" Built-In Combination Convection Microwave/Convection Wall Oven

NOTE: Elements installed subjected to wall
in 1970 must have an extension space of at
least a 101°F temperature rating.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


Wired connections are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Note: There are no art and
apparent for the holder of
which is not a full person.




KW RATING	
210A	7.5
210A	2.1
BREAKER SIZE	
210A	10 1/2 amp
210A	20 1/2 amp



For answers to your questions, call toll-free 1-800-678-9272 or write to GRE Application Service, P.O. Box 1617, Princeton, NJ 08542.

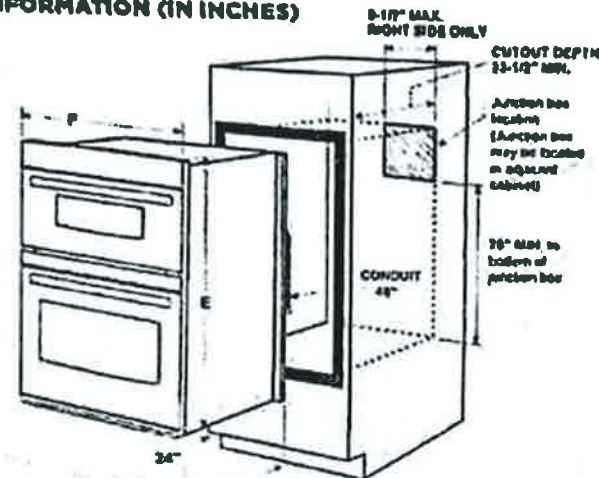

Dimension and
installation information
are shown in inches.

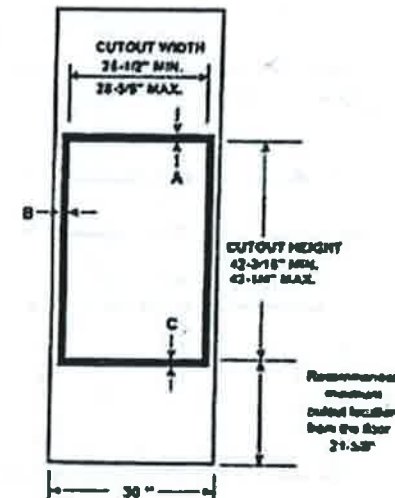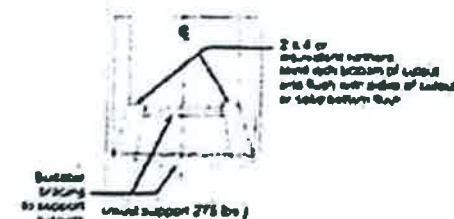

Flowerwood
Cubed location
Sage the Star
21.25

ATTENTION INSTALLER:

NOTE: If the national flag has been a gift, but you left it to the United States and it is now in the hands of the government, you can't claim it. The same rule applies to the flag of the United States if it is now in the hands of the government.

NOTE: If the national flag is a gift, but you left it to the United States and it is now in the hands of the government, you can't claim it. The same rule applies to the flag of the United States if it is now in the hands of the government.

NOTE: If the national flag is a gift, but you left it to the United States and it is now in the hands of the government, you can't claim it. The same rule applies to the flag of the United States if it is now in the hands of the government.

CASSET

- A - Overlap of given at top of cabinet
- B - Overlap of given over side of edges of cabinet
- C - Overlap of given at bottom of cabinet

OVEN

- D - Inside oven
- E - Current to go with oven
- F - Overall oven

PT7800

[illegible]

എന്നതിൽ അംഗം എടുത്തത് 24

RECEIVED

MAY 04 2021


Scanned with CamScanner

PT7800SH

GE Profile™ 30" Built-In Combination Convection Microwave/Convection Wall Oven

FEATURES AND BENEFITS

- Convection microwave (upper oven)
- True European Convection (lower oven)
- Next-generation honey-comb roller racks (lower oven)
- Self-clean with Micro (2nd option) (lower oven)
- Glass touch controls
- Halogen interior oven lighting (lower oven)
- 10-power bake element (lower oven)
- 8-power broil element (lower oven)
- 1.7 cu. ft. microwave capacity
- 10" turntable (upper oven)
- 1" U. Guarantee
- Model PT7800SH - Stainless steel

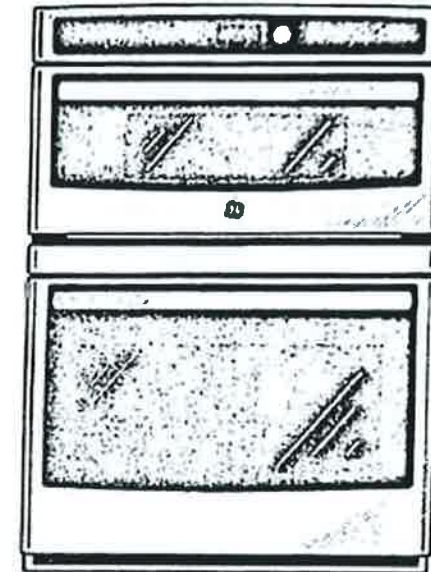

GUARANTEED FIT

Replacing a similar wall oven from GE or another brand? GE wall ovens are guaranteed for an exact fit to make replacement easy.

Visit geappliances.com for more info.



Scanned with CamScanner

Lot 56

Am SA

RECEIVED

MAY 04 2021


Page 1 of 10

PT7800SH

GE Profile™ 30" Built-In Combination Convection Microwave/Convection Wall Oven

FEATURES AND BENEFITS

- Combination microwave/convection (lower oven)
- True European Convection (lower oven)
- Sevenspeed broil, roast, bake, broil, roast (lower oven)
- Self-clean with Steam & Ion system (lower oven)
- Glass touch controls
- Halogen interior oven lighting (lower oven)
- Hi-pure bake element (lower oven)
- 8-quart broil element (lower oven)
- 1.7 cu. ft. microwave capacity
- 10" turntable (upper oven)
- Hi Convector
- Model PT7800SHS - Stainless steel

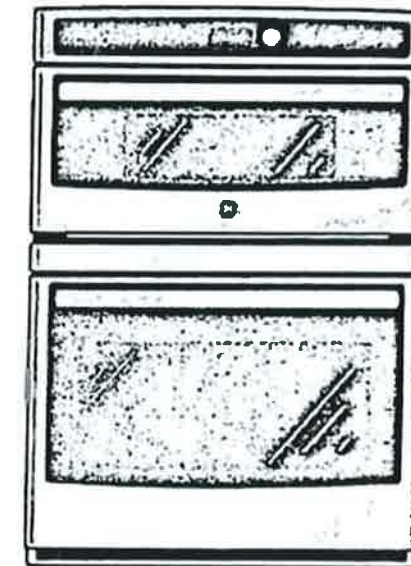

GUARANTEED FIT

Replacing a similar wall oven from GE or another brand? GE wall ovens are guaranteed for an exact fit to make replacement easy.

Visit geappliances.com for more info.



Scanned with CamScanner

Lot 56



RECEIVED
MAY 04 2021


Lot 56

SA

Enclosure Requirements


A WARNING

To Avoid Scalding or Electrical Shock Hazard!
Make sure the water supply and electrical supply are shut off
before installation or service.
To Avoid Electrical Shock/Fire Hazard!
Do not allow the electrical and supply lines to touch.

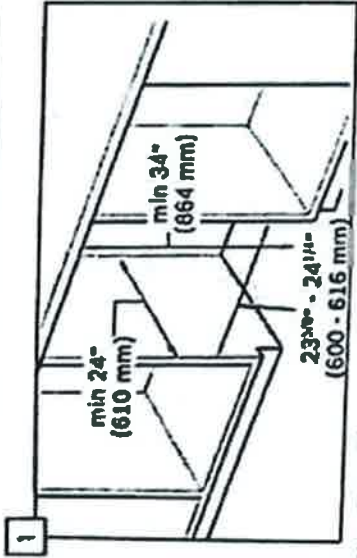

Note: This dishwasher is designed to be enclosed on the top, back and both sides by standard residential kitchen cabinetry.

- Select a location as close to the sink as possible for easy access to water supply and drain lines.
- For proper dishwasher operation and appearance, ensure that the enclosure is square and has the dimensions shown.

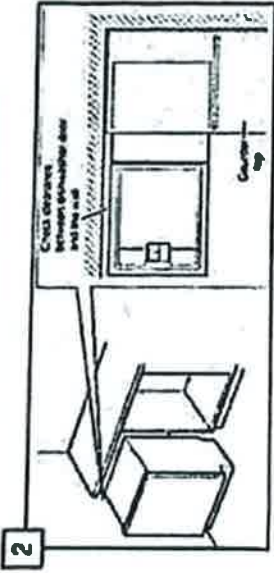

- If the dishwasher is to be installed in a corner, ensure that there is adequate clearance to open the door as shown.

RECEIVED
MAY 04 2021

207 56

4 54

Electrical Supply
The customer has the responsibility of ensuring that the dishwasher electrical installation is in compliance with all national and local electrical codes and ordinances. The dishwasher is designed for an electrical supply of 120V, 60 Hz, AC, connected to a dishwasher-dedicated, properly grounded electrical circuit with a fuse or breaker rated for 15 or 20 amps.

Dishwasher Electrical Rating

Volts	Hertz	Amperes	Watts
120	60	12	1,440 (max)

Grounding Instructions

The dishwasher must be properly grounded before operating. The appliance must be connected to a grounded metal permanent wiring system or an equipment grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the dishwasher.

Do NOT use an extension cord.

Make sure that the dishwasher is connected to a suitable ground in compliance with all local codes or, in the absence of a local code, with the NATIONAL ELECTRICAL CODE in the United States or the CANADIAN ELECTRIC CODE C22.1-latest edition in Canada as well as any provincial/state or municipal or local codes that apply.



Note: Installations requiring hard wiring and terminal block - The accessory terminal block/junction box model, SMZPCJB1UC, designed for permanent wire connection, is not included but can be ordered through Customer Service by calling 1-800-944-2904. Follow the instructions enclosed with the kit.

RECEIVED
MAY 04 2021

INSTALLATION INSTRUCTIONS


Installation Preparation

PRODUCT DIMENSIONS

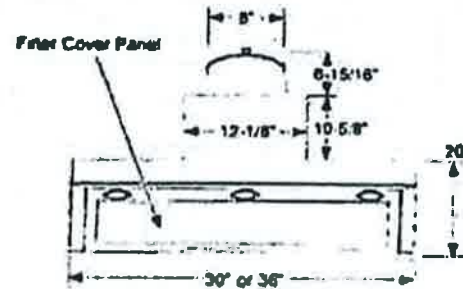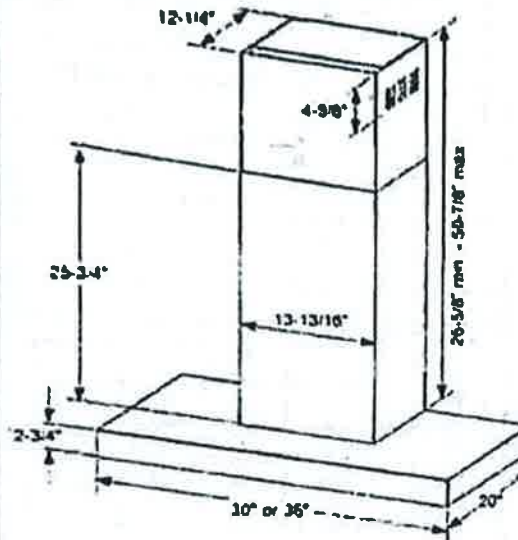

INSTALLATION CLEARANCES

These vent hoods are designed to be installed onto a wall with no above cabinets.

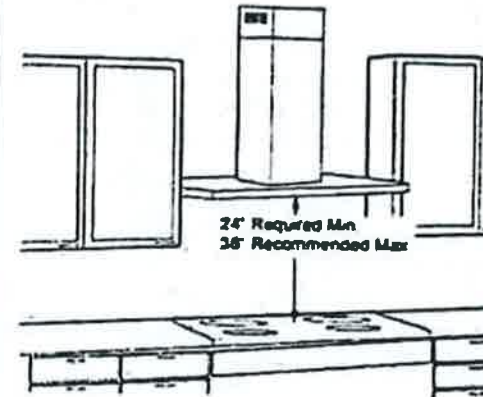

The vent hood must be installed between the 24" required minimum and 36" recommended maximum above the cooking surface. For supplied duct cover ceiling heights, see Installation Height Table.

NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. The hood must be installed onto a wall. It can be vented to the outdoors, or it can be installed for recirculating operation. For recirculation operation, see Recirculation Install Planning.

7
S4
25/5/21


RECEIVED
MAY 04 2021

Lot 56

(A) (S)

PREPARING THE OPENING

1 APPROXIMATE COOKTOP DIMENSIONS

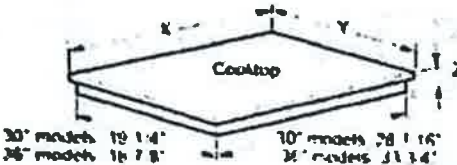


Size	Models	X	Y	Z Front	Z Rear
30"	JXTR30 I	20 3/4"	28 7/8"	3 1/4"	3"
	JXTR30 II	20 3/4"	28 7/8"	3 1/4"	3"
	JXTR30 III	20 3/4"	28 7/8"	3 1/4"	3"
	JXTR30 IV	20 3/4"	28 7/8"	3 1/4"	3"
	JXTR30 V	20 3/4"	28 7/8"	3 1/4"	3"
	JXTR30 VI	20 3/4"	28 7/8"	3 1/4"	3"
36"	JXTR36 I	31 3/4"	31 3/4"	3 1/2"	3 1/2"
	JXTR36 II	31 3/4"	31 3/4"	3 1/2"	3 1/2"
	JXTR36 III	31 3/4"	31 3/4"	3 1/2"	3 1/2"
	JXTR36 IV	31 3/4"	31 3/4"	3 1/2"	3 1/2"
	JXTR36 V	31 3/4"	31 3/4"	3 1/2"	3 1/2"
	JXTR36 VI	31 3/4"	31 3/4"	3 1/2"	3 1/2"

* Depth at rear of cooktop at conduit location

2 CUTOUT DIMENSIONS OF THE COUNTERTOP

To ensure accuracy, it may be best to create a template when cutting the opening in the counter.

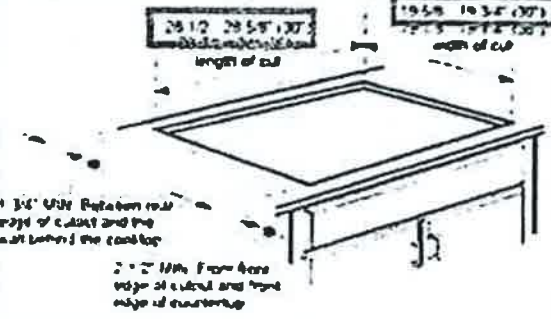

JXTR32 CUTOUT FILLER TRIM KIT

(for use with 30" models):
 A filler trim kit is available for use if your countertop cutout is larger than the dimensions shown, up to 29-13/16" x 20-7/16". Order JXTR32B (black) or JXTR32W (white) to reduce the cutout opening for installation of this cooktop. This kit may be ordered from your dealer or directly from GE Appliances at www.geappliances.com

PP9030DJ

GE Profile™ 30" Built-In Touch-Control Electric Cooktop

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 3" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


NOTE: 30" Ribbon cooktops are approved for use over select GE 27" and GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for current dimensional data.

CUTOUT FILLER TRIM KIT: A filler trim kit is available for use if your countertop cutout is larger than the dimension shown on up to 23-13/16" x 20-7/16". Order JXTU32B for black or JXTU32W for white. To reduce the cutout opening for installation of this cooktop. These kits may be ordered from your GE Appliances Dealer.




For answers to your questions, call 1-800-GE-APPLIANCES or visit us online at www.geappliances.com or call GE Answer Center Service, 800.828.7663.

APPROXIMATE COOKING DIMENSIONS

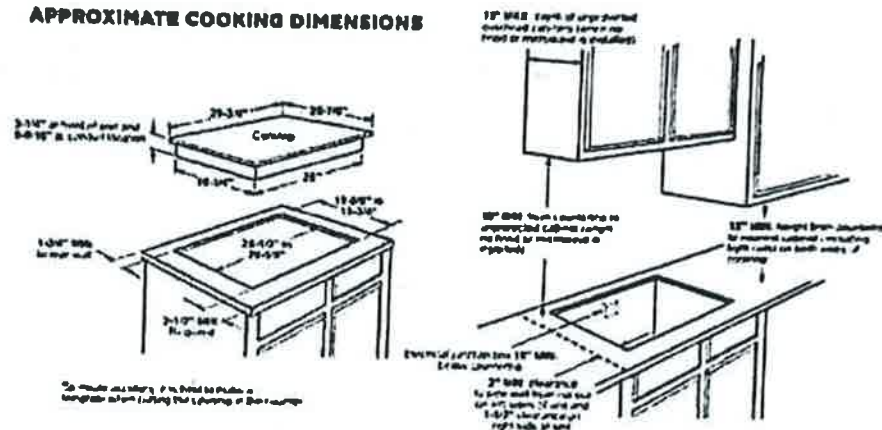

INSTALLATION ABOVE A WALL OVEN



VOLTAGE (60HZ AC)	210V	240V
CONNECTED LOAD (MAX.)	9.5kW	7.1kW
CURRENT DRAW (MAX.)	39.0 Amperes	31.0 Amperes
RECOMMENDED CIRCUIT BREAKER	40 Amperes	30 Amperes

*NOTE: (Check local codes for required breaker size.)



Page 1 of 1

Lot 56

SA


RECEIVED
MAY 04 2021

PP9030DJ

GE Profile™ 30" Built-In Touch-Control Electric Cooktop

FEATURES AND BENEFITS

- Five radiant cooking elements
- Glide touch controls
- Power Boil dual-ring element
- 2nd Power Boil dual-ring element
- Synchrowave
- Multi-element timer
- Control lock capability
- Custom settings
- Keep warm setting
- 1 yr. Guarantee
- Model PP9030DJ - Black on Black

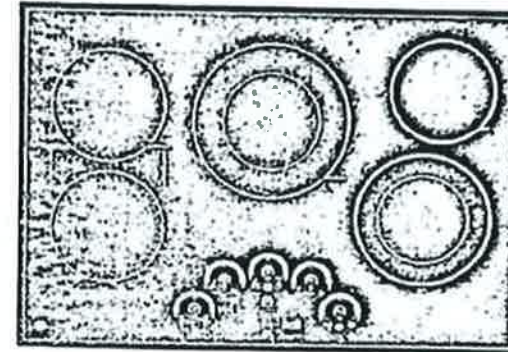

OPTIONAL STAINLESS STEEL CLAD ALUMINUM GRIDDLE

Achieve even results with this light weight griddle, tailored to fit GE Synchrowave. Order part number 25411011 from your GE Dealer.

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit on GE Appliances with pay up to \$100 toward modifications.

Visit geappliances.com for more info.



Scanned with CamScanner

Lot 56

(M) (SA)

RECEIVED
MAY 04 2021