FRIGIDAIRE GALLERY

FGBC5334VS

LOT 76 June 13, 2022 AA, LA

BEVERAGE CENTER

165 (12 FL. OZ.) CANS

PRODUCT DIMENSIONS

Opened 90°





Height 34-1/8" to 35" Width 23-7/16" Depth 23-1/4" Depth with Door 45"

MORE EASY-TO-USE FEATURES

Built-In or Freestanding Installation Conveniently place this beverage center in the optimal location for your home with our front venting cooling system that enables built-in or freestanding installation and leg levelers for customizing to your height needs.

Reversible Door Swing Door can be installed to open left or right based on your needs.

SIGNATURE FEATURES

Precision Temperature Controls with LED Display Can Chill Beverages Down to 34°F (1°C)

Keep your drinks at the perfect temperature with LED temperature controls and display, which can be easily adjusted from 34°F to 50°F (1°C-10°C) with the touch of a button.

Sleekly Designed Stainless Steel Door with Tinted Glass Window and Adjustable Glass Shelving

Enjoy the sleek look of a contemporary handle, stainless steel door with tinted glass window, and adjustable endto-end glass shelving with stainless steel trim on this elegant beverage center.

165 Twelve-Ounce Can Storage Capacity

Keep your favorite refreshments at just the right temperature without sacrificing refrigerator space with this 5.3 cubic foot built-in beverage center that has an easy fit capacity of 165 twelve-ounce cans and a maximum fit capacity of up to 195 twelve-ounce cans.


Door Alarm

Monitor the ideal environment for your drinks and avoid lukewarm beverages with our audible door alarm that alerts you if the door is mistakenly left open.

frigidaire.com / frigidaire.ca

FGBC5334VS **BEVERAGE CENTER**

165 (12 FL. OZ.) CANS



FRIGIDAIRE GALLERY

FEATURES


Installation Type


Cubic Feet (Cu.Ft.)	5.3
Bottle/Can Capacity	165 (12 fl. oz.) cans
EXTERIOR	
Door Calor	Stainless Steel
Cabinet Color	Black
Window Type	Tinted Glass
Door Handle	Stainless Steel
Reversible Door	Yes
Adjustable Leveling Legs	4
INTERIOR	a kari artarna eta eta e e e e e e e e e e e e e e e
Control Type	Electronic
Display	F° or C°
Lighting	LED
Frost-Free Performance	Yes
Candenser	Dynamic
High-Temperature Acoustic Alarm	Yes
Power-On/Off Control	Yes
Temperature Zones	
Temperature Range	34°F to 50°F
Adjustable Shelves	Yes
Stainless Steel Shelf Trim	Yes
Cabinet Liner	Black
SPECIFICATIONS	4-54-54-54-54-5-10-commission representative files (4-54-54-commission representative files)
Power Supply Connection Location	Lower RH Rear Corner
Voltage Rating	115V/60Hz
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	119 Lbs.

Built-In or Freestanding

PRODUCT DIMENSIONS

A-Height	34-1/8" to 35"
B-Width	23-7/16
C-Depth	23-1/4"
D-Depth with Door Open 90°	43

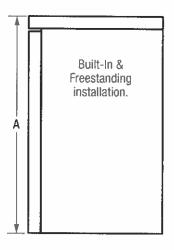

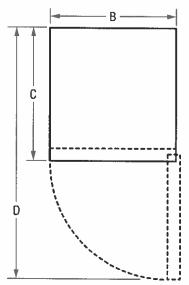



Note: For planning purposes only. Always consult local and national electric and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca



22 cu. ft. 36-Inch Width Counter Depth French Door Refrigerator with Interior Dispense

http://www.kitchenaid.com



Key Features:

- ExtendFresh™ Temperature Management System
- Interior Water Dispenser
- Produce Preserver
- Humidity-Controlled Crispers
- FreshChili™ Temperature-Controlled Full-Width
- Pull-Out Tri-Level Freezer Drawer
- SatinGlide® System
- LED Lighting
- Star-K Certified
- · Automatic Ice Maker
- Max Cool
- · Metallic Accents on Shelf Trim

Product Dimensions:

Height: 72

Width: 35 3/4

Depth: 30 1/4

Electrical Requirements:

15.

Additional Information:

Use And Care Guide

Dimension Guide

Energy Guide

Warranty Certificate

Available in:

Black Stainless Stainless Steel

INVESTED AMERICA

©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved.
All other trademarks are owned by their respective companies.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.

Created On: Monday, March 06, 2017 19:12:25

KitchenAid[®]

FOR THE WAY IT'S MADE!

Bottom Mount Refrigerator

LOT 76 June 13, 2022 AA, LA

PRODUCT MODEL NUMBERS


KRFC302E

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


Reverse Osmosis Water Supply: IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

PRODUCT DIMENSIONS

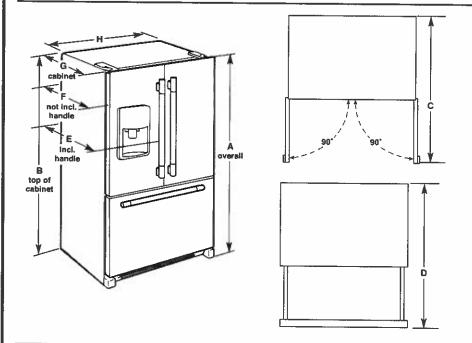

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet	
21.9	72" (182.9 cm)	713%° (181.3 cm)	441/6" (112.1 cm)	451/4* (114.9 cm)	301/4" (76.8 cm)	27 ³ / ₄ * (70.5 cm)	24%* (62.5 cm)	35¾* (90.8 cm)	

LOCATION REQUIREMENTS

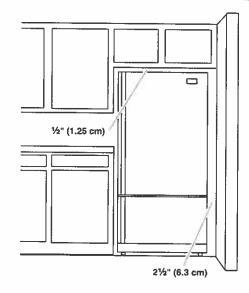


IMPORTANT: This refrigerator is designed for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for $\frac{1}{2}$ (1.25 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave 21/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

24" Custom Panel Dishwasher

300 Series - Custom Panel SHVM63W53N







SHVM63W53N Custom Panel

The 3rd rack provides the perfect space for silverware and large utensils while its V shape leaves room below for taller items.

Features & Benefits

44 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

With PrecisionWash®. intelligent sensors and precision spray arms target every item of every load, so dishes come out sparkling clean every time.

The AquaStop® leak protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are away or at home.

General Properties	
Number of wash cycles	5
Number of options	4
dBA	44
Drying system	PureDry
Third rack	Standard 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Buttons
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
NSF®-certified* sanitize option	Yes
Water softener	No
Five-level wash	Yes
ChildLock	No
Special features	InfoLight®, Extra Dry Option
Efficiency	SHIP IN THE
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5

C EHO?	Market telephone
NSF	
ENERGY GIAR	
rs	
outing clips	

Technical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door (in)**	Left - 45" Right - 56"
Minimum water pressure (lb/sin)	14
Length outlet hose (in)	79"
Dimensions & Weight	
Overall appliance dimensions (HxWxD)(in)	33 7/8" x 23 9/16" x 23 1/16"
Required cutout size (HxWxD)(in)	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes
Net weight (lbs)	88 lbs
Accessories-Optional	
Junction Box	SMZPCJB1UC
Bosch Dishwasher Water Supply Hose	SMZSH002UC
Drain Hose Extension Kit	SGZ1010UC
Stainless Steel Straight Bosch Bar Handle	SMZ1007UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC





*Certification to NSF/ANSI Standard 184 for residential dishwasher

**September 2020 running production change to remove adhesive rou for power cord. These clips and the edge protector are now include dishwasher accessory kit * SMZEPCCTUC.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

Capacity

Number of place settings 16

SBH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


24" Custom Panel Dishwasher LOT 76

300 Series - Custom Panel SHVM63W53N

AA, LA




Installation Details

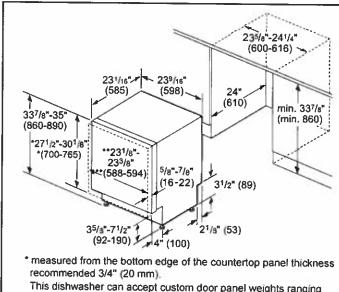



This dishwasher can accept custom door panel weights ranging from 7 to 24 lbs; however, the dishwasher comes from the factory ready for custom panel door weights from 11 to 18 lbs. If you plan on using a door panel that is not 11 to 18 lbs. please contact customer service at (800) 944-2904.


** 24" (610 mm) wide panel may be used depending on cabinet design

Note: Refer to installation template for mounting hardware locations measurements in inches (mm)

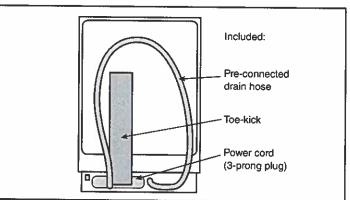

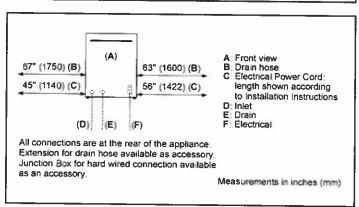

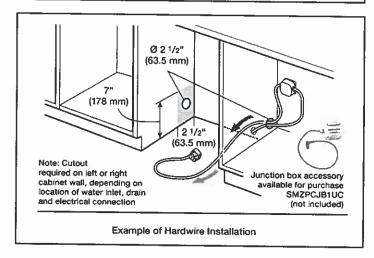

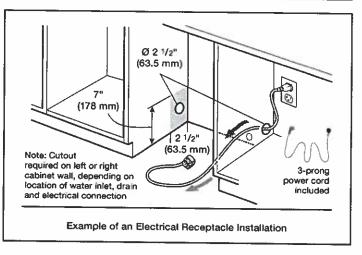

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warrantles: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


24" Custom Panel Dishwasher LOT 76


300 Series - Custom Panel SHVM63W53N

AA, LA



Installation Details





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).


Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



KitchenAid^{*}

30" Combination Wall Oven with Even-Heat™ True Convection (Lower Oven)

http://www.kitchenaid.com



Key Features:

- Even-Heat™ True Convection Oven (lower oven)
- Microwave Convection Cooking (upper oven)
- Professionally-Inspired Design
- Temperature Probe
- EasyConvect[™] Conversion System
- 5.0 Cu. Ft. Total Capacity (lower oven)
- 1.4 Cu. Ft. Capacity (upper oven)
- Crispwave™ Microwave Technology and Crisper Pan (upper oven)
- SatinGlide™ Roll-Out Extension Rack (lower oven)

Product Dimensions:

Height: 42 1/2

Width: 30

Depth: 27 1/8

Electrical Requirements:

40 Amps.

Additional Information:

Use And Care Guide

Dimension Guide

Installation Guide

Warranty Certificate

Available in:



Stainless Steel ○White

INVESTED AMERICA

©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved.

All other trademarks are owned by their respective companies.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

transition products without notice.

Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.

Created On: Monday, March 06, 2017 18:50:58

Kitchen Aid 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309E KOCE500F KOCE507E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

 Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the iunction box
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 - 1. Connect a section of solid copper wire to the pigtail leads.
 - 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.


Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
120/240	32	30	8000
120/208	30	28	6600
	120/240	120/240 32 120/208 30	120/240 32 30 120/208 30 28

Amperage values noted above are for information purposes only: the units are rated in watts.

PRODUCT DIMENSIONS

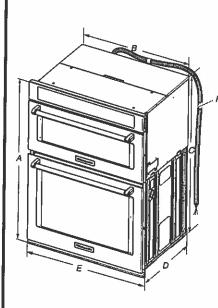

27" (68.6 cm) models


- A. 42% (108.0 cm) overall
- height B. 25⁷/1s" (64.6 cm) recessed width
- C. 41" (104.1 cm) recessed
- height
 D. 23'/4" (59.1 cm) max.
- recessed depth
- E. 27" (68.6 cm) overall width F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the

oven. Do not remove the

conduit clamp. 30" (76.2 cm) models


- A. 42% (108.0 cm) overall height
- B. 281/16" (72.3 cm) recessed
- C. 41° (104.1 cm) recessed
- height D. 23½" (59.1 cm) max.
- E. 30" (76.2 cm) overall width
- F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions

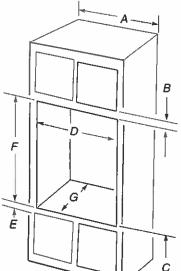

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet doo
- C. 191/4" (48.9 cm) bottom of cutout to floor is recommended. 4"-191/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 251/2" (64.8 cm) cutout width E. 11/2" (3.8 cm) min. bottom of
- cutout to top of cabinet doo. 41⁵/₁₆* (105 cm)* recommended
- cutout height G. 24" (60.7 cm) cutout depth
- 30" (76.2 cm) models
- A. 30" (76.2 cm) min. cabinet width B. 1" (2.5 cm) top of cutout to bottom
- C. 191/4" (48.9 cm) bottom of cutout to floor is recommended. 4"-191/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 281/2" (72.4 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout
- F. 415/16" (105 cm)" recommended cutout
- G. 24* (60.7 cm) cutout depth
- NOTE: The cabinet height can be between 41" (104.1 cm) and 41 $\frac{1}{2}$ " (105.6 cm) for microwave/oven combination.





36-Inch 5-Element Sensor Induction Cooktop

http://www.kitchenaid.com



- Sensor Induction Technology
- Auto Presets for Melt, Simmer, Keep Warm and Boil
- Assisted Cooking Modes for Boil, Fry and Grill
- Power Boost Function
- Touch-Activated Controls
- Pan Size Detection
- Control Lock
- Frameless Design
- Requires Induction-Compatible Cookware

Product Dimensions:

Height: 2 5/16 Width: 36 11/16 Depth: 21 23/32


Additional Information:

Owners Manual

Dimension Guide

Installation Guide

Warranty Certificate

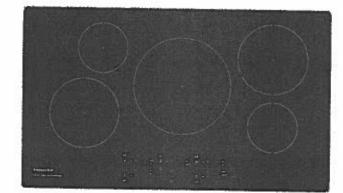

Available in:



Stainless Steel

INVESTED AMÉRICA



©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2021 Whirlpool Corporation, All Rights Reserved.
All other trademarks are owned by their respective companies.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or Iransition products without notice.

Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.

Created On: Tuesday, May 24, 2022 06:57:31

INDUCTION COOKTOP PRODUCT DIMENSIONS

KCIG950	36" Cooktop KCIG556JBL/SS KCIG956JBL/SS		
in	cm	in	cm
313/16	79.2	a market amount of the part of	93.2
2123/32	55.1	 	55.1
303/4		1	
		 	92.2
	in 31 ³ / ₁₆	in cm 31 ³ / ₁₆ 79.2 21 ²³ / ₃₂ 55.1 30 ³ / ₄ 78.2	in cm in 31 ³ / ₁₆ 79.2 36 ¹¹ / ₁₆ 21 ²³ / ₃₂ 55.1 21 ²³ / ₃₂ 30 ³ / ₄ 78.2 36 ⁵ / ₁₆

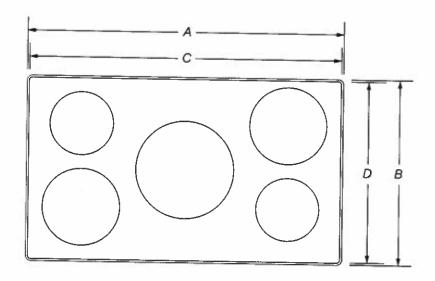


TOP VIEW

INDUCTION COOKTOP PRODUCT DIMENSIONS

MODEL #	30" Cooktop KCIG550JBL/SS KCIG950JBL/SS		KCIG550JBL/SS KCIG950JBL/SS		KCIG556	ocktop GJBL/SS GJBL/SS
Unit of Measurement	in	cm	in in	cm		
Glass Width (E)*	3035/32	78.2	365/16	92.2		
Electric Inlet to Surface (F)	329/32	9.9	329/32			
Center to Electric Inlet (G)	133/32	33.2		9.9		
Recessed Cooktop Width (H)			1325/32	35.0		
Includes width of grates and evidels	2911/32	74.5	355/16	89.7		

^{*}Includes width of grates and griddle.

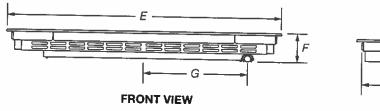




IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.



INDUCTION COOKTOP PRODUCT DIMENSIONS

MODEL # KCIG		ooktop OJBL/SS OJBL/SS	KCIG55	ooktop 6JBL/SS 6JBL/SS	
Unit of Measurement	in	cm	in	cm	
Height with Grates (I)	25/16	7.1	25/16	7.1	
Control Panel Height (J)	39/16	9	39/16		
Recessed Cooktop Height (K)	3 ²³ / ₃₂	9.4	323/32	9.0	
Cooking Surface Height (L)	201/4	51.4		9.4	
Recessed Cooktop Depth (M)			201/4	51.4	
	211/4	54.1	211/4	54.1	
Depth with Front Edge (M)	22	55.9	22	55.9	

IMPORTANT: Supplied regulator does not come preattached and is pictured for reference purposes only.

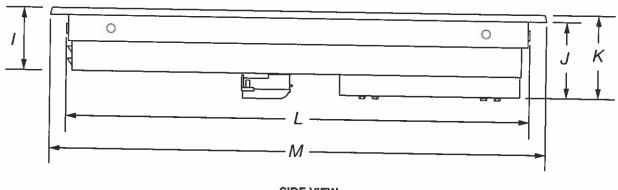

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.


Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

4 of 21

INDUCTION COOKTOP OPENING/CLEARANCE DIMENSIONS

MODEL #	KCIG55	ooktop 60JBL/SS 60JBL/SS	36" Cooktop KCIG556JBL/SS KCIG956JBL/SS	
Unit of Measurement	in	cm	in	cm
Combustible Area above Cooking Surface Width (minimum) (A)	30	76.2	36	91.4
Bottom of Cabinet Height above Cooking Surface (minimum) (B)*	30	76.2	30	76.2
Bottom of Cabinet Height above Countertop (minimum) (C)	18	45.7	18	45.7
Distance to Fixed Wall or Combustible Material (D)	1	2.5	1	2.5

If installing a hood above the cooktop, follow the hood instructions for dimensional clearances above the cooking surface.

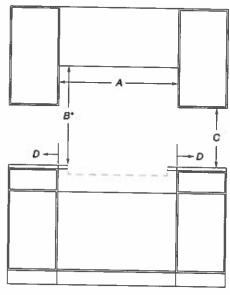

FRONT VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.


Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

INDUCTION COOKTOP OPENING/CLEARANCE DIMENSIONS

MODEL #	30" Cooktop KCIG550JBL/SS KCIG950JBL/SS		36" Cooktop KCIG556JBL/SS KCIG956JBL/SS	
Unit of Measurement	in	cm	in	
Recommended Upper Cabinet Depth (E)	13	33	13	33
Cutout to Wall Depth (if backwall is constructed of non-combustible material) (F)*	1	2.5	1	2.5
Cutout to Wall Depth (if backwall is constructed of combustible material) (F)*	1	2.5	1	2.5
Cabinet to Countertop Height (G)**	315/16	10	315/16	10
Cabinet Depth (H)	239/32	59.1	239/32	59.1

[&]quot;If the back wall is constructed of a combustible material and a backsplash is not installed, a 73/4" (19.7 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the cooktop.

^{**}The bottom of the cutout supports the product. Unlike many cooktops, these models do not hang from the side flanges, but rather sit on the floor of the cutout.

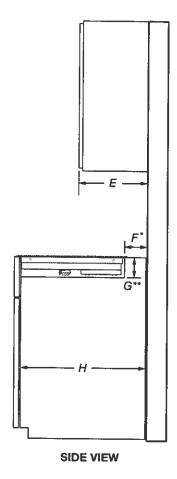


IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

INDUCTION COOKTOP OPENING/CLEARANCE DIMENSIONS

MODEL #	30" Cooktop KCIG550JBL/SS KCIG950JBL/SS		36" Cooktop KCIG556JBL/SS KCIG956JBL/SS	
Unit of Measurement	in	cm	in	cm
Countertop and Cabinet Cutout Width (I)	299/16	75.1	359/16	90.3
Countertop and Cutout Depth (J)	203/4	52.7	203/4	52.7

NOTE: Due to manufacturing factory tolerances, these are nominal dimensions. You may need to readjust to meet your clearance.

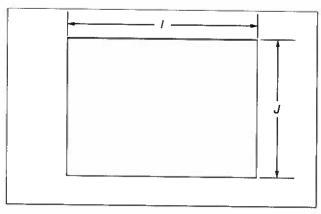

TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.


7 of 21

INDUCTION COOKTOP ELECTRICAL REQUIREMENTS

ELECTRIC REQUIREMENTS CHECKLIST

- ☐ A 240 V, 60 Hz, AC only, fused, electrical circuit is required.
- ☐ For 30" (78.2 cm) cooktops, use a 40 A circuit.
- ☐ For 36" (91.4 cm) cooktops, use a 50 A circuit.
- D A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL OUTLET ZONE

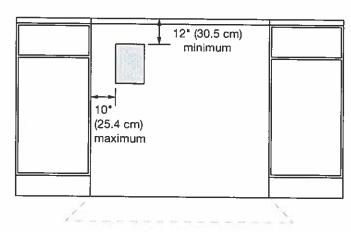

FRONT VIEW

NOTE: If you have questions about your electrical supply, call a licensed, qualified electrician.

IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.