

SRSXB2622S

42" Built-In Side-By-Side Refrigerator

Pro-Style Design with Seamless Finish in Every Edge and Corner

25.6 cu.ft Largest Capacity (in 42" Width Built-in Refrigerator

Category\*)

ENERGY STAR® Qualified

Stainless Steel Tall Ice & Water Dispenser

Versatile Interior Design

- Sliding Door Baskets, Removable Drawers, Slam-Proof™ Drawers

Soft Closing Door

ThinQ®

2 Year Limited Warranty



CAPACITY

Refrigerator	16.25 cu.ft.
Freezer	9.35 cu.ft.
Total	25.6 cu.ft.

FEATURES

Energy Rating	ENERGY STAR® Qualified
Energy Consumption	762 kWh/Year
Ice & Water Dispenser	Yes
Dispenser Type	External Ice & Water Dispenser
Daily Ice Production	3.5 lbs/3.8 lbs
Ice System	SpacePlus™ Ice System
Ice Storage Capacity	4.0 lbs
Water Filtration System	LT700P
Linear Compressor	Yes

CONVENIENCE

Display Type	Touch/White LED
Temperature Controls	Yes
SmartDiagnosis™	Yes
Auto Closing Door Hinge	Yes

REFRIGERATOR

No. of Shelves	4 Split
Shelf Construction	Tempered Glass
Crisper Bins	3 (2 Magic Crispers)
Refrigerator Light	Premium LED

REFRIGERATOR DOOR

No. of Shelves/Bins	5 Total w/ Moving Baskets
Door Bin Construction	3 Piece (Clear+Opaque+Spray Deco)

FREEZER

No. of Shelves	4
Drawers	3
No. of Door Bins	2
Freezer Light	Premium LED

MATERIALS AND FINISHES

Surface	Stainless Steel
Available Colors	Stainless Steel (ST)
Handles	STUDIO Design

DIMENSIONS / CLEARANCES / WEIGHT

Depth with Handles	27 7/8"
Depth without Handles	25 3/8"
Depth without Door	22 1/2"
Depth (Total with Door Open)	48 5/16"
Height to Top of Case	83 1/2"
Width	42"
Width (Door Open 90° with Handle)	45 9/16"
Width (Door Open 90° without Handle)	41"
Installation Clearance	Sides 1/4", Top 1/4", Back 1/6"
Cabinet Dimension Cut-Out Size	41 1/2" x 83 3/4" x 24"
Weight (Unit/Carton)	542 lbs. / 615 lbs.
Carton Dimensions (WxHxD)	44 1/10" x 90 3/5" x 30 1/10"

LIMITED WARRANTY

Parts & Labor	2 Years
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Compressor (Parts Only)	6-10 Years

UPC CODES

SRSXB2622S (Stainless Steel)	195174024478
------------------------------	--------------

Lot 236-6  
Sept. 2, 22



HOME APPLIANCES

LG STUDIO

# SRSXB2622S

42" Built-In Side-By-Side Refrigerator

## QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

IMPORTANT

### DIMENSIONS/CLEARANCES/WEIGHTS

A Depth with Handles	27 7/8"
B Depth without Handles	25 3/8"
C Depth without Door	22 1/2"
D Depth (Total with Door Open)	48 5/16"
E Height to Top of Case	83 1/2"
F Width	42"
Width (Door Open 90° with Handle)	45 9/16"
Width (Door Open 90° without Handle)	41"
Installation Clearance	Sides 1/4", Top 1/4", Back 1/6"
Cabinet Dimension Cut-Out Size	41 1/2" x 83 3/4" x 24"
Carton Dimensions (WxHxD)	44 1/10" x 90 3/5" x 30 1/10"
POWER / ENERGY	
ENERGY STAR® Qualified	Yes
Energy Consumption	762 kWh/Year

### CHOOSING THE PROPER LOCATION

#### WATER

Select a place where a water supply can be easily connected for the automatic

#### NOTE

- The water pressure must be 20 – 120 psi or 138 – 827 kPa or 1.4 – 8.4 kgf/cm<sup>2</sup>. If the refrigerator is installed in an area with low water pressure (below 20 psi), you can install a booster pump to compensate for the low pressure.

#### ELECTRICITY

The refrigerator should always be plugged into its own individual properly grounded electrical outlet rated for 115 Volts, 60 Hz, AC only, and fused at 15 or 20 amperes. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires. It is recommended that a separate circuit serving only this appliance be provided.

#### WARNING

- To reduce the risk of electric shock, do not install the refrigerator in a wet or damp area.

#### FLOORING

To avoid noise and vibration, the unit must be leveled and installed on a solidly constructed floor. If required, adjust the leveling legs to compensate for the unevenness of the floor. The front should be slightly higher than the rear to aid in door closing. Leveling legs can be turned easily by tipping the cabinet slightly. Turn the leveling legs to the left to raise the unit or to the right to lower it.


#### NOTE

- Installing on carpeting, soft tile surfaces, a platform or weakly supported structure is not recommended.



#### AMBIENT TEMPERATURE

Install this appliance in an area where the temperature is between 55°F (13°C) and 110°F (43°C). If the temperature around the appliance is too low or high, cooling ability may be adversely affected.

### DIMENSIONS

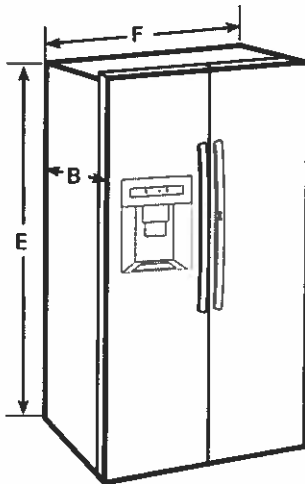


### CLEARANCES

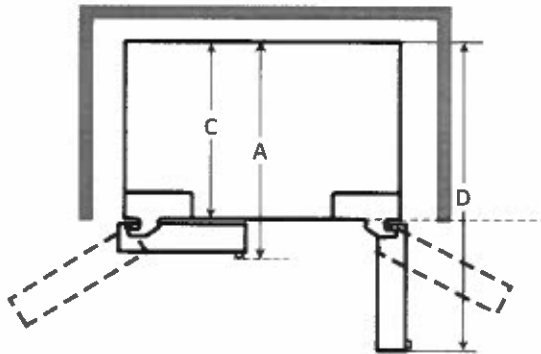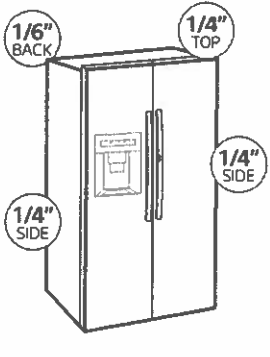

### CONNECTING POWER AND SECURING SPACE FOR WATER SUPPLY PIPE

- Make sure the location of the water supply pipe is within the marked range.
- Before connecting the power, always make sure to ground the product. (If the product is not grounded, the user may be able to feel the electricity due to the minute leakage current when touching the refrigerator door handle or side corner even when there is no issue with the product.)
- Do not ground the product to gas pipe, plastic water pipe or telephone wire etc. It can cause electric shock and explosion.



#### Power connection

The location of the 115V 60Hz power connector must be located on the rear side of the product as shown in the picture.

When installing the product, make sure to check whether the cord is hung on the hook on the rear side so that it is not pressed on the refrigerator. Damaged power cord can cause a fire.

#### Installation space for water supply pipe

Place the water hose for ice maker and water dispenser as shown in the picture, and prepare hose to come up from the floor. (Copper pipe with diameter of 5/16\"/>





800 Series, Combination Oven, 30",  
Stainless steel  
HBL87M53UC



Included accessories

x oven racks /lower  
x temperature probe /lower

Optional accessories

HEZTR301 : Telescopic Oven Rack 30"

Bosch microwave combination ovens  
create an all-in-one cooking center with an  
upper microwave and a Genuine European  
Convection oven below

- **Home Connect:** home appliances with smart connectivity for an easier everyday life.

Technical Data


Cooking mode :	Microwave
Cooking method second cavity :	
3rd element convection, Convection Bake, Convection	
Broil, Convection Roast, Dough proving setting, Pizza	
setting, Small area grill, Top/bottom heating, Top heating,	
1/3 bottom heat., Variable small-area grill, Warming	
Integrated Cleaning system :	No
Number of interior lights :	1
Included accessories :	
x oven racks /lower, x temperature probe	
Bake Element Wattages cavity 1 (W) :	600
Broil Element Wattages cavity 1 (W) :	1750
Convection Element Wattages cavity 1 (W) :	1700
Microwave Wattages (W) :	1000
UPC code :	825225960164
Product color :	Stainless steel
Energy source :	Electric
Watts (W) :	7975
Current (A) :	40
Volts (V) :	208-240
Frequency (Hz) :	60
Approval certificates :	CSA
Power cord length (in) :	50"
Power cord length (cm) :	127.0
Appliance Dimensions (h x w x d) (cm) :	124.4 x 75.5 x 62.2
Required cutout size (HxWxD) (in) :	48 5/8" x 28 1/2" x 23 1/2"
Overall appliance dimensions (HxWxD) (in) :	49" x 29 3/4" x 24 1/2"
Overall appliance dimensions (HxWxD) (mm) :	1244 x 755 x 622
Product packaging dimensions (HxWxD) (in) :	55 3/4" x 34" x 31 1/2"
Product packaging dimensions (HxWxD) (mm) :	1441 x 787 x 863
:	328
Net weight (kg) :	148.768
Gross weight (lbs) :	328.000
Gross weight (kg) :	148.8

Lot 236-6


Sept 2, 22




**800 Series, Combination Oven, 30",  
Stainless steel  
HBL87M53UC**

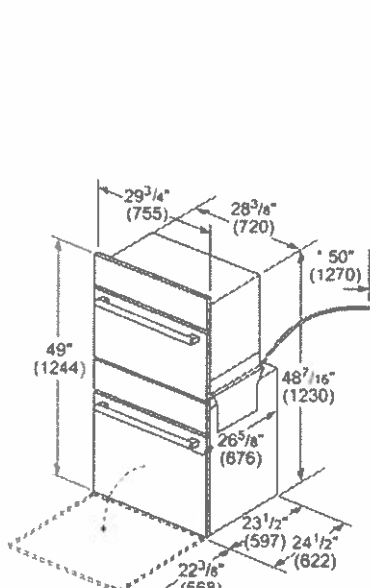

Flush installation Top view

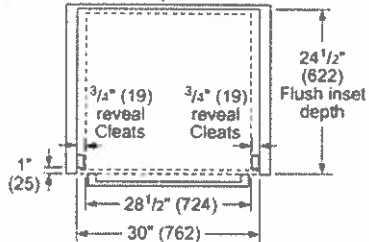


Side view

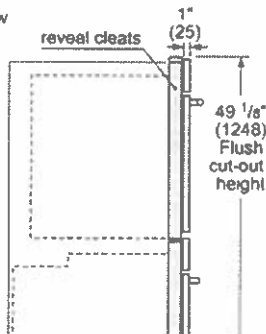

Standard Installation


Combination oven over storage or warming drawer

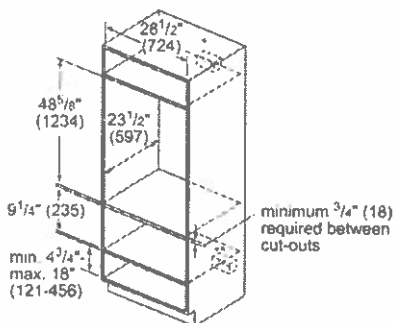

\*Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.

\*\*Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

measurements in inches (mm)




\* Junction box may be installed above, below, or to the left or right of the unit within reach of the power cable.

measurements in inches (mm)

Flush installation

Combination oven over storage or warming drawer

Side view

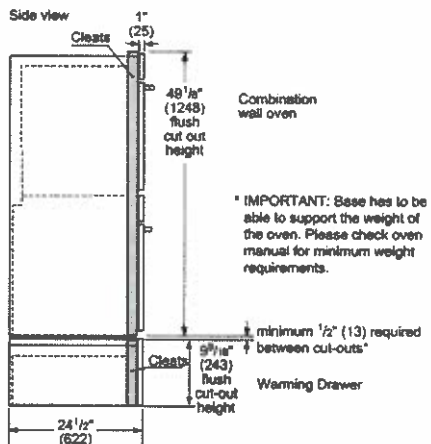

\* IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum 1/2" (13) required between cut-outs\*







Warming Drawer

measurements in inches (mm)

Lot 236-6  
Sept 2, 22



# 800 Series, Single Wall Oven, 30", Stainless steel HBL8454UC

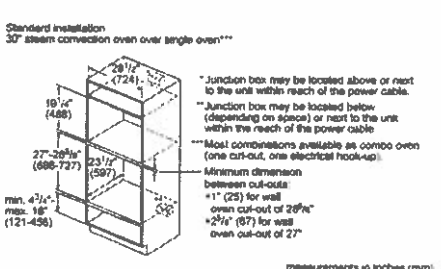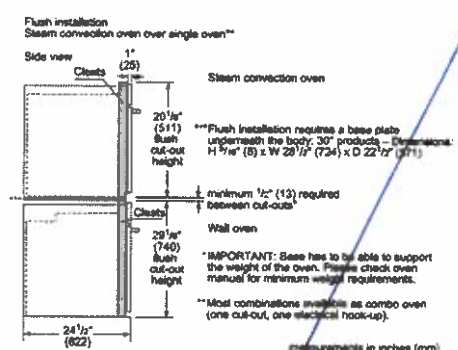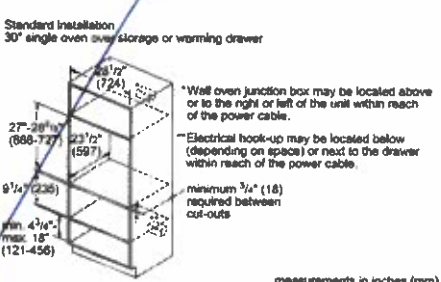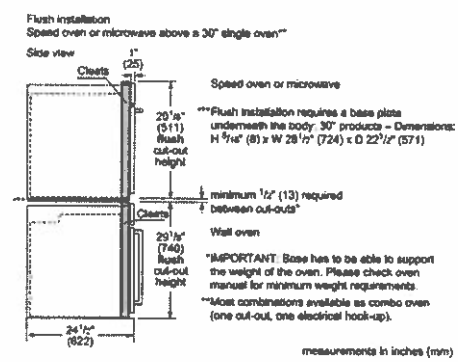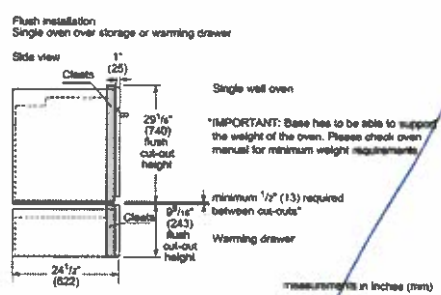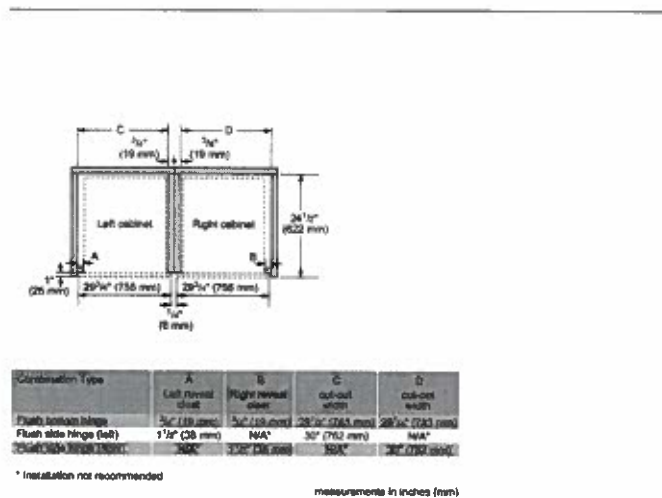


**BOSCH**

measurements in inches (mm)



measurements in inches (mm)

Diagram illustrating the top view of a flush installation. The unit is shown within a rectangular frame. Key dimensions and components are labeled:

- Overall width: 30" (762)
- Overall height: 34 1/2" (882)
- Internal width (between reveals): 26 1/2" (724)
- Internal height (between reveals): 31" (787)
- Reveal depth: 3/4" (19)
- Flush installation depth: 34 1/2" (882)
- Side panel thickness: 1" (25)


**Side view**

Dimensions:

- Top width:  $\frac{7}{8}$ " (21.6)
- Bottom width:  $2\frac{1}{2}$ " (6.22)
- Left height:  $2\frac{3}{4}$ " (6.25)
- Right height:  $29\frac{1}{8}$ " (740) Flush cut-out height
- Right thickness:  $\frac{1}{8}$ " (2.5)

Feature: reveal cleats

measurements in inches (mm)




measurements in inches (mm)

Standard side-by-side installation

Diagram showing three units installed side-by-side. Dimensions are provided in inches (in) and millimeters (mm).

- Top spacing: 30" (762) between unit centers.
- Unit width: 28 1/4" (724) for each unit.
- Side spacing: 29 1/4" (755) between unit centers.
- Internal unit spacing: 5/8" (16) between unit frames.
- Bottom spacing: 5/8" (16) between unit frames.

A: Left oven type  
B: Middle oven type  
C: Right oven type  
D: Conventional oven  
E: Steam, speed or microwave  
F: Conventional oven, Bottom hinge door modules only.  
Side hinge door not recommended.



A: Left reveal close  
B: Right reveal close  
C: Cut-out width  
D: Cut-out width  
E: Cut-out width  
F: Installation not recommended



Lot 236-6

Sept 2, 22



**BOSCH**

**800 Series, Single Wall Oven, 30",  
Stainless steel  
HBL8454UC**



**The Bosch All-in-One Wall Oven with Air Fry combines all your favorite kitchen tools into one appliance for the ultimate cooking versatility without the countertop clutter.**

- Air fry mode quickly cooks foods to crisp perfection without adding oil.
- Dampened Hinges Softly and Quietly Guide the QuietClose™ Door Shut.
- Convection Pro has a third heating element and a fan evenly circulates air around the cavity so you get consistently even golden results.
- Remote start and monitor your Bosch wall oven via the Home Connect app on your smartphone or tablet.
- **Pyrolytic self-cleaning:** Automatically cleans the oven, just wipe out the ash.

**Technical Data**

Cooking mode : 3rd element convection, Combination fusion cooking, Convection Bake, Convection Broil, Conventional heat, Dough proving setting, Half width grill, Pizza setting, warming

Integrated Cleaning system : Self Clean

Interior Lights - cavity 1 : 2

Timer settings : Alarm, Off, On, timer

Included accessories : 1 x oven racks /upper, 1 x temperature probe /upper

Bake Element Wattages cavity 1 : 2400 W

Broil Element Wattages cavity 1 : 3800 W

Convection Element Wattages cavity 1 : 2000 W

**Included accessories**

1 x oven racks /upper  
1 x temperature probe /upper

**Optional accessories**

HEZTR301 : Telescopic Oven Rack 30"

Net 236-6      ○ ○  
Sept 2, 22

12 Electrical connection

Read these instructions to safely connect your appliance to the electrical supply.

12.1 Electrical requirements

Make sure your electrical installation supports the following requirements.  
This appliance must be supplied with the proper voltage and frequency and connected to an individual, properly grounded branch circuit, protected by a circuit breaker or fuse. To know the circuit breaker or fuse required by your

model, see the rating plate to find the wattage consumption and refer to the ratings table to get the circuit breaker or fuse amperage.  
All oven models on the front cover of this Installation Instructions are dual rated, designed to be connected to either 208 V or 240 V AC, 60 Hz, 4-wire, single-phase power supply.

Model	Circuit required	Watts @ 240 V	Circuit required	Watts @ 208 V
HBL5351UC, HBL5344UC	30 A	6300	30 A	4800
HBL5451UC, HB- N8451UC, *HBL8454UC, HBL8453UC, HBL8443UC, HBL8444LUC, HBL8444RUC, HBLP454UC, HBLP451UC, HBLP451LUC, HBLP451RUC	30 A	6400	30 A	4800
HBL5551UC	40 A	6000	30 A	4500
HBL5651UC, HBL8651UC, HBL8642UC	40 A	8500	40 A	6500
HBL57M52UC, HBL87M53UC	40 A	8000	40 A	6500
HBL5754UC, HBL8753UC, HBL8743UC, HBLP752UC	40 A	9600	40 A	8400
HBN8654UC	40 A	8600	40 A	6600
HBLP651UC, HBLP651LUC, HBLP651RUC	40 A	9200	40 A	7000
HSLP751UC	40 A	8400	40 A	6400

12.2 Location of the power outlet

- Before you install the appliance, check the location of the power outlet.
- If the electrical supply is located in the cabinet opening, the electrical connection must be made prior to placing the oven in the opening.
  - If the electrical supply is in an adjacent cabinet, electrical connection can be made after placing the oven in the opening.

- ▶ The electrical conduit cable swivels where it is connected at the oven. Rotate the electric conduit cable upward or downward and direct it through the prepared hole in the cabinet.

12.3 Routing the electrical conduit cable

Requirements

- A hole in the cabinet has been prepared to route the electric conduit from the oven to the junction box.
- Serviceability must be maintained. Do not shorten the electric conduit cable. Route the electric conduit cable in a way to permit temporary removal of the oven.



# 30" Induction Cooktop

Benchmark® Series – Black with Stainless Steel Frame NITP060SUC



**BOSCH**  
Invented for life



## NITP060SUC

Black with Stainless Steel Frame

Also available in:  
Frameless NITP060UC

**FlexInduction® cooktop allows you to place your cookware wherever you want on the flexible cooking zone.**

### Features & Benefits

**FlexInduction®** – provides more flexibility by combining two cooking zones into one larger zone

**11" cooking zone for larger pots and pans**

**PowerMove™** – divides FlexInduction® into 3 preset power level zones. Simply move the cookware to change the power level

**Home Connect™** – the easy way to connect your smart device with your Bosch cooktop

Element Performance	
Power of Full Zone Left heating element	3,300 W
Power of Full Zone Left heating element (in boost)	3,600 W
Power of Front Left heating element	2,200 W
Power of Front Left heating element (in boost)	3,600 W
Power of Back Left heating element	2,200 W
Power of Back Left heating element (in boost)	3,600 W
Power of Back Right heating element	2,600 W
Power of Back Right heating element (in boost)	3,600 W
Power of Front Right heating element	1,400 W
Power of Front Right heating element (in boost)	2,200 W
Burners with booster	All*
Element Size	
Dimension of Front Left heating element	8" x 9"
Dimension of Back Left heating element	8" x 9"
Dimension of Back Right heating element	11"
Dimension of Front Right heating element	6"

General Properties	
Home Connect™ (Wi-Fi Enabled)	Yes
Controls	PreciseSelect® Touch
Technical Details	
Watts	7,200 W
Circuit breaker	30 A
Volts	208-240 V
Frequency	60 Hz
Plug type	No plug
Power cord length	37"
Energy source	Electric
Dimensions & Weight	
Overall appliance dimensions (HxWxD)	4 1/8" x 31" x 21 1/4"
Required cutout size (HxWxD)	4 1/8" x 28 7/8" x 20"
Minimum distance from counter front	2 1/4"
Minimum distance from rear wall	2"
Net weight	43 lbs
Accessories—Optional	



HEZ390210  
8" AutoChef® pan



HEZ390220  
9" AutoChef® pan



HEZ390230  
10" AutoChef® pan



HEZ390512  
Teppanyaki



HEZ9GR37UC  
17" Non-Stick Induction Grill



Home Connect

**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

**For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904**

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


Benchmark® Series – Black with Stainless Steel Frame NITP060SUC

Lot 236-6  
060SUC  
Sept 2, 22




**BOSCH**  
Invented for life

## Installation Details

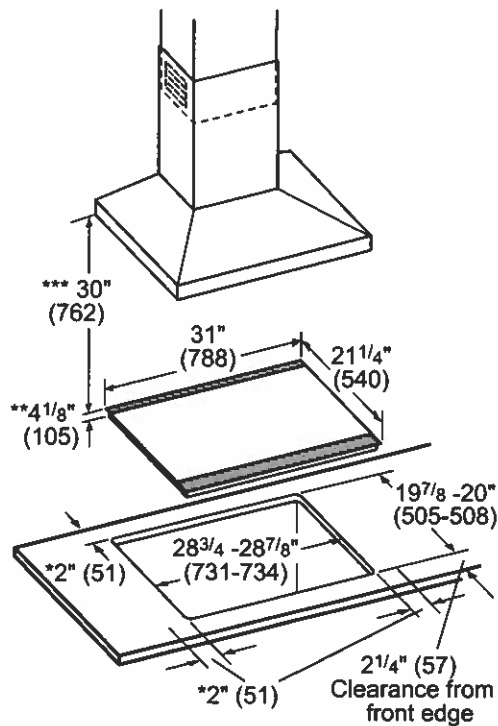


- \* Minimum clearance from the cooktop cutout to the wall
- \*\* Installed depth includes a gap of 1" (26 mm) for ventilation
- \*\*\* Minimum clearance between the cooktop surface and lower edge of the hood

measurements in inches (mm)

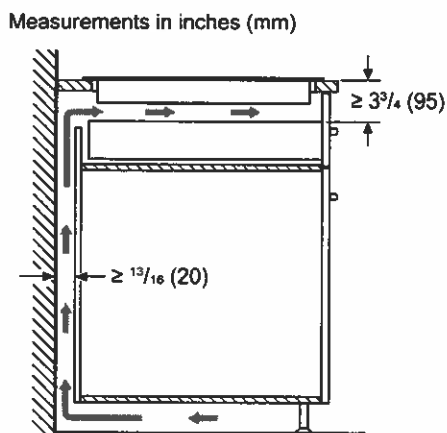

## Installation above Wall Ovens

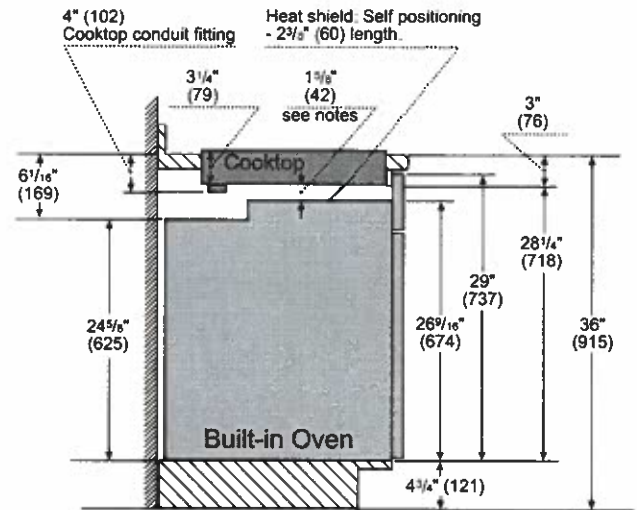


**Notes:**

Dimensions based on standard countertop height (36" with 4 3/4" toe kick including base plate).

The built-in oven can be installed below the induction cooktop as long as there is a minimum 1" (25) clearance between the bottom of the cooktop and the top of the oven.

measurements in inches (mm)

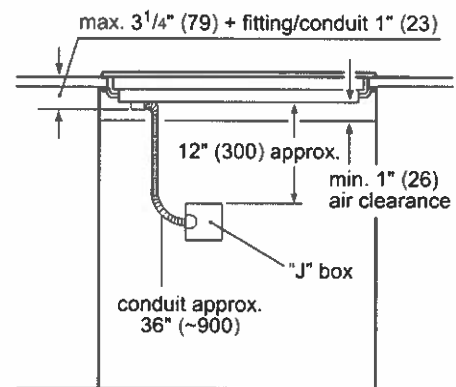

Measurements in inches (mm)

**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

# 30" Pull-Out Hood

500 Series – Stainless Steel HUI50351UC

Lot 236-6  
Sept. 2, 22



**HUI50351UC**  
Stainless Steel

This sleek, 30" integrated pull-out hood allows you to close the hood when not in use, providing a flush-look with cabinetry.


### Features & Benefits

- Front stainless steel panel is replaceable with custom cabinetry panel.
- 300 CFM integrated blower included & recirculation kit available for sale.
- 3 speed slider control & 2 halogen lights.
- Dishwasher safe aluminum mesh filters.
- Absorbs odors with charcoal replacement filters (available for sale).

General Properties	
Operating mode	Convertible: ducted / recirculating
Maximum CFM	300 CFM
Sound Rating	65.3 dBA / 48 dBA
Number of speed settings	3-stage
Motor location	Integrated motor in hood body
Number of lights	2
Bulb type	Halogen (20 W)
Light lumens	320
Light color	3000° K
Total power of the lamps	40 W
Damper included	Yes
Grease filter material	Aluminum
Grease filter type	Multilayer cassette
Technical Details	
Volts	120 V
Frequency	60 Hz
Plug type	No plug
Power cord length	50"

Dimensions & Weight	
Overall appliance dimensions (width of canopy included) (HxWxD)	11 9/16" x 29 7/8" x 11"
Minimum distance above cooktop / range cooking surface	Min. 24" electric / 29 1/2" gas
Diameter of air duct top	6"
Diameter of air duct back	6"
Net weight	26 lbs

### Accessories – Optional



**HUIF06UC**  
Recirculation Kit



**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


## 500 Series – Stainless Steel HUI50351UC

Lot 236-6  
Sept 2, 22




**BOSCH**  
Invented for life

## Installation Details

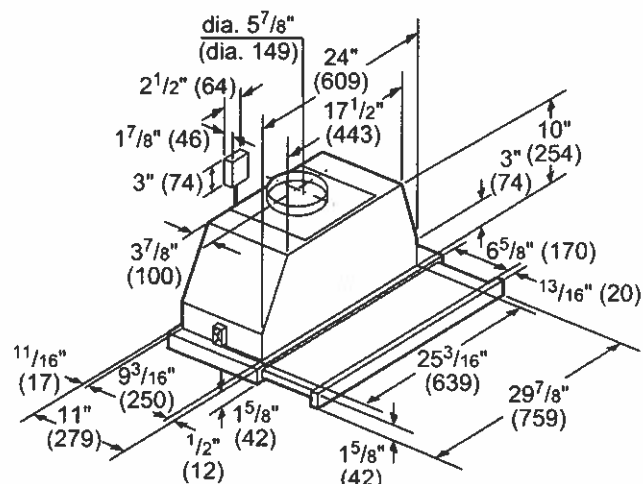


Installation height  
above cooking surface:  
24"-34" (610-864) to Electric  
29½"-34" (750-864) to Gas

measurements in inches (mm)

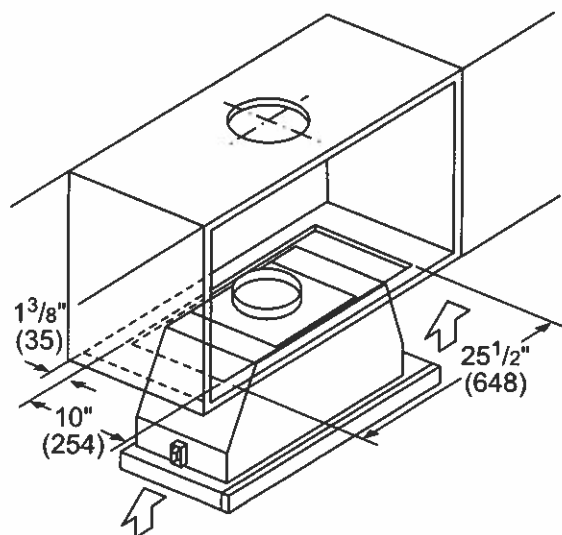

measurements in inches (mm)

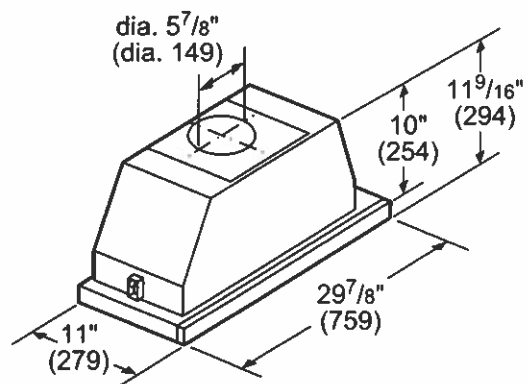

measurements in inches (mm)

**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.