
24" Custom Panel Dishwasher

800 Series - Custom Panel SHV78B73UC







SHV78B73UC Custom Panel

Patented CrystalDry technology transforms moisture into heat to get dishes, including plastics, 60% drier.1

Features & Benefits

42 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

The Flexible 3rd Rack with fold down sides adds 30% more² loading area, perfect for utensils and ramekins.

Connect to WiFi and enable Home Connect™ to reorder dish tabs via Amazon³, plus get alerts when dishes are done.

The Favorite button allows you to easily access your preferred cycle/option combination with 1 touch.

The AquaStop* leak protection system contains leaks through a precisely engineered system, giving you the ultimate peace of mind whether you are away or at home.

Number of wash cycles	6
Number of options	6
dBA	42
Drying system	CrystalDry" option
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic*
Tub material	Stainless Steel
Control type	Touch Control
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop* Plus
Sanitize option	Yes
Water softener	Yes
Five-level wash	Yes
ChildLock	No
Home Connect™ (WiFi enabled)	Yes
Special features	InfoLight*
Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR* qualified	Yes
Total annual energy consumption	269 kWh
Total annual water consumption	623.5 g

Mome Connect	t
--------------	---



Capacity	
Number of place settings	15
Technical Details	
Watts	1440 W
Current	12 A
Volts	120 V
Frequency	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door	Left - 47 1/4" Right - 47 1/4"
Minimum water pressure	14 lb/sin
Length outlet hose	74 3/4"
Dimensions & Weight	***
Overall appliance dimensions (HxWxD)	34 1/16" x 23 9/16" x 21 5/8"
Required cutout size (HxWxD)	34 1/16" x 24" x 24"
Adjustable feet	Yes
Net weight	105 lbs
Accessories-Optional	
Junction Box	SMZPCJB1UC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC
Stainless Steel Straight Bosch Bar Handle	SMZ1007UC

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry on combined household load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry®. Drying performance may vary by dish type. Compared to a Bosch dishwasher with 2 racks. Smart reordering via the Amazon Alexa app. Only available in participating countries.


24" Custom Panel Dishwasher


800 Series - Custom Panel SHV78B73UC





Installation Details

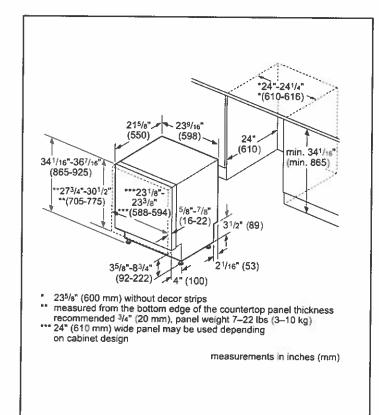

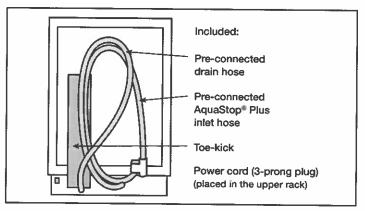

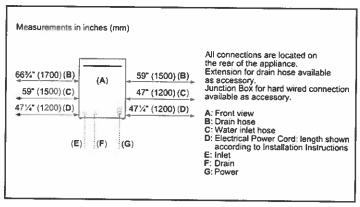

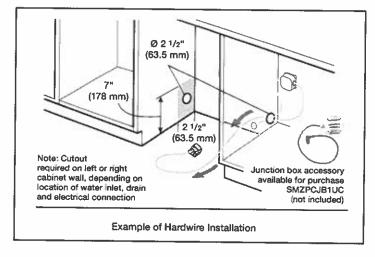

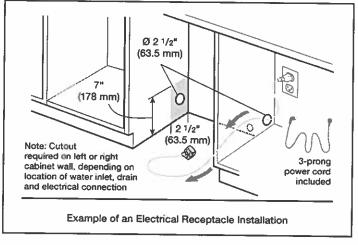

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved, Bosch is a registered trademark of Robert Bosch GmbH.


24" Custom Panel Dishwasher

800 Series - Custom Panel SHV78B73UC



Installation Details





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.


Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Bohart Bosch Conbil.


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

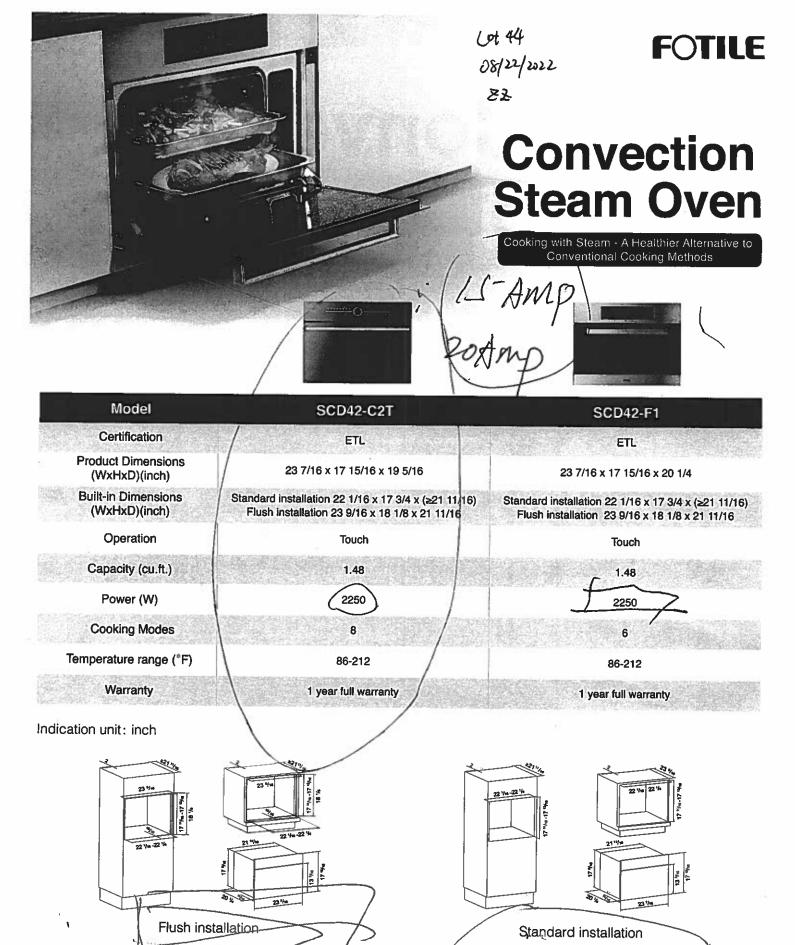

Toll Free: 844-315-0315 Website: ca.fotileglobal.ca Email: info@fotileca.com



Wechat

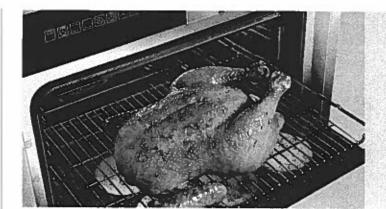

FOTILE

MASTER Series Electric Oven

Uniform Temperature for Accurate Cooking





Lot 44 08/24/2022 ठेठ

	·
Model	KSS7002A
Certification	ETL
Product Dimensions (MVHvD)(inch)	22 7/46 = 22 7/46 = 24 2/4

23 7/16 x 23 7/16 x 21 3/4

Standard Built-in 22 1/16 x 23 1/4 x (≥21 11/16) Flush Built-in 23 9/16 x 23 9/16 x (≥22 13/16)

Touchscreen
2.47
3800
10
104 - 482
1-Year Full Warranty, Parts & Labor

ETL 23 7/16 x 23 7/16 x 21 3/4

KSG7003A

Standard Built-In 22 1/16 x 23 1/4 x (≥21 11/16) Flush Built-In 23 9/16 x 23 9/16 x (≥22 13/16)

Touchscreen	
2.47	
3800	
10	
104 - 482	


ar Full Warranty, Parts & Labor

Installation Diagram(Unit:inch)


Built-in Dimensions (WxHxD)(inch)

Operation Capacity (cu. ft.) Power (W) Preset Modes

Temperature Range (°F) Warranty



Standard Built-In



Flush Built-In

Email: info@fotileca.com Toll Free: 1-844-315-0315

Address: 8365 Woodbine Ave, Unit 113, Markham ON. L3R 2P4

Website: ca.fotileglobal.com



Wechat 公众号

@ 661117686

@ FOTILECanada

@ fotile_canada

bb 207

nochnbo

K K

蒸箱

Single Phase (2Wire/2相) 240V~/15A/14号线

240V NEMA 6-15

冻箱

Single Phase (3Wire/3相) 240V~/30A/10号线

240V NEMA 14-30

SD2F-P1X

Single Phase (2Wire/2相)

240V~/9A/14号线

18" Built-In Custom Panel Single **Door Freezer**

Lot 44 08/22/2022



Benchmark® Series - Custom Panel B18IF905SP



B18IF905SP Custom Panel

The 18" Custom Panel single door built-in freezer works efficiently to keep food fresh longer, and prevent the transfer of flavors and odors.

Features & Benefits

Remotely monitor and control your refrigerator with the Home Connect™ app.

Bright LED lighting illuminates the entire interior.


Optifiex® hinge allows for flush-mount doors, without damaging surrounding cabinetry.

ENERGY STAR® qualified for energy efficiency.

General Properties	
Home Connect™ (WI-FI Enabled)	Yes
Reversible door hinge	Yes
Water filter	UltraClarityPro™
Lighting	All-LED sidewall and theater lighting
Number of shelves	6
Defrost process	Automatic
Number of drawers	2
Adjustable shelves	2
Sheif material	Glass w/ metal trim, metal bin
Type of shelves	Glass w/ metal trim
Ice maker	Yes
Quick ice	Yes
Capacity	
Total capacity	8.6 cu. ft.
Technical Details	
Watts (W)	367 W
Current (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in.)	118"
Plug type	3-Prong



Dimensions & Weight	
Appliance dimensions (H x W x D) (In.)	84" x 17 3/4" x 24 3/4"
Required cutout size (H x W x D) (in.)	84" x 18" x 24 3/4" or 25"
Net weight (lbs)	332 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh/yr)	404 kWh
Accessories	
18-Inch Flat Stainless Steel Benchmark® Series Door Panel	BFL18IF800
36-Inch Benchmark® Series Handle	B36HNDL800
UltraClarityPro™ Water Filter	BORPLFTR55
Heater Kit may be required when two columns are installed side-by-side. See next page for details.	HEATKITB80 (included)



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 6 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or cell 1-800-844-2904


BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


18" Built-In Custom Panel Single **Door Freezer**




Benchmark® Series - Custom Panel B18IF905SP

Installation Details

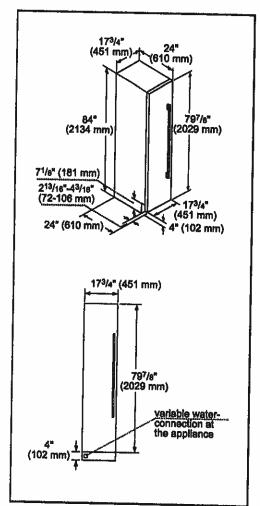

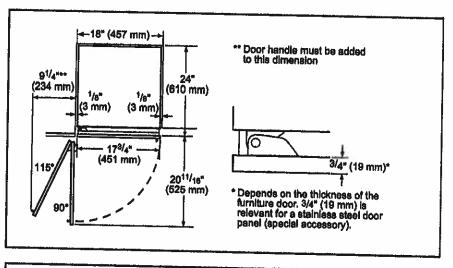

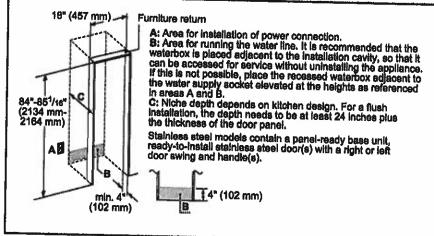



HEATKITB80 Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two bottom freezers) side-by-side combinations or instances where any appliances are installed less than 6" (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

IMPORTANT: Handleless Panels should not be installed on units without the soft close capability. If you are uncertain if you have a refrigeration unit with soft close capability please contact our customer team by calling 1-800-944-2904.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Accessores: 10 purchase mosch accessores, deaners of parts please visit www.cosconnome.com/veystore or dan 2 october 4 mon to refer the product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-600-644-2904

© BSH Home Appliances Corporation, All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Built-In Custom Panel Single **Door Refrigerator**

Benchmark® Series - Custom Panel B30IR905SP







B30/R905SP **Custom Panel**

The 30" Custom Panel Single door built-in refrigerator works efficiently to keep food fresh longer, and prevent the transfer of flavors and odors.

Features & Benefits

Remotely monitor and control your refrigerator with the Home Connect™ app.

Bright LED lighting illuminates the entire Interior.


Optifiex® hinge allows for flush-mount doors, without damaging surrounding cabinetry.

ENERGY STAR® qualified for energy efficiency.

General Properties	
Home Connect™ (WI-FI Enabled)	Yes
Reversible door hinge	Yes
Water filter	No
Lighting	LED sidewall and theater lighting
Defrost process	Frost-free
Number of shelves	The second secon
Adjustable shelves	3
Shelf material	Glass w/ metal trim
Type of shelves	3 adjustable, 4 full width
Number of Drawers	3
Gallon storage bins	Yes
Humidity control drawer	Yes
Capacity	
Total capacity	16.8 cu. ft.
Technical Details	
Watts (W)	180 W
Current (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in.)	118"
Plug type	3-Prong



Dimensions & Weight	
Appliance dimensions (H x W x D) (in.)	84" x 29 3/4" x 24 3/4"
Required cutout size (H x W x D) (in.)	84" x 30" x 24 3/4 or 25"
Net weight (ibs)	261 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh/yr)	279 kWh
Accessories	
30-inch Flat Stainless Steel Benchmark® Series Door Panel	BFL30IR800
36-Inch Benchmark• Series Handle	B36HNDL800
Heater Kit may be required when two columns are installed side-by-side. See next page for details.	HEATKITB80



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notice: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty. For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-844-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH,


30" Built-In Custom Panel Single **Door Refrigerator**




Benchmark® Series - Custom Panel B30IR905SP

Installation Details

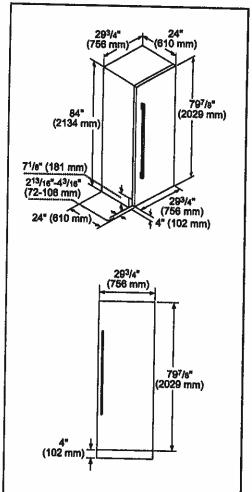

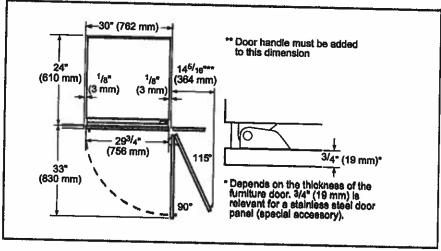

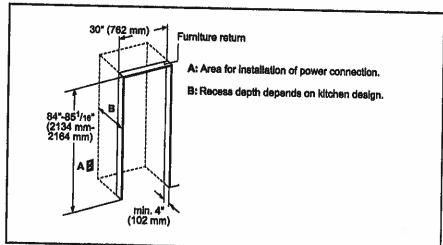



HEATKITB80 Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two bottom freezers) side-by-side combinations or instances where any appliances are installed less than 6" (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

IMPORTANT: Handleless Panels should not be installed on units without the soft close capability. If you are uncertain if you have a refrigeration unit with soft close capability please contact our customer team by calling 1-800-944-2904.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 8 pm PBT, Sat 6 am to 3 pm PBT).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty. For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-844-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

36" Gas Cooktop

Benchmark® Series - Stainless Steel NGMP658UC

08/32/2022 2





NGMP658UC Stainless Steel

The Benchmark® Series gas cooktop with FlameSelect* is a better way to cook with gas and delivers precision flame levels for consistent results.

Features & Benefits

FlameSelect® offers 9 distinct power levels and delivers precision flame height every time for consistent, repeatable results.

Digital display indicates the power level selected and informs you of the burner's residual heat.

Dual-ring power burner has 2 rings for low and high flame settings so you can go from simmer to sear with ease.

Dishwasher safe heavyduty enameled cast iron grates makes cleanup simple and convenient.

OptiSim® burner offers more flame control at the lowest settings for precise simmering and melting.

General Properties	
No. of burners	91 5 - 9003// N
Knob color	Stainless Steel Appearance
Control location	Front-Center
Sealed burners	Yes
Valves	Five 9-Level Gas Step Valves
Ignition system	Electronic; Thermocouple Flame Monitor Control
Cooktop surface material	Stainless Steel
Grate material	Cast Iron
Grate features	Continuous Grates Dishwasher Safe
Element Performance	
Total BTU load (NG / LP)	43,750 / 36,800
Power of front left burner (NG / LP)	3,400 / 3,400
Power of back left burner (NG / LP)	6,000 / 6,000
Power of center burner (NG / LP)	18,050 / 11,100
Power of back right burner (NG / LP)	10,300 / 10,300



Power of front right

burner (NG / LP)

Technical Details	
Circuit breaker	15 A
Volts	(120 V)
Frequency	60 Hz
Plug type	3-Prong
Power cord length	40"
Fuel type	Natural Gas (Factory Set)
Convertible to LP (kit required)	Yes
Dimensions & Weight	
Overall appliance dimensions (HxWxD)	3 1/4" x 37" x 21 1/4"
Required cutout size (HxWxD)	2" x 34 15/16" x 19 1/8"
Minimum distance from counter front	1 7/8"
Minimum distance from rear wall	3"
Net weight	45 lbs
Accessories - Included	
Included	LP Conversion Kit OptiSim® Cap
Accessories — Optional	



HEZ9GR58UC

Griddle





'To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without the product's installation instructions for final dimensional data and other details prior to making cutout.

6,000 / 6,000

Notice. Consult the product a installation instructions for final dimensional data and other details prior to making of Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

36" Gas Cooktop

Benchmark® Series - Stainless Steel NGMP658UC



Installation Details

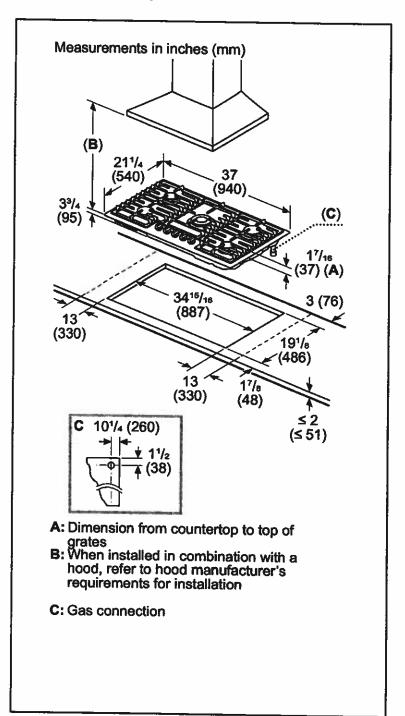

Installation with horizontal panel If there is no oven beneath the cooktop, install a horizontal panel. To allow access to the power supply connection and regulator, maintain a minimum clearance of %" (10 mm) from the edges of the panel. **IMPORTANT:** Complete the installation of the cooktop before installing the horizontal panel. Measurements in inches (mm) Cooktop over drawer 2³/e (60) ≥0(≥0) (70)- ≥ ³/a (≥ 10) Measurements in Inches (mm) Cooktop over door ≥0 (≥0) ³/₅ (≥ 10)

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Marrantles: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-844-2904


BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


36" Gas Cooktop

Benchmark® Series - Stainless Steel NGMP658UC



Installation Details



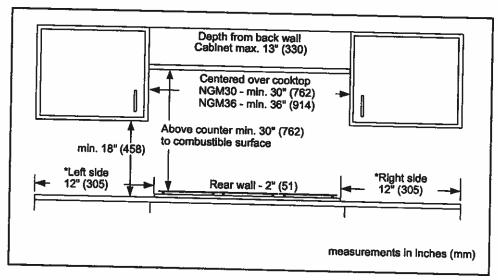

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information as the action in the control of the c

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Ultra Large Capacity 4.5 cu.ft. Washer and 7.4 cu.ft. Dryer Single Unit WashTower™ Design

Built-In Intelligence - Al Fabric Sensors/Smart Learner/Smart Pairing™ Advanced Washing & Drying - TurboWash™ 360°/Allergiene™ wash cycle/ TurboSteam™

Single Unit LG WashTower™ with Center Control™

4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

ThinQ® Technology / Proactive Customer Care Tempered Glass Door

Enjoy new ways to control your

- home with LG smart appliances

 Use the ThinQ® app to start the laundry while you're out

 Get alerts when the cycle is finished

 With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



LG ThinQ


















				_				
SUMMARY	Washer	Dryer	Drying Levels		Very, More, Normal,	ThinQ® TECHNOLOGY	Washer	Dryer
Туре	Front Load Washer	Front Load Dryer		5)	Less, Damp	SmartDiagnosis ^{to} (v3.0)	Y	fes
Capacity (cu.ft.)	4.5 cu.ft	7.4 cu. ft.	Manual Dry Times		60 min, 50 mln, 40	Wi-Fi	Y	/es
Color	Black Steel	(B), White (W)			min., 30 min., 20 min.	Remote Start and Cycle Monitor	٧	/es
APPEARANCE	Washer	Dryer	FABRIC CARE FEATURES	Washer	Dryer	Energy Monitoring	Y	fes.
Hard Buttons	•	Yes	AIDD	Yes	-	Tub Clean Coach	Yes	
Touch Buttons	,	Yes	TurboWash th 360 Technology	Yes	.5	MOTOR AND AGITATOR	Washer	Dryer
Full Touch Electronic Control	,	Yes	Steam Technology	Yes	1.5	Motor Type	Inverter Direct Drive	-
Panel with LED Display			Allergiene ^{ter} Cycle	Yes			Motor	
Unified Center Control		Yes	Sanitary Cycle	Yes		Axis	Horizontal	100
Reversible Door		No	SenseClean™ System	Yes	2	MATERIALS AND FINISHES	Washer	Dryer
EMERGY	Washer	Dryer	Al Dry		Yes	NeveRust** Stainless Steel Drum		-
ENERGY STAR® Qualified		Yes	Sensor Dry		Yes	Cabinet	PCM	•
CEE Tier	Tier2	2.0	Precise Temperature Control		Yes	Control Panel	Plastic	•
IMEF	2.92	* 1	with Variable Heater	-	143	Top Plate	Painted	-
RAF .	2.9	•	Steam Technology		Yes (TurboSteem ^{NA})	NeveRust ^{tu} Stainless Steel Drum	•	Yes
CEF		Electric: 3.94	CONVENIENCE FEATURES	Washer	Dryer	Tub Rear	•	Painted
PROCEEDING	***	Gas: 3.49	TrueBalance* Anti-Vibration	Yes		CERTIFICATION	Washer	Dryer
PROGRAMS	Wesher	Dryer	System			AAFA	Yes	-
No. of Programs	6	6		Prewash, Main		PDWER SOURCE	Washer	Dryer
	Normal, Bedding,	Normal, Bedding,	4 Tray Dispenser	Wash (with liquid detergent cup),		Ratings	UL Listed	•
	Delicates, Heavy Duty, Speed Wash,	Delicates, Heavy Duty, Speed Wash,		Bleach, Fabric	2	Electrical Requirements	120V, 10 Amps	•
	Downloaded	Downloaded		Softener		Туре	Electric	•
OPTIONS	Washer	Dryer	LoDecibel ³⁶ Quiet Operation	Yes		Ratings	moretime -	CSA Listed
No. of Options	10	9	End of Cycle Signal	Yes	2		wisher_	120V, 15 Amps
,	TurboWash®	Wrinkle Care.	LoadSense	Yes		Electrical Requirements	comer-	240V30 Amps
	Steam,	TurboSteam™ Re-	Child Lock	Yes		B	July	(Esecuric)
	Extra Rinse, Pre-	duce Static , Energy	Auto Suds Removal	Yes		Type	•	Gas / Electric
	wash, Sanitary, Tub	Saver, Steam Fresh*,	Leveling Legs	4 Adjustable Legs		BTU Rating LP Conversion Kit	•	10,000 Feet
	Clean, Drum Light, Child Lock, Signal	Drum Light ^a , Child Lock ^a , Signal ^a , Wi-Fi ^a	Easy Loading TilTub™	Yes		LP Conversion Kit Side Venting Kit	•	383EE13002D
	Wi-Fi / Remote	/ Remote Start*	Drum Light	Yes		DIMENSIONS	Market	383EFL90018
	Start		Remaining Time Display/Status	Yes		Product (Widhd)	Wesher	Dryer mt
DETAILS	Wather	Dryer	Indicator(s)	167		Depth with Door Open		/8" x 30 3/8"
No. of Wash/Rinse Temps	\$	43	3 Minute Installation Check		Yes	Carton (Widdel)		h door open
	Hot, Warm/Hot,		LoDecibel ^{ne} Quiet Operation		Yes			9 11/32" x 32"
Wash/Rinse Temps	Warm, Cold/Warm,		End of Cycle Signal		Yes	Weight (Product/Carton)	· · · · · · · · · · · · · · · · · · ·	26 lb / 361 lb) 3 lb / 364 lb
	Cold		Drum Light	*	Yes	LIMITED WARRANTY	Washer	Dryer
No. of Spin Speeds	5	5.0	FlowSense™ Duct Clogging	2	Yes	Parts and Labor	1 Year	1 Year
Sala Sanada	High, Medium/		Indicator			Direct Drive Motor	10 Years	-
Spin Speeds	High, Medium, Low, No Spin	211	Wrinkle Care Option	-	Yes	Drum	3 Years	3 Years
Max RPM	1300		Child Łock		Yes	UPCCODES	3 1447	J 144,13
Water Levels	Load Sensing	•	Venting Option		Electric: 3 Way	WKEX200HBA (Black Steel)	048334030404	
No. of Sail Levels	Loas Sensing 5	30	exercing opposit	7.0	Venting / Gas: 2 Way Venting	= *	048231028486	
THE OF PURLITARIES	3	Link Madium 114-4	4 Adjustable Legs	1.5	Yes	WKGX201HBA (Black Steel)	048231029254	
Temperature Settings		High, Medium/High, Medium, Low/Me-	Remaining Time Display/Status	100		WKEX200HWA (White)	048231028462	
	1,50	dium, Low	Indicator(s)	70	Yes	WKGX201HWA (White)	048231029261	
							V-V43 IV4940 I	

Slant Vent Series Range Hoods JQG9001 Spec Sheet



FOTILE JQG9001 36" Slant Vent Range Hood is powerful and sleek looking. With versatile mounting options whether under cabinet or wall mount, this powerful certified Range Hood offers superior smoke, grease, and odor extraction due to its unique design, close proximity to the cooktop, and a 90 degree angle automatic open Capture Shield. Best of all, this powerful range hood not only offers excellent venting performance, it's exceptionally quiet so you can have a casual conversation as you are preparing a meal. Available in Onyx Black Tempered Glass.





Key Features



90°Automatic Open Capture Shield to Prevent Smoke From Spreading



Slant Vent Design Ensures Close Proximity to Cooking Surface and Smoke



Dual AC Centrifugal Motors for Exhaustive and Strong Ventilation



98% Odor Reduction Rate & 95% Grease Separation Rate

6" Vert - confirmed Hug 23 + Secondary Features

Extra Wide Smoke Inlet

Covers 7.2 ft ² of Cooking Area (5-6 Burner

Auto Delay Shutoff

Extracts Lingering Odors After Cooking

Powerful LED Light
Lights Up Your Cooktop

Large Oil Collection Cup

Detachable and Easy to Clean


Slant Vent Series Range Hoods JQG9001 Spec Sheet



Specifications Table

Model	JQG9001				
Certification	ETL, HVI				
Width(inch)	35 7/8				
Installation	Under Cabinet/Wall Mount(Optional Decorative Cover Required)				
Max. EQUIV.CFM	850				
Max Static Pressure(Pa)	400				
Power Supply(V/Hz)	120/60				
Speed Setting	3				
Min. Noise Level(dB)	39				
Illumination(W)	3W × 2 (LED)				
Motor	Dual AC Motors				
Operation Type	Touch				
Delay Shutoff	2min				
Screen Lock	Υ				
Grease Filtration Rate	95%				
Odor Reduction Rate	98%				
	Labor: 1 Years				
Warranty	Parts: 3 Years(Limited)				
	Motors: Lifetime Limited Warranty				

Installation Dimensions

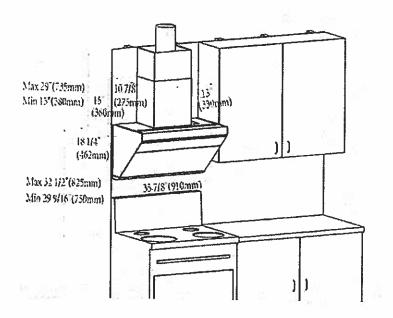

Installation Examples

