

Integrated Column Refrigerator, 30", Water

Series II | Integrated

Panel Ready | Right Hinge


Panel Ready
Flush Custom Panel
Door

LOT #91
Aug 26, 2022
D.M. AI

Date 12.08.2021 > 1

DIMENSIONS

Height	84"
Width	29 3/4"
Depth	24"

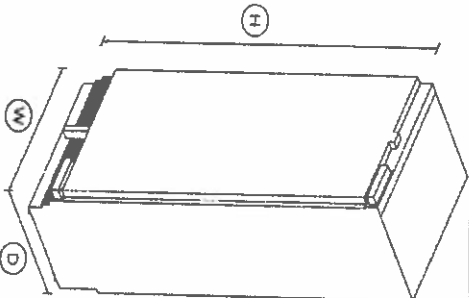

FEATURES & BENEFITS

- Install it separately or pair with another Column for seamless integration - this model is right hinge with stainless steel interior.
- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature
- Two separate Variable Temperature Zones. Choose from Fridge, Pantry or Chill
- Internal water dispenser for convenient access to fresh, chilled water
- Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory

Variable temperature zones
Create the perfect climate by storing food at their optimal temperature. Change a compartment to Fridge, Pantry or Chill.

Internal water dispenser
This integrated model features a slimline water dispenser, located on the inside for an uninterrupted exterior. The flush-fit design of the water dispenser maximizes internal storage space, allowing the shelves to be adjusted to suit your needs. Enjoy a

continuous flow of temperature-controlled chilled water to fill almost any size or shape of vessel.

Mix & match

Integrated Column Refrigeration gives you the freedom to mix and match refrigerators and freezers based on your needs - or install separately. They can be customized with your kitchen cabinetry for a seamless look, or finished with one of our stainless steel door panels.

Clever energy

ActiveSmart™ makes your refrigerator more energy efficient - adapting to daily use and cooling and defrosting only when needed. This means it uses the energy it needs without compromising on food care

Appealing illumination

Bright LEDs light up the ceiling, shelves, bins and trays in both refrigerator and freezer, creating a welcoming glow in your kitchen at night and using less power than comparable halogen lights.

Design quality

<>

Perfect fit

<>

SPECIFICATIONS

Accessories (sold separately)	
18" Stainless steel toe kick	25388
24" Stainless steel toe kick	25390
30" Stainless steel toe kick	25392
42" Stainless steel toe kick	25394
48" Stainless steel toe kick	25396
54" Stainless steel toe kick	25398
60" Stainless steel toe kick	25400

FISHER & PAYKEL

QUICK REFERENCE GUIDE > R33084SRHK1

66" Stainless Steel Toe Kick	26077
72" Stainless Steel Toe Kick	26078
78" Stainless Steel Toe Kick	26079
84" Stainless Steel Toe Kick	26080
Contemporary round handle	24981
Contemporary square handle	24979
Hinge change (from left hinge)	848190
Hinge change (from right hinge)	848189
Joiner kit	24985
Professional round flush handle	25921
Professional round handle kit	24982
Professional square handle kit	24980
Replacement water filter	847200
Square fine aluminium handle	25863
Square fine black handle kit	25908
Stainless steel door panel	24972 (right hinge); 24971

Capacity	
Volume refrigerator	16.3 cu ft

Consumption	
Energy star rating	Yes

Performance	
ActiveSmart™ Foodcare	•
Adaptive defrost	•
Dual evaporator	•
Frost free	•
Humidity control system	•
Inverter controlled compressor	•

Lot # 91
Aug 26, 2022
J.M. AI

Date: 12.08.2021 > 2

Sabbath mode
Variable food modes
Variable temperature zones

Pantry; Fridge; Chill
2

Parts and labor
2 years
Sealed system parts and labor
additional 3 years

Power Requirements

Rated current
10 A

Supply frequency
60 Hz

Supply voltage
115 V

SKU
26166

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Product dimensions

Depth
24"

Height
84"

Width
29 3/4"

Refrigerator features

Adjustable door shelves
4

Adjustable glass cantilevered
•

Covered door shelves
1

Door alarm
•

Gallon door shelves
1

Internal water dispenser
•

LED bin lighting
•

LED ceiling lighting
•

LED side lighting
•

SmartTouch interface at
•

Soft-close fruit and vegetable
•

Stackable bottle holders
4


W-Fi capable
4 x clip in; 4 x flexible
•

Warranty


FISHER & PAYKEL

PRODUCT DIMENSIONS


REFRIGERATOR OR FREEZER

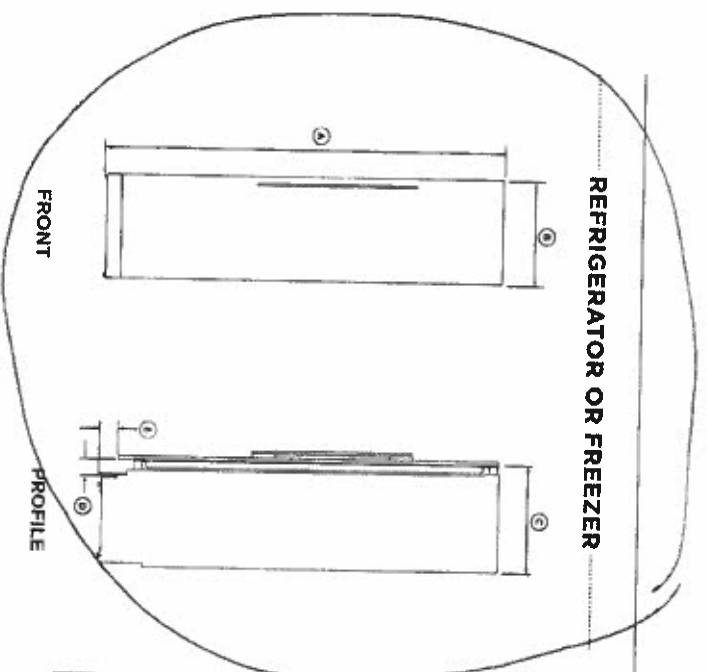

REFRIGERATOR-FREEZER

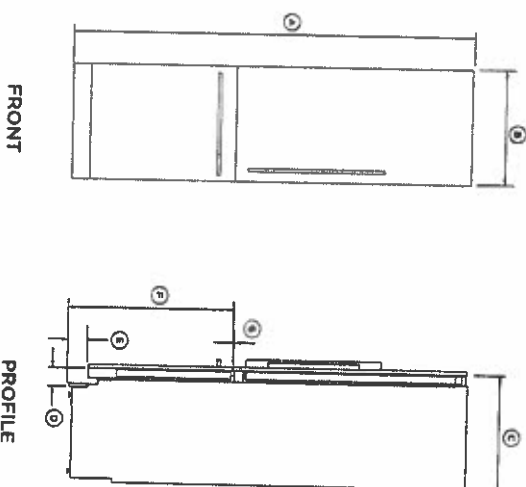

WINE CABINET

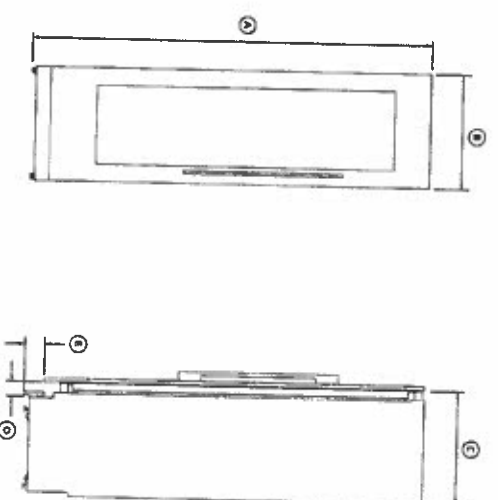


Lot #91
Aug 26, 2022
PI
J.M

PRODUCT DIMENSIONS		18"		24"		30"	
		IN	MM	IN	MM	IN	MM
Overall height	1	84	2134	84	2134	84	2134
Overall width	2	17 3/4	451	23 3/4	603	29 3/4	756
Overall depth (excluding door panel)	3	24	610	24	610	24	610
Depth of toe kick (measured from back of door panel)	4	2 7/8 - 4	73 - 102	2 7/8 - 4	73 - 102	2 7/8 - 4	73 - 102
Height from floor to bottom of Stainless steel door/drawer panel	5	4	102	4	102	4	102
Height from floor to top of drawer panel (Refrigerator-Freezer only)	6	-	-	34 7/16	874	34 7/16	874
Gap between door and drawer panels (Refrigerator-Freezer only)	7	-	-	1/8	3	1/8	3
PRODUCT WEIGHT (WITHOUT PACKAGING)		LBS		LBS		LBS	
Refrigerator or Freezer		KG		KG		KG	
Refrigerator or Freezer		223		101		258	
Refrigerator-Freezer		-		-		313	
Wine cabinet		-		335		152	
88" model for Freezer only. Wine Cabinet available in 24" only		-		-		-	


Illustrations may differ from your purchased appliance.

CABINETRY DIMENSIONS – MULTIPLE INSTALLATION

DUAL INSTALL

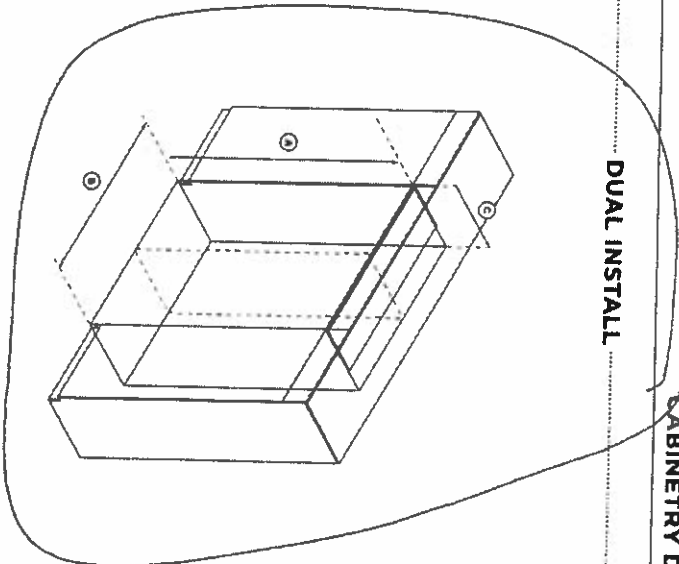

TRIPLE INSTALL

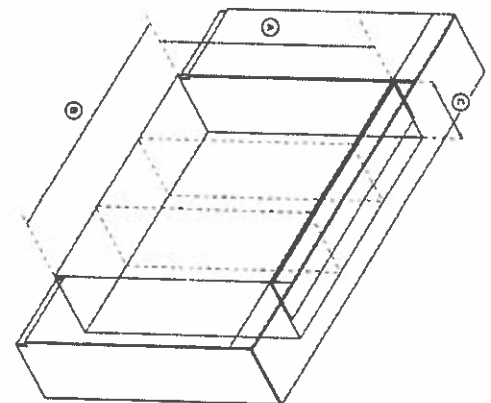

Lot # 2911
Aug 26, 2022
PI
d.m.

DUAL INSTALL

CAVITY DIMENSIONS		42"		48"		54"	
	IN	MM	IN	MM	IN	MM	
Ⓐ Overall height of cavity	84	2134	84	2134	84	2134	
Ⓑ Overall width of cavity	42	1067	48	1220	54	1372	
Ⓒ Minimum overall depth of cavity*	25	635	25	635	25	635	

		60"	
	IN	MM	
	84	2134	
	60	1524	
	25	635	

TRIPLE INSTALL


CAVITY DIMENSIONS		66"		72"		78"		84"		90"	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	
Ⓐ Overall height of cavity	84	2134	84	2134	84	2134	84	2134	84	2134	
Ⓑ Overall width of cavity	66	1677	72	1829	78	1982	84	2134	90	2286	
Ⓒ Minimum overall depth of cavity*	25	635	25	635	25	635	25	635	25	635	

Illustrations may differ from your purchased appliance.

CUSTOM DOOR PANEL DIMENSIONS — MULTIPLE INSTALLATION

DUAL INSTALL

The illustrations below are examples of custom door panels of different combinations for dual installation. Minimum gaps of 1/8" (3mm) must be retained between door panel side edges and cabinetry regardless of door panel widths.

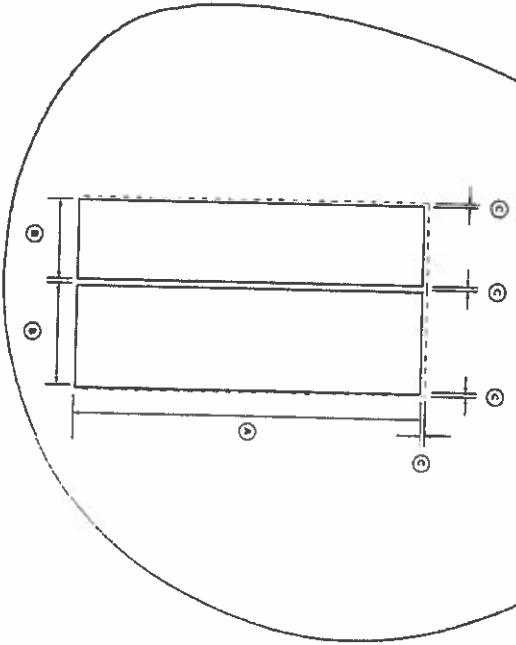


CUSTOM PANEL		18"		24"		30"	
DIMENSIONS		IN	MM	IN	MM	IN	MM
A	Height of door panel	79 7/8	2029	79 7/8	2029	79 7/8	2029
B	Width of door panel	17 13/16	452	23 13/16	605	29 13/16	757
C	Minimum clearance between door panels and cabinetry	1/8	3	1/8	3	1/8	3

* Excluding handle

TRIPLE INSTALL

The illustrations below are examples of custom door panels of different combinations for triple installation. Minimum gaps of 1/8" (3mm) must be retained between door panel side edges and cabinetry regardless of door panel widths.

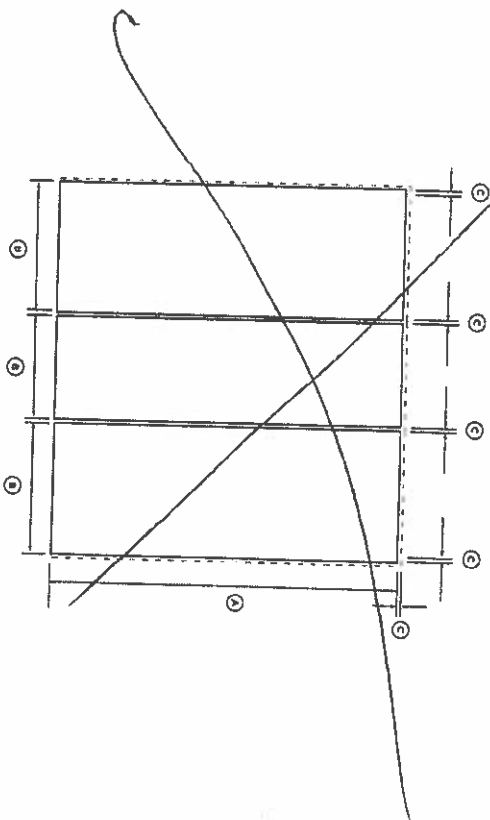


CUSTOM PANEL		18"		24"		30"	
DIMENSIONS		IN	MM	IN	MM	IN	MM
A	Height of door panel	79 7/8	2029	79 7/8	2029	79 7/8	2029
B	Width of door panel	17 13/16	454	23 13/16	605	29 13/16	757
C	Minimum clearance between door panels and cabinetry	1/8	3	1/8	3	1/8	3

* Excluding handle


Lot # 91
Aug 29, 2022
P.I.
J.M.

TOE KICK DIMENSIONS


Lot # 911
Aug 26, 2022
A.M.

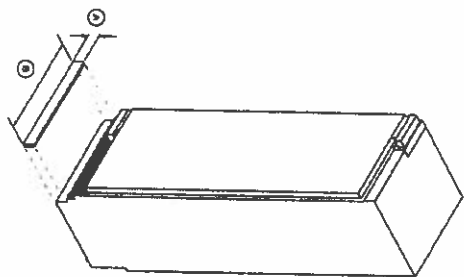

SINGLE INSTALL

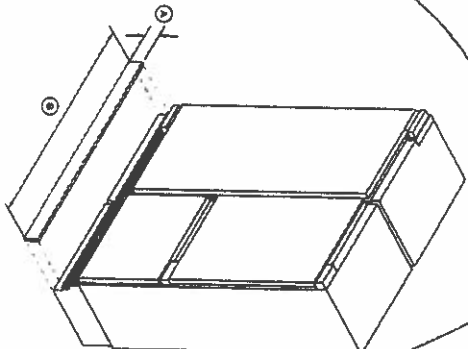


DUAL INSTALL

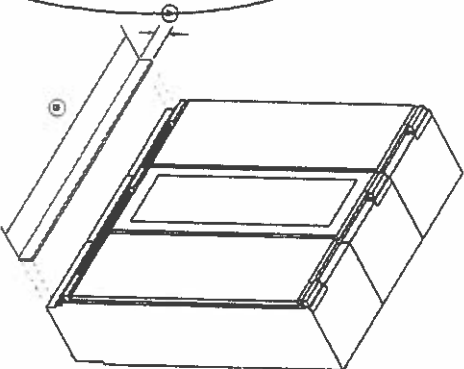


TRIPLE INSTALL


Custom toe kick options




2 7/8" (73mm) - 4" (102mm)
toe kick clearance measured
from rear of door panel



2" (51mm) toe kick height
(with extra lower grille attached)



6" (152mm) toe kick height



4" (102mm) toe kick height

SINGLE INSTALL									
STAINLESS STEEL/CUSTOM PANEL		18"		24"		30"			
ⓐ Height of toe kick*	IN	MM	IN	MM	IN	MM			
	2 - 6	50 - 152	2 - 6	50 - 152	2 - 6	50 - 152			
ⓑ Width of toe kick	17 7/8	454	23 7/8	606	29 7/8	759			
DUAL INSTALL									
STAINLESS STEEL/CUSTOM PANEL		36"		42"		48"		54"	
ⓐ Height of toe kick*	IN	MM	IN	MM	IN	MM	IN	MM	60"
	2 - 6	50 - 152	2 - 6	50 - 152	2 - 6	50 - 152	2 - 6	50 - 152	MM
ⓑ Width of toe kick	35 7/8	912	41 7/8	1064	47 7/8	1216	53 7/8	1368	IN
							59 7/8	1521	MM
TRIPLE INSTALL									
STAINLESS STEEL/CUSTOM PANEL		66"		72"		78"		84"	
ⓐ Height of toe kick*	IN	MM	IN	MM	IN	MM	IN	MM	
	2 - 6	50 - 152	2 - 6	50 - 152	2 - 6	50 - 152	2 - 6	50 - 152	
ⓑ Width of toe kick	65 7/8	1674	71 7/8	1826	78	1982	83 7/8	2131	


*Stainless steel toe kick height is 4" (102mm) for all install options.

Illustrations may differ from your purchased appliance


INSTALLATION OPTIONS

Lot #91
Aug 26, 2023
W.A.I.

SINGLE INSTALL

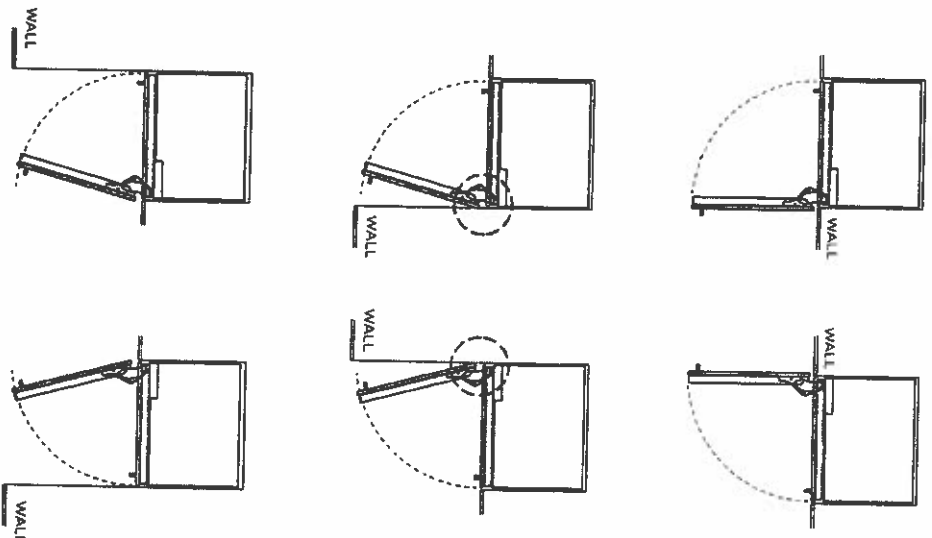



MULTIPLE INSTALL

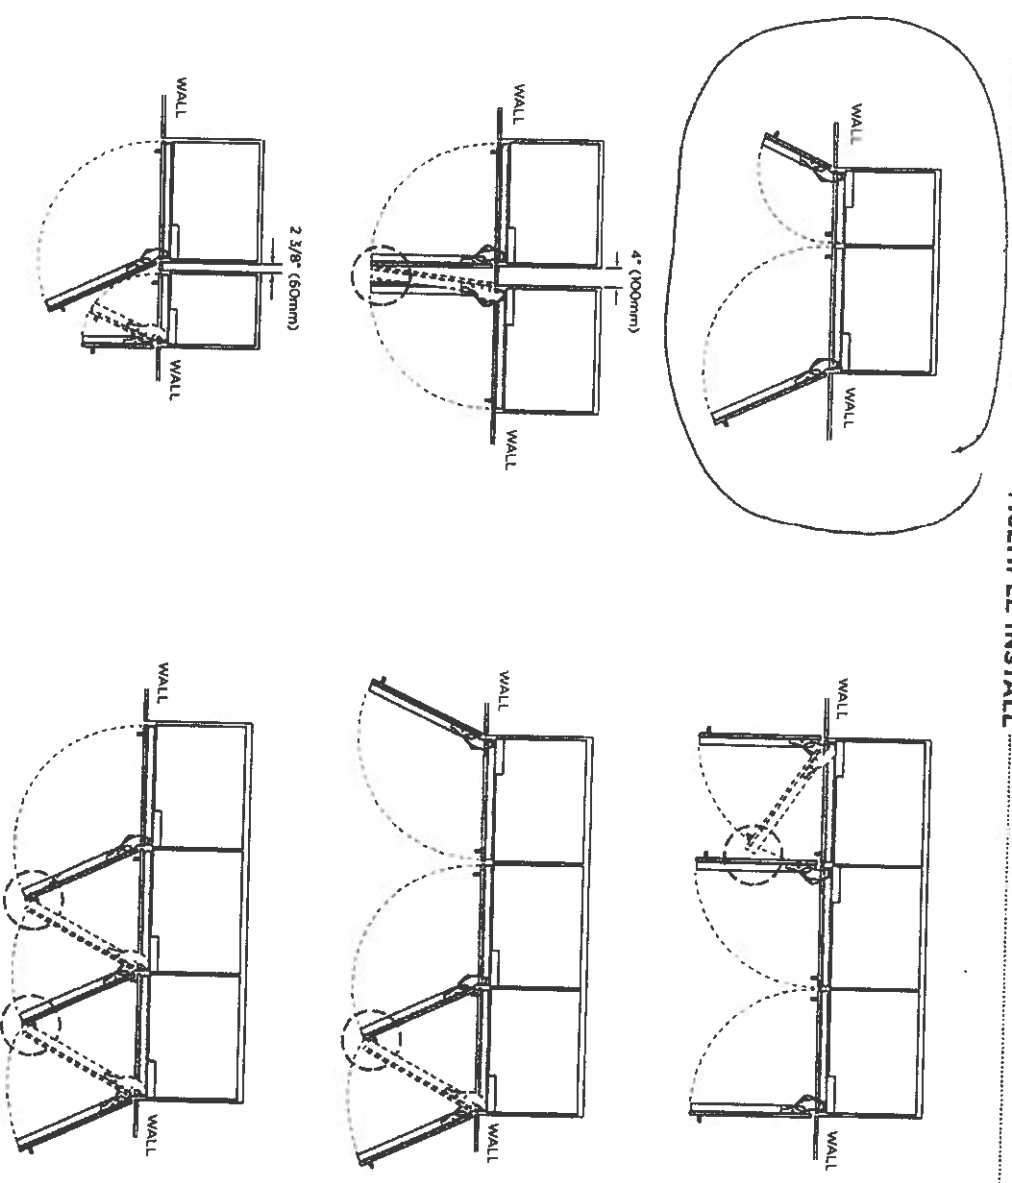

The illustrations above show acceptable installation options with reference to the door opening range and partition (optional). Be aware of clashing (circled) of doors or handles when opening at the same time. If installing a partition between the appliances, ensure there is enough clearance to avoid doors/handles from interfering with each other when opening or closing. If necessary, use a hinge limiting pin to restrict door opening rotation to 90°. Refer to 'Door Clearance' for more information.

Illustrations may differ from your purchased appliance.

DOOR CLEARANCE

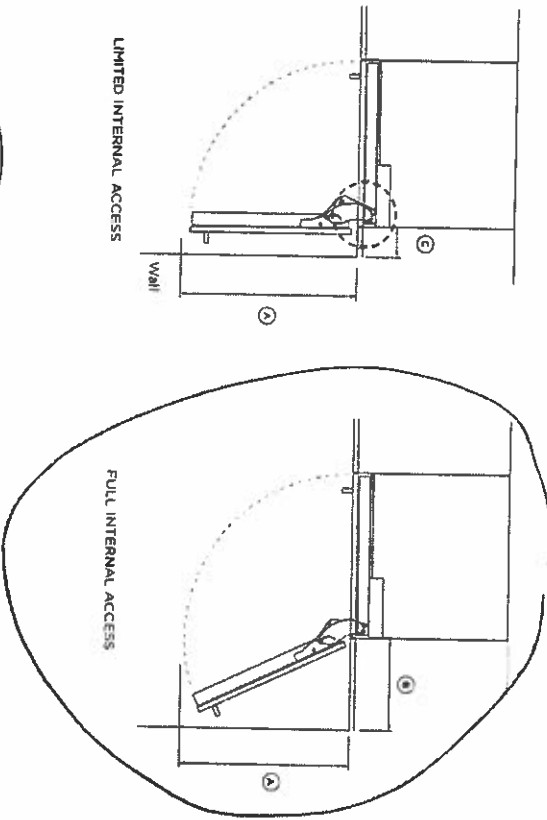

Insert hinge limiting pin
Before pushing the appliance into the cabinetry, insert the supplied hinge limiting pin into the borehole of the top and bottom/middle door hinges. The hinge limiting pin limits door swing to 90°.

DIMENSIONS	18"		24"		30"	
	IN	MM	IN	MM	IN	MM
② Depth of door (90° open) measured from front of door	20	508	26	660	32	813
③ Minimum door clearance to adjacent wall* (115° — full internal access)	11 1/2	292	14	356	16 1/2	419
⑤ Minimum door clearance* to adjacent wall* (90° — reduced internal access)	4 5/16	110	4 5/16	110	4 5/16	110


Illustrations may differ from your purchased appliance.

Illustrations may differ from your purchased appliance.

Lot # 911
Aug 26, 2022
J.M. DT

DRAWER CLEARANCE

These dimensions apply to Refrigerator-Freezer models only.

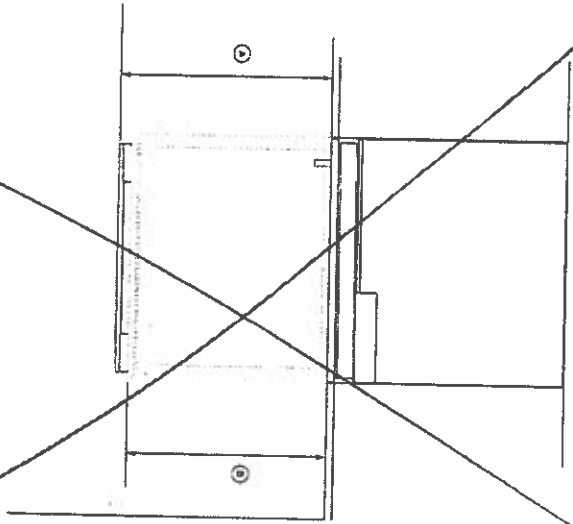


DIMENSIONS	24"		30"	
	IN	MM	IN	MM
Ⓐ Maximum drawer extension when open (including handle)*	18 1/8	461	18 1/8	461
Ⓑ Maximum drawer extension when open (excluding handle)	16 9/16	420	16 9/16	420

* Assumes handle depth of 15/8" (41mm).



* Assumes handle depth of 1/58" (4mm).

ELECTRICAL AND PLUMBING

Lot #BA1
Aug 25, 2022
* M AI

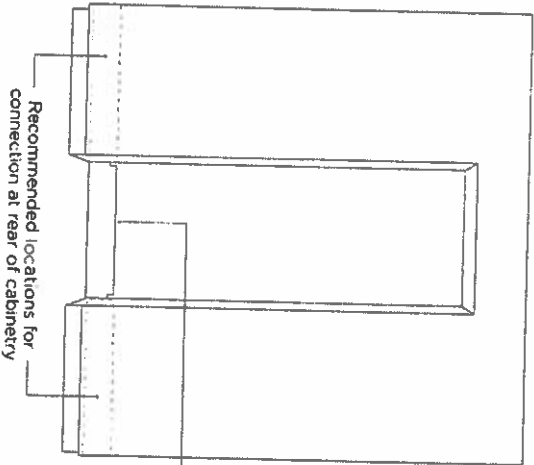

Electrical connection must be within this space if located behind the appliance and must not protrude from the back wall.

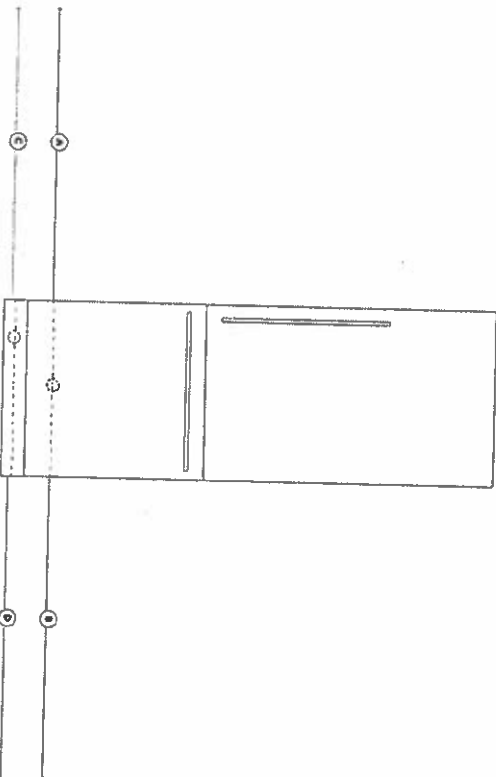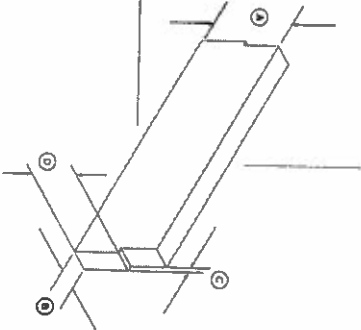

SUPPLY AREA DIMENSIONS

	IN	MM
Ⓐ Overall height of supply area	9	229
Ⓑ Overall depth of supply area	1	25
Ⓒ Width of notch in supply area (both sides)	1/2	13
Ⓓ Height of sides of supply area (both sides)	5	127

ELECTRICAL SPECIFICATIONS

Supply	115 VAC, 60 Hz
Service	10 amp circuit
Receptacle	3-prong grounding-type

PLUMBING SPECIFICATIONS

Supply	1/2" (12.7mm) BSP Stainless steel braided hose with adaptor
Pressure	22psi (min 151kPa) - 120psi (max 827kPa) @ 68°F (20°C)

POWER CORD

	IN	MM	IN	MM	IN	MM
Ⓐ Total length exiting from left side of appliance (excluding plug)	54 1/2	1385	71 1/4	1809	68 1/4	1733
Ⓑ Total length exiting from right side of appliance (excluding plug)	55 9/16	1411	72 1/4	1835	69 1/4	1759

WATER HOSE

	IN	MM	IN	MM	IN	MM
Ⓐ Total length exiting from left side of appliance	89 7/16	2271	86 7/16	2196	68 1/4	1733
Ⓑ Total length exiting from right side of appliance	77	1956	72 1/4	1878	69 1/4	1759


Illustrations may differ from your purchased appliance.

Integrated Column Freezer,
30", Ice

paired Frezzer (flush)
Custom-Panel
Door

Series 11 | Integrated

Panel Ready | Left hinge

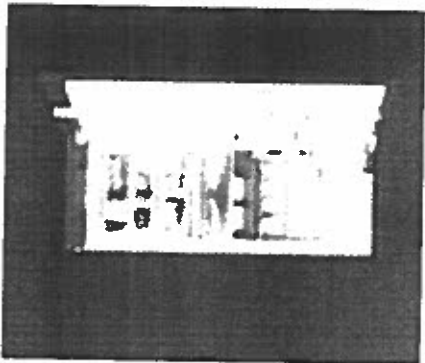


- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature
- Two separate Variable Temperature Zones: each with Freeze, Soft Freeze or Deep Freeze
- Internal ice maker with boost for busy times
- Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory

Install it separately or pair with another Column for seamless integration - this model is left hinge with brushed steel interior.

DIMENSIONS

Height	84"
Width	29 3/4"
Depth	24"

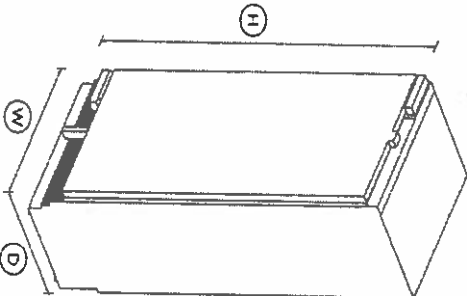

FEATURES & BENEFITS

Variable Temperature Zones

Food is stored in two separate zones. You have the choice of three food modes: Freeze -7°F to 7°F, Soft Freeze 14°F to 18°F and Deep Freeze is fixed at -13°F.

Mix & match

Integrated Column Refrigeration gives you the freedom to mix and match. Different sized Column Fridges and Freezers can be installed separately or paired. Finish them with our stainless steel door panels or customize to match your own kitchen cabinetry.

FISHER & PAYKEL

Lot #91
Aug 26, 2022
AHS
P.I.N

Date 16.12.2021 > 1

Clever energy

Our Energy Star certified ActiveSmart™ Foodcare Fridges & Freezers adapt to daily use by cooling and defrosting only when needed. This means your refrigerator uses the energy it needs without compromising on food care.

Appealing illumination

Bright LEDs light up the ceiling, shelves, bins and tray in both refrigerator and freezer, making it easy to find your food and creating a welcoming glow in your kitchen for those midnight snacks.

Design quality

The Premium design and quality finish includes a steel interior lining as well as full extension metal shelf runners for easy access and robust glass shelving.

Easy install

Integrated Column Refrigerators and Freezers have been developed to make their installation easy. The joiner kit is included when pairing refrigerator and freezers. All models come with front adjustable levelling feet and they've been designed to easily slide into place as separate units.

Perfect fit

These models fit flush and have only 3/4" / 3mm gaps around them with no visible hinges or grilles. Our integrated Column models can be seamlessly hidden behind your cabinetry or you can purchase our stainless steel door panel.

SPECIFICATIONS

Accessories	
30" Stainless steel toe kick	25392
48" Stainless steel toe kick	25396
54" Stainless steel toe kick	25398
60" Stainless steel toe kick	25400
Contemporary round handle	AHS-RDB4

QUICK REFERENCE GUIDE > RS3084FLJK1

Lot # 91
Aug 26, 2022
M. M. AI

Date: 16.12.2021 > 2

Contemporary square handle Joiner kit	AHD3-RD84 24985	Fast freeze	4	Parts and labor	2 years
Matching Replacement Water	847200	Freezer bins		Sealed system parts and labor	additional 3 years
Professional round flush handle	AHP3RDSF	Ice Boost			
Professional round handle kit	AHC-RD84	LED bin lighting			
Professional square handle kit	AHV2-RD84	LED ceiling lighting			
Square fine aluminium handle	AHDSRDSF	LED side lighting			
Square fine black handle kit	AHDSRDSFB				
Stainless steel door panel	24972			SKU	26132
Capacity		Performance		<p>The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020</p>	
Volume	15.6cu ft	ActiveSmart™ Foodcare			
Volume freezer	15.6cu ft	ActiveSmart™ technology			
		Adaptive defrost			
		Dual evaporator			
		Frost free			
		Frost free freezer			
Consumption		Inverter controlled compressor			
Energy rating	Energy star	Sabbath mode			
Energy usage	491kWh/year	Variable temperature zones	2		
Features		Power requirements			
Adjustable door shelves	4	Rated current	10A		
Adjustable glass cantilevered		Supply frequency	60Hz		
Adjustable glass shelves	3	Supply voltage	115V		
SmartTouch interface at					
Water Filter	847200	Product dimensions			
Wi-Fi connectivity		Depth	24"		
		Depth (including handles)	24"		
Freezer Features		Height	84"		
Automatic ice maker		Width	29 3/4"		
Bottle chill					
Door alarm		Warranty			

FISHER & PAYKEL

Lot #491
Aug 26, 2022
J.M. DT

FISHER & PAYKEL

PRODUCT & CAVITY DIMENSIONS
30" Integrated Column Fridge / Freezer

Model nos:
R33084SR1 / R33084SRN1 / R33084FRJ1 / R33084FRJN1
NOTE: Left hand hinge model is a mirrored version of image shown
R33084SL1 / R33084SLN1 / R33084FL1 / R33084FLN1

Cavity Dimensions	
① Overall height of cavity	84"
② Overall width of cavity	30"
③ Minimum overall depth of cavity*	25"

Total front panel width with required gaps at sides = B4"
(Refer custom panel dimensions - panel width + 2 x ② cabinetry gaps)
* Assumes a door panel thickness of 3/4"

Product Dimensions	
④ Overall height of product	84"
⑤ Overall width of product	29 3/4"
⑥ Minimum cabinetry gap clearance from edge of custom panels**	1/8"
⑦ Overall depth of product (excl. door front panel)	24"
⑧ Height of lockick**	2" - 6"
⑨ Width of lockick**	29 7/8"
⑩ Depth of lockick** (excl. door front and lockick panel)	2 1/16"

** For custom panel dimensions refer to page 11
Door panel and custom lockick panel to be manufactured and fitted by cabinetmaker. Door panel thickness min 5/8" - max 1"

INDICATES CAVITY CLEARANCES


DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by 2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FRONT VIEW

PROFILE VIEW

PLAN VIEW

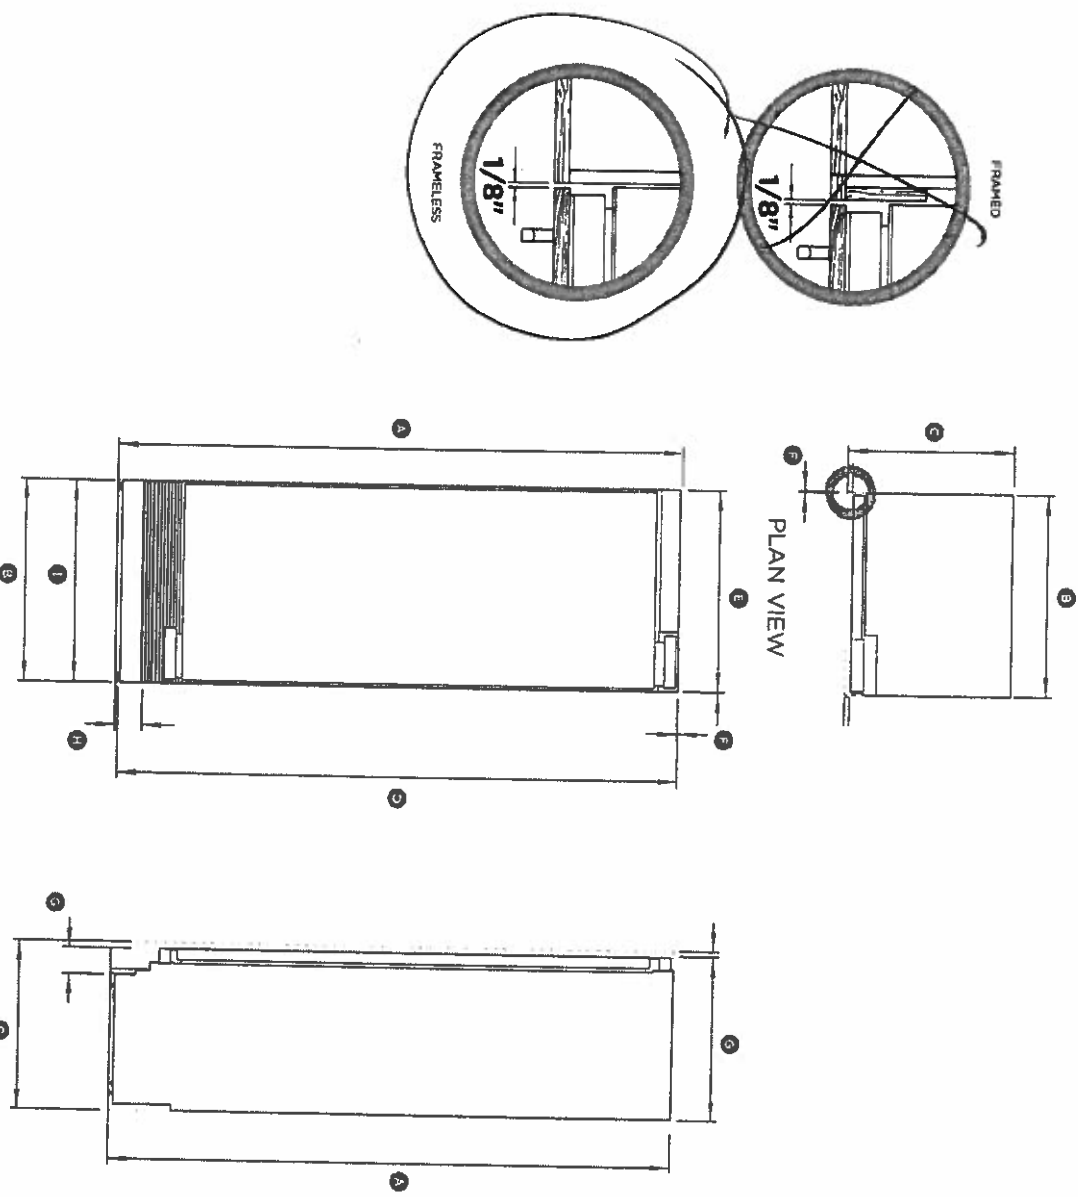

Lot 91
Aug 26, 2022
M.H. AT

FISHER & PAYKEL

DOOR OPENING CLEARANCE DIMENSIONS
30" Integrated Column Fridge / Freezer

Model nos.

R33064SR1 / R33064SR1 / R33064FR1 / R33064FR1

NOTE: Left hand hinge model is a mirrored version of image shown


R33064SL1 / R33064SL1 / R33064FL1 / R33064FL1

Door Opening & Clearance Dimensions


	in
a) Depth of door (90° open) measured from front of door	32"
b) Minimum door clearance** to adjacent wall (115° - full internal access)	16 1/2"
c) Minimum door clearance** to adjacent wall (90° - reduced internal access)	4 5/8"

* Does not include the custom door panels or handles to be manufactured and fitted by cabinetmaker

** Measured from front cabinet edge

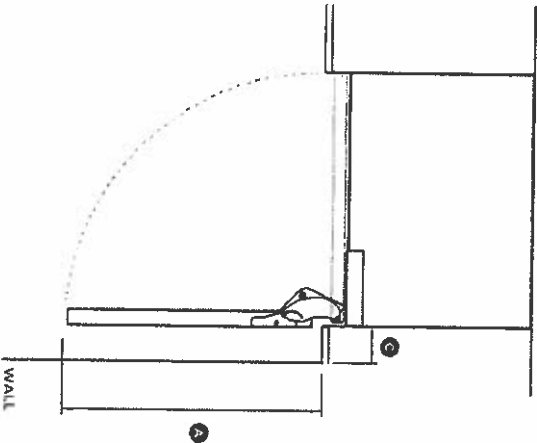

90° DOOR OPENING

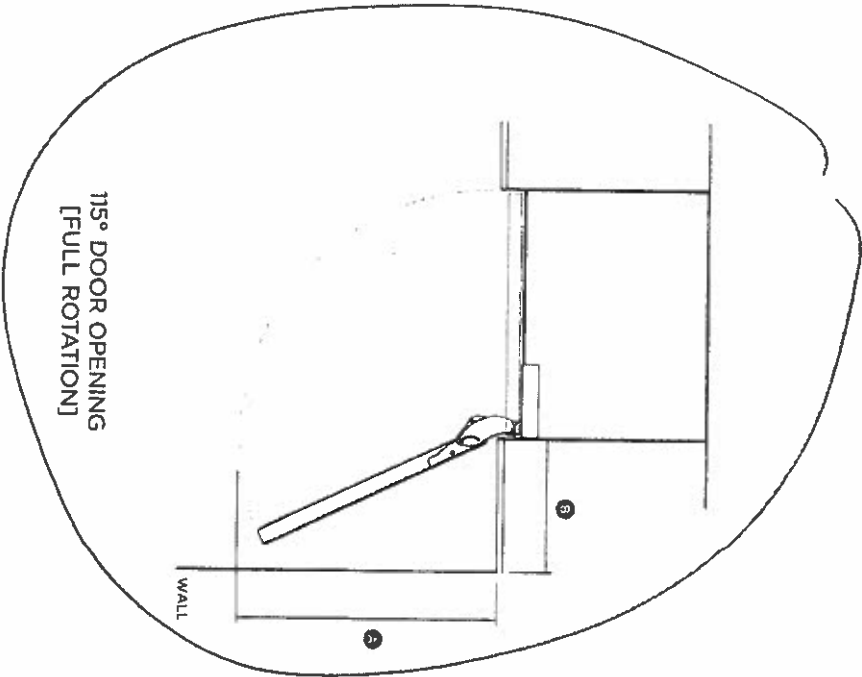

115° DOOR OPENING
[FULL ROTATION]

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by 2mm (1/8"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

Lot # 91
Aug 26, 2022
M. J. M.
IT


FISHER & PAYKEL

CUSTOM PANEL PREPARATION - HINGE
30" Integrated Column Fridge / Freezer

Model nos:
RS3064SR1 / RS3064SRK1 / RS3064FRJ1 / RS3064FRK1
NOTE: Left hand hinge model is a mirrored version of hinge shown.
RS3064SL1 / RS3064SLK1 / RS3064FL1 / RS3064FLK1

Dwg & Dxf Files
Dwg and Dxf files of the panel preparation are available within the download folder for this product and can be found on
<http://theclinchertools.finepaykel.com>

Door Hinge - Hettich KOS

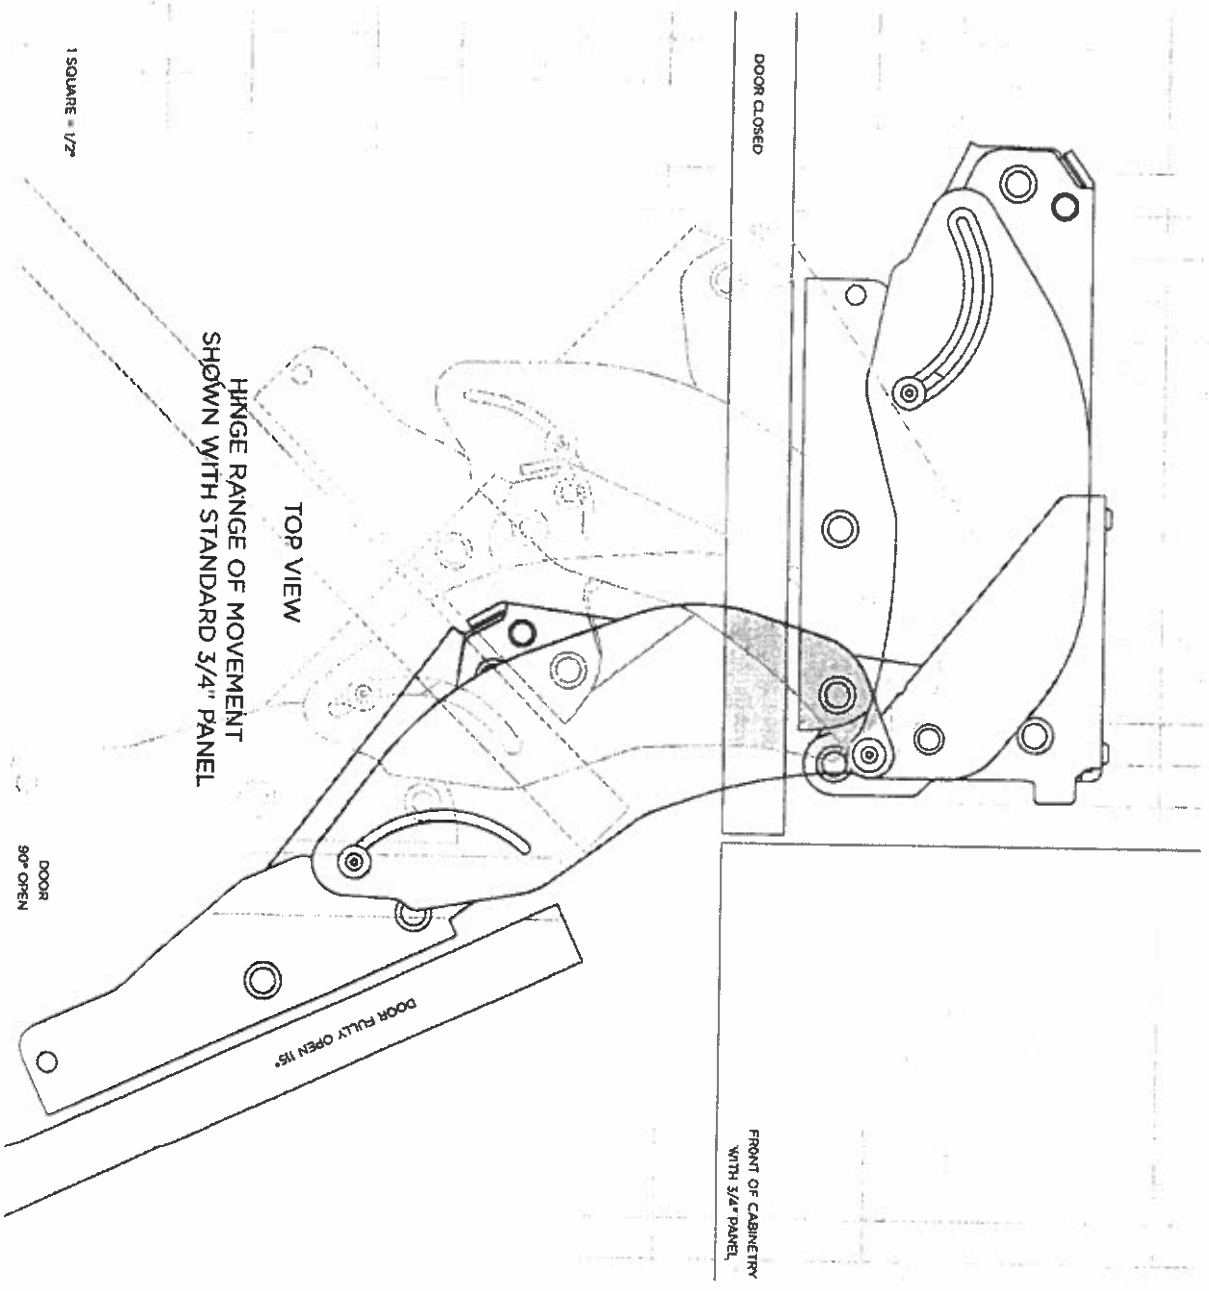


DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide dimensions may vary by 2mm (1/62). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

2-6" thick

Lot 91
Aug 26, 2022
M. M. AT

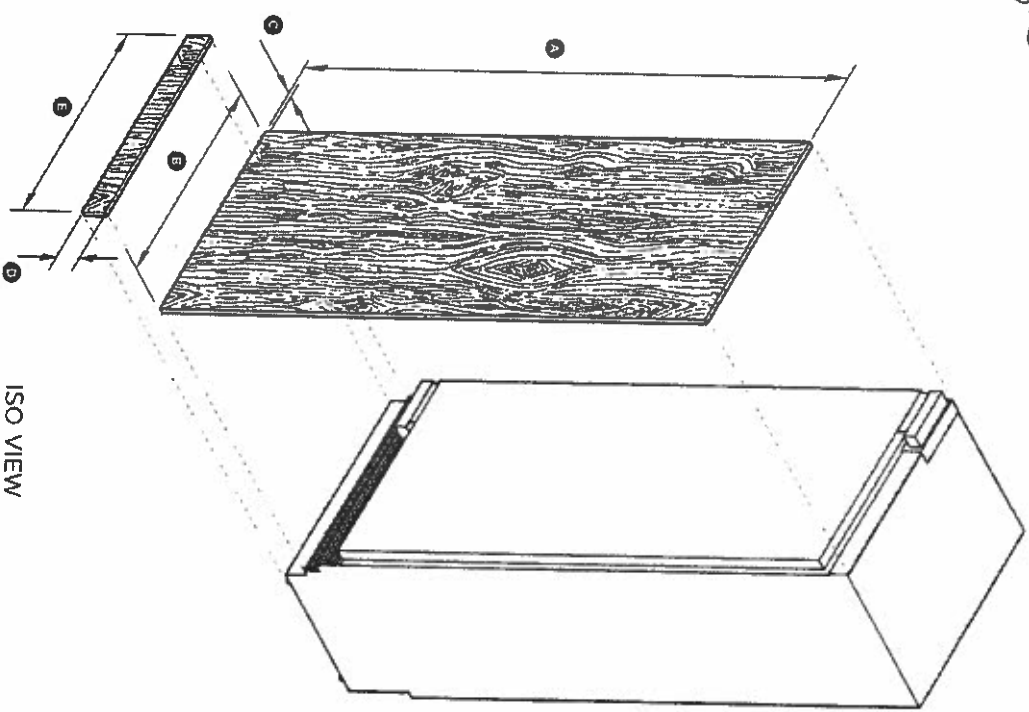

ISO VIEW

FISHER & PAYKEL

CUSTOM PANEL DIMENSIONS
30" Integrated Column Fridge / Freezer

Model nos:
RS3084SLU / RS3084SLKI / RS3084FLN / RS3084FLKI
NOTE: Right hand hinge model is a mirrored version of image shown.
RS3084SRU / RS3084SRKI / RS3084FRU / RS3084FRKI



Custom Panel Dimensions*	
① Height of door panel	77 7/8" - 81 7/8" In
② Width of door panel - single install	29 3/4"
③ Width of door panel - dual install	29 13/16"
④ Maximum depth of custom panel	min 5/8" max 1"
⑤ Height of toekick panel**	2" - 6"
⑥ Width of toekick panel	29 7/16"
Maximum weight of door panel***	
66lb	

* Custom door panel, toekick and handles to be manufactured / fitted by customer.
** The bottom grille can be reduced to allow for a higher toekick. Adjust the height of the door panel accordingly.
*** Includes weight of handle

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by 52mm (1/6"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

Lot 91
Aug 26, 2022
A.M. AT

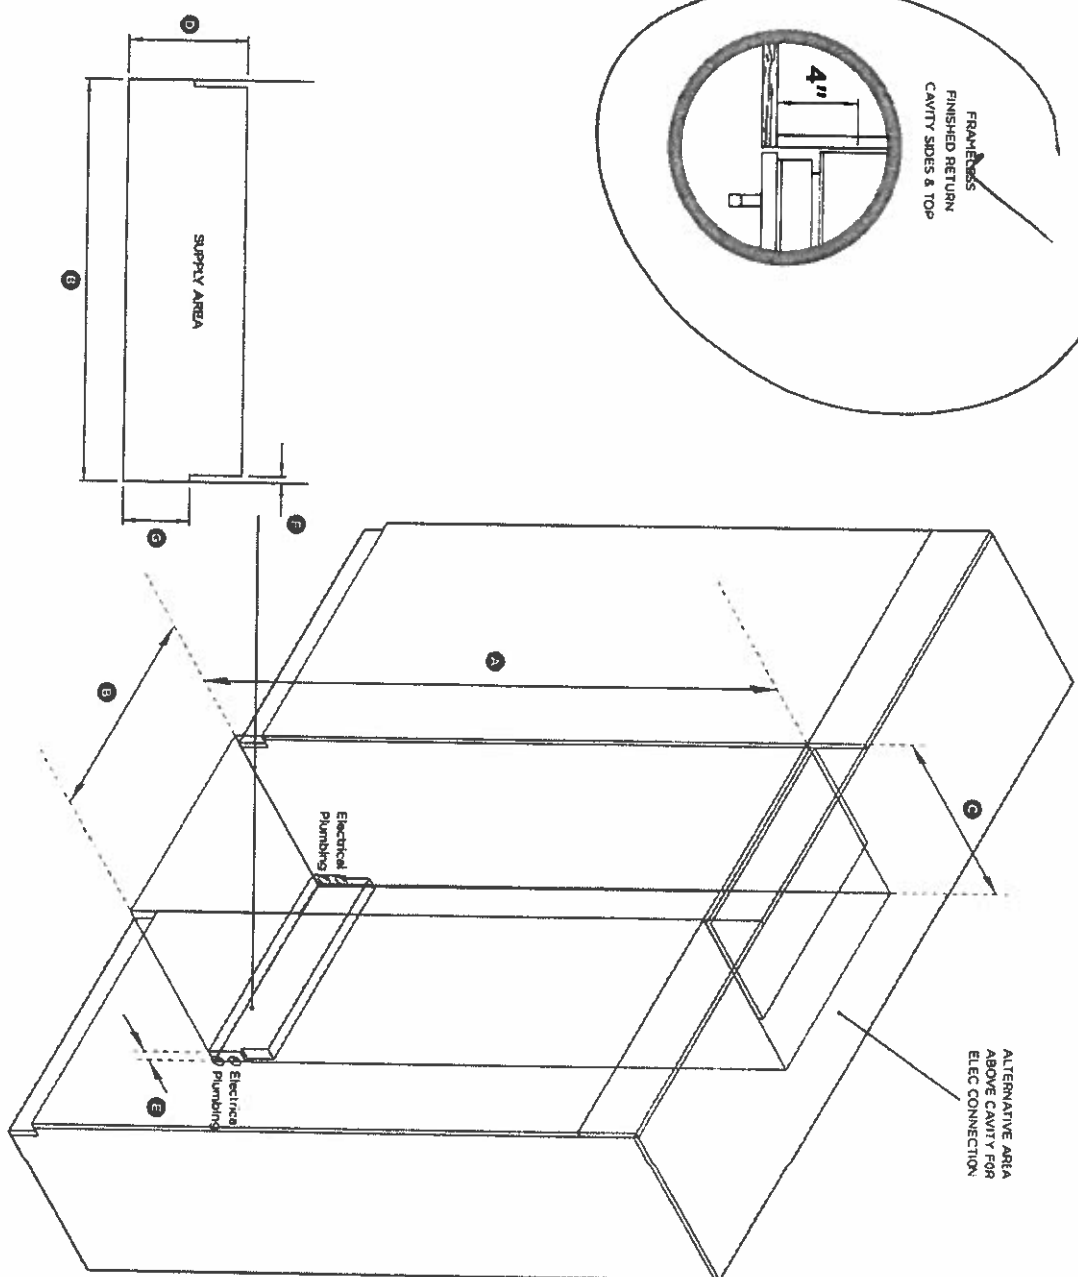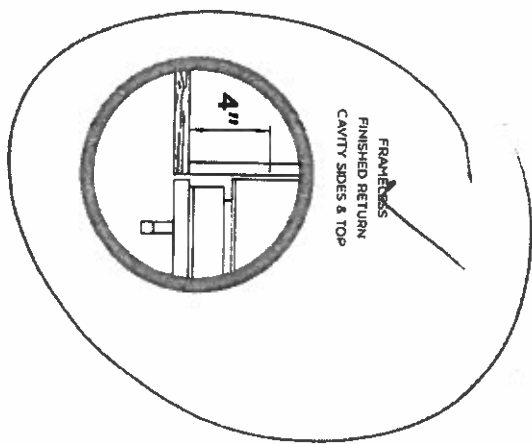

ISO VIEW OF CAVITY

FISHER & PAYKEL

CAVITY PREPARATION - FRAMELESS
30" Integrated Column Fridge / Freezer

Model nos.
R3304ASR1 / R3304ASR1 / R3304FRJ1 / R3304FRJ1
NOTE: Left hand hinge model is a mirrored version of image shown.
R3304ASL1 / R3304ASL1 / R3304FLJ1 / R3304FLJ1

IMPORTANT!
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Minimum Cavity Dimensions	
① Overall height of cavity	1m
② Overall width of cavity	84"
③ Overall depth of cavity	30"
④ Minimum required finished return	25"
Electrical / Plumbing Supply Dimensions	
⑤ Overall height of supply area	1m
⑥ Overall depth of supply area	9"
⑦ Width of notch in supply area (both sides)	1"
⑧ Height of sides of supply area (both sides)	1/2"


Specifications	
Electrical	
Supply	115 VAC, 60 Hz
Service	10 amp circuit
Plumbing	
Supply	1/4" (6mm) comp. stainless steel braided hose with adaptor
Pressure	min 22 psi (150 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Electrical connection can be located an adjacent cabinet to either side of the fridge or above the fridge cavity

DATE: 10/10/2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by 25mm (1/8"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

30" COLUMN DOOR PANEL REAR VIEW

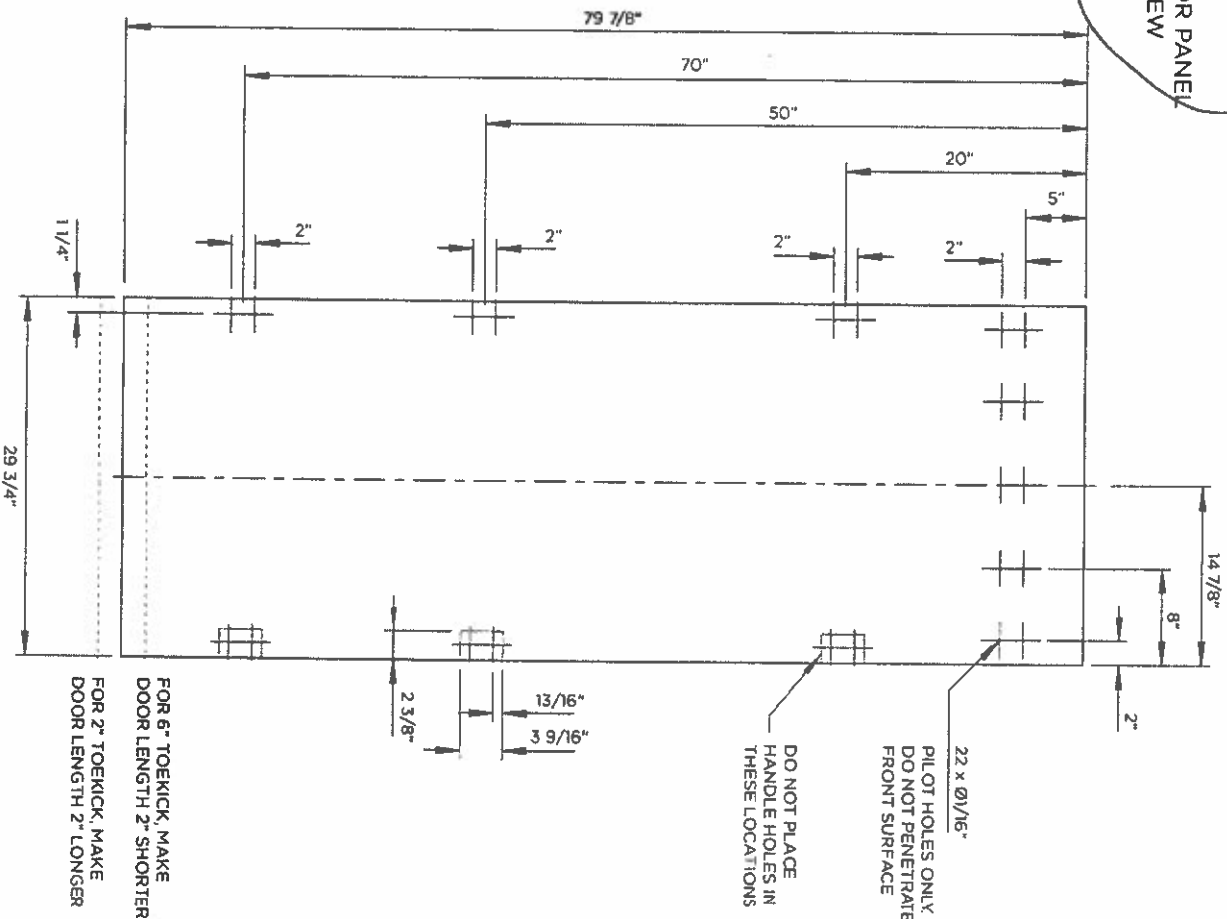

Lot 91
Aug 26, 2022
J. M. HT

FISHER & PAYKEL

CUSTOM PANEL PREPARATION
30" Integrated Column Fridge / Freezer

Model nos
RS3044SR1 / RS3044SRK1 / RS3044FRJ1 / RS3044FRJK1
NOTE: Left hand hinge model is a mirrored version of image shown
RS3044SL1 / RS3044SLK1 / RS3044FL1 / RS3044FLK1

Custom Panel Preparation
Dimensions are shown in inches.
Dimensions apply for the preparation and installation of custom panels

Handles
Ensure handle screw heads are countersunk into back of panel to avoid interfering with hanging bracket, and clear of side brackets as indicated.

Draw & Cut Files
Draw and Cut files of the panel preparation are available within the download folder for this product and can be found on <http://hatchertools.fisherpaykel.com>

DATE: 10/10/2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by 2mm (1/8"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

Lot # 91
Aug 26, 2021
N.M.
AJ


FISHER & PAYKEL

POWER AND WATER CONNECTIONS
30" Integrated Column Fridge / Freezer

Model nos:

RS3084SR1 / RS3084SRN1 / RS3084FRN1 / RS3084FRUK1
RS3084SL1 / RS3084SLUK1 / RS3084FL1 / RS3084FLUK1

* Water inlets apply to freezers only

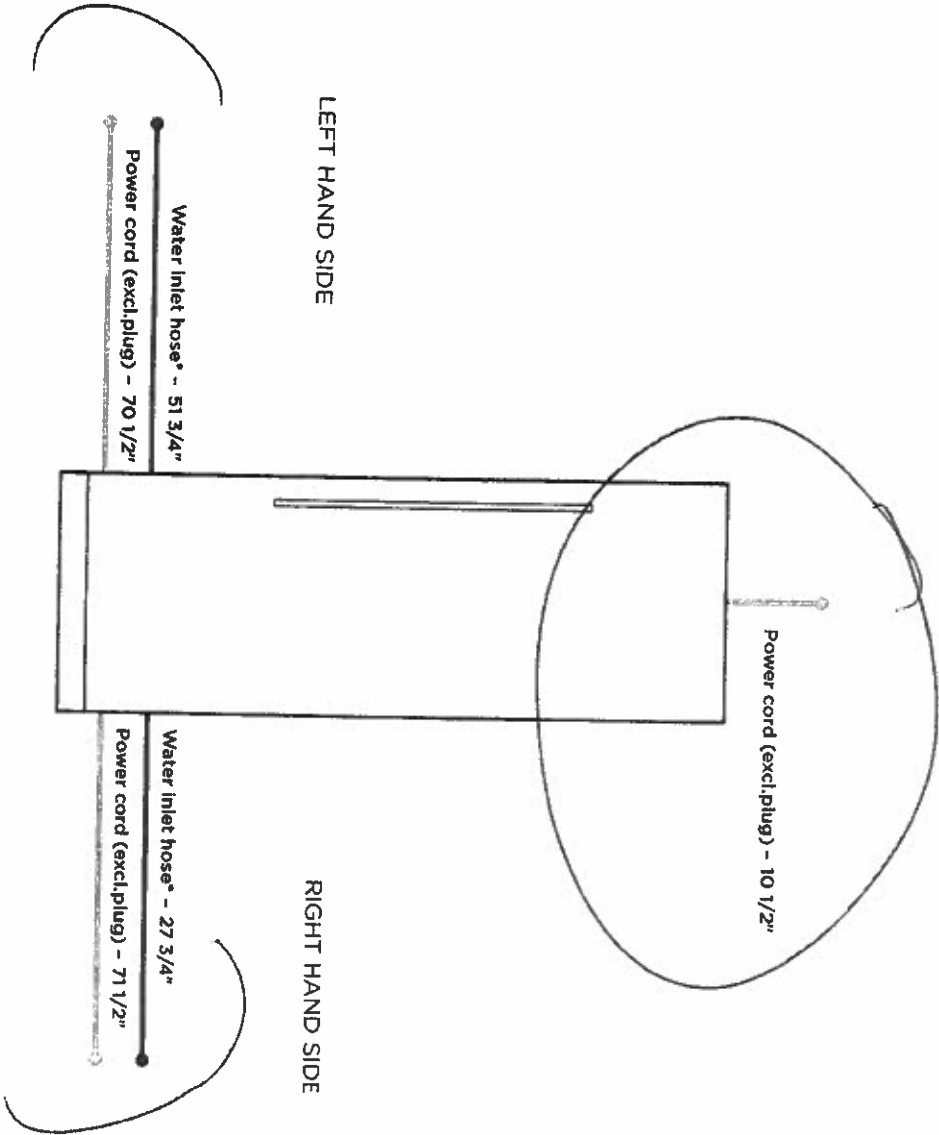

DATE: 10/10/2018


IMPORTANT NOTE: Throughout this guide, dimensions may vary by 2mm (0/8"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

QUICK REFERENCE GUIDE > OB30SPPTX1

Oven, 30", 4.1 cu ft, 17
Function, Self-cleaning

Series 9 | Professional


Stainless Steel



Flush

DIMENSIONS

Height	27 1/8"
Width	29 29/32"
Depth	23 29/32"

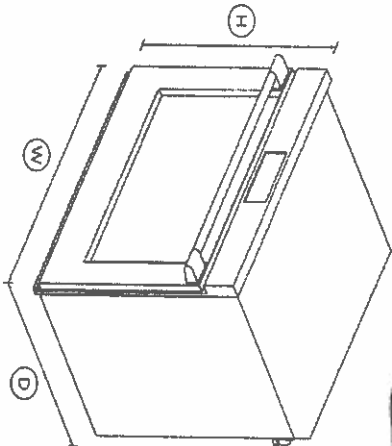

Lot # 91
Aug 26, 2022
A.T.

Date: 21.01.2020 > 1

cooked dishes at once using multiple shelves.

Multi-function Flexibility

The cooking functions have each been tailored, tested, tweaked and perfected to ensure that no matter what you're cooking, you've got the right heat to match. A food probe precisely monitors cooking in real time, giving you complete control.

Exceptional performance

AeroTech circulates heat evenly for a consistent temperature throughout the cavity, helping you ensure perfect results even when cooking on multiple shelves.

Self-cleaning

Our self-clean technology breaks down food residue at a very high temperature, leaving a light ash that's easily removed with a damp cloth. The enamel coated side racks don't need to be removed when using this function.

Design freedom

Designed to fit seamlessly into your kitchen, this built-in oven features premium materials and elegant styling to support a cohesive, considered kitchen design.

SPECIFICATIONS

- With professional styling, advanced cook functions and touchscreen, this large capacity oven is a highlight of our collection.
- Guided cooking using your touchscreen makes it simple to cook by food, function or recipe.
 - 4.1 cu ft total capacity, with 17 oven functions including Aero™ Pastry and Roast, Air Fry and Dehydrate
 - Non-tip, full extension sliding shelves for safe removal of hot dishes
 - Accessories include food probe, smokeless grill tray, and more

FEATURES & BENEFITS

Cook with confidence

Our touchscreen interface provides an intuitive guided cooking experience that helps deliver perfect results, whether you've been cooking all your life or just starting out. Cook with a favorite method, a hero ingredient, or a go-to cooking function or recipe.

Generous capacity

With its 4.1 cu ft total capacity, you can create several perfectly

Accessories	
Food probe	•
Full Extension Telescopic	3 sets
Full extension sliding shelves	3 sets
Grill rack	1
Roasting dish	1
Self-cleaning side runners	1 set
Smokeless grill tray	1
Capacity	
Shelf positions	8

FISHER & PAYKEL

QUICK REFERENCE GUIDE > OB30SPPTX1

Total	4.1 cu ft
Usable capacity	3.6 cu ft

Cleaning	
Acid resistant graphite enamel	*
Removable oven door	*
Removable shelf runners	*
Self-clean	Standard and light cycles

Controls	
Adjustable audio and display	*
Automatic cooking/minute	*
Automatic pre-set	*
Automatic rapid pre-heat	*
Celsius/Fahrenheit	*
Connected Fisher and Paykel	*
Electronic clock	*
Electronic oven control	*
Food probe	*
Guided cooking by food type	*
Interior light	3 x 20W halogen
Intuitive touchscreen display	*
Precise electronic temperature	*

Functions	
Aero Broil	*
AeroTech™ technology	*
Aero™ Bake	*
Air fry	*
Bake	*

Broil	*
Classic bake	*
Dehydrate	*
Maxi Broil	*
Number of functions	17
Pastry Bake	*
Pizza bake	*
Rapid proof	*
Roast	*
Self-clean function	*
Slow cook	*
Vent bake	*
Warm	*

Performance	
AeroTech™ technology	*
Automatic rapid pre-heat	*
Broil power	4400W
Broil width	20"
CoolTouch door	*
Number of passes on broil	10

Power requirements	
Amperage	16.6 - 19.4A
Supply voltage	208 - 240V

Product dimensions	
Depth	23 29/32"
Height	27 1/8"
Width	29 29/32"

Date: 21.01.2020 > 2

Safety	
Advanced cooling system	*
Balanced oven door	*
Catalytic venting system	*
Control panel key lock	*
CoolTouch door	*
Full extension sliding shelves	*
Non-tip shelves	*

SKU	81921
-----	-------


The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2019.

FISHER & PAYKEL


Lot 911
Aug 26, 2022
A.M. A.I.

PRODUCT DIMENSIONS – SINGLE OVENS


Lot 91
Aug 26, 2022
R.M. AI

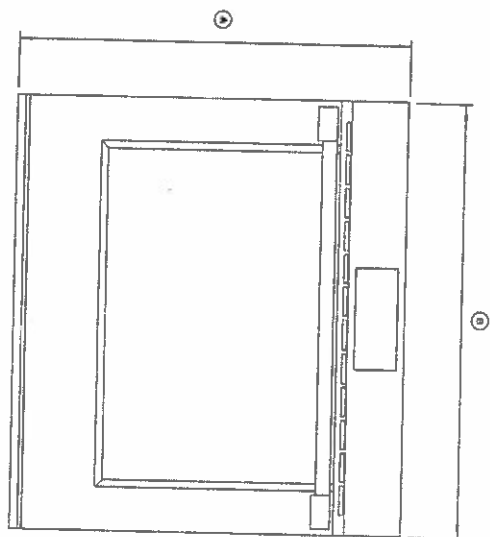

FRONT

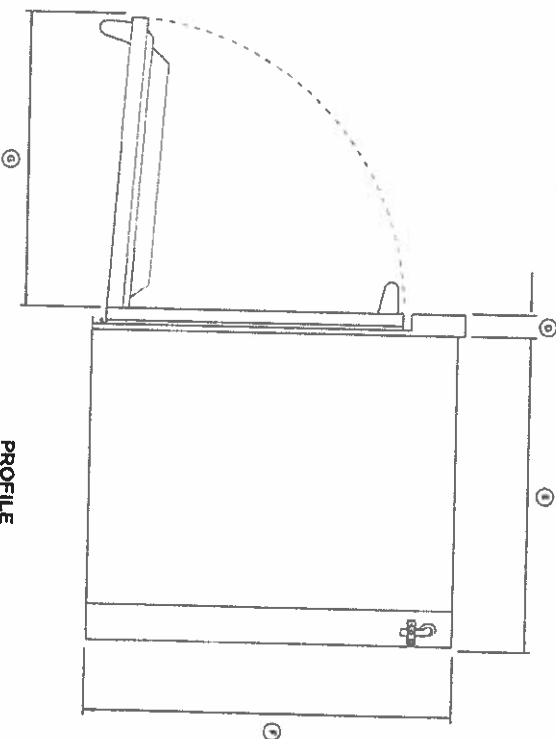

PROFILE

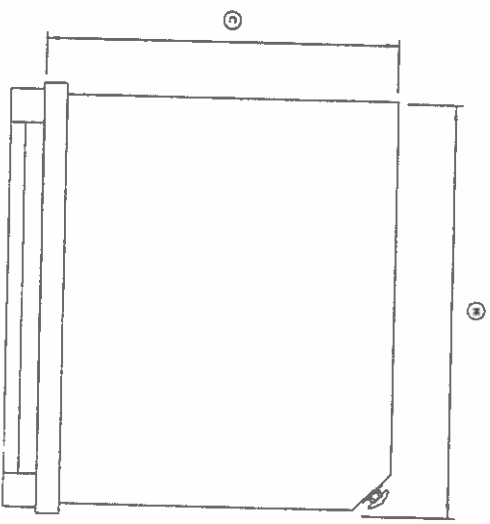


PLAN

PRODUCT DIMENSIONS		OB30S
	INCHES	MM
1 Overall height of product	27 1/8	689
2 Overall width of product	29 13/16	757
3 Overall depth of product (excl. handle and dials)	23 15/16	608
4 Depth of oven front and control panel (excl. handle and dials)	1 9/16	39
5 Depth of chassis (does not include oven front)	22 3/8	569
6 Height of chassis	26 9/16	675
7 Depth of door (open) (measured from front of door)	21 5/8	550
8 Overall width of chassis	28 5/16	719

Note: If flush installing, you need to replace the lower trim with the supplied long trim at the base of the oven, and the depth of the control panel 1 with the fitted spacer is larger than conventional ovens. Ensure you have created a 1 5/8" (42mm) recess in cabinetry.

CABINETRY DIMENSIONS – SINGLE OVENS

Lot 91
Aug 26, 2012
J.V.M. AD

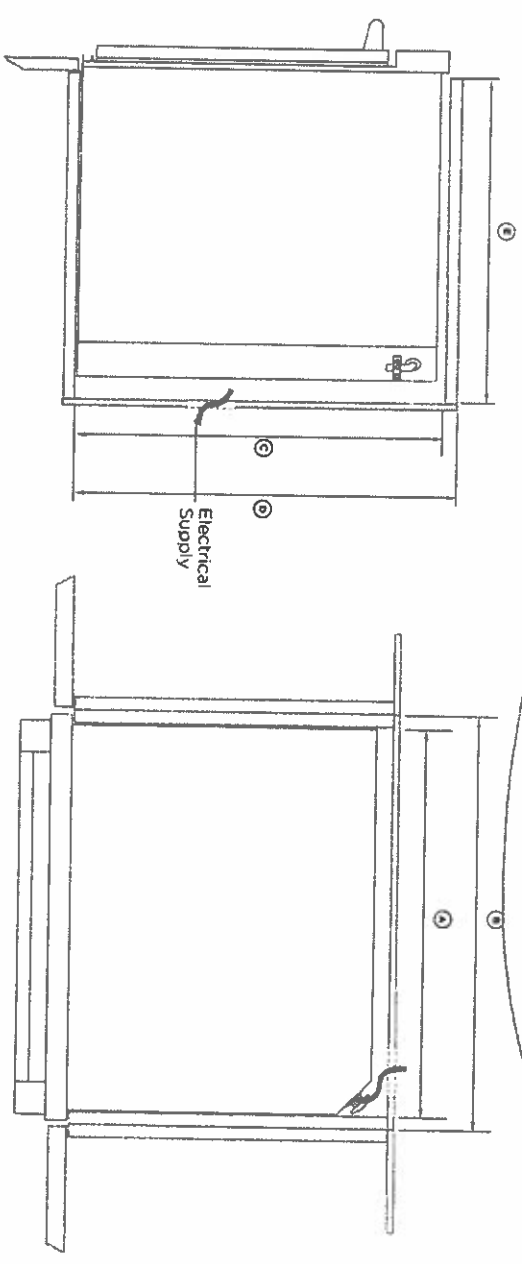


PROFILE


PLAN

CABINETRY DIMENSIONS			OB30S	
	INCHES	MM		
① Minimum inside width of cavity	28 1/2	724		
② Overall width of cabinetry	30 1/8	764		
③ Minimum inside height of cavity	26 13/16	681		
④ Overall height of cabinetry	27 3/8	693		
⑤ Minimum inside depth of cavity	22 5/8	575		
• Proud install	24 3/16	614		
• Flush install				

Notes:
 If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.
 Ensure the cavity is completely sealed with no gaps. This is to ensure the oven cooling system functions correctly.

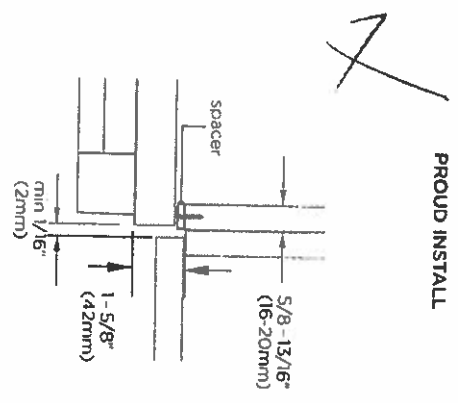

PROUD INSTALL


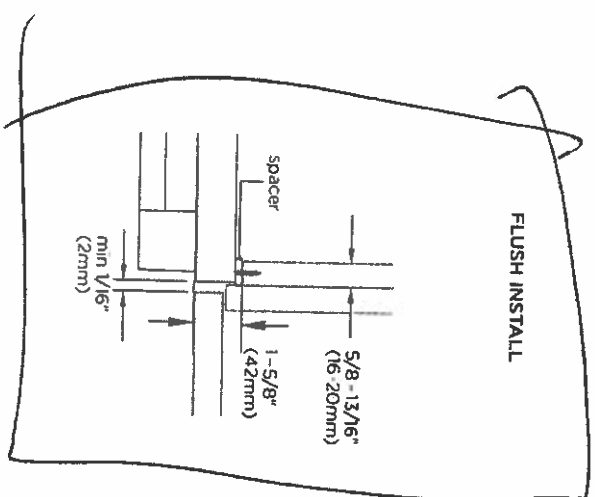


FLUSH INSTALL

FISHER & PAYKEL

SPECIFICATION GUIDE

CONVECTION SPEED OVEN, 30"

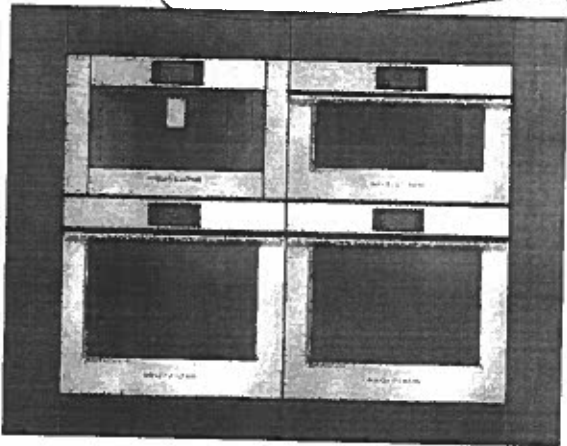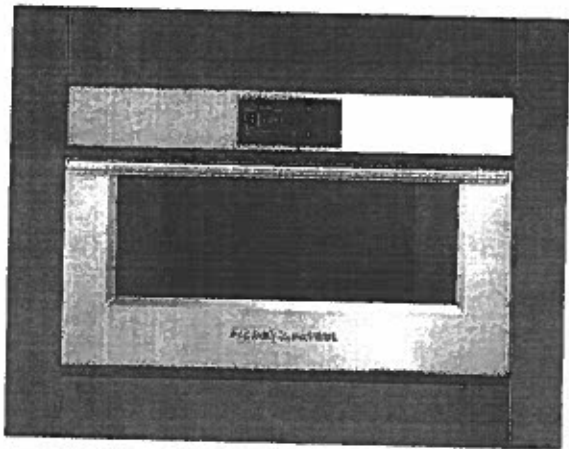

OVERVIEW

Designed to complement our Professional style wall oven and warming drawer, this built-in Convection Speed Oven seamlessly integrates into any kitchen design, with a stylish stainless steel finish. With the flexibility of both microwave and oven technology, it features six cooking functions including True Convection and Broil. Pair with other companion products to create a kitchen suite for every need.

MODELS

Convection Speed Oven, 30", Stainless steel
OM30NPX1

SERIES & STYLE

Series 9
Professional Style

FEATURES

- ① Part of our suite of companion products, designed to match aesthetically for flexible configurations
- ② Pairs perfectly with the Professional style 30" Oven and Warming Drawer
- ③ Intuitive touch display for ease of use
- ④ Flexibility of both microwave and oven technology, with six cooking functions
- ⑤ A CoolTouch door ensures it's safe to touch from the outside, protecting hands
- ⑥ Easy-to-clean stainless steel interior
- ⑦ 1.3 cu ft total gross capacity
- ⑧ Full width broil function with 1500W power
- ⑨ Program in desired cooking function and duration with automatic cooking feature
- ⑩ 900W microwave power and 1500W fan element power

ACCESSORIES

- ① Baking pan and wire shelf
- ② Turntable wire stand
- ③ Glass turntable

Lot # 91
Aug 26, 2022
A.M. PJ

FISHER & PAYKEL


SPECIFICATION GUIDE

CONVECTION SPEED OVEN, 30"

SPECIFICATIONS

Model No.	OM30NPX1
Dimensions	H 18 1/2" (470mm) x W 29 13/16" (757mm) x D 22 5/16" (567mm)
Total capacity	1.3 cu ft (37L)
Electrical	
Supply	120V / 208V - 120V / 240V 60Hz
Service	15 Amp circuit
Receptacle	Hard wired


PRODUCT DIMENSIONS



ISO VIEW

	in	mm
Ⓐ Overall height of speed oven	18 1/2	470
Ⓑ Overall width of speed oven	29 13/16	757
Ⓒ Overall depth of speed oven	22 5/16	567
Ⓓ Depth of speed oven front frame and control panel	1 9/16	39

CAVITY DIMENSIONS: STANDARD INSTALLATION

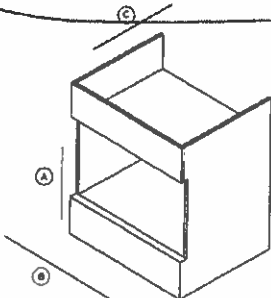


ISO VIEW

	in	mm
Ⓐ Minimum inside height of cavity*	18 3/8	467
Ⓑ Minimum inside width of cavity	25 3/8	645
Ⓒ Minimum inside depth of cavity measured from rear of front frame	22 7/16	560


*A 1/2" (12mm) spacer must be installed in the base of the cavity. See installation guide for details.
Note: Ventilation required at the rear of the cavity.

Lot 91
August 2022
M.A.M.
AT

Lot 191
Aug 26, 2022
A-1



Ventilation of 2" x 22 1/8" (50x560 mm) or totalling 4.3 air (280cm²) is required for companion products. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back of the cavity.

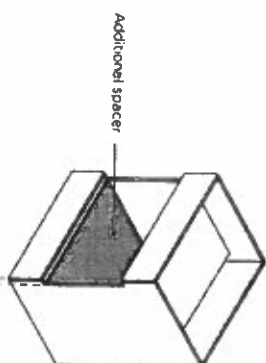


Critical rebate to achieve flush finish

SIDE ELEVATION
with front panels



CAVITY DIMENSIONS		OM30 MODELS	
		INCHES	MM
Ⓐ	Minimum inside height of cavity	18 11/16	474
Ⓑ	Minimum inside width of cavity	25 3/8	645
Ⓒ	Minimum inside depth of cavity (from front of rebate)	22 1/16	560
Ⓓ	Minimum height between cabinetry front panels	18 11/16	474
Ⓔ	Overall width of cabinetry	30	762
Ⓕ	Minimum overall depth of cavity (incl. front panel)	23 5/8	600
Ⓖ	Rebate depth for flush install (incl. front panel)	1 9/16	39
Ⓜ	Overall height of spacer in base of cavity	1/2	12
Ⓛ	Ventilation gap	2	50
Ⓣ	Minimum clearance to adjacent cabinetry or other appliances	1/16	2

DETAIL - PLAN VIEW

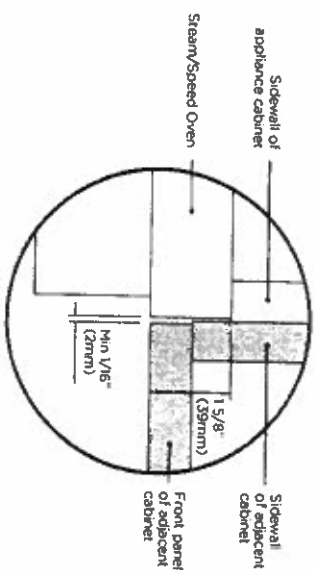

Integrated Dishwasher, 24" Sanitize

Series 7 Integrated

Panel Ready




Offering a superior wash performance, this Dishwasher is panel ready and designed to be integrated into your kitchen for a seamless look.

- Customize with your own front panel and handle to match your kitchen cabinetry
- Six wash programs to suit any load, from Delicate to Heavy
- Quick, Sanitize and Extra Dry provide extra wash options
- Flexible racking allows you to customise internal shelves to suit your needs

DIMENSIONS

Height	32 1/4"
Width	23 9/16"
Depth	21 3/4"

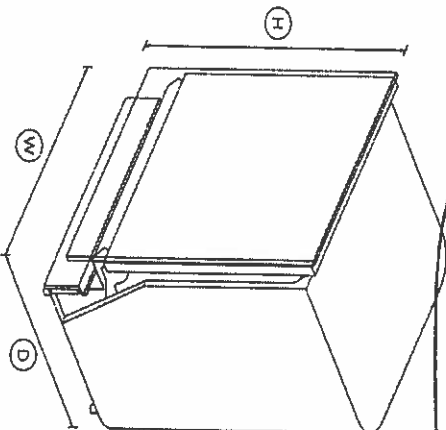

FEATURES & BENEFITS

- Sized to suit**
Install this fully integrated dishwasher to tall (American size) or short (Euro/ADA size) counter heights, ensuring minimal gaps. Customize with a front panel to match kitchen cabinetry.
- A quality wash**
This dishwasher offers seven wash programs including Auto, which automatically senses the optimal wash cycle for your dishes. The three stage filtration system delivers a superior clean, while the rinse aid indicator reminds you to top up for squeaky-

clean dishes

Flexible stacking

Designed to fit 14 place settings, the flexible, adjustable storage lets you stack even large items with ease - featuring a full width cutlery tray, height adjustable middle rack, cup holders and wine glass supports.

Quick, Sanitize and Extra Dry options

A Quick wash modifier results in a faster clean, while maintaining wash performance. The Sanitize option provides extra protection killing 99.9% of bacteria in the final rinse. The Extra Dry setting is perfect for plastic dishes.

Quiet and Reliable

Running at a very low decibel rating, this dishwasher does its job without making a fuss. The combination of clever technology and simple mechanics means greater reliability and superior wash performance.

Efficient performance

This dishwasher is very efficient in its use of water and energy, while delivering a powerful wash that ensures optimal results.

SPECIFICATIONS

Accessories	
Kickstrip	Black
Capacity and loading	
Accommodates round plates	10 1/4"
Fold down tines	•
Pitch adjustable tines	•
Place settings	14
Controls	
Child lock	•

QUICK REFERENCE GUIDE > DW24U6H

Date: 21/01/2020 > 2

react 29/12/20
JF + JHB
A. M. A.

End of cycle beeps
Energy saving delay start
Rinse aid indicator light

Water connection
Water pressure

0.03 - 1

Features

Quiet operation

SKU

B872

Power requirements
Amperage

10A

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2019.

Product dimensions
Depth
Height
Width

21 3/4"
32 1/4"
23 9/16"

Warranty

Parts and labor

2 years

Wash programs

Delicate
Extra Dry
Fast
Heavy
Medium
Number of wash programs
Quick
Rinse
Sanitise
Wash modifiers

•
•
Yes
•
Yes
10
•
•
•
4

Other product downloads available at fisherpaykel.com

- Quick Start Guide
- User Guide
- Service & Warranty Booklet
- Installation Guide



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1300 650 590 W www.fisherpaykel.com

FISHER & PAYKEL