

Amsterdam User Manual


VRH-WC01-30/36SS

Lot 85
Feb. 18, 24



Vesta Simple Kitchen Solutions

Height & Clearance

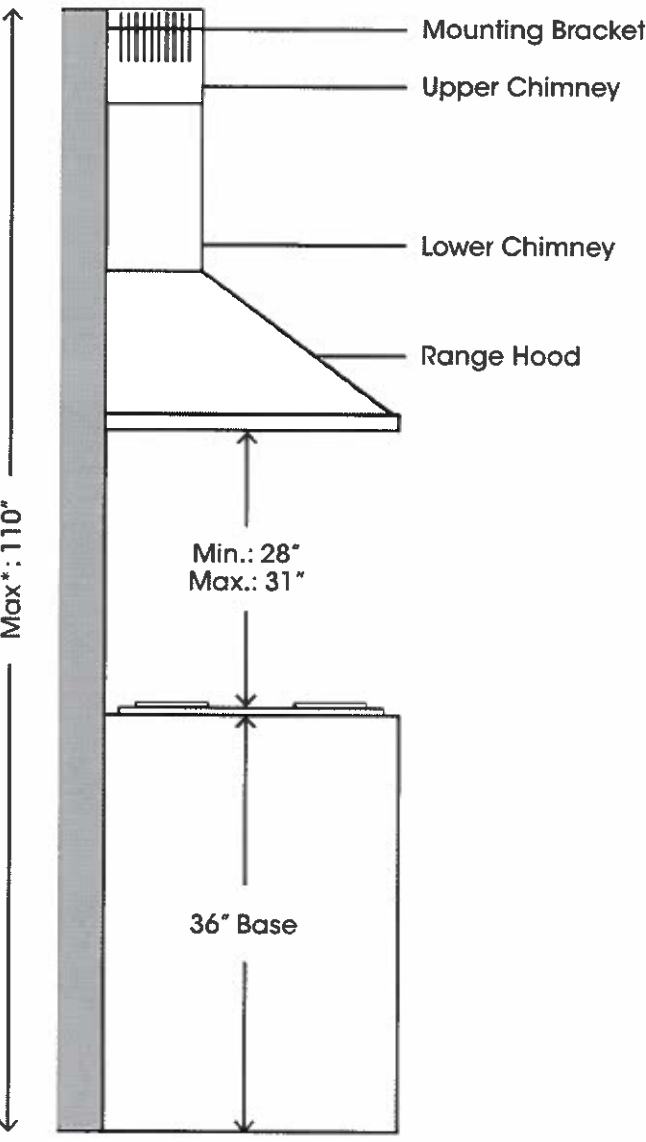

Maximum ceiling clearance 110" at 31" hood mounting height above countertop/stove (may vary with different model).
Chimney extensions available for higher ceilings.

Important

A minimum of 6" round (standard for this range hood) or 3-1/4 x 10" rectangular duct (purchased separately) must be used to maintain maximum airflow efficiency.

Flexible 6" round duct provided for convenience, always use rigid type metal/aluminum ducts if available to maximize airflow when connecting to provided duct.

Please use Duct Run Calculation below to compute the total available duct run when using elbows, transitions and caps.

ALWAYS, when possible, reduce the number of transitions and turns. If long duct run is required, increase duct size from 6" to 7" or 8". If a reducer is used, install a long reducer instead of a pancake reducer. Reducing duct size will restrict airflow and decrease airflow, thus reduce duct size as far away from opening as possible.

If turns or transitions are required: Install as far away from opening and as far apart, between 2, as possible.

Minimum mount height between stove top to hood bottom should be no less than 28-inch*.

Maximum mount height between stove top to hood bottom should be no higher than 31-inch*.

It is important to install the hood at the proper mounting height. Hoods mounted too low could result in heat damage and fire hazard; while hoods mounted too high will be hard to reach and will lose its performance and efficiency.

If available, also refer to stove top manufacturer's height clearance requirements and recommended hood mounting height above range.

* Due to different ceiling height configurations, recommended height may not be applicable.

Minimum Duct Size:

Round - 6" minimum

Rectangular - 3-1/4 x 10" minimum (requires a 6" to 3-1/4x10" adapter, not supplied)