


Lot 88
Apr 20, 22

36" Glass Canopy Chimney Hood

Benchmark™ Series - Stainless Steel HCG56651UC



HCG56651UC
Stainless Steel

Wall mounted chimney hoods add style and sophistication to the kitchen and give you greater freedom in your kitchen planning.

Features & Benefits

Touch controls with LCD display.

600 CFM centrifugal integrated blower included.

Four speed touch controls with LCD display.

Dishwasher safe filters with stainless steel covers.

Converts to recirculation mode with accessory kit (separate purchase required).

General Properties

Operating mode	Convertible: ducted / recirculating
Maximum CFM	600 CFM
Number of speed settings	4-stage
Motor location	Integrated motor in hood chimney
Number of lights	2
Bulb type	Halogen
Total power of the lamps (W)	80 W
Damper Included	Yes
Grease filter material	Washable stainless steel
Grease filter type	Multilayer cassette

Technical Details

Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug type	No plug




Dimensions & Weight

Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	27 7/16" x 42 3/8" / 27 7/16" x 46 5/16" / 35 7/8" x 19 11/16"
Height of the chimney (in.)	25 7/8" x 40 13/16" / 25 7/8" x 44 3/4"
Required distance above cooktop/range cooking surface	24" Electric / 30" Gas
Diameter of air duct (in.) top	8"
Net weight (lbs)	54 lbs

Accessories—Optional




HCGEXTBUC
Chimney extension



HCGFILTUC
Filter kit



HGRECSUC
Recirculation kit

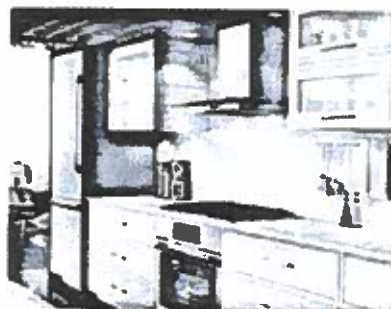

For help and assistance with Bosch accessories please call 1-800-944-2804 Mon-Fri 9am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty days (365) days from the date of purchase. The foregoing business begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. The Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chips, dents, or other damage to the finish of the Product) for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight colour variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2804


© 2014 BSH Home Appliances Canada. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH

36" Glass Canopy Chimney Hood

Benchmark™ Series • Stainless Steel HCG56651UC



Installation Details

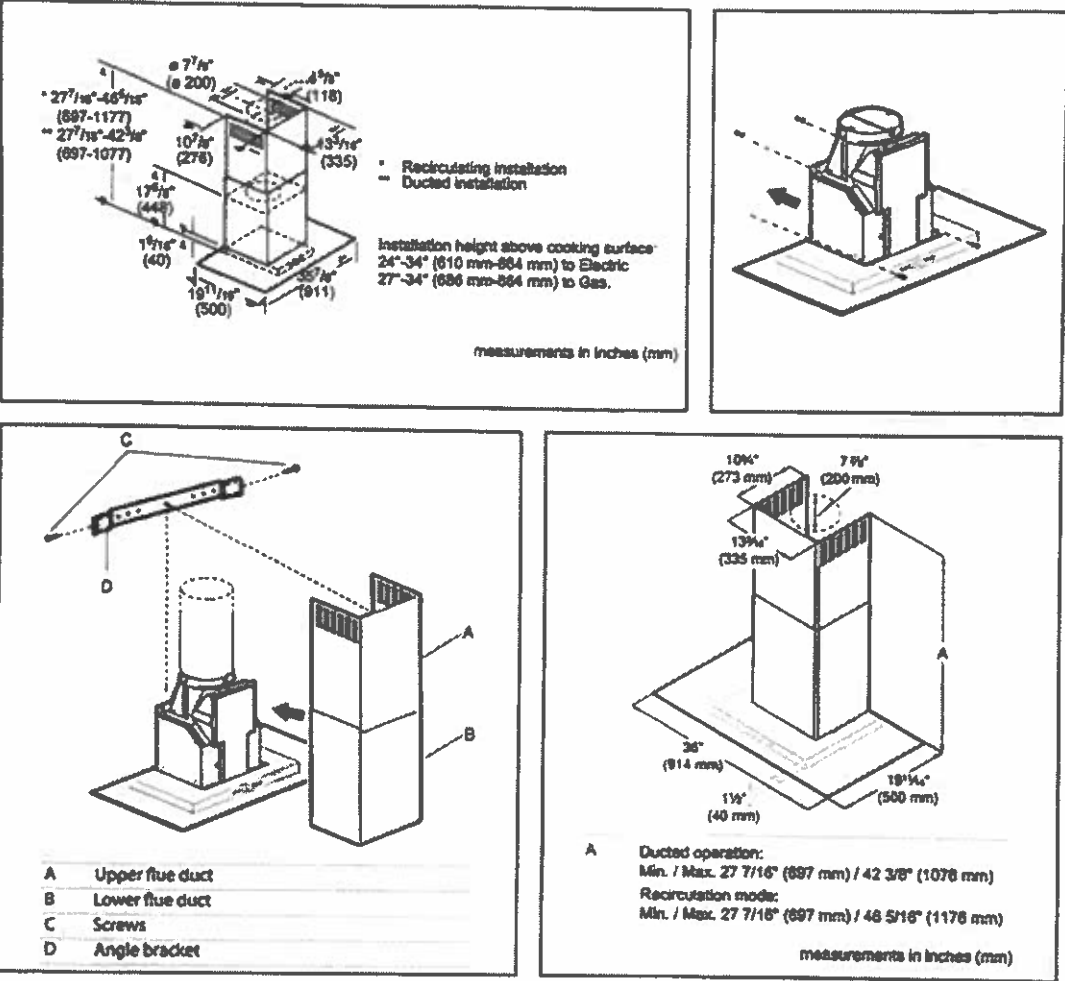

For help and assistance with Bosch necessities please call 1-800-946-2894 Mon-Fri 9am to 6pm CST

Notes: All height, width and depth dimensions are shown in inches. Please refer to installation instructions prior to making layout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranty: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing warranty begins to run upon the date of purchase, and shall not be started, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in materials and workmanship (such as scratches of stainless steel, paint/powdercoater blemishes, chips, dings, or other damage to the finish of the Product) for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight colour variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "as is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-946-2894

© 2014 BSH Home Appliances Canada. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH

Lot 88 
Apr. 20, 22

HOME APPLIANCES

LG DISHWASHERS

LDFN4542

Front Control Dishwasher with Quadwash™



KEY FEATURES

QuadWash™ System

3rd Rack

15 Place Settings

EasyRack™ Plus

Dynamic Dry™

NeverRust™ Stainless Steel Tub

LoDecibel™ Operation (48 dB)

NFC Tag On Technology

NSF Certified

Available in PrintProof™ Black Stainless Steel, PrintProof™ Stainless Steel, black, and White

* Hardwired



PRODUCT FEATURES

CAPACITY	15
Total Place Settings	15
Upper Rack Dish Height Limit	9.6"
Lower Rack Dish Height Limit	12.5"
RACKS AND BASKETS	
Cutlery Baskets	Yes
Fold Down Trays	Yes (Half Fold-on Upper & Half Fold-on Lower)
RFN-Free Hygienic Coated Racks and Trays	Yes
Rack Handle	Yes (Upper)
EasyRack™ Plus System	Yes
Height Adjustable Upper Rack	Yes
3rd Rack (Fixed)	Yes
STYLE AND DESIGN	
Control Panel Location	Front Control
Electronic Controls	Fully Integrated Control Panel
Tub Material	NeverRust™ Stainless Steel
Handle	Protect Handle
All Available Colors	PrintProof™ Stainless Steel, PrintProof™ Black Stainless Steel, White, Black
PrintProof® Technology	Yes
FEATURES	
QuadWash®	Yes
Inverter Direct Drive Motor	Yes
6-Direction™ Quick Operation	48dB
Number of Wash Cycles	9 (Auto, Heavy, Normal, Turbo, Standard Cycle, Machine Clean, Rinse, Express)
Number of Options	9 (Dual Zone, Half Load, Energy Sensor, High Temp, Extra Dry, Delay Start, Control Lock, Night Dry)
Number of Spray Arms	3 (Top, Upper, Lower)
SenseClean™ Wash System	Yes
Vapo Wash	Yes
Dispenser and Rinse-Aid Dispenser	Yes
Drying System	Dynamic Dry
End of Cycle Indicator	Yes (Chime - BPO indicator on display)
Hidden Water Heater	Yes
Safety Place Switch (Locked)	Yes
Soil Turbidity Sensor	Yes
Tub Protection (Scratching Sheet, Sound Absorbing Material Pad, Seal)	Yes
RFN-Free Hygienic Coated Racks and Trays	Yes
Anti-Backflow Protection (Pump, Inlet / Outlet Filter, Drain pump case, Drain hose)	Yes
Child Lock	Yes
3-Stage Filtration System	Yes

SMART FEATURES	Yes
NFC Tag On	Yes
CERTIFICATIONS	Yes
NSF Certified	Yes
POWER RATINGS	
ENERGY STAR® Qualified	Yes
CEE Tier	1
Energy Use (kWh/year)	258 kWh/year
Water Factor (WF)	2.9
DIMENSIONS / CLEARANCES / WEIGHT	
Product Dimensions (H x W x D)	33 3/4" x 23 5/8" x 24 1/8"
Product Weight (Lb)	75 Lb
Depth with Door Closed with Handle (in)	24 5/8"
Depth with Door Open (in)	40 1/4"
Carpet Dimensions (Lb x W x D)	28" x 36 7/8" x 29 1/4"
Shipping Weight with Carton (Lb)	88.7 Lb
LIMITED WARRANTY	
Labor	1 Year
Parts	1 Year
Control Board and Rack Parts	5 Years
Glass Drain Motor	10 Years
Stainless Steel Door Liner or Tub	Lifetime
UPC CODES	
LDFN4542S (PrintProof™ Stainless Steel)	040221341943
LDFN4542B (PrintProof™ Black Stainless Steel)	040221341901
LDFN4542B (Black)	040221341901
LDFN4542W (White)	040221341900

© 2020 LG Electronics USA, Inc. All rights reserved. "Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Net weight and dimensions are approximate. Some features may require internet access. Content and images may vary by product and are subject to change without notice. 4/20/20

Lot 88
Apr. 20, 23

Prepared by
Nick Benson
radiostar_11@hotmail.com (416) 432-1134


CANADIAN APPLIANCE SOURCE LP

36" 5-Burner Gas Cooktop with Griddle

KCGS956ESS

Available Finishes/Colours

KCGS956ESS
Stainless Steel

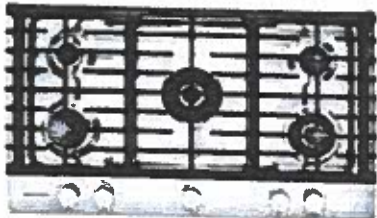

Dimensions		Features	
Depth	21	Digital Display	No
Height	3 11/16	Downdraft Vent	No
Width	36 1/4	Heating Element On Indicator Light	Yes
Controls		Hot Surface Indicator Light	No
Control Location	Front	Installs Over Built-In Oven	Yes
Control Type	Knobs	Griddle	Included
Infinite Heat Controls	Yes	LP Convertible	Yes - Kit Included
Knob Type	Metal	Power Boost	No
Knob Color	Stainless Steel Lighted Knobs	Power Outage Compatible	Yes
Features		Selection	Automatic Reversion, Summer
Automatic Pan Detection	No	GDS	
		IsSteelUnit	true

Five burners and a removable griddle give this 36-inch gas cooktop the power and versatility challenging recipes demand. The 20K BTU Professional Dual Ring Burner is among the most powerful in the industry, and our innovative Even-Heat™ Torch Burner provides even coverage to ensure proper heating without scorching. Multi-Finish Knobs and the scratch-resistant CookShield Finish help protect the surface against stains that may occur with high-temperature cooking.

Top Features
18,000 BTU Even-Heat™ Torch Burner
20K BTU Professional Dual Ring Burner
Removable Griddle Included

Manuals & Literature:

[Dimension Guide](#) [Installation Guide](#)

[Owner Manual](#) [Warranty Information](#)

KitchenAid

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

2.7 88

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

PRODUCT MODEL NUMBERS

KCGS350E	KCGS950E	MGC9530D	WCG75US0D
KCGS356E	KCGS956E	MGC9536D	WCG97US0D
KCGS550E	MGC7430D	WCG51US0D	WCG97US6D
KCGS556E	MGC7536D	WCG51US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas

Natural Gas:

This cooktop is factory set for use with Natural gas. If converting to LP gas, see the "LP Gas Conversion" instructions provided in the package containing literature. The model/serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion instructions provided in the package containing literature.

Gas Supply Line

Provide a gas supply line of 1/2" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.

Flexible metal appliance connector:

If local codes permit, use a 1/2" or 3/4" I.D. flexible stainless steel tubing gas connector, designed by CSA to connect the cooktop to the rigid gas supply line.




A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.

Do not kick or damage the flexible metal tubing when moving the cooktop.

Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



A. Gas supply line
B. Shutoff valve "open" position
C. To cooktop

*TEFLON is a registered trademark of E.I. Du Pont de Nemours and Company


ELECTRICAL REQUIREMENTS

A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.

Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.


PRODUCT DIMENSIONS

KCGS550ESS and KCGS850ESS Models

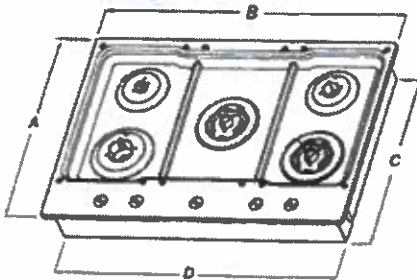


- | | |
|----------------------|---------------------|
| A. 21" (53.3 cm) | E. 3 1/2" (8.9 cm) |
| B. 30" (76.2 cm) | F. 4 1/2" (11.6 cm) |
| C. 19 1/2" (49.2 cm) | G. 1 1/2" (3.8 cm) |
| D. 28 1/2" (72.1 cm) | |

KCGS556ESS and KCGS856ESS Models

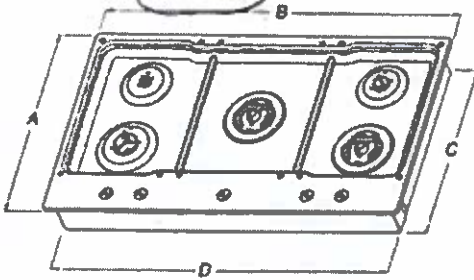


- | | |
|----------------------|---------------------|
| A. 21" (53.3 cm) | E. 3 1/2" (8.9 cm) |
| B. 36" (91.4 cm) | F. 4 1/2" (11.6 cm) |
| C. 19 1/2" (49.2 cm) | G. 1 1/2" (3.8 cm) |
| D. 34 1/2" (88.1 cm) | |

All Other 30" (76.2 cm) Models

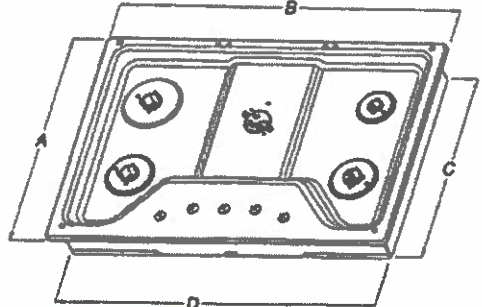


- | | |
|----------------------|---------------------|
| A. 21" (53.3 cm) | E. 3 1/2" (8.9 cm) |
| B. 30" (76.2 cm) | F. 4 1/2" (11.6 cm) |
| C. 18 1/2" (46.9 cm) | G. 1 1/2" (3.8 cm) |
| D. 28 1/2" (72.1 cm) | |

All Other 36" (91.4 cm) Models

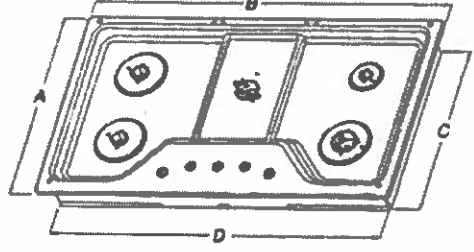


- | | |
|----------------------|---------------------|
| A. 21" (53.3 cm) | E. 3 1/2" (8.9 cm) |
| B. 36" (91.4 cm) | F. 4 1/2" (11.6 cm) |
| C. 18 1/2" (46.9 cm) | G. 1 1/2" (3.8 cm) |
| D. 33 1/2" (85.7 cm) | |

CABINET DIMENSIONS

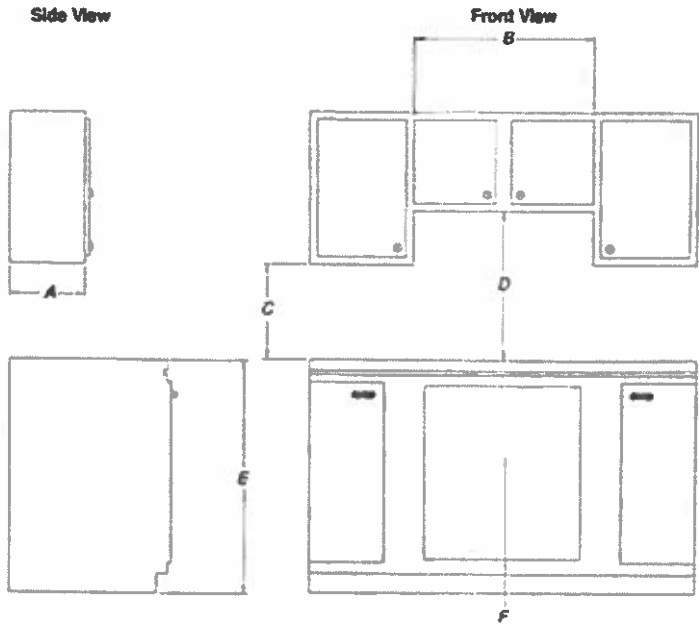

- A. 13" (33.0 cm) recommended upper cabinet depth.
B. 30" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearance to cooktop.
D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet. 24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper.
E. 36" (91.4 cm) top of countertop to floor.
F. Gas line opening - Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

CABINET DIMENSIONS (cont.)

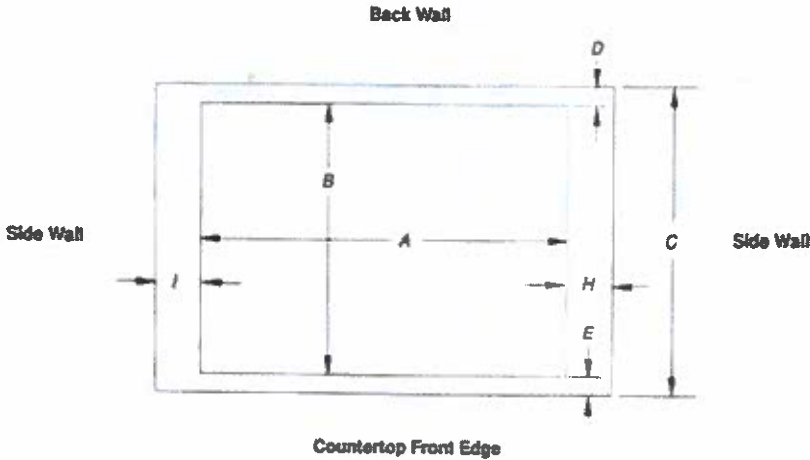

Cutout (Product Opening) Dimensions						
30" (76.2 cm) Models						
Models	A			B		
	Min	Recommended	Max	Min	Recommended	Max
KCGS350 and KCGS950	28 1/2" (72.4 cm)	28 1/2" (73.4 cm)	29 1/2" (74.3 cm)	19 1/2" (49.5 cm)	19 1/2" (50.2 cm)	20" (50.8 cm)
All Other 30" (76.2 cm) Models	28 1/2" (72.4 cm)	28 1/2" (73.4 cm)	29 1/2" (74.3 cm)	19" (48.3 cm)	19 1/2" (49.5 cm)	20" (50.8 cm)
36" (91.4 cm) Models						
KCGS350 and KCGS950	34 1/2" (88.4 cm)	35 1/2" (89.4 cm)	35 1/2" (90.3 cm)	19 1/2" (49.5 cm)	19 1/2" (50.2 cm)	20" (50.8 cm)
All Other 36" (91.4 cm) Models	33 1/2" (86.0 cm)	34 1/2" (87.0 cm)	35 1/2" (89.5 cm)	19" (48.3 cm)	19 1/2" (49.5 cm)	20" (50.8 cm)

Side Walls (Combustible Surfaces)	
Models	H and I
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).
KCGS350, KCGS350, MCGS350, WCGS7US0, WCG8TUS0	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).
All Other Models	Both have to be 8" (20.3 cm) or more.

Back Wall and Countertop Front Dimensions			
Models	C	D	E
KCGS350 and KCGS950	25" (63.5 cm)	2 1/2" (7.3 cm)	2 1/2" (6.9 cm)
All Other Models			3 1/2" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.