


Lot 40 Brooklyn

Need Assistance? 877-374-3439



Kitchen Aid KGRS308XSS Freestanding Gas Range, 30in, 5.1 cu.ft, with 5 Sealed Burners, True Convection Oven, Self Clean, Continuous Grates, Easy Convect, Cast-Iron Griddle and Warming Drawer

Brand: KitchenAid
Model #: KGRS308XSS

Product Options

\$2,024.10 CAD KGRS308XSS - Stainless Steel - Rebate available

Product Quick Specs

Width: 29 7/8
Height: 46 3/4
Depth: 28 3/4
Weight: 245 lbs.
Type: Gas Range
Exterior Width: 30 inch
Volts: 110 Volts
Self Clean: Yes
Convection: Yes
Number of Burners: 4
Cooktop Surface: Sealed Burners (Gas)
Warmer/ Bake Drawer: Warming Drawer
Downdraft: No
Temperature Probe: No
Time of Day Clock: Yes
Amps: 15
Weight: 245
Hertz: 60
Height to Cooking Surface: 36"
Capacity (Cu. Ft.): 5.1
Capacity Cu. Ft. (Main Compartment): 5.1
Capacity Cu. Ft. (Secondary Compartment): none
Oven Controls: Touchpad
Control Location: Backsplash
Window: Yes
Burner Grates: Cast Iron
Continuous Grates: No
Cooktop Construction: Stainless Steel
Deep Recessed Cooktop: No
Oven Racks -- Main Oven: 3
Audible Preheat Signal: Yes
Auto Oven Shut-Off: No
Broiler Location: Upper
Certified Sabbath Mode: No
Control Lock Capability: Yes
Delay Bake Option: Yes
Delay Clean Option: Yes
Digital Temperature Display: Yes
Electronic Clock and Timer: Yes
Electronic Ignition: Yes
Extra Large Oven: Yes
Hot Surface Indicator Lights: Yes
In-Oven Broiler: Yes
Interior Oven Light: Yes
Meat Thermometer: No
Modules required: No
Non-Stick Griddle: Yes
Oven Timer (Time Bake): Yes
LP Conversion Kit: Included
Right Front Burner QTY: 18000 BTU
Right Rear Burner QTY: 5000 BTU
Left Front Burner QTY: 9500 BTU
Left Rear Burner QTY: 14000 BTU
Center Burner QTY: 5000 BTU
Center Rear Burner QTY: none

Ad.

Product Description
Kitchen Aid KGRS308XSS Freestanding Gas Range, 30in, 5.1 cu.ft, with 5 Sealed Burners, True Convection Oven, Self Clean, Continuous Grates, Easy Convect, Cast-Iron Griddle and Warming Drawer

Product Features

5.1 cu. ft. oven capacity provides more room to cook multiple dishes simultaneously more

http://www.canadianappliance.ca/product/KitchenAid_KGRS308XSS_Ranges_KitchenAid 10/16/2012

For greater flexibility, you can use the interchangeable cast-iron griddle or center grate with the oval burner. more
18K BTU professional burner produces a high output for searing and reduces to a low output for simmering sauces. more
T.H.E.™ (Third Hidden Element) True Convection provides even heating throughout oven. more
EasyConvect™ Time and Temperature Conversion System takes the guesswork out of convection cooking. more
The built-in warming drawer allows you to keep cooked food warm or warm plates before serving. more

Product Specifications

Performance	Natural Gas
Fuel Type	
Cooktop Features	
Left Front Burner (BTU)	9500
Right Front Burner (BTU)	18000
Left Rear Burner (BTU)	14000
Right Rear Burner (BTU)	5000
Oven Features	
Cooking System	Convection Oven
Total Capacity	5.1 Cu. Ft.
Convection Bake	Yes
Convection Roast	Yes
Bake	Yes
Cleaning System	Self-Cleaning
Temperature Probe	Yes
Hidden Bake Element	CleanBake™ Hidden Element
Delayed Cooking	Yes
Bread Proofing	Yes
Drawer Type	Warming Drawer
Convection Element Wattage @240v	350
Design	
Grate Material	Cast Iron
Cooktop Controls	Mechanical/ 360
Delayed Cooking	Yes
Oven Lights	1
Dimensions	
Product Height	46 3/4 Inches
Product Depth	28 3/4 Inches
Product Width	29 7/8 Inches



KITCHENLAUNDRYOUTDOOR KITCHENSMALL APPLIANCESBEDDINGSHOP BY BRAND

lot 40

OUR PRODUCTS


- KITCHEN
- BEVERAGE CENTERS
- COOKING PRODUCTS
- DISHWASHERS
- FAUCETS
- ICE MACHINE
- MICROWAVE ACCESSORIES
- MICROWAVE OVENS
- REFRIGERATION
- REFRIGERATION ACCESSORIES
- TRASH COMPACTORS
- VENTILATION
- VENTILATION ACCESSORIES
- WINE COOLERS
- LAUNDRY
- OUTDOOR KITCHEN
- SMALL APPLIANCES

YOU ARE HERE : PRODUCTS KITCHEN MICROWAVE OVENS

←BACK TO PREVIOUS PAGE



KitchenAid® Microwave Ovens YK HMS2040WSS
YK HMS2040WSS

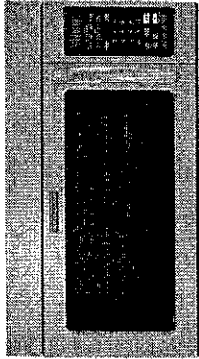

LIQUIDATION
REBATE

KitchenAid 2.0 cu.ft. over-the-range microwave. All of KitchenAid microwaves offer you large capacity, advanced cooking systems and innovative features. Of special note is KitchenAid microwave hood combination that not only gives you all that speed and functionality, but is also outfitted with a ventilation system and contemporary built-in look.



ADDITIONAL IMAGES

ADD TO QUOTE REQUEST

DOCUMENTS



Installation GuideProduct Manual



CLICK ON THE ASK AN EXPERT TAB TO OPEN THE FORM AND ASK YOUR QUESTIONS.

ASK AN EXPERT FORM

First name *

Last name *

Email *

Postal Code *

Phone

* = required fields


Question / Comment *

Text in image *



☐ Be the first to hear about our upcoming exclusive offers.

SEND



DIMENSIONS

Width 29.93 " / 76.04 cm
Height 17.25 " / 43.82 cm
Depth 15.99 " / 40.64 cm
Weight 73.41 lb(s) / 33.3 kg

Shipping weight

FEATURES

Turntable Yes
Child lock Yes
Kitchen timer Yes
Auto defrost Yes
Interior oven light Yes

Brand specific features/technology Auto-cook, reheal, and defrost cycles. Popcorn sensor. Add 30 seconds control. Soften and melt cycles.

MICROWAVE

Type Over the Range

Capacity 2.0 cu. ft.

Wattage 1000 watts

Convection No

Color Stainless Steel

Power levels 10

Ventilation System Yes

Sensor cook Yes

Convection wattage

POWER

Voltage 120 volts

Amperage 15 amps

UPC

UPC#

WARRANTY

Warranty 1 year(s)

Additional warranty information



TASCO'S VISION

TO BE THE PREMIUM APPLIANCE SUPPLIER OF CHOICE.

MISSION

EVERYONE... PASSIONATELY CREATING LOYAL CUSTOMERS FOR LIFE



1-416-642-5600
Monday to Friday
from 9 am to 5 pm

HOME

ABOUT TASCO

CUSTOMER TESTIMONIALS

PRESS RELEASES / RADIO SPOTS

SITE MAP

CONTACT US

TERMS & POLICIES

Copyright © 2012 - TASCO DISTRIBUTORS. All rights reserved.
Site designed and powered by Tailbase

lot 40
Brown

KitchenAid® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

KFIS29BB KFIS29PB

PRODUCT DIMENSIONS


Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.


IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

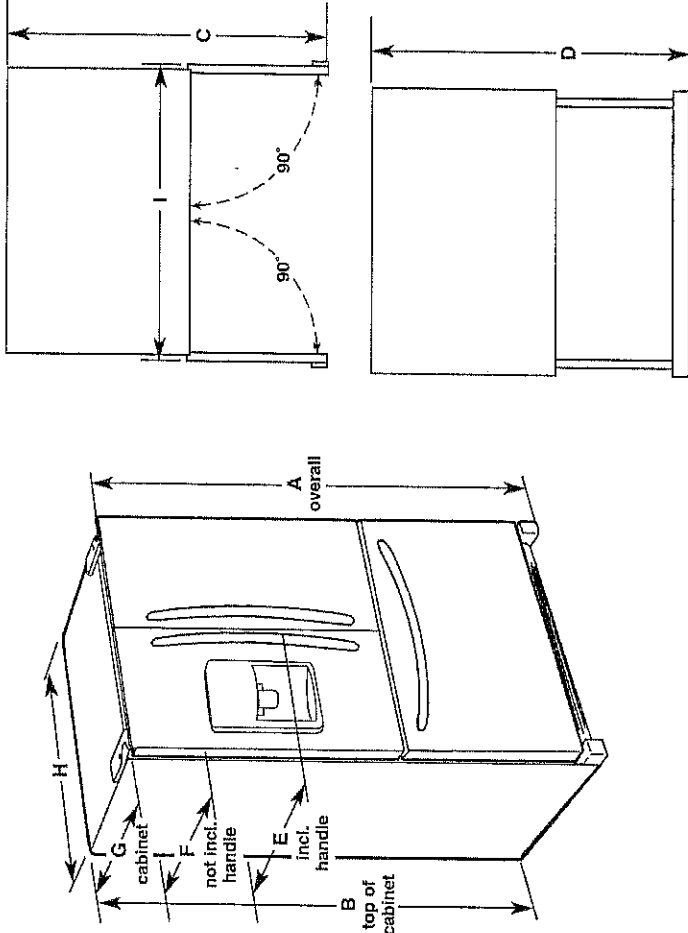

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
28.5 cu.ft.	70 1/8" (178.1 cm)	68 3/8" (174.3 cm)	48" (121.9 cm)	47 3/8" (121.0 cm)	35 1/4" (90.5 cm)	33 3/8" (84.3 cm)	28 15/16" (73.5 cm)	35 11/16" (90.6 cm)	38 3/16" (97.0 cm)

LOCATION REQUIREMENTS

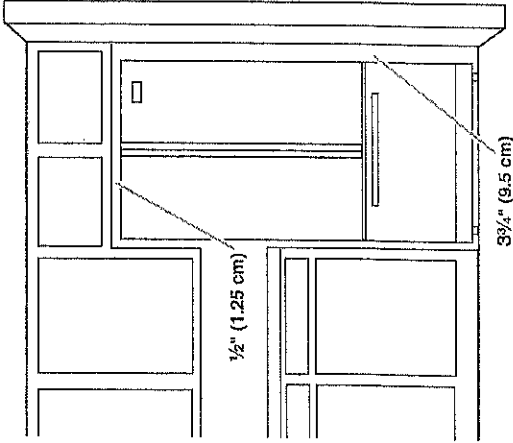

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 3 3/4" (9.5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.