

gas

Lot 87612



36" Gas Ranges

Wolf has perfected the form, function and sheer durability of our gas ranges. Wolf gas ranges offer standard features such as an infrared oven broiler, convection baking, dual-stacked sealed surface burners and our signature large red control knobs. Optional infrared charbroiler and infrared gridle give you the freedom to customize your gas range. Wolf gas ranges are available in natural or LP gas.

FEATURES

- Heavy-duty stainless steel exterior with island trim.
- Dual-stacked, sealed burners for precise control and easy cleanup.
- Flame recognition and automatic relight for safety and ease of use.
- Signature red control knobs with infinite control.
- Stainless steel bezels surround control knobs.
- Porcelain-coated, cast iron continuous burner grates.
- Top configurations including infrared charbroiler and infrared gridle with stainless steel covers.
- Large-capacity gas convection oven with three adjustable oven racks.
- Infrared broiler with ultrafast pre-heating.
- Halogen lit, porcelain oven interior with window in door.
- Adjustable stainless steel legs in front and rear casters.
- Wolf exclusive spring and damper door hinge system.

SURFACE FEATURES

Model	Surface Burners	Surface Burner	Infrared Charbroiler	Infrared Gridle
GR364G	3	15,000 Btu high / 950 Btu simmer	1	1
GR364C	3	15,000 Btu high / 950 Btu simmer	1	1
GR366	5	9,200 Btu high / 325 Btu simmer	1	1

Model numbers are for natural gas ranges, add (LP) to the model number for LP gas.

ACCESSORIES


- 5" and 10" stainless steel risers—20" riser with shelf.
- Red, black or stainless steel control knobs.
- Brass and chrome bezels.
- Cast iron S-grates and wok grate.
- Hardwood cutting board (gridle model only).
- Additional oven racks.
- Full-extension easy glide rack.
- Bake stone kit.
- Gridle cleaning kit.
- Front leg covers.
- High altitude conversion kit.

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the Wolf showroom section of our website, wolfappliance.com.




Model GR364G



Model GR364C



Model GR366



Shipping Weight	44.9-47.0 lbs
Electrical Requirements	50/60 Hz, 15 amp circuit
Opening Depth	24"
Opening Height (to countertop)	36"
Opening Width	36"
Oven Interior Dimensions	30" W x 18 3/8" H x 17" D
Oven Interior Capacity	5.5 cu ft
Overall Depth	28 3/8"
Overall Height (to cooking surface)	37"
Overall Width	35 7/8"
Exterior Finish	Stainless Steel

- A riser is required for installations against a combustible surface.
- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.

©Wolf Apparel, Inc. all rights reserved. Features and specifications are subject to change at any time without notice.

15 MP

36" Gas Ranges

The image contains two technical drawings of a kitchen layout, labeled 'FRONT VIEW' and 'SIDE VIEW'.


FRONT VIEW: This drawing shows the layout from the front. It includes a sink area on the left, a central cooking area with a stove and oven, and a refrigerator on the right. Dimensions are provided for various components: a 5" gap at the top left, a 12" gap for 'GAS (122)', a 2" gap for '(51)', a 7 3/4" (157) gap, a 5 3/4" (145) gap, a 12" gap, a 10" (254) gap, a 36" (914) opening width, a 5" gap, a 18" (457) gap, and a 30" (762) to 36" (914) gap for 'VENTILATION HOOD TO BOTTOM OF'.

SIDE VIEW: This drawing shows the layout from the side. It includes a sink area on the left, a central cooking area with a stove and oven, and a refrigerator on the right. Dimensions are provided for various components: a 5" gap at the top left, a 13" (330) gap, a 37" (940) gap for 'TO COOKING SURFACE', and a 5" gap for 'ON FLOOR'.

^aWithout ventilation hood, 42° (109°) minimum clearance counting to combustible materials; open-ended and GFD-6 require non-combustible materials.


LOT 87 KING

LOT 87K12
10.29.13

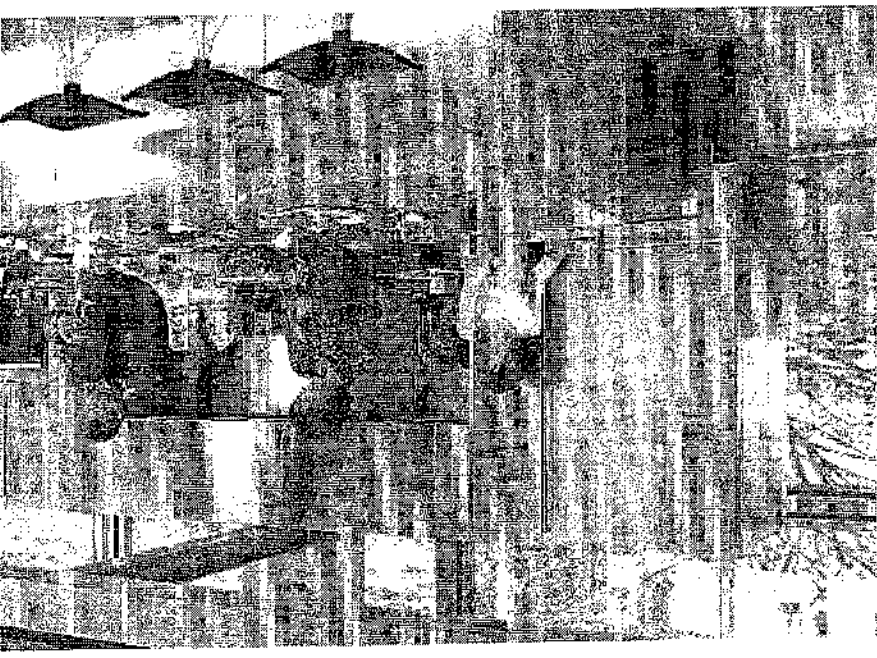

Integrated refrigeration can be used anywhere in the home. It merges seamlessly into the décor, with no visible hinges or grilles. Model 736TCI has an upper cabinet refrigerator with freezer storage drawers. Two distinct temperature zones ensure the freshest food and energy efficiency. This model is ENERGY STAR® qualified for energy efficiency.

36" Integrated
Combination—Tall



FEATURES

- Upper cabinet refrigerator and two freezer storage drawers.
- Custom front panels and hardware allow for infinite design options.
- Point-of-use refrigeration that can be placed anywhere in the home.
- Dual refrigeration system ensures the freshest food and energy efficiency.
- Microprocessor maintains precise control, within 1° of set temperature.
- Easy-access, illuminated touch control panel.
- Bright interior lighting in cabinet and drawers.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- High-humidity drawer keeps fruits and vegetables crisp and fresh.
- Smooth-glide, full-extension storage drawers.
- Alarm feature will sound an audible beep if door or drawer is left open.
- Automatic ice maker provides crescent-shaped ice.
- 90° door stop built into hinge.
- Star-K compliant with harness kit.

MODEL

Design


INTERIOR FEATURES

- Refrigerator
 - Dual Refrigeration
 - 2 Temperature Zones
 - 3 Adjustable Glass Shelves
 - 1 Stationary Crisper Drawer
 - 3 Adjustable Door Shelves
 - Adjustable Dairy Compartment
 - Egg Container
- Freezer (Drawers)
 - 1 Removable Drawer Divider
 - Automatic Defrost
 - Automatic Ice Maker

ACCESSORIES

- Stainless steel front panels with tubular or pro handles—80" or 84" finished height.
- Stainless steel tubular and pro handles.
- Dual installation kit for installation with column, tall or drawer model.
- Delt drawer and shelf assembly.
- Dozen egg container.


Accessories are available through your Sub-Zero dealer. For local dealer information, visit the Find a showroom section of our website, subzero.com.



LOT 87
K12

15 AMP LOT 87-K1116

Sub-Zero, Inc. all rights reserved. Features and specifications are subject to change at any time without notice. 9/11

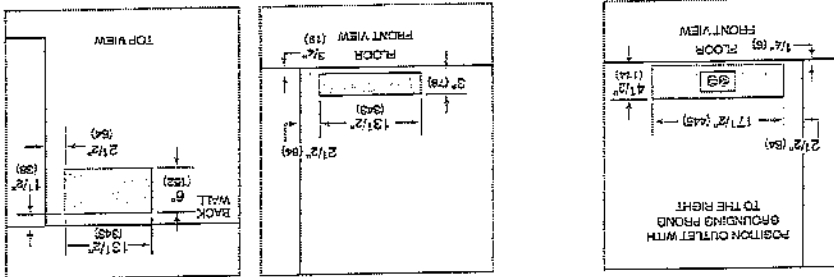

Location of Electrical Supply

Location of Water Supply

INSTALLATION NOTES

Stainless steel panels with handles are available as accessories. These panels are not installed at the factory. Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

*Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back. require a minimum opening depth of 25".

Shipping Weight 480 lbs

Plumbing Requirements 1/4" OD copper, braided stainless steel or PEX tubing

Electrical Requirements 115 V AC, 60 Hz, 15 amp dedicated circuit

Finished Opening 36" W x 80" H x 25" D*

Refrigerator Capacity 13.3 cu ft

Freezer Capacity 7.1 cu ft

Drawer Clearance 19 1/2"

Door Clearance 34 1/2"

Overall Depth 24"


Overall Height 80"

Overall Width 36"

SPECIFICATIONS


INSTALLATION SPECIFICATIONS

Opening Dimensions

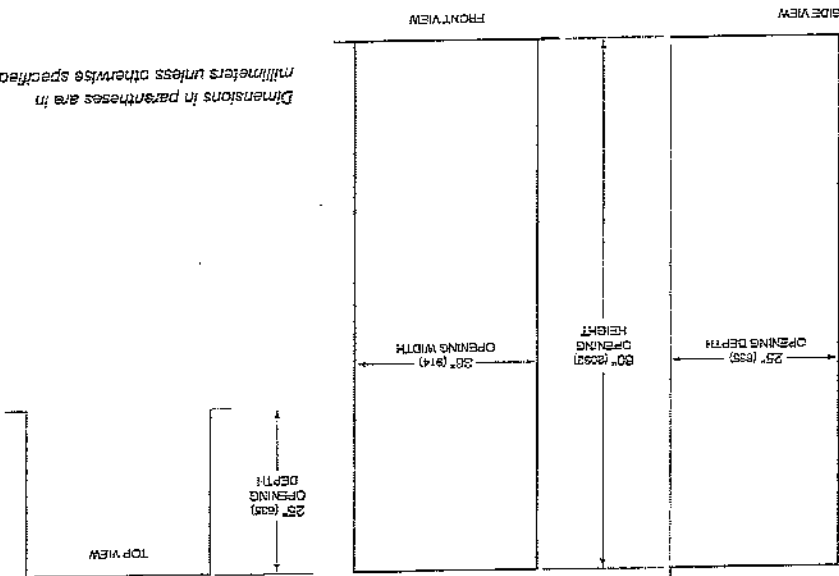


Dimensions in parentheses are in millimeters unless otherwise specified.


36" Integrated Combination-Tail



OVERALL DIMENSIONS

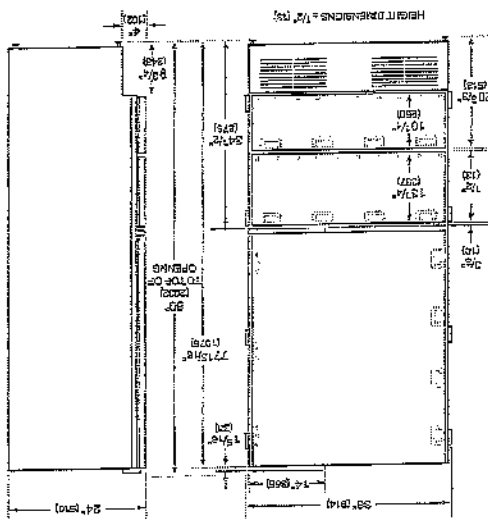

Unit dimensions may vary by $\pm 1/8$ ".

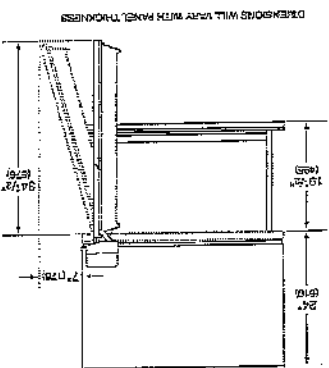

DIMENSIONS WILL VARY WITH PANEL THICKNESS

LOT 87K12 10.29.13

LOT 87K2
10-29-13



24" Undercounter Wine Storage

SUB-ZERO

Better wine storage conditions for the bottle ultimately means better enjoyment in the glass. Undercounter model 424 has a wine storage capacity of 46 (750 ml) bottles. Two independent storage zones maintain the temperature and humidity that wine — and wine lovers — require. Model 424G is available in overlay and stainless steel design applications.

MODEL OPTIONS

Design/Finish	Overlay	Stainless Steel	Tubular	Pro
424G/O	424G/S/TH	424G/S/PH		

*Handle not included to allow for design flexibility.

ACCESSORIES

- Stainless steel tubular and pro handles.
- Door lock.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

Heat — Two independent storage zones can be set in a range of 39°F to 65°F, with one-degree digital accuracy.


Light — UV resistant bronze tinted glass shields wines from harmful rays.

Humidity — Dual evaporators, one for each storage zone, maintain steady, moderate humidity.

Vibration — Sub-Zero's quiet compressor lets wines rest undisturbed. Shelves glide out smoothly, providing access without agitating the wine.

For additional information on the enemies of wine, visit www.subzerowine.com.

- Overlay and stainless steel design options.
- Undercounter design allows for dual installation with undercounter unit.
- Individual temperature control of two separate compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Temperature zones range from 39°F to 65°F.
- Full-view, UV-resistant glass door—high altitude glass available.
- Illuminated touch control panel.
- Discreet interior lighting.
- Wine shelves accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine shelves with natural cherrywood facing have three-quarter extension for easy access.
- Can be connected to home security system.
- Star-K compliant with installation of a harness kit.

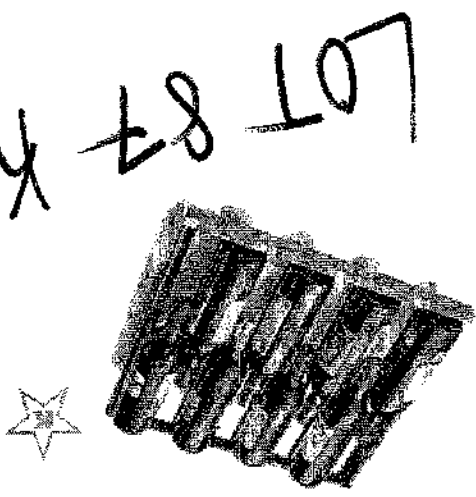


15 AMP

10/11


©Sub-Zero, Inc. all rights reserved. Features and specifications are subject to change at any time without notice.

Dimensions in parentheses are in millimeters unless otherwise specified.

LOT 87 KING





Location of Electrical Supply

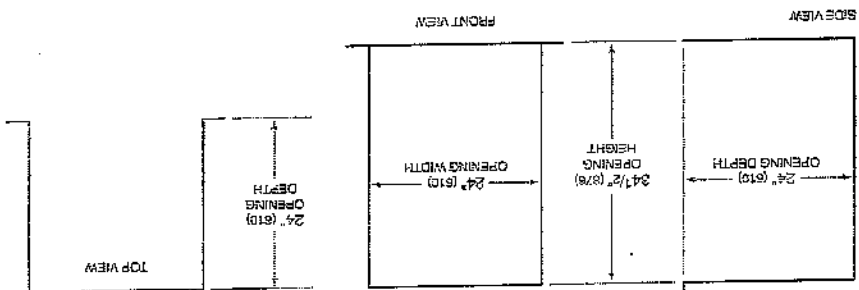

Opening Dimensions

INSTALLATION SPECIFICATIONS

Overall dimensions are based on stainless steel panels and handles. Unit dimensions may vary by 1/8\"/>

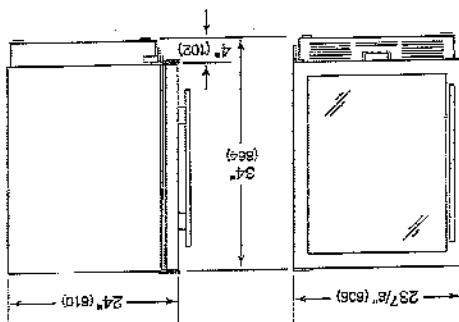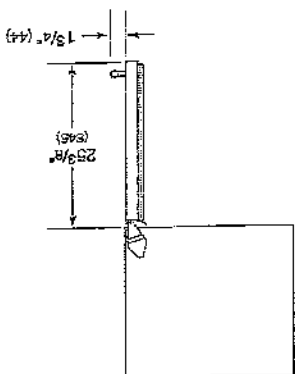


OVERALL DIMENSIONS

INSTALLATION NOTES

For overlay models, you will be adding a door panel for a custom look. Overlay models also allow you to match surrounding cabinetry hardware. Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

SPECIFICATIONS	
Overall Width	23 7/8" (605)
Overall Height	34"
Overall Depth	24"
Door Clearance	25 3/8"
Wine Storage Capacity	48 bottles*
Opening Width	24"
Opening Height	34 1/2"
Opening Depth	24"
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Shipping Weight	195 lbs
* 750 ml bottles	

24" Undercounter Wine Storage



LOT 87K12
10.29.13

LOT 87 KINGS

- FEATURES**
- Built-in or freestanding standard microwave oven with 2.0 cu ft capacity and 1200 watts of power.
 - Stainless steel trim to match L series and E series ovens.
 - Black glass E series trim.
 - Sensor cooking.
 - Easy-to-operate control panel and programmable power options.
 - Interactive display—99 minutes, 99 seconds.
 - Warming feature.
 - Menu label and food guide.
 - Multi-language—English, French and Spanish.
 - Removable turntable and support.
 - Safety door latches—oven will not operate unless the door is closed.
 - Oven light comes on when oven is operating or door is open.
 - Tight door seals with one-touch door open pad.


ACCESSORIES

The optional trim kits listed above are available as sales accessories through your authorized Wolf dealer. For local dealer information, visit the Wolf showroom section of our website, wolfappliance.com.

- BUILT-IN TRIM KITS**
- 27" E series.
 - 30" E series.
 - 30" L series.
- This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

The Wolf standard microwave oven with optional trim can be used in combination with a Wolf built-in oven and/or warming drawer to finish off your cooking tower with an integrated look. You can choose from two different trim styles to match our built-in ovens. Model MW24 may also be used in a freestanding application. This is the only standard microwave oven that deserves the Wolf name.

Standard Microwave Oven

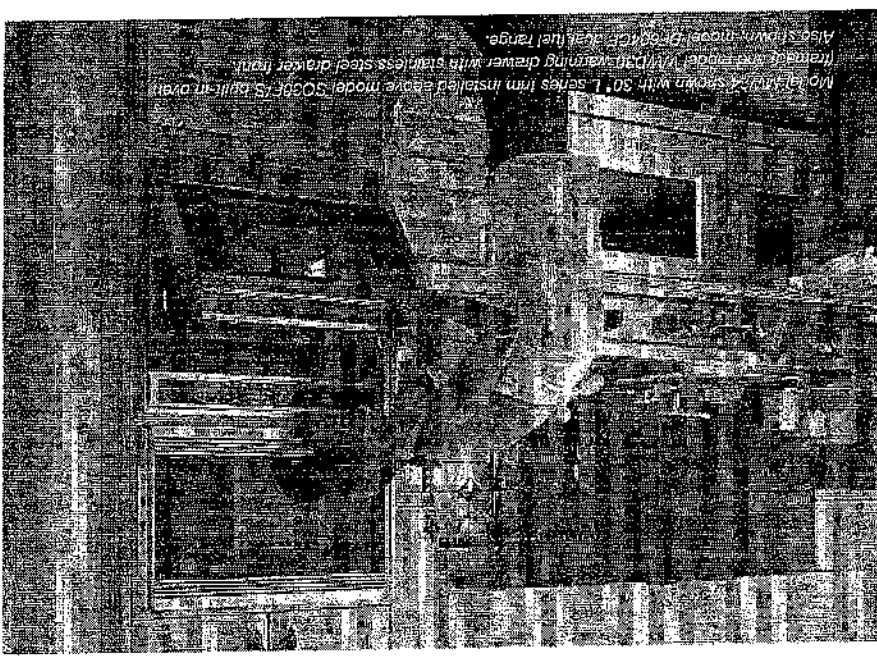

Model MW24 shown with 30" L series trim installed above model SC60F4S built-in oven (warming drawer). Model MW24 shown with stainless steel drawer front. Also shown in Wolf's new 30" L series range.

LOT 87 K2
10-29-13

Dimensions in parentheses are in millimeters unless otherwise specified.

Complete installation specifications can be found on our website, wolfappliance.com. If the microwave oven is built in, a trim kit is required for proper ventilation. Specifications will vary with L series and E series trim kits. Refer to installation instructions provided with the trim kit for detailed specifications.


INSTALLATION NOTES

Shipping Weight	59 lbs
Power Cord	8' cord with grounded plug
Electrical Requirements	120 V AC, 50 Hz 15 amp circuit
Power	1200 W
Interior Dimensions	17 3/8" W x 10 1/2" H x 18 5/8" D
Interior Capacity	2.0 cu ft
Overall Depth	19 1/8"
Overall Height with Trim	18 1/4"
Overall Height (freestanding)	13 5/8"
Overall Width with 27" Trim	26 7/8"
Overall Width with 30" Trim	29 7/8"
Overall Width (freestanding)	24"


SPECIFICATIONS

INSTALLATION SPECIFICATIONS

Built-in Installation with Trim

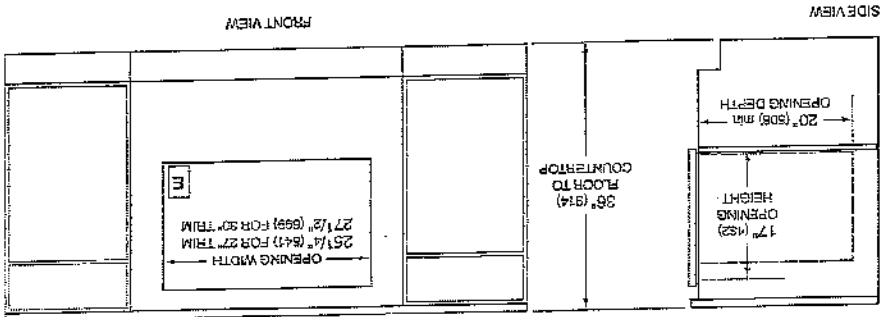

Unit dimensions may vary by $\pm 1/8"$.

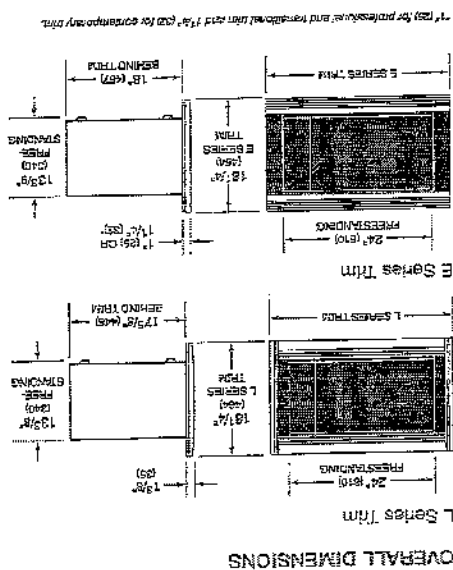

Standard Microwave Oven




lot 87k2
10-29-13

lot 87kr
10.29.13

XXL TALL TANK MODELS

Planning & Design: XXL Dishwashers
D5524XXLFI, D5534XXLFI, D554XXLFI, D5894XXLFI

Unit Dimensions		Technical Data	
HEIGHT:	33 7/8" - 36"	860 - 914 mm	METRIC
WIDTH:	23 5/8"	600 mm	
DEPTH:	22 3/4"	578 mm	
DEPTH W/DOOR OPEN:	49 1/2"	1257 mm	
WEIGHT:	94 lbs 43 kg		
		Water pressure	18 - 176 psi
		Heating element	1200 watt
		Max loading	1300 watt
		Electricity	120 V, 60 Hz, 15 Amp

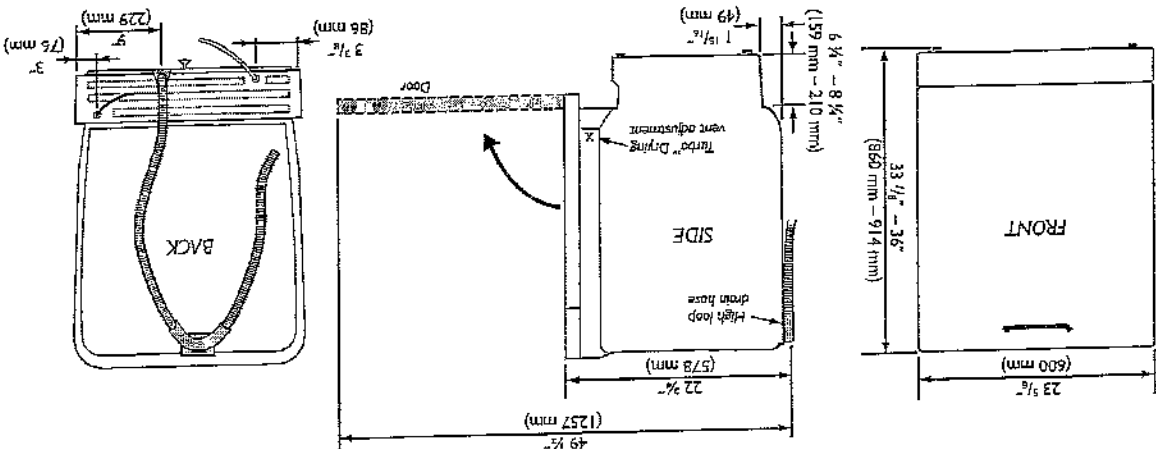

Toe kick reveal height will be the dishwasher installation height minus the door panel height

Custom Front Panels


The D5524XXLFI, D5534XXLFI, D554XXLFI and D5894XXLFI can only be installed with a fully-integrated custom door panel that extends from the desired toe kick height to the counter top. A one-piece accessory door panel selection is also available.

Cutout Dimensions

US		METRIC	
HEIGHT:	33 7/8" - 36"	860 - 914 mm	
WIDTH:	23 5/8" - 24"	600 - 610 mm	
DEPTH:	24"	610 mm	

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" (51 mm) in diameter.

If accessory fit fill strips are used, then 1/2" (13 mm) must be added to the dishwasher height and cutout. Additionally, 3/8" (10 mm) must be added to the dishwasher width and cutout width.

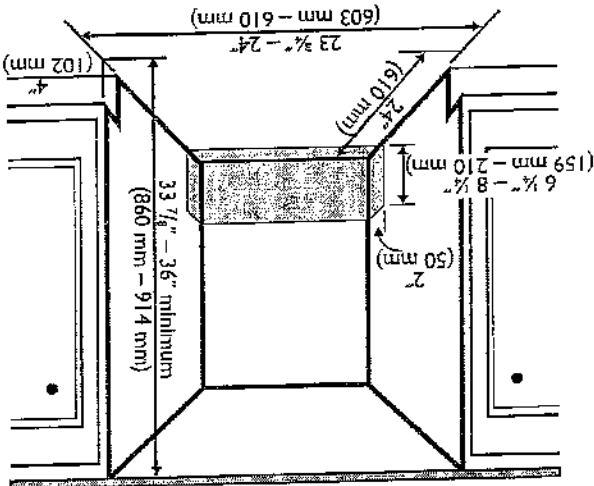

Specifications are subject to change without notice. See installation instructions for additional details.

lot 87 link



**Breda
Baypoint**
Plumbing & Mechanical Inc
45 Rockwood Road, Unit 6 | Maple | ON L6A 1R3
O: 905.553.5711 | F: 905.553.6168

UPGRADE

Sink

**ZANCOR
HOMES**

Nov 22/2013

EXTRA NUMBER :

LOT 071K2
Maax OPTIK F 6636 #105742

LOT :

Phase:


Model :

Date:

Master suite

Maax Optik F 6636 105742


Maax Catalogue 2013 Pg 85

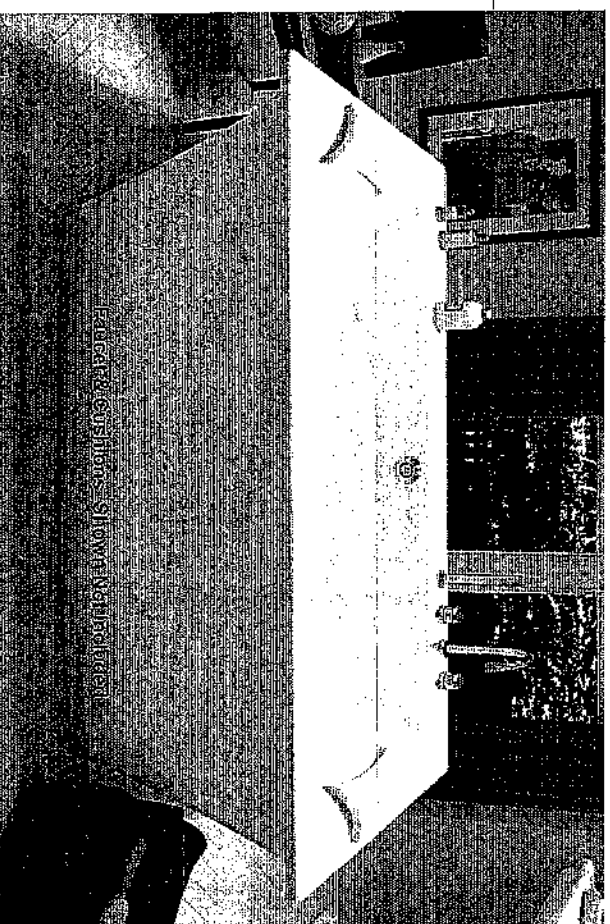

st

Authorized by Zancor: _____

Please print name: _____

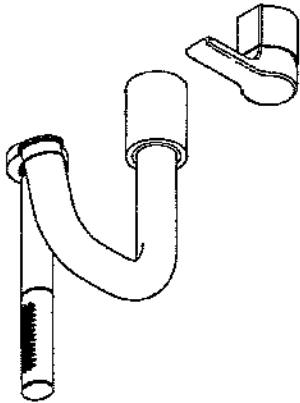

Colors/Finishes

- CP: Polished Chrome

Features

- Brass construction
- Deck-mount installation
- 9-1/8" (232 mm) high-arc spout
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Rotational spout
- Adjustable handheld shower sprayface rotates to select wide-coverage or forceful utility spray options
- MasterClean™ sprayface resists hard water buildup and easy to clean

Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- ASSE 1014
- CEC Standard 1605.3(h)

Specified Model:


Model	Description	Color/Finish
K-10873-4	Deck-mount bath filler	☐ CP

Kot 87 KE - Master Emsuite

Product Specification

The deck-mount bath filler shall be made of brass construction. Product shall have 9-1/8" (232 mm) high-arc spout and rotational spout. Product shall have a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall have an adjustable handheld shower sprayface, which rotates to select wide-coverage or forceful utility spray options. MasterClean™ sprayface resists hard water buildup and easy to clean. The deck-mount bath filler shall be Kohler Model K-

Product Diagram

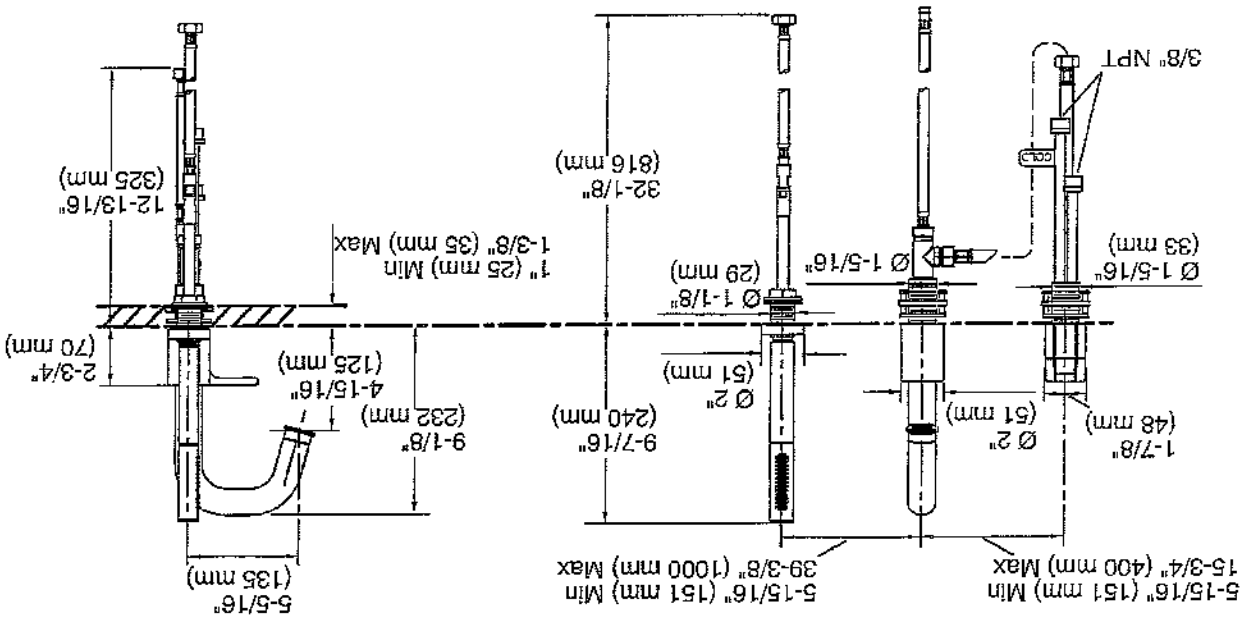

Lot 87 KR - Master Elite



WARNING: Risk of personal injury. Do not use this product as a handrail. This product is not designed to support weight.

Install this product according to the installation guide.

Installation Notes


SINGULIER™

(x2)
LOT 87 KR - Master Ensuite

SINGULIER™

LAVATORY FAUCET

K-10860
ADA

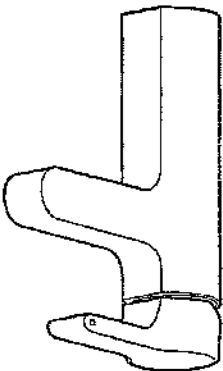

Features

- Brass construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- 1.5 gallons (5.7L) per minute maximum flow rate
- Single-hole mounting
- Pop-up drain
- Flexible connections for easy installation
- Lever Handle
- 3-15/16" (100 mm) spout length

Codes/Standards Applicable

- Specified model meets or exceeds the following at date of manufacture:
 - ASME A112.18.1/CSA B125.1
 - All applicable US Federal and state material regulations.
 - NSF 61
 - ADA
- CP: Polished Chrome
- Other: Refer to Price Book for additional colours/finishes

Specified Model

Model	Description	Colours/Finishes
K10860-4-CP	Single-control lavatory faucet with lever handle and pop-up drain	☐ CP ☐ Other

Accessories

Additional Flow options are available (refer to the Kohler Price Book)

Product Specification


Single-control lavatory faucet shall be of brass construction and rated at 1.5 gallons (5.7L) per minute. Valve shall be a one-piece, self-contained ceramic disc valve, allowing volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Valve includes a high-temperature limit stop. Faucet shall be single-hole mounted, and shall include flexible connections, lever handle, and brass pop-up drain. Faucet shall be Kohler Model K10860-4.

LOT 87 KK - Master Ensuite

SINGULIER™

Installation Notes

Install this product according to the installation guide.

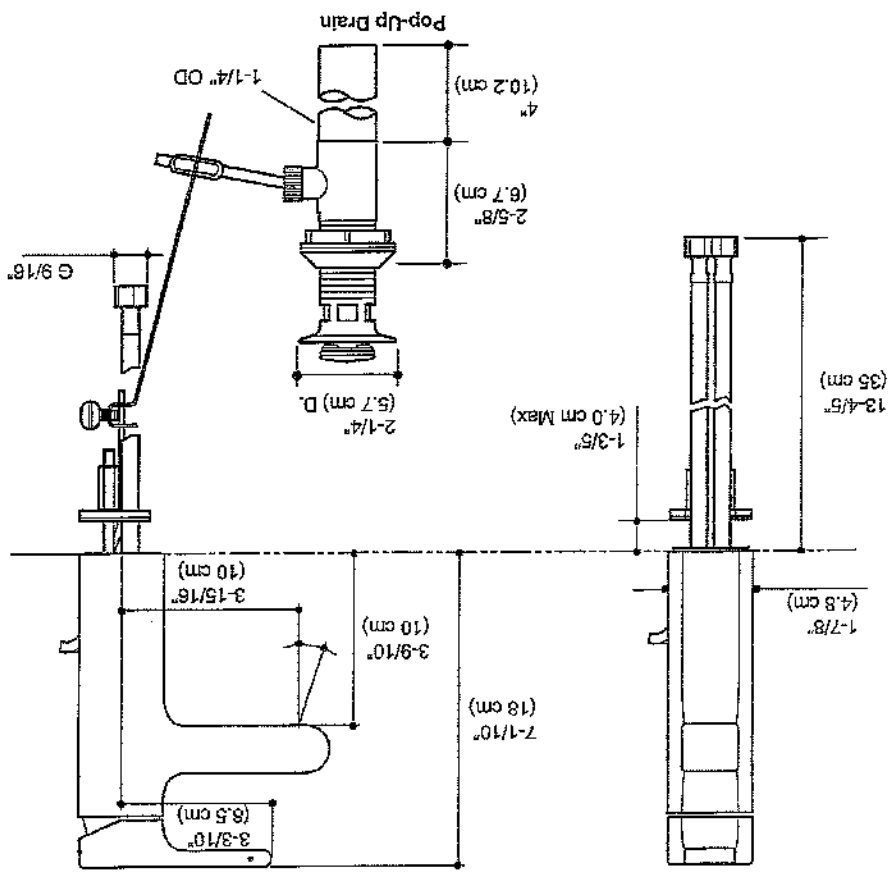

Product Diagram


SINGULIER™ LABORATORY FAUCET

Kitchen
LOT 87 KR

SENSATE™

ELECTRONIC PULL-DOWN KITCHEN
SINK FAUCET
K-72218

ADA

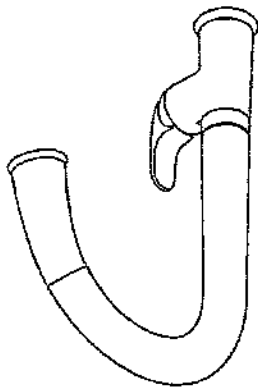

Colors/Finishes

- CP: Polished Chrome
- VS: Stainless Steel

Accessories

- NA: None applicable

Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992
- NSF 61
- All applicable US Federal and State material regulations

Specified Model

Model	Description	Colors/Finishes
K-72218	Electronic pull-down kitchen sink faucet	☐ CP ☐ VS
K-72218-B7	Electronic pull-down kitchen sink faucet with black accents	☐ CP ☐ VS

Product Specification

The electronic pull-down kitchen sink faucet shall be of metal construction. Product shall have a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature Response™ technology, which allows hands-free operation to turn faucet on and off and DockNetik™, which ensures a secure sprayhead fit. Product shall feature Promotion™ technology with nylon hose and ball joint for easy operation. Two-function sprayhead with touch control for spray and aerated stream settings and off at any temperature setting. Flexible connections for easy installation. 290° spout rotation. For single-hole installation. 1.8 gallons (6.8 L) per minute maximum flow rate at 60 psi (4.1 bar). Meets CalGreen requirements for kitchen faucets.


Lot 87 KR

SENSATE™

Optional Accessories		
1012715	Deep roughing-in kit - provides an additional 2" (51 mm) assembly depth	☐ NA
1167289	Low flow kit - reduces maximum flow to 1.5 gpm (5.7 L) at 60 psi (4.1 bar)	☐ NA
1167290	High flow kit - increases maximum flow to 2.2 gpm (8.3 L) at 60 psi (4.1 bar)	☐ NA
1203620	10' (3 m) Power supply extension cable, 12 V DC	☐ NA
1209172	3-hole escutcheon kit	☐ CP ☐ VS

Installation Notes

Install this product according to the installation guide.
REQUIRED: Unswitched power outlet (120 V AC) located below the sink and within 5' (1.5 m) of the control box. (Garbage disposal typically use switched outlets and are not recommended.)
ADA compliant when installed to the specific requirements of the regulation.

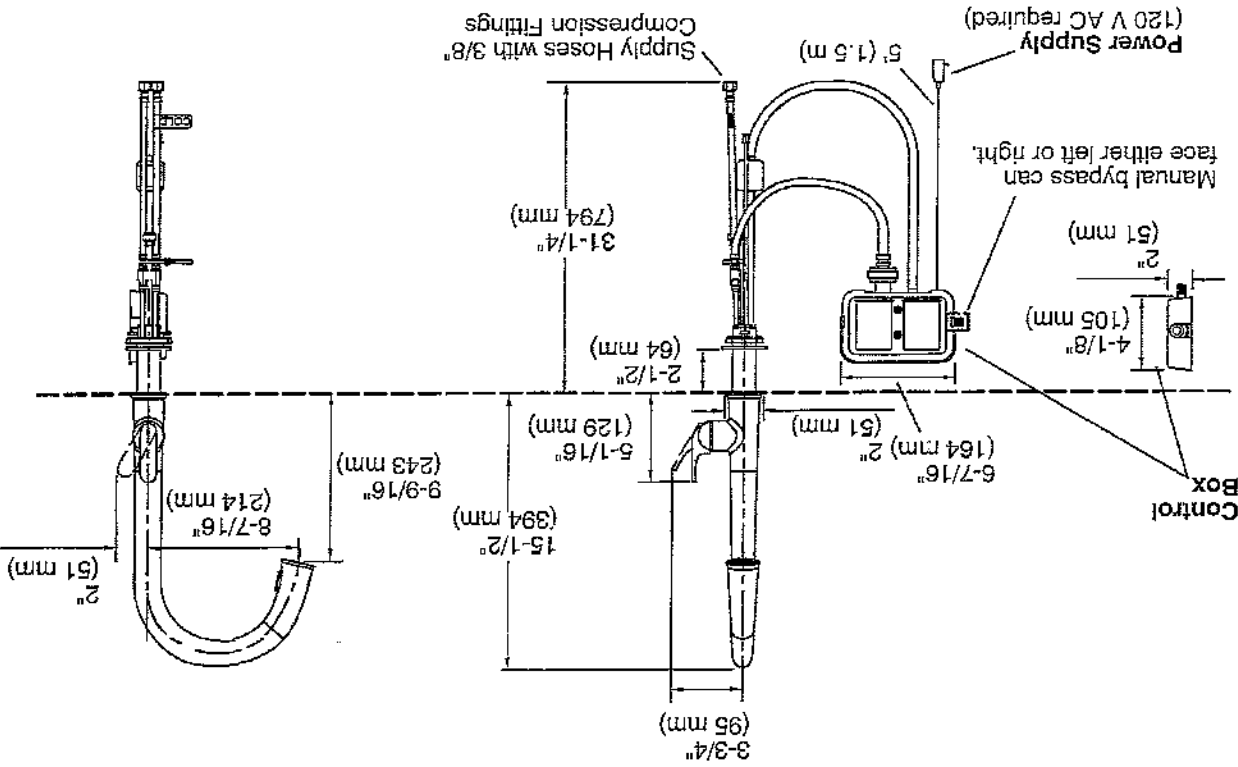

Product Diagram

SENSATE™ ELECTRONIC PULL-DOWN KITCHEN SINK FAUCET

THE BOLD LOOK
OF KOHLER®