



Standard Microwave Oven

The Wolf standard microwave oven with optional trim can be used in combination with a Wolf built-in oven and/or warming drawer to finish off your cooking tower with an integrated look. You can choose from two different trim styles to match our built-in ovens. Model MW24 may also be used in a freestanding application. This is the only standard microwave oven that deserves the Wolf name.

FEATURES

- Built-in or freestanding standard microwave oven with 2.0 cu ft capacity and 1200 watts of power.
- Stainless steel trim to match L series and E series ovens.
- Black glass E series trim.
- Sensor cooking.
- Easy-to-operate control panel and programmable power options.
- Interactive display—99 minutes, 99 seconds.
- Warming feature.
- Menu label and food guide.
- Multi-language—English, French and Spanish.
- Removable turntable and support.
- Safety door latches—oven will not operate unless the door is closed.
- Oven light comes on when oven is operating or door is open.
- Tight door seals with one-touch door open pad.


BUILT-IN TRIM KITS

- 27" E series.
- 30" E series.
- 30" L series.

ACCESSORIES

The optional trim kits listed above are available as sales accessories through your authorized Wolf dealer. For local dealer information, visit the wolfappliance.com.

Let us

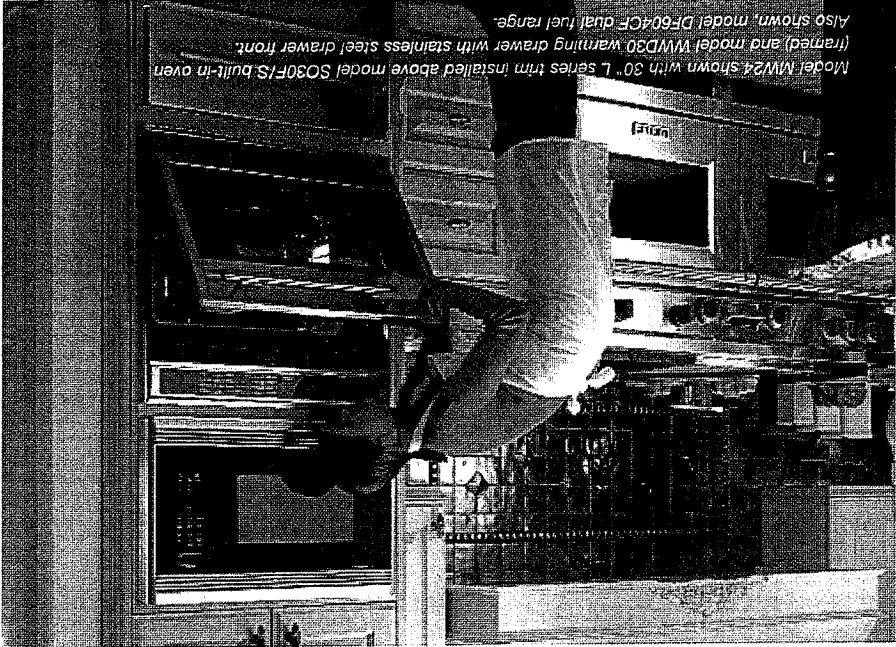

Model MW24 shown with 30" L series trim installed above model SO30F/S built-in oven (framed) and model WWD30 warming drawer with stainless steel drawer front. Also shown, model DF604CF dual fuel range.

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.




wolfappliance.com

Standard Microwave Oven

FEATURES

- Built-in or freestanding option for design versatility.
- Built-in trim kits available to match Wolf L and E series ovens.
- Large-capacity interior.
- Easy-to-operate control panel and programmable power options.
- Sensor cooking to monitor and adjust settings.
- Warming feature for gentle heating.
- Turntable is removable for easy cleaning.
- Interactive display with timer up to 99 minutes.
- English, French and Spanish language options.
- Menu label and food guide.
- Interior light and window in door.
- One-touch door open pad.
- Safety door latches will not allow oven to operate unless door is closed.

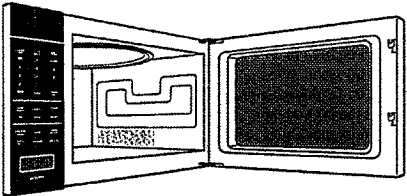


LOT 11 MC

MODEL OPTIONS

Model MS24

- BUILT-IN TRIM KITS
- 27" E series.
 - 30" E series.
 - 30" L series.

Optional trim kits are available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

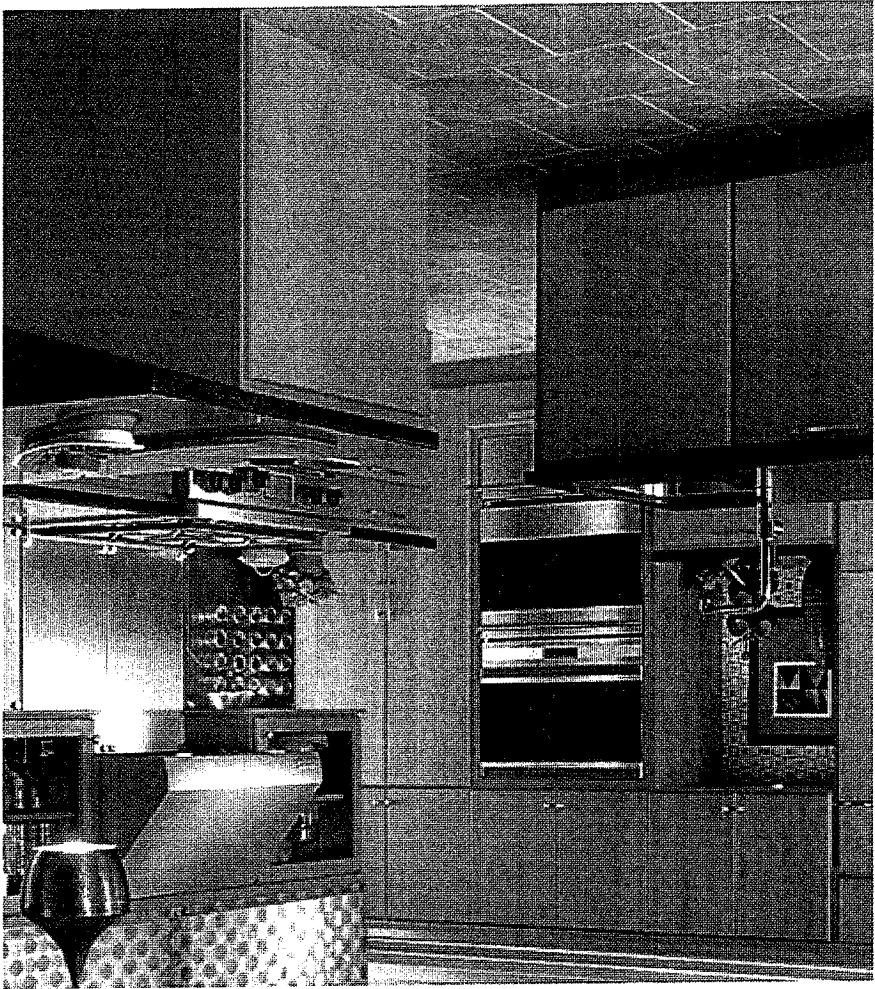



wolffappliance.com

Standard Microwave Oven

SPECIFICATIONS

PRODUCT
Dimensions 24" W x 13 3/8" H x 19 1/8" D
Weight 50 lb


OVEN INTERIOR
Capacity 2.0 cu ft
Dimensions 17 3/8" W x 10 1/2" H x 18 5/8" D

ELECTRICAL
Power
Supply 120 VAC, 60 Hz
Service 15 amp circuit

Power Cord
4 ft


If the microwave oven is built in, a trim kit is required for proper ventilation.


Specifications are subject to change without notice. Visit wolffappliance.com/specs for the most up-to-date information.
Dimensions may vary ± 1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

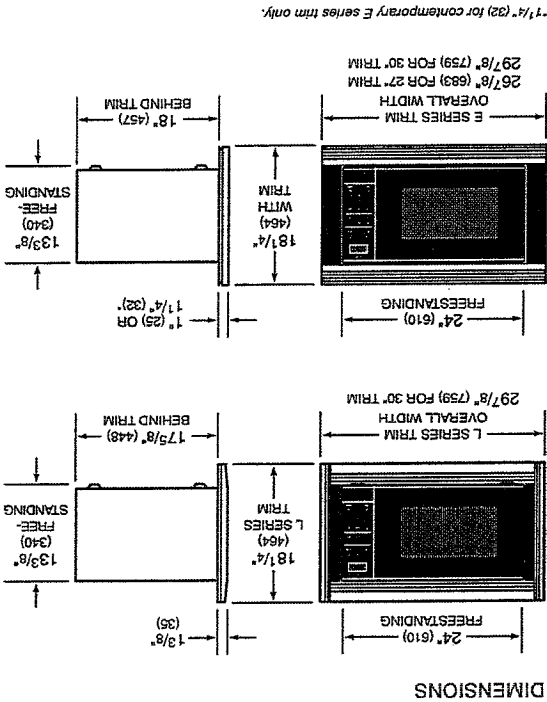


OPENING WIDTH	
TRIM	W
27" Trim	25 1/4" (641)
30" Trim	27 1/2" (699)

INSTALLATION WITH TRIM

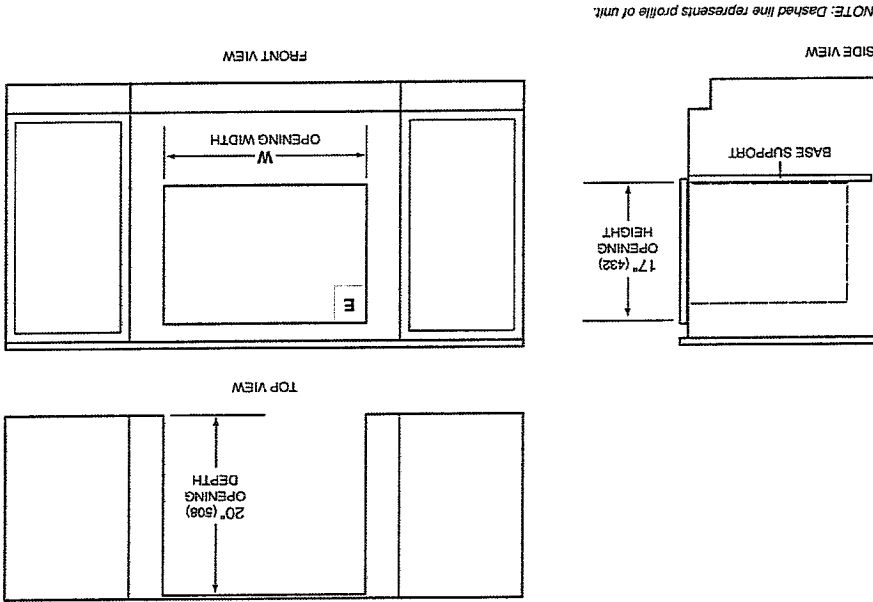



OVERALL DIMENSIONS

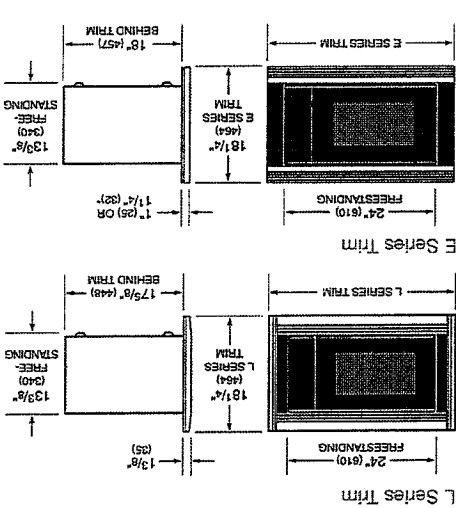

1" (25) for professional and transitional trim and 1 1/4" (32) for contemporary trim. Unit dimensions may vary by ±1/8".


SPECIFICATIONS

Overall Width (freestanding)	24"
Overall Width with 30" Trim	29 7/8"
Overall Width with 27" Trim	26 7/8"
Overall Height (freestanding)	13 3/8"
Overall Height with Trim	18 1/4"
Overall Depth	19 1/8"
Interior Capacity	2.0 cu ft
Interior Dimensions	17 3/8" W x 10 1/2" H x 18 5/8" D
Power	1200 W
Electrical Requirements	120 V AC, 60 HZ 15 amp circuit
Power Cord	3' cord with grounded plug
Shipping Weight	50 lbs

INSTALLATION NOTES

If the microwave oven is built in, a trim kit is required for proper ventilation. Specifications will vary with L series and E series trim kits. Refer to installation instructions provided with the trim kit for detailed specifications. Complete installation specifications can be found on our website, wolffappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.

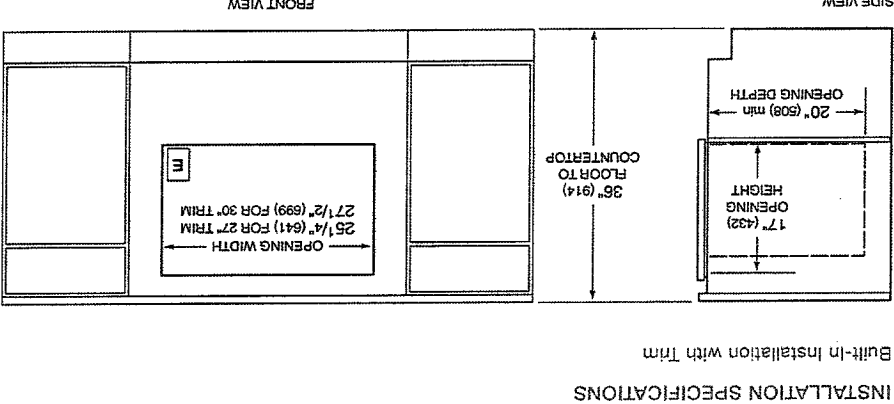

Dashed line represents profile of unit.




wolfappliance.com

30" E Series Single Oven—Transitional

FEATURES

- Stainless steel control panel.
- Can be installed in a standard or flush inset application.
- Crafted of heavy-duty stainless steel.
- Dual convection oven with two fans for even heat distribution.
- Ten cooking modes—bake, roast, broil, convection bake, convection broil and proof—bake stone and dehydration modes require accessory.
- Cobalt blue porcelain oven interior.
- Large viewing, double-pane window and dual halogen interior lights.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard.
- Hidden bake element and recessed broil element.
- Temperature probe and broiler pan.
- Self-clean, delayed start, timed cook and Sabbath features.
- Balanced door hinge system for smooth opening and closing.

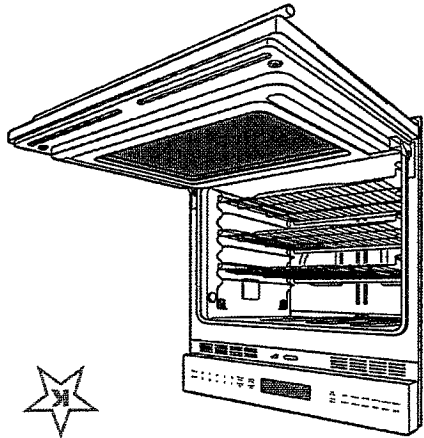

MODEL OPTIONS

Transitional
S030TE/S/TH

lot 11 MC

ACCESSORIES

- Bake stone kit—includes stone, rack and peel.
- Dehydration kit—includes racks and door stop.
- Set of three standard oven racks.
- Full-extension easy glide rack.
- 30" premiere baking pan.
- Temperature probe and broiler pan.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.




SPECIFICATIONS

PRODUCT	Dimensions	29 7/8" W x 27 7/8" H x 23 3/4" D
Weight	273 lb	
OVEN INTERIOR	Capacity	4.5 cu ft
Interior	25" W x 16 1/2" H x 19" D	
ELECTRICAL	Supply	240/208 VAC, 60 Hz
Service	30 amp circuit	
Conduit	4 ft	



Specifications are subject to change without notice. Visit wolffappliance.com/specs for the most up-to-date information. Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.

lot 11 MC

DIMENSIONS

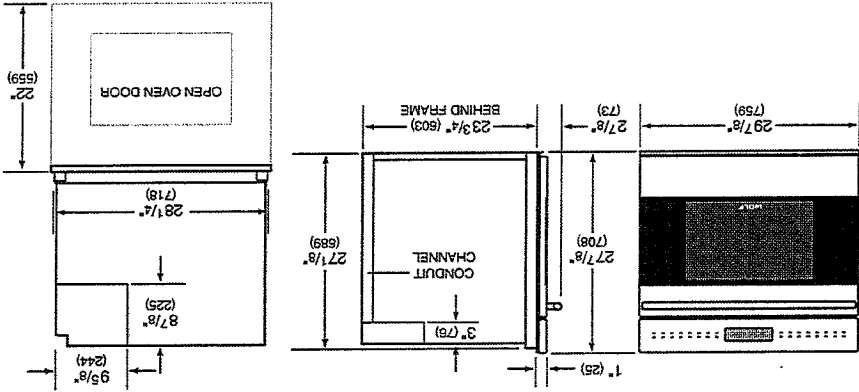


STANDARD INSTALLATION

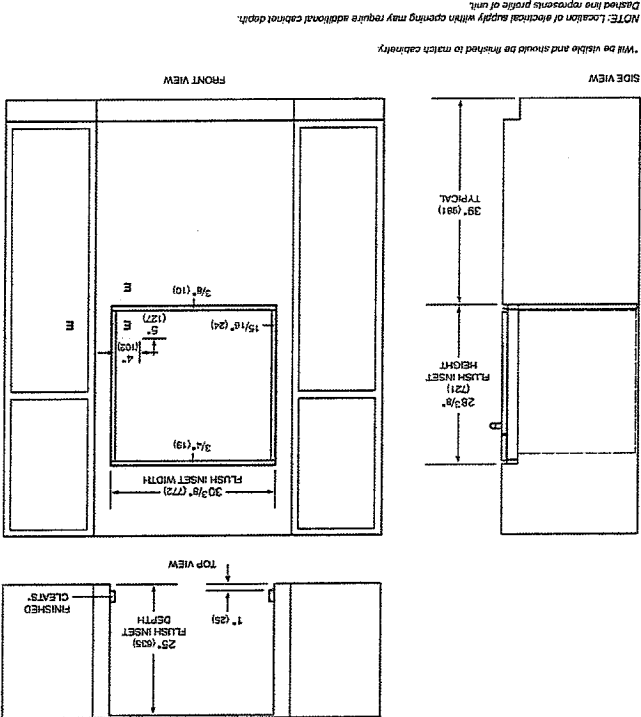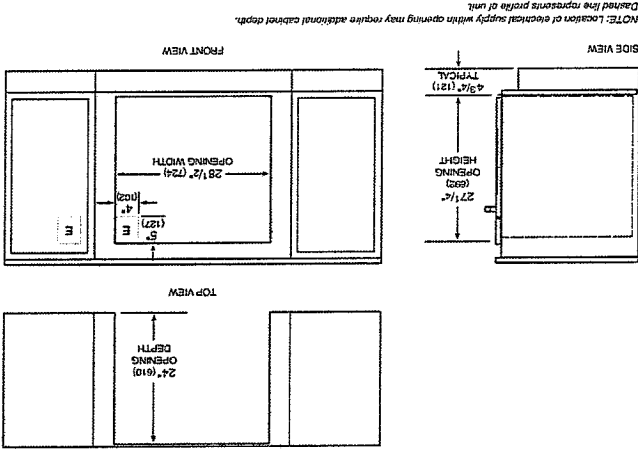

FLUSH INSET INSTALLATION



36" Dual Fuel Ranges



Wolf dual fuel ranges offer a variety of top configurations and standard dual-stacked sealed surface burners. The optional infrared charbroiler and infrared griddle give you the freedom to customize your range. The large electric oven features ten cooking modes and the Wolf exclusive dual convection system that delivers even temperature and airflow throughout. Dual fuel ranges are available in natural or LP gas.

FEATURES

- Stainless steel exterior finish with island trim included.
- Red, black or stainless steel control knobs (specify with range).
- Stainless steel bezels surround all knobs.
- Dual-stacked, sealed burners, all with simmer capabilities and automatic reignition at all settings.
- Melt feature on 9,200 Btu burner.
- Ten cooking modes, temperature probe and self-clean features.
- Porcelain-coated cast iron continuous top grates.
- Pivoting hidden touch control panel.
- Coaxial temperature displaying oven selector knob.
- Cobalt blue porcelain oven interior with halogen lighting.
- Three adjustable oven racks: one full-extension easy glide, one full-extension door glide and one standard.
- Hidden bake element and recessed broil element.
- Spring/damper door hinge system.



SURFACE FEATURES


Model	Surface Burners	15,000 Btu high / 950 Btu simmer	9,200 Btu high / 325 Btu simmer	Infrared Charbroiler – 16,000 Btu	Infrared Griddle – 15,000 Btu
DF366	5		1	•	•
DF364C	3		1	•	•
DF364G		3	1		•

Model numbers are for natural gas dual fuel ranges, add (-LP) to the model number for LP gas.

ACCESSORIES

- Stainless steel risers in 5" and 10" heights, or 20" riser with shelf.
 - Red, black or stainless steel control knobs.
 - Chrome or brass bezels.
 - One piece porcelain-cast wok grate and single burner grate.
 - Porcelain-cast two-burner S-grate.
 - Set of three standard oven racks.
 - One full-extension easy glide rack.
 - Broiler pan and temperature probe.
 - Hardwood cutting board (griddle model only).
 - Bake stone kit.
 - Dehydration kit.
 - Griddle cleaning kit.
- High altitude conversion kits.
caster covers.
Front leg extension covers and rear
- Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfsappliance.com.
- This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

Lot 11 MC

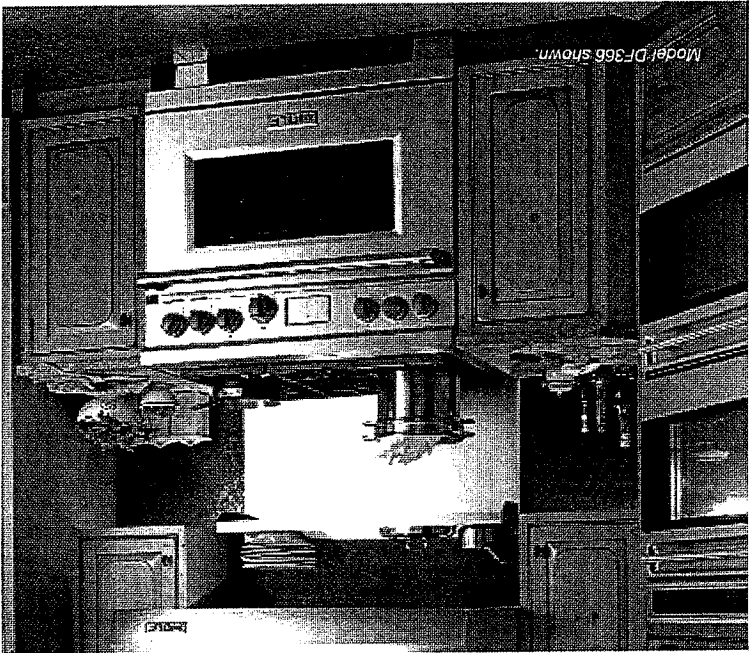

SPECIFICATIONS

Stainless Steel

Overall Width

8/

Overall Depth

12-

Oven Interior Capacity

5.4 cu ft

Oven Interior

30" W x 16 1/2" H x 19" D

Opening Width

49

Opening Depth

—

Electrical Requirements

60 Hz, 30 amp circuit

Electrical Rating

Electrical Rating

4.5 kW at 208 V AC


Total Amps

117

Shipping Weight

445-470 IDS

INSTALLATION SPECIFICATIONS

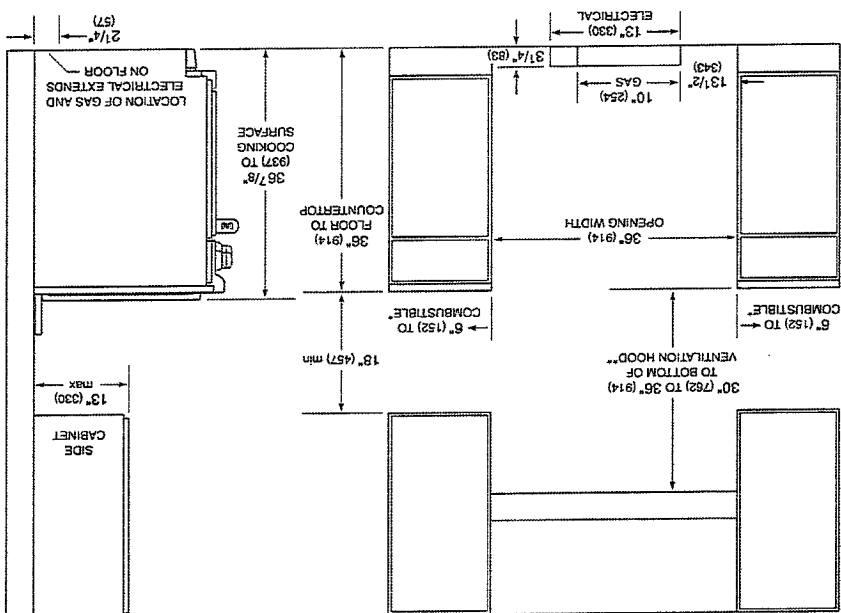

NOTE: For island installations, 12" (305) minimum clearance from back of range to combustible rear wall above countertop.
 .36" (914) minimum clearance, 44" (1118) for charbroiler, from countertop to combustible materials without ventilation hood.
 Minimum clearance from rough opening to combustible materials up to 18" (457) above countertop.


INSTALLATION NOTES

- A user is required for installations against a combustible surface.
- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.
- High altitude conversion kit for LP gas installations above 8,600'. For natural gas above 10,250', contact Wolf customer service.

Dimensions in parentheses are in millimeters unless otherwise specified.

©Wolf Appliance, Inc. all rights reserved. Features and specifications are subject to change at any time without notice.

OVERALL DIMENSIONS

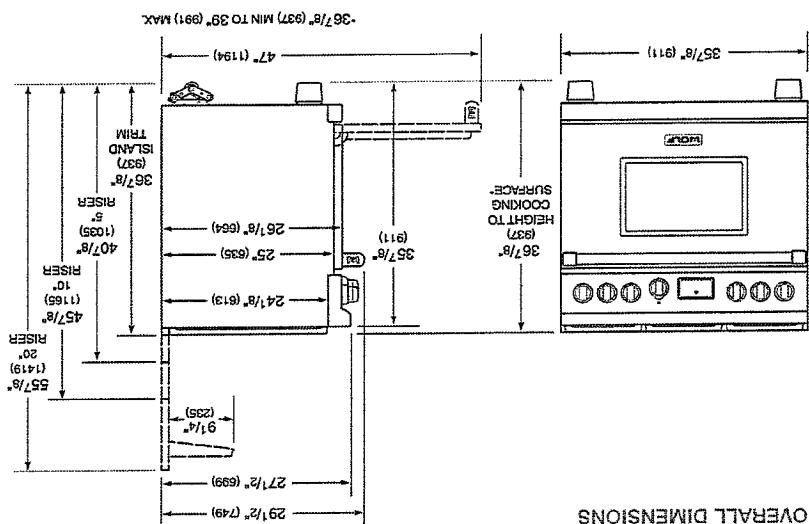Unit dimensions may vary by $\pm 1/8"$.


36" Dual Fuel Ranges





Pro Ventilation Hood Liners

Whether you prefer French country or modernist, Wolf pro hood liners allow you to incorporate superior ventilation within your kitchen design. All you have to do is decide what it will look like. Sometimes referred to as power packs, these liners bring all of the controls, lighting and convenience of our pro ventilation line for those applications with a custom exterior treatment.

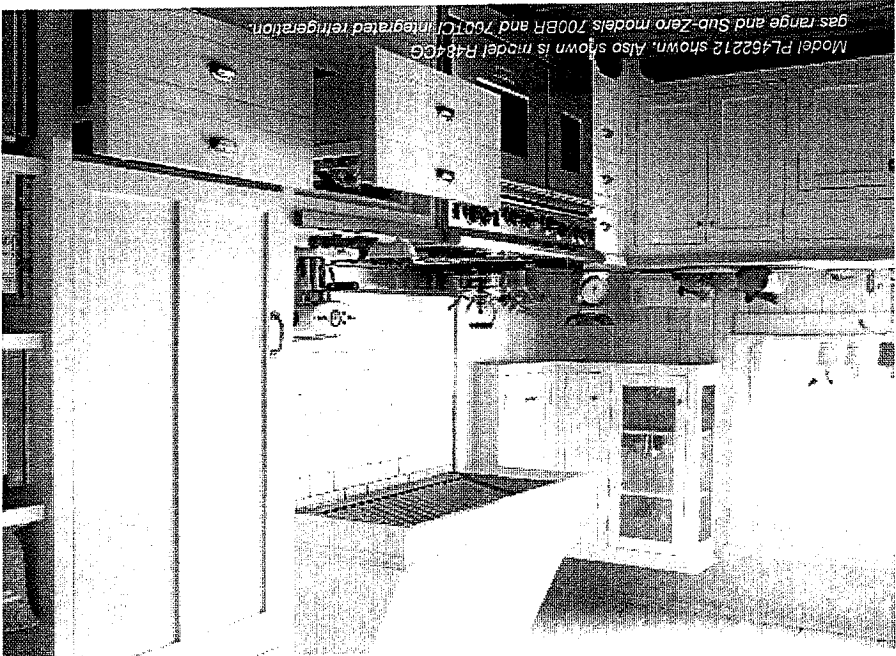

Model PL462212 shown. Also shown is model PL4870G gas range and Sub-Zero models 700BR and 700CI integrated refrigeration

FEATURES

- Stainless steel enclosed liner with seamed construction.
- Recessed easy-access controls.
- Infinite-speed blower control.
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed.
- Halogen lighting with two settings.
- Removable, dishwasher-safe, restaurant-grade stainless steel baffle filters.
- Transition with backdraft damper included.

MODEL OPTIONS

Model	Overall Width
PL341912	34 3/8"
PL401912	40 3/8"
PL461912	46 3/8"
PL521912	52 3/8"
PL581912	58 3/8"

MODEL OPTIONS	CFM	34" and 40"	46"	52"	58"
INTERNAL	900	•	•	•	•
IN-LINE	600	•	•	•	•
REMOTE	1200	•	•	•	•
	1500	•	•	•	•


BLOWER OPTIONS

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart above).
- 38" high stainless steel backsplash with or without warming racks.


Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

Lot 11 MC

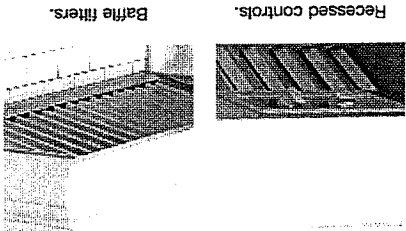


Recessed controls.

Baffle filters.




Pro Ventilation Hood Liners

OVERALL DIMENSIONS

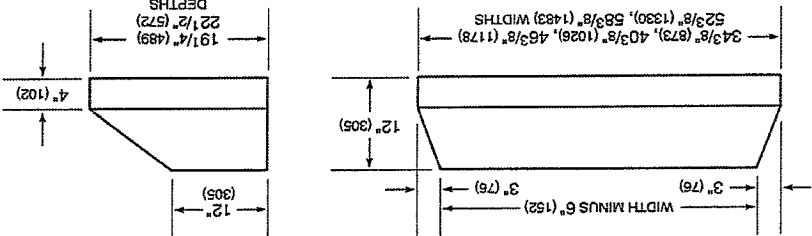

Unit dimensions may vary by $\pm 1/8$ ".

INSTALLATION SPECIFICATIONS

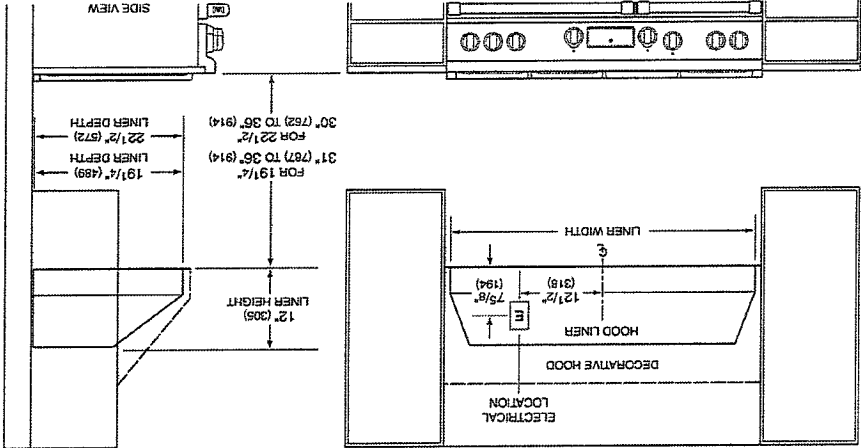


VERTICAL DISCHARGE ONLY FOR VENTILATION HOOD LINERS.

INSTALLATION NOTES

- Overall Widths 34 3/8", 40 3/8", 46 3/8", 52 3/8" and 58 3/8"
- Overall Height 12"
- Overall Depth 19 1/4" or 22 1/2"
- Bottom of Hood to Countertop 30" to 36"
- Discharge Vertical
- Duct Size 10" Round
- Electrical Requirements 110/120 VAC 60 Hz, 15 amp dedicated circuit
- Shipping Weight 45-80 lbs

Pro hood liners are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolffappliance.com. Pro hood liners are recommended for use with all Wolf cooking appliances. A decorative hood can be created out of wood, plaster, tile or metal. The shape of the decorative hood is not critical, the only place where the liner and outside cover must meet is at the bottom edge of the metal liner. The decorative hood and liner must fit at the bottom edge in both width and depth. The height of the liner does not have to be the same as the height of the decorative hood, and is generally shorter. IMPORTANT NOTE: For optimal performance, a pro 27" deep wall hood is recommended for use with ranges and rangetops that contain a charbroiler or gridle. Complete installation specifications can be found on our website, wolffappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.

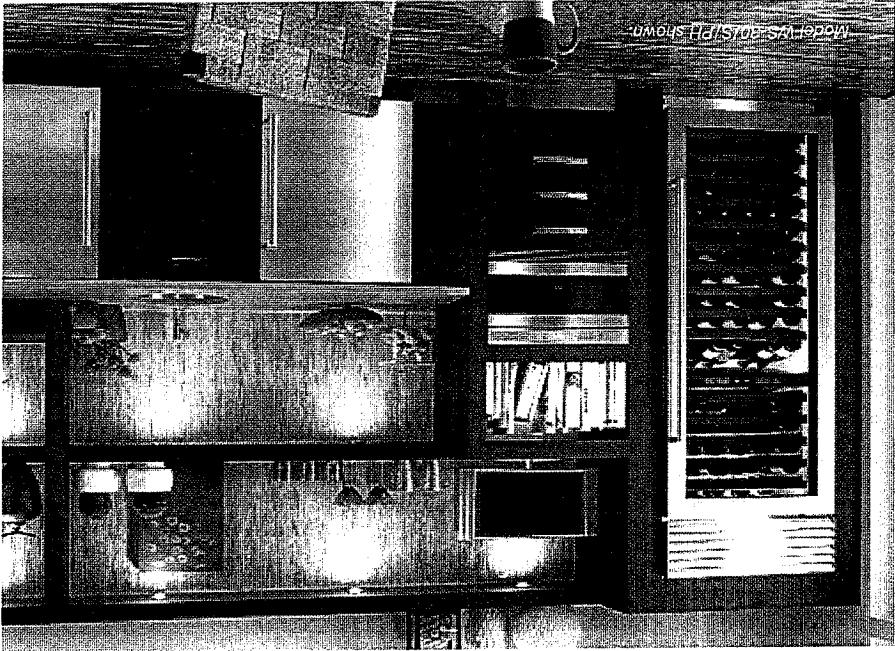

30" Wine Storage

SUB-ZERO

Better wine storage conditions for the bottle ultimately means better enjoyment in the glass. Model WS-30 is our largest wine storage unit with a capacity of 147 (750 ml) bottles. Two independent storage zones maintain the temperature and humidity that wine — and wine lovers — require. Model WS-30 is available in framed, overlay, flush inset and stainless steel design options.

FEATURES

- Four design options: framed, overlay, flush inset and stainless steel.
- Built-in design allows for dual installation with built-in unit.
- Full-size wine storage with individual temperature control of two separate compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Temperature zones range from 39°F to 65°F.
- Full-view, UV-resistant glass door—high altitude glass available.
- Illuminated touch control panel.
- Discreet interior lighting.
- Wine shelves accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine shelves with natural cherrywood facing have three-quarter extension for easy access.
- Illuminated display shelf for prized bottles of wine.
- Can be connected to home security system.
- Star-K compliant with installation of a harness kit.

MODEL OPTIONS


Design	Grille	Handle
Overlay/Framed/Flush Inset	Panel	*
WS-30/O		
WS-30/S/TH	Stainless	Tubular
WS-30/S/PH	Stainless	Pro

*Handle not included to allow for design flexibility.

ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handle.
- Dual installation kit with or without dual wide grille—84" finished height.
- Side panels in white or stainless steel.
- Stainless steel kickplate.
- Framed grille insert and full-length handles.
- Stainless steel tubular and pro handles.
- Door lock.
- 90° door stop.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

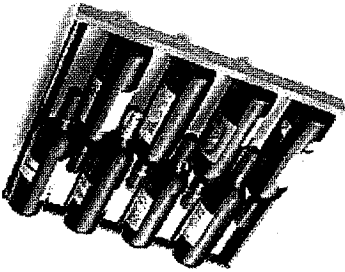

ENEMIES OF WINE

Heat — Two independent storage zones can be set in a range of 39°F to 65°F, with one-degree digital accuracy.

Light — UV resistant bronze tinted glass shields wines from harmful rays.

Humidity — Dual evaporators, one for each storage zone, maintain steady, moderate humidity.


Vibration — Sub-Zero's quiet compressor lets wines rest undisturbed. Shelves glide out smoothly, providing access without agitating the wine.

For additional information on the enemies of wine, visit www.subzerowine.com.

lot 11 MC


SUB-ZERO 30" Wine Storage

OVERALL DIMENSIONS

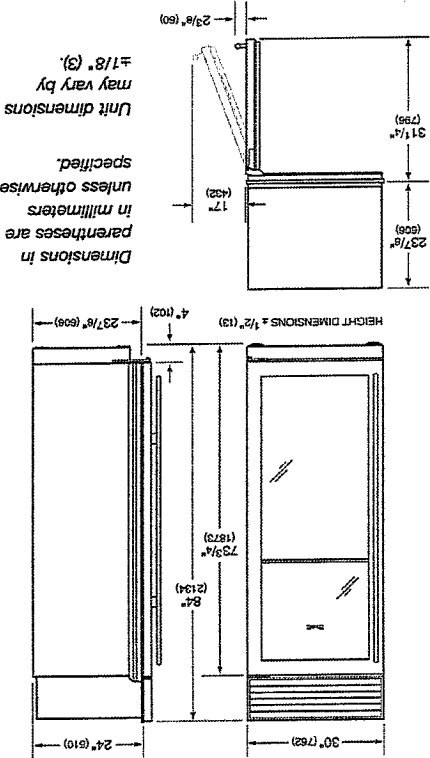


INSTALLATION SPECIFICATIONS

Standard Installation

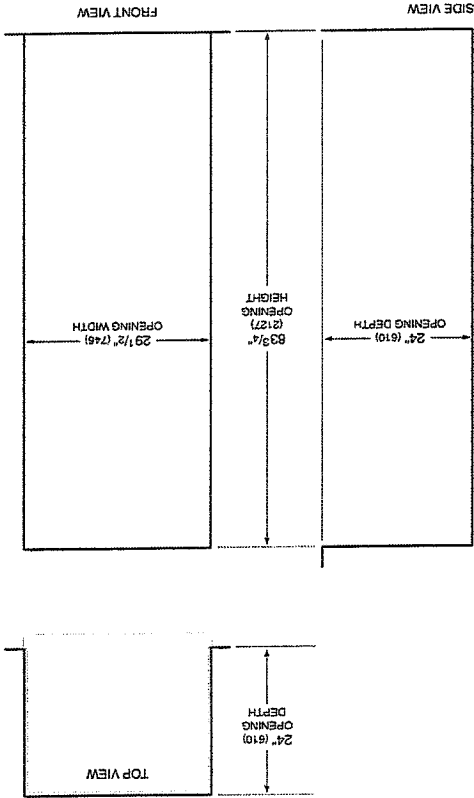

Location of Electrical Supply




SPECIFICATIONS

Overall Dimensions	30" W x 84" H x 24" D
Door Clearance	Standard 31 1/4"
Wine Storage Capacity	147 bottles*
Opening Width	29 1/2"
Flush Inset Width	32"
Opening Height	83 3/4"
Flush Inset Height	84"
Opening Depth	24"
Flush Inset Depth	26 3/16"
Electrical Requirements	115 V AC, 60 Hz 15 amp circuit
Shipping Weight	445 lbs
	*750 ml bottles.

INSTALLATION NOTES


For overlay models, you will be adding a door panel for a custom look. Overlay models allow you to match surrounding cabinetry hardware, and the panel grille accepts a custom panel inset.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

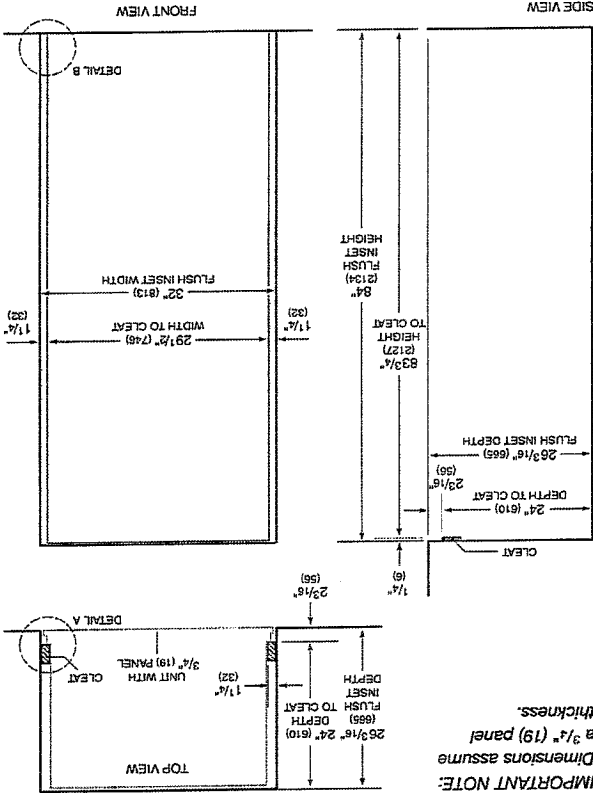


IMPORTANT NOTE: Dimensions assume a 3/4" (19) panel thickness.

Flush Inset Installation

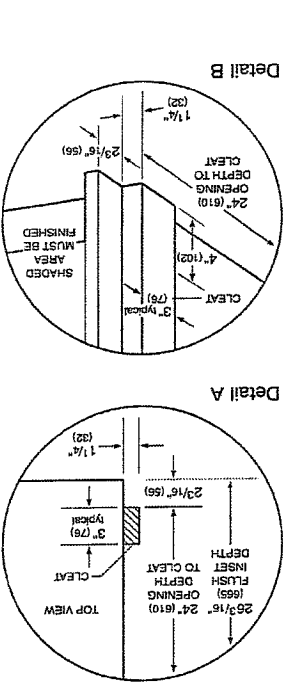


48" Built-In Side-by-Side with Internal Dispenser

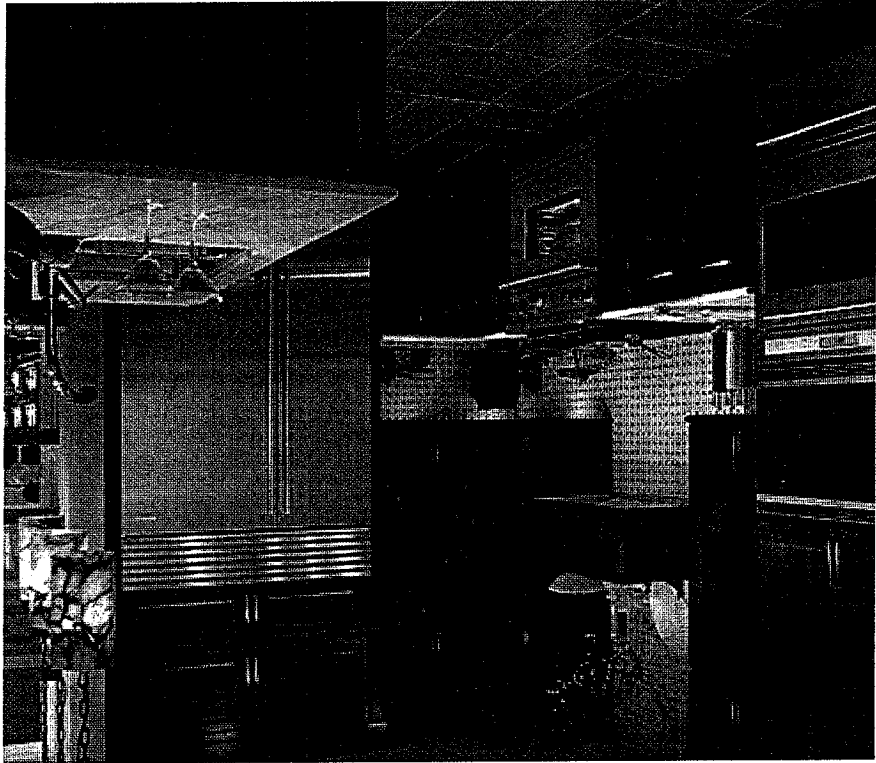

FEATURES

- Four design options: framed, overlay, flush inset and stainless steel.
- Dual refrigeration system ensures the freshest food and energy efficiency.
- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Air purification system reduces odors, bacteria, viruses and ethylene gas.
- Advanced water filtration system.
- Internal dispenser provides ice and chilled water inside refrigerator.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable door shelves, spill-proof glass refrigerator shelves, dairy compartment and wire freezer shelves.
- Crisper and deli drawers form a lower temperature zone ideal for produce and meats.
- Soft-close glide system on refrigerator storage drawers.
- Easy-access flip-up grille.
- Informational freshness cards.
- Automatic ice maker provides crescent-shaped ice—max ice feature increases production for a 24-hour period.

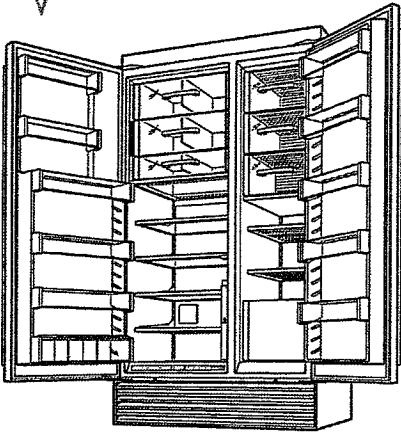

687 11 MC

MODEL OPTIONS

- OVERLAY
- Framed, overlay, flush inset BI-48SID/O
- STAINLESS STEEL
- Tubular handles BI-48SID/S/TH
- Pro handles BI-48SID/S/PH


INTERIOR FEATURES

- REFRIGERATOR
 - Internal ice and water dispenser
 - 4 Adjustable glass shelves
 - 1 Stationary glass shelf
 - 1 High-humidity drawer with divider
 - 2 Storage drawers with divider
 - 3 Adjustable door shelves
 - 2 Stationary door shelves
 - Adjustable dairy compartment
 - FREEZER
 - 2 Adjustable wire shelves
 - 1 Stationary solid shelf
 - 3 Storage drawers
 - 5 Adjustable door shelves
 - Automatic ice maker
- Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.
- Custom front panel mounting kit.
 - Side panel in white or stainless steel.
 - Stainless steel tubular and pro handles.
 - Full-length standard and extended framed handles.
 - Stainless steel kickplate.
 - Retrofit kit for 600 series panels.
 - Dozen egg container.
 - Replacement air purification cartridge and water filter.


SPECIFICATIONS

PRODUCT	48"W x 84"H x 24"D
Dimensions	656 lb
Weight	18.6 cu ft
Refrigerator	9.6 cu ft
CAPACITY	15 amp circuit
Service	1/4" OD copper, braided
PLUMBING	stainless steel or PEX tubing
Supply	35-120 psi
Pressure	
Specifications are subject to change without notice. Visit subzero.com/specs for the most up-to-date information.	
Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.	


DIMENSIONS

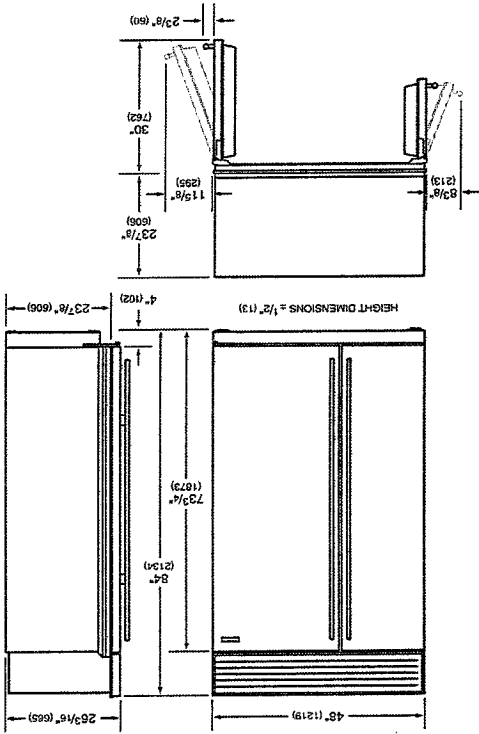


ELECTRICAL




PLUMBING



STANDARD INSTALLATION

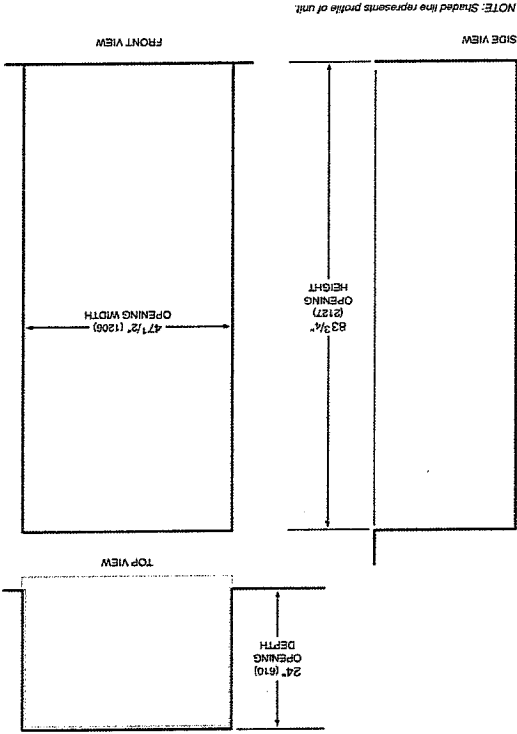

FLUSH INSET INSTALLATION

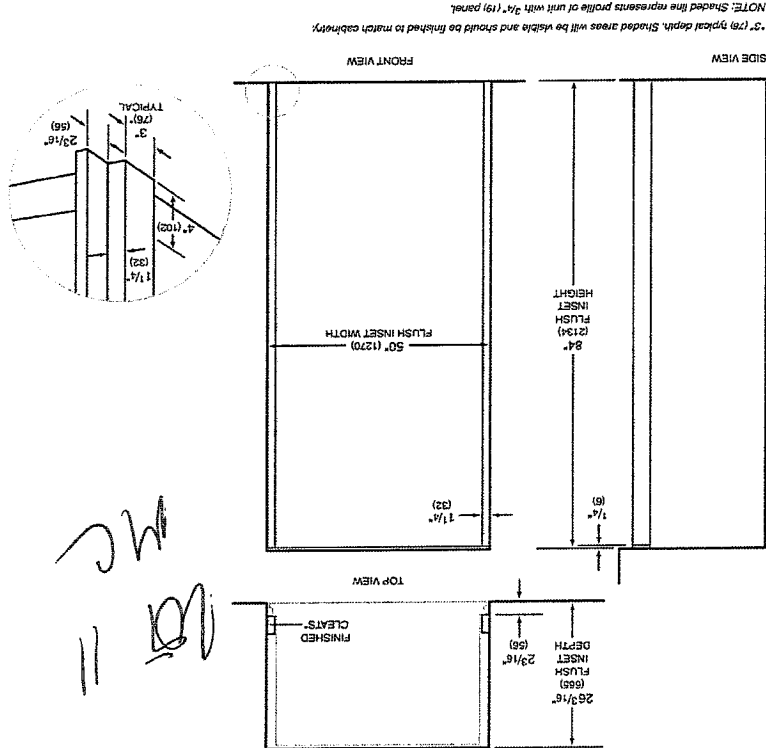

NOTE: Shaded line represents profile of unit.

NOTE: Shaded line represents profile of unit with 3/4" (19) panel. * (79) typical depth. Shaded areas will be visible and should be finished to match cabinetry.