

SALES ORDER INFORMATION

DOCUMENT NUMBER

LOT#44RC ALEX MELUSHKOVSK

TYPE: SALES ORDER/INVOICE

062544Z9112001

DEL/PU: D

ZZZANCOR

ZONE: 2

SALESPERSON(S)

DAY: TBA

ELI Y

DATE: TBA

ALVIN H

SERV. DELIVERY

E



ACC

DELIVERY/PICKUP DATE WILL BE CONFIRMED AND SCHEDULED UPON ARRIVAL OF PRODUCT FROM SUPPLIERS.

SPECIAL ORDER AGREEMENT

The items indicated with an * beside QTY on your order have been purchased with the understanding that these items will be specifically ordered for you. Special order items will be ordered only when full payment of the invoice has been received. You will be contacted when your purchase arrives and items must be delivered or picked up within 7 days of arrival.

Please initial below indicating that you have read and acknowledged the terms and conditions as stated.

Buyers Initial _____

44RC



QTY	ITEM CODE	DESCRIPTION	EXT'D PRICE
* 1	B130USTHR	MARO SUB ZERO FRIDGE FREEZER	\$ 1000.00
* 1	GR304	MARO WOLF RANGE	\$ 1000.00
* 1	UP26M30SB	MARO UNDERCABINET HOOD	\$ 1000.00
* 1	P5	MARO INTERIOR BLOWER	\$ 1000.00
1	FAFW381LW	WHIT F/L WASHER - WW	\$ 1000.00
1	CAQE701LW	WHIT ELECTRIC DRYER - WW	\$ 1000.00
1	MIELEPROD	MIEL MIELE PRODUCT	\$ 1000.00
1	CORPINST	BRIC CORP SALES INSTALL	\$ 1000.00

DELIVERY INSTRUCTIONS

deliver to site and put in place
total upgrade \$1367.30
alternate no. is 905-883-1302

SEE
REVERSE FOR
MORE
INFORMATION
YOU SHOULD
KNOW!

MERCH SUBT. \$
DELIVERY \$
ENVIRO SCHG \$ 0.00 *
GST/HST \$
PST \$ 0.00 *
TOTAL \$
DEPOSIT \$
BALANCE DUE \$

TRAN TYPE	AMOUNT	ACCT	ACCOUNT NUMBER	MERCHANT #	FIN CODE	APPROVAL	DATE/TIME
Purchase	\$1367.30	CDN Visa	*****4586	714305	C	048356	25-JUN-2014 16:18:27
APN/APL	VISA	Card Type	AID: A0000000031010	TVR: 000000000	SECL 148	BATCH 001	CA1

00001 APPROVED - THANK YOU

Thank You For Shopping At The BRICK®
www.thebrick.com

CUSTOMER SERVICE INQUIRIES

For Customer Service call:
7 days per week
(877)353-2850 or (877)353-2850
For Appliance and Electronic Repairs call:
or (800)360-2742

IMPORTANT
Retain this copy for your records

MONDAY TO SATURDAY

Please Visit www.thebrick.com or call us at 1 (866) 508-7766 to obtain our Privacy Policy.

CREDIT CARD TRANSACTION: Cardholder will pay card issuer above amount pursuant to Cardholder Agreement.

PAYMENT OPTIONS
☐ STANDARD REVOLVING
☐ MONTHS NO INTEREST NO PAYMENT PROMOTIONAL OFFER
☐ EQUAL MONTHLY PAYMENTS PROMOTIONAL OFFER

DATE: 25-JUN-2014 18:05:45

BUYER SIGNATURE(S) _____

TRANS GLOBAL WARRANTY CORPORATION'S FULL CIRCLE PROTECTION PLAN EXPLAINED AND ☐ ACCEPTED ☐ DECLINED Customer Initial _____
GST/HST Registration Number: BN654123304RT PST Registration Number: 8857-4698 ACCOUNTING / CUSTOMER COPY





30" Built-In Over-and-Under

SUB-ZERO

subzero.com

FEATURES

- Four design options: framed, overlay, flush inset and stainless steel.
- Dual refrigeration system ensures the freshest food and energy efficiency.
- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Air purification system reduces odors, bacteria, viruses and ethylene gas.
- Advanced water filtration system.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- Crisper and deli drawers form a lower-temperature zone ideal for produce and meats.
- Soft-close glide system on refrigerator storage drawers.
- Easy-access flip-up grille.
- Informational freshness cards.
- Full-extension, roll-out freezer drawer.
- Automatic ice maker with max ice feature temporarily increases production.
- ENERGY STAR® qualified.

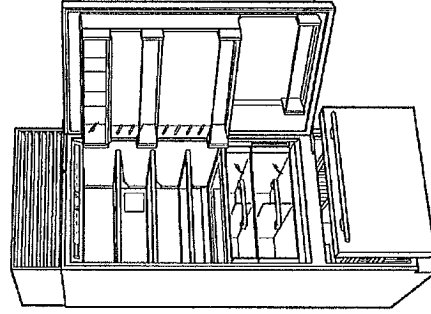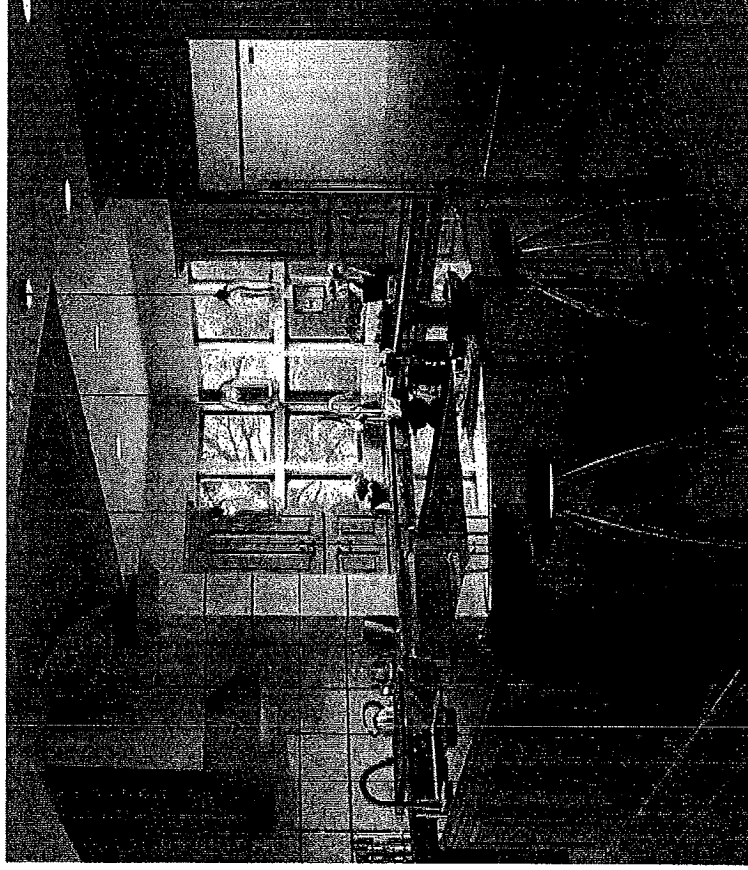

Model BI-30U



MODEL OPTIONS

Overlay (framed, flush inset)	BI-30U/O
Stainless (tubular handle)	BI-30U/S/TH
Stainless (pro handle)	BI-30U/S/PH

Specify RH or LH door.

INTERIOR FEATURES

REFRIGERATOR
3 Adjustable glass shelves
1 Stationary glass shelf
1 High-humidity drawer with divider
1 Storage drawer with divider
2 Adjustable door shelves
1 Stationary door shelf
Adjustable dairy compartment
FREEZER
Full-extension roll-out freezer drawer
Two-tier wire storage baskets
Automatic ice maker

ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panels in white or stainless steel.
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handles.
- Custom front panel mounting kit.
- Side panel in white or stainless steel.
- Stainless steel tubular and pro handles.
- Full-length standard and extended framed handles.
- Stainless steel kickplate.
- Dual installation kit with or without dual wide grille—84" finished height.
- Dozen egg container.
- Replacement air purification cartridge and water filter.

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

4422

30" Built-In Over-and-Under

SUB*ZERO

subzero.com



SPECIFICATIONS

PRODUCT		30"W x 84"H x 24"D
Dimensions		31 9/16"
Door Clearance		462 lb
CAPACITY		
Refrigerator		13.2 cu ft
Freezer		4.2 cu ft
ELECTRICAL		
Supply		115 VAC, 60 Hz
Service		15 amp circuit
PLUMBING		
Supply		1/4" OD copper, braided stainless steel or PEX tubing
Pressure		35-120 psi

Specifications are subject to change without notice. Visit subzero.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

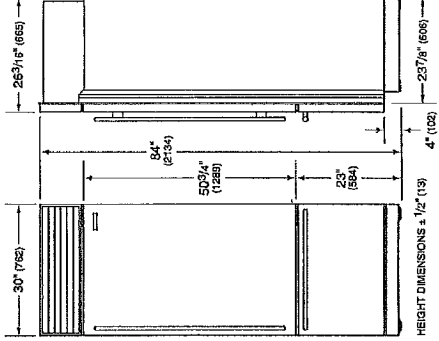


Dimensions based on stainless steel model. For flush inset, add 1/2" (13) to door clearance dimensions.


ELECTRICAL



PLUMBING




STANDARD INSTALLATION

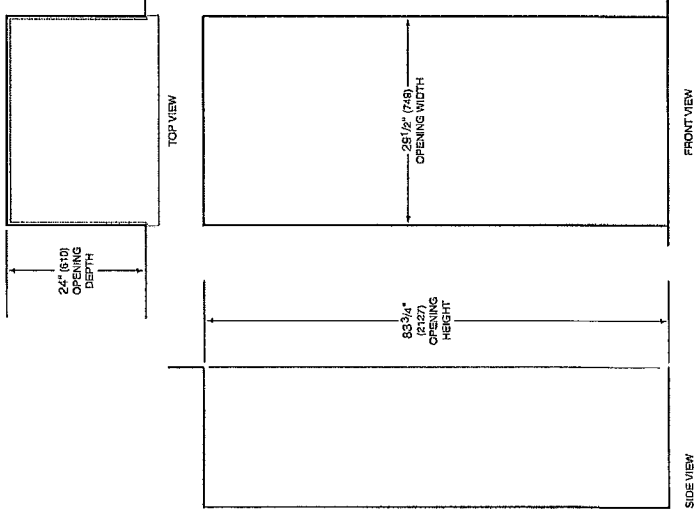

NOTE: Shaded line represents profile of unit.

FLUSH INSET INSTALLATION

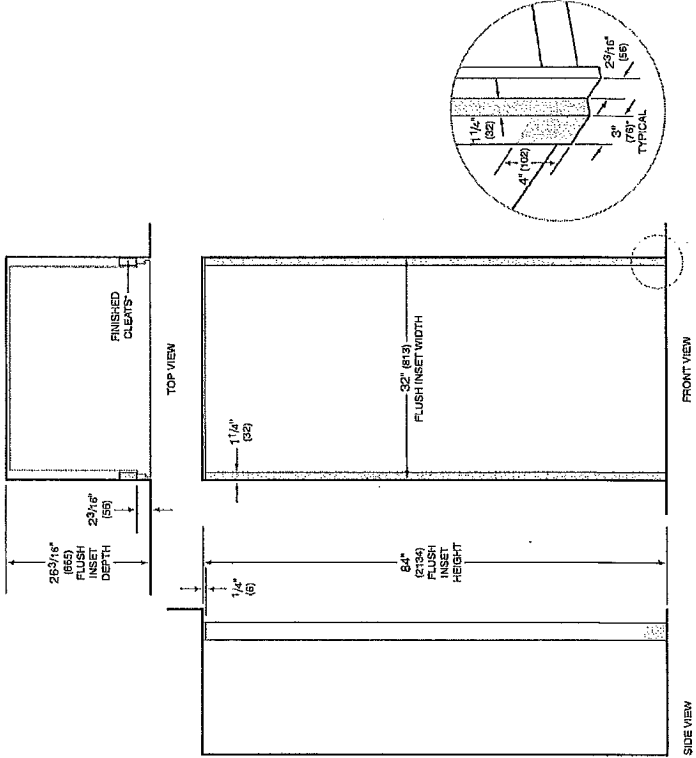

NOTE: Shaded line represents profile of unit with 3/4" (19) panel.

44 PC

©Sub-Zero, Inc. all rights reserved.

6/2014



30" Gas Range



wolfappliance.com

FEATURES

- Dual-stacked sealed surface burners with flame recognition and automatic reignition for safety and ease of use.
- Heavy-duty stainless steel exterior with island trim.
- Individual spark ignition system—only the burner in use will spark.
- Porcelain-coated, cast iron continuous burner grates.
- Signature red control knobs with infinite control.
- Large-capacity gas convection oven with three adjustable oven racks.
- Infrared broiler with ultrafast preheating.
- Lighted, porcelain oven interior with window in door.
- Adjustable stainless steel legs in front and rear casters.
- Wolf exclusive spring and damper door hinge system.

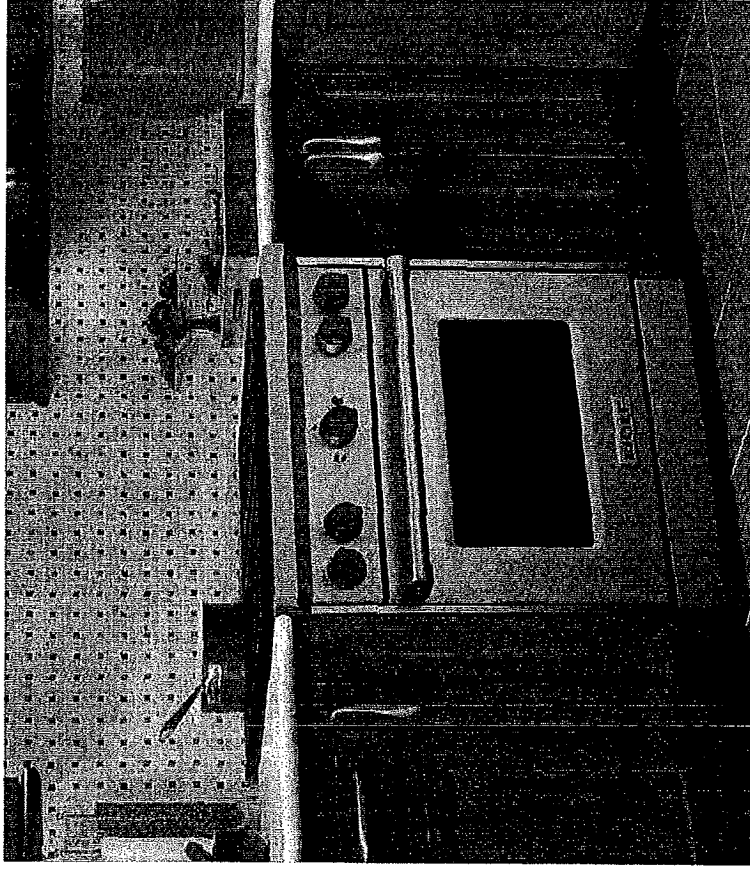


Model GR304



MODEL OPTIONS

Natural Gas	GR304
LP Gas	GR304-LP



GR304

ACCESSORIES

- 5" and 10" stainless steel risers, and 20" riser with shelf.
- Signature red, black or stainless steel control knobs.
- Stainless steel, brass or chrome bezels.
- Cast iron S-grates and wok grate.
- Full-extension easy glide oven rack.
- Bake stone kit—includes stone, rack and peel.
- Front leg covers.
- Stainless steel kickplate.
- High altitude conversion kit—LP above 8,600' and NG above 10,250'.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

442c

30" Gas Range



wolfappliance.com

SPECIFICATIONS

PRODUCT	29" ⁵ / ₈ " W. x 37" H x 28 ³ / ₈ " D	4.4 cu ft
Dimensions	19" ¹ / ₂ "	24" W x 18 ⁵ / ₈ " H x 17" D
Door Clearance	325 lb	110/120 VAC, 50/60 Hz
Weight		15 amp circuit
OVEN		
Capacity		
Interior		
ELECTRICAL		
Supply		
Service		
GAS		
Supply		
Inlet		


BURNER RATING (Btu)

SURFACE	SIMMER	HIGH
Large (3)	950	15,000
Small	325	9,200
OVEN		BTU
Oven Burner		30,000
Broiler		18,000

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

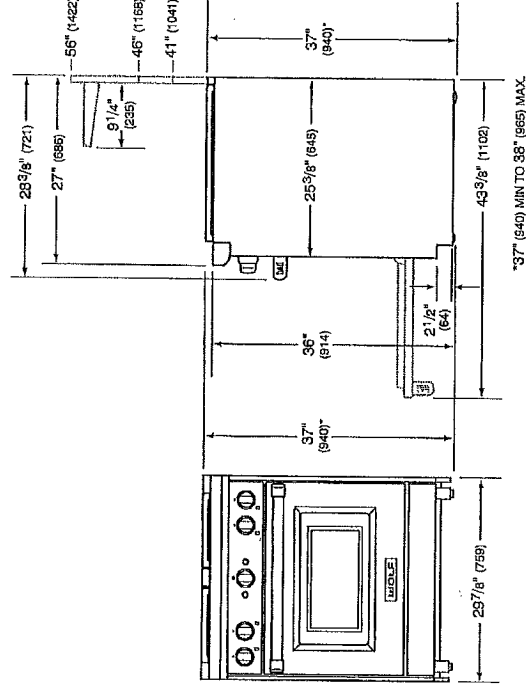

*37" (940) MIN TO 38" (965) MAX.

INSTALLATION

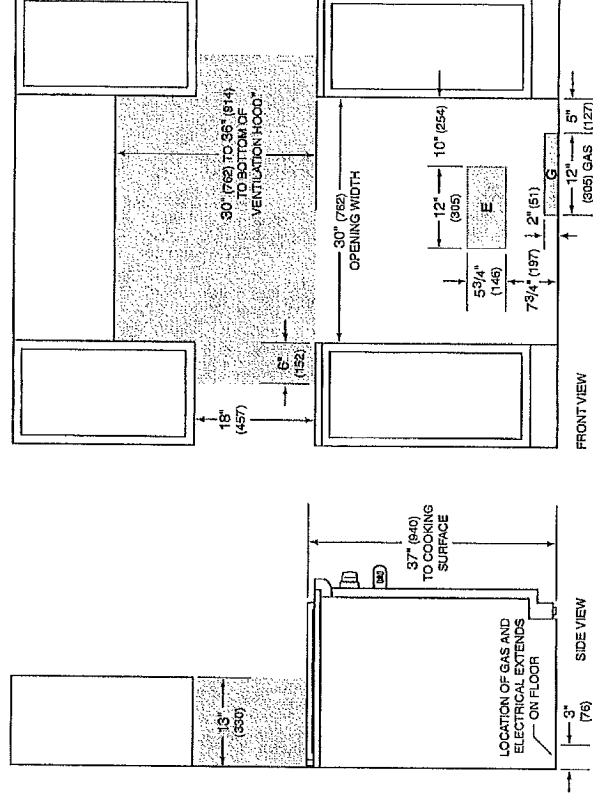


*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.

combustible materials cannot be located within this area.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.



SPECIFICATION SHEET

CLASSICO POCO UP26M SERIES RANGE HOOD

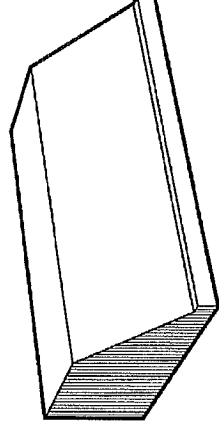

Timeless under-cabinet style has been the standard of excellence. Classico Poco provides high ventilation and durable construction to meet the needs of professional-style cooking appliances. A complete installation requires optional components.

FEATURES


- 430 Stainless Steel construction
- Hood width: 30", 36", 42" or 48"
- Halogen lighting (2 x 50 watt GU10 for 30" and 36" hood, 4 x 50 watt GU10 for 42" and 48" hood) Lamps included
- Infinite speed rotary blower control with on-off rocker switch
- Dishwasher safe, mesh-lined, Hi-Flow™ baffle filters
- Heat Sentry turns blower ON to HIGH speed when excess heat is detected
- For indoor use only

OPTION

- Backsplash (RMP Series): Widths - 30", 36", 42" or 48" Stainless Steel construction - protects back wall and wipes clean easily
- Designed for use with interior blower models iQ6, P6, P3, P5, P6 or P8, exterior blower models EB6, EB9, EB12, or EB15, and in-line blower models ILB3, ILB6, ILB9 or ILB11 (Purchase blowers separately)

SPECIFICATIONS

120 VAC, 60 Hz
Amps for 30" and 36" hood (without blower): 0.8 A
Amps for 42" and 48" hood (without blower): 1.3 A

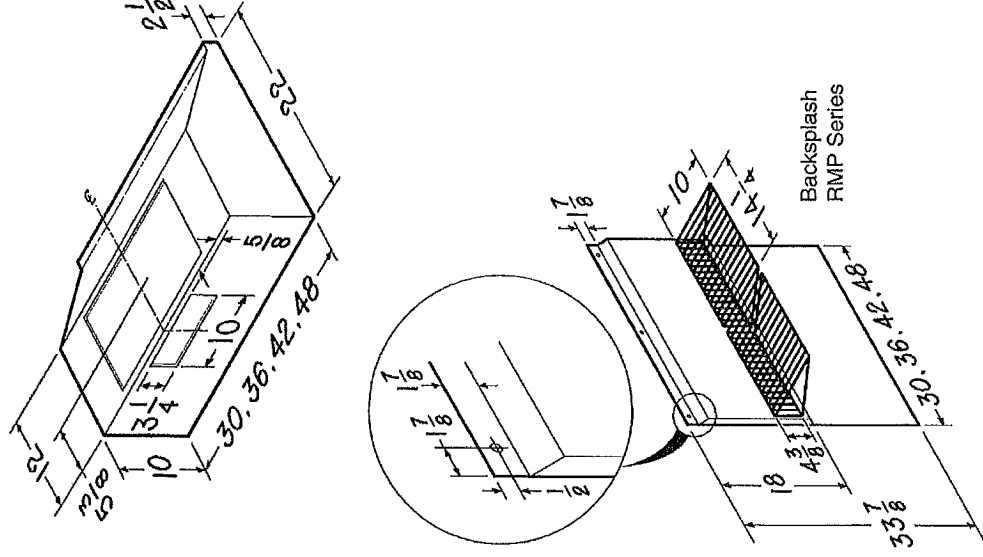


BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Drummondville, QC Canada www.BestRangeHoods.com 866-737-7770

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

31M

99045206A


- UP26M SERIES RANGE HOOD SYSTEM - - P5 & P8 INTERIOR BLOWERS -

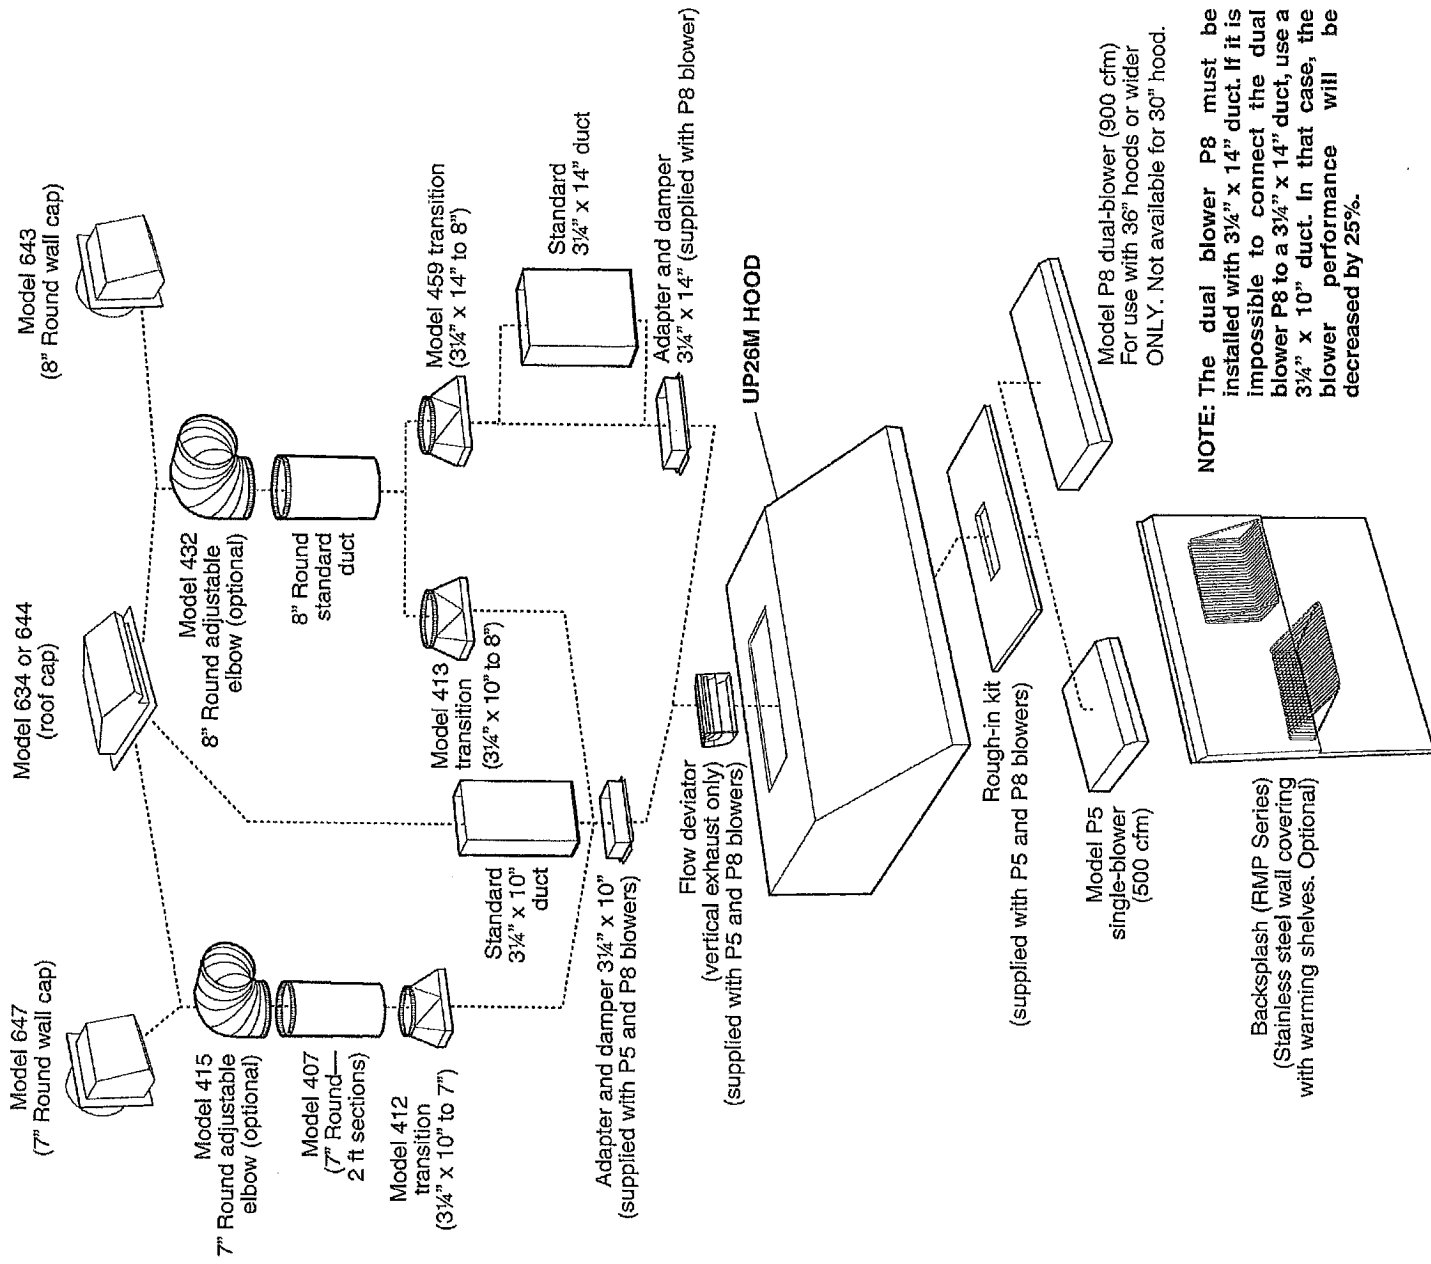

best

YFLC


- UP26M SERIES RANGE HOOD SYSTEM - - P3, P6 & iQ6 Interior Blowers -

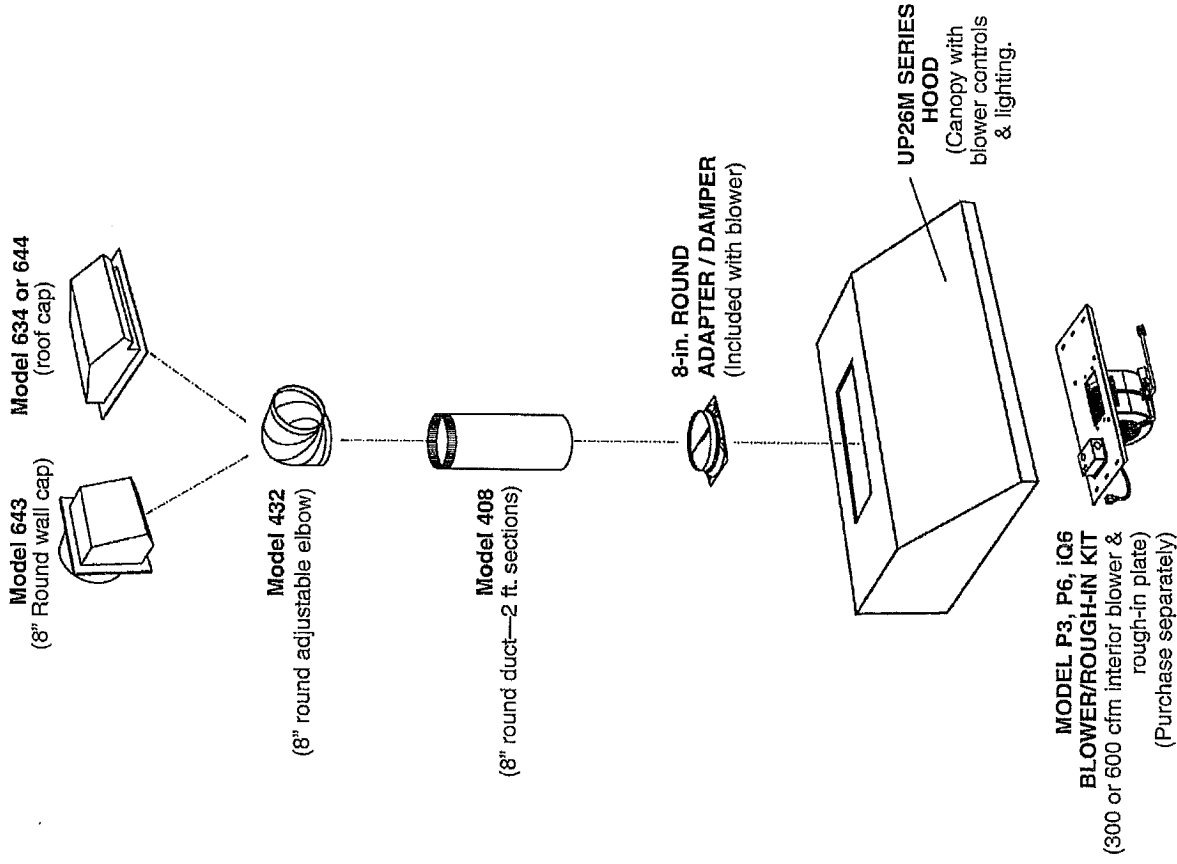


best

4412C

- UP26M SERIES RANGE HOOD SYSTEM - IN-LINE AND EXTERIOR BLOWERS

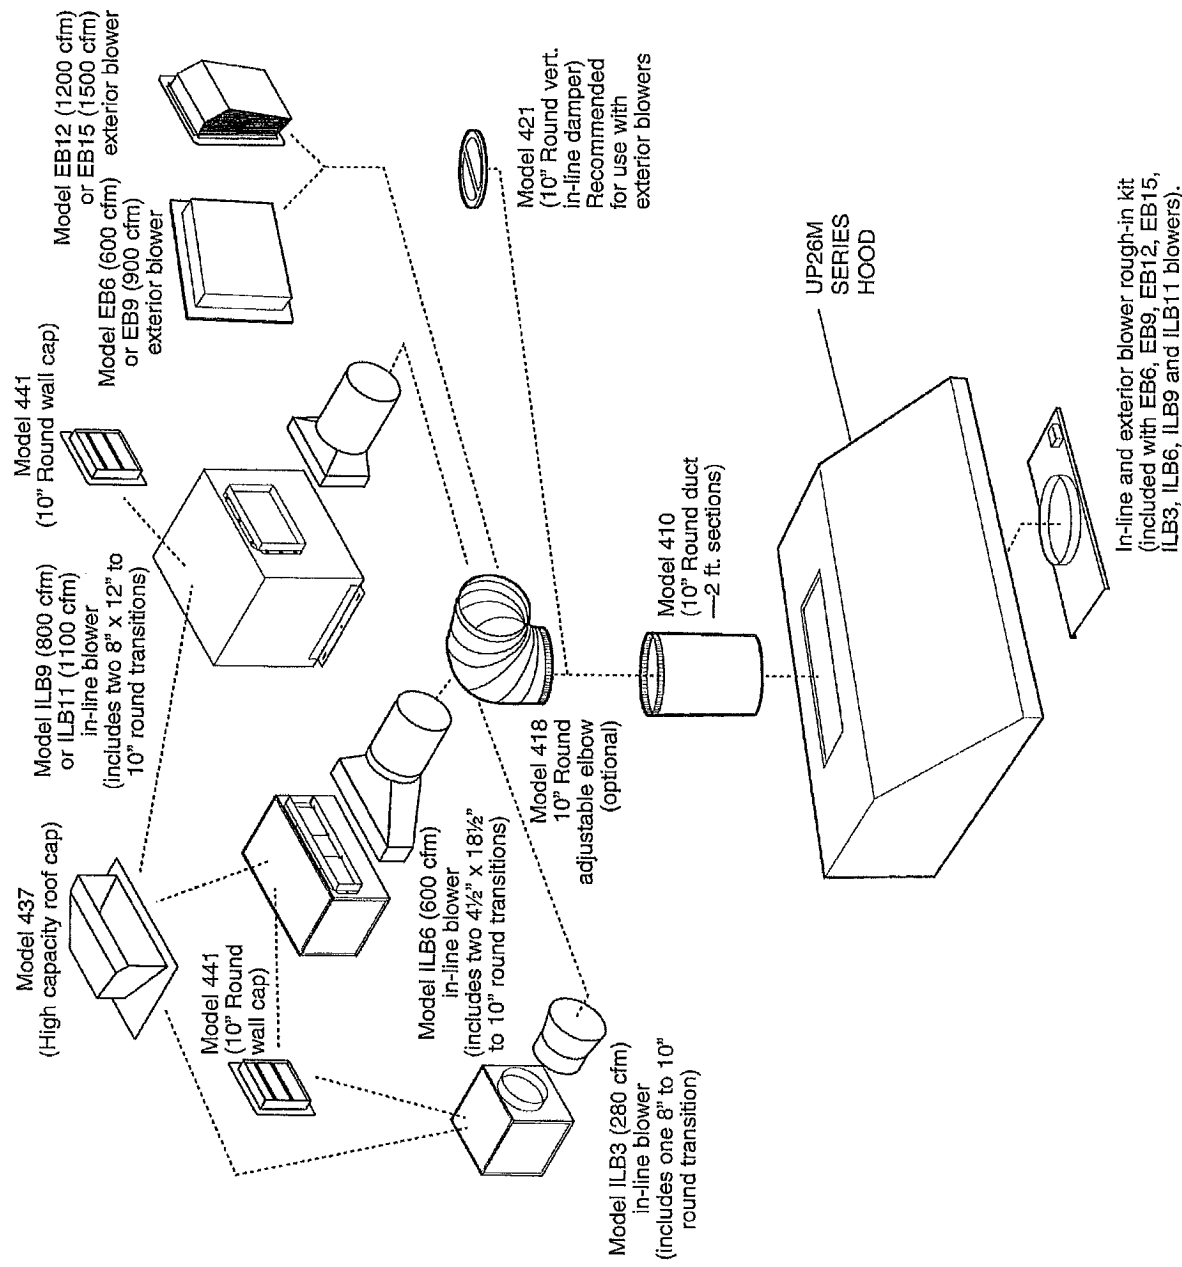

RMP Series Backsplash
(Stainless Steel wall
covering with warming
shelves. Optional)



best


uplc

- UP26M SERIES RANGE HOOD SYSTEM - BLOWER DUCTING POSITION


BLOWER DUCTING POSITION

(Choice of transition will determine the final duct placement.)


MODEL EB6, EB9, EB12, EB15, ILB3, ILB6, ILB9, ILB11, P12 & iQ12:

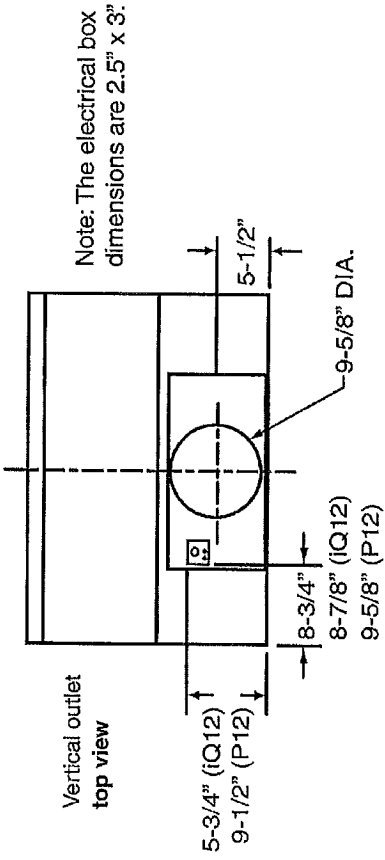

MODEL P3, P6 & iQ6:

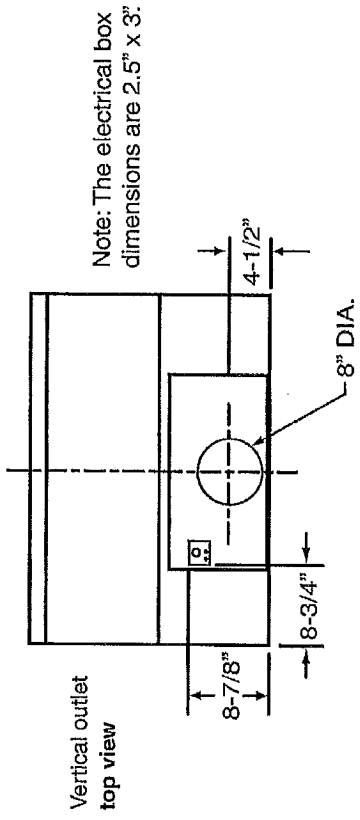

MODEL P5 & P8:

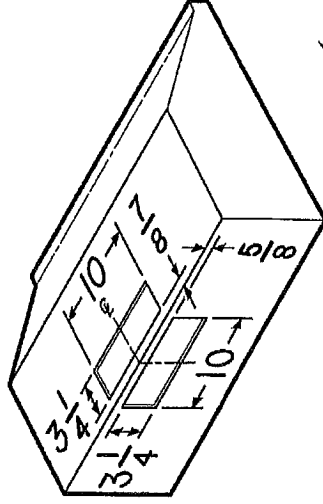


4422

best



PRODUCTS | ABOUT | CATALOGS | TRADE RESOURCES | FOR DEALERS | CONTACT | SUPPORT | FIND A

View Catalog
View All Results
AVAILABILITY (3)
Available in Canada (3)
STYLE (28)
Professional (28) ☒
FINISH (28)
Stainless Steel (28)
WIDTH (28)
30"-35" (6)
36"-41" (6)
42"-47" (4)
48"-53" (6)
54"-59" (2)
60"+ (4)
DEPTH (26)
22"-24" (19)
25"-30" (7)
DUCT SIZE (7)
10 (7)
LIGHTING TYPE (28)
Halogen (28)
RATED SONES (4)
6 plus (4)
RATED CFM (4)
Greater than 1000 (3)
700 to 999 (1)
OUTDOOR RATED (6)

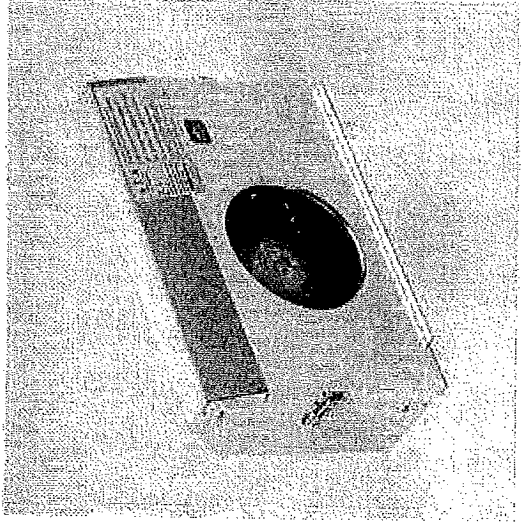

P5
500 CFM Int
Professional
Be ti

Click above to View Larger Image.

Features | Make-Up Air Specifier | Images

Be the first to write a review

Handwritten signature/initials

SERIES (28)
UP26 (4)
UP27 (6)
WP28 (6)
WP29 (6)
WPD38I (3)
WPD39M (3)
OTHER (6)
Outdoor Rated (6)

Handwritten signature



Print Page




G 4225 SCU Futura Classic Series Dishwasher

prefinished with visible control panel

- Visible control panel, prefinished door panel
- 5 wash programs
- Cutlery tray
- 16 place settings
- Ultra quiet acoustics rating: Q1

Colour: ☐ ☐ ☐

Miele Pricing \$1,599.00
Miele \$1,809.00
Advantage
Miele \$2,109.00
Advantage Plus

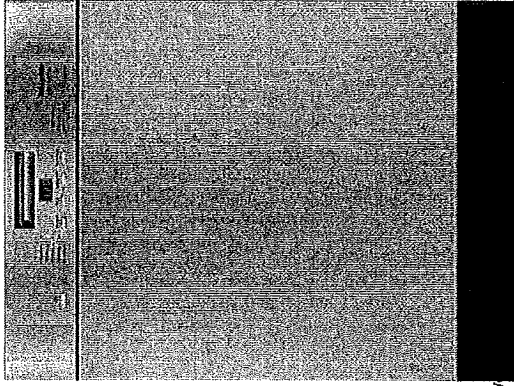[What is this?](#)[Add To Cart](#)[Find a Retailer \(en/Home/FindRetailer\)](#)

(<http://classic-g4225-scu-ss-en-CA.png>)



[Product Details](#) [Dimensions](#) [Interface](#)
[u-scu-sci-control-](#)



Series	Classic
Series name	Classic
Width	
Number of place settings	16
Full size (60 cm)	•
Design	
Straight control panel	•
Touchtronic controls	•
Prefinished	•
Control Panel	
Visible control panel	•
# of Wash Programs	

Number of wash programs	5
Basket	
EasyComfort baskets	•
Wash Programs	
Number of temperature settings	40-75°
SaniWash	•
Rinse & hold	•
Pots & pans	•
Economy	•
Normal	•
Features	
Child safety lock	•
Ultra quiet acoustics rating (Q1-Q5)	Q1
Intensive bottom basket	•
Turbo function	•
Countdown timer	•
Delay start	•
ComfortClose	•
AutoSensor	•
Energy Star qualified	•
Annual energy consumption	285 kWh
Cutlery Configuration	
Cutlery tray	•

Back to Top



- Miele Corporate (<http://www.miele.com>)
- Contact Us (</en/Service/ContactUs>)
- Privacy Policy (</en/Home/Privacy>)
- Terms & Conditions of Sale (</en/Home/Terms>)

4422

Miele



NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 151208

Miele



NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 151208


Front Panel Information G4225 & GXX5 Integrated Models



Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

Panel size is determined in the following manner:

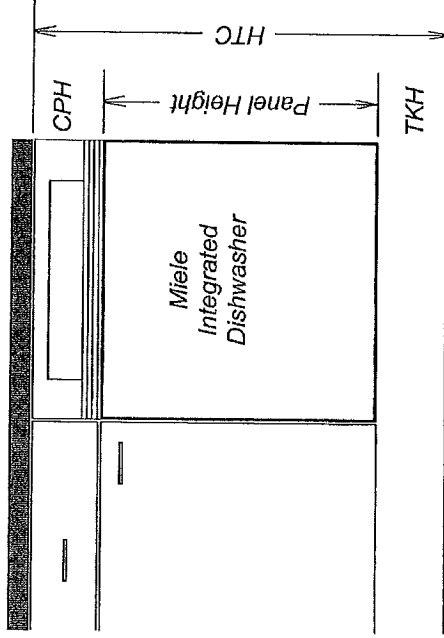

Width: 23 7/16" (598mm) in all cases

Thickness: 3/4" in all cases

Height: Determined using the following calculation:

Panel Height = HTC - CPH - TKH

HTC = Height to the underside of countertop

CPH = Control panel height (Note 1)

TKH = Toe-kick height

Note 1: Control Panel Height is determined by the height of the drawers in the cabinets. This height is adjustable between 4 5/8" and 5 7/8" (116-150mm) with spacer strips provided.

Maximum panel height: 27 1/4" (692 mm)

Minimum panel height: 21 1/4" (540 mm)

Maximum panel weight:

White / Black

23 Pounds (10.4 kg)


Stainless Steel

19 Pounds (8.6 kg)

GDU Kit Installations


In lieu of a custom front, Miele offers a decorative panel system called a GDU kit. GDU kits vary depending upon the model chosen. Each GDU kit contains a front panel and a toe-kick cover.

GDU 60/65-1 4" Toekick

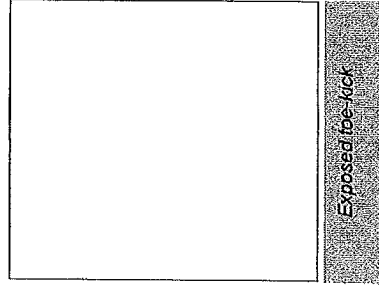

This GDU accepts a custom insert:
Height: 25 11/16" (650 mm)
Width: 23 1/8" (587 mm)
Thick: 1/8" (3 mm)

GDU 60/60-1 -6" Toekick

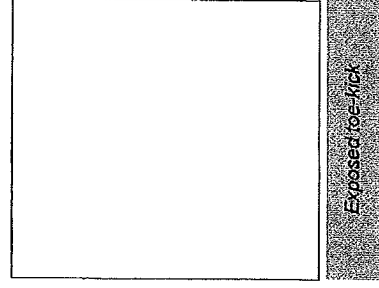

This GDU accepts a custom insert:
Height: 23 5/8" (600 mm)
Width: 23 1/8" (587 mm)
Thick: 1/8" (3 mm)

Handwritten signature: J. J. J.

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 151208


FRIGIDAIRE

affinity.

Front Load Washer

FAFW3801LW


5 Wash Cycles
3.26 Cu. Ft. D.O.E.

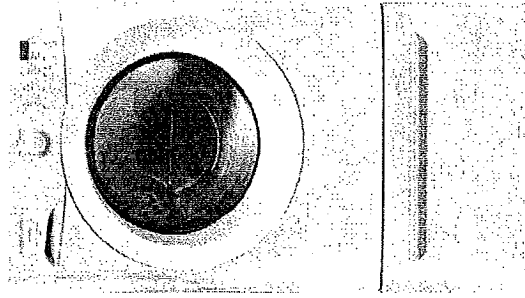


Optional SpaceWise® Pedestal Drawer Shown




Signature Features




ENERGY STAR®



Vibration Control System
Advanced vibration control technology keeps even oversized loads balanced for smooth, quiet operation. Ideal for second floor installation.



Fresh Water Rinse Option
An additional rinse cycle uses advanced rinse technology to effectively reduce detergents and additives.



Express-Select® Controls
Easily select options with the touch of a button.

Product Dimensions

Height	36"
Width	27"
Depth	29-3/4"

More Easy To Use Features

SilentDesign™
Designed for quiet operation.

Stay-Fresh™ Door Seal

Optional Pedestal Drawer

Most Installation Options In its Class

TimeWise® Technology

TimeWise® Technology ensures wash time equals dry time — so you don't wait for clothes to dry.

ENERGY STAR® Most Efficient

Available In:



Classic White (CW)

Recognized as the Most Efficient of ENERGY STAR® in 2012

frigidaire.com

W422

FRIGIDAIRE

affinity.


Front Load Washer

FAFW3801LW 3.26 Cu. Ft. D.O.E.

Features	
Total Capacity D.O.E. (Cu. Ft.)	3.26
Controls	Express-Select®
Washer Drum Interior	Stainless Steel
Lifetime Warranty Tub	Yes
Interior Light/Door Trim	No/Color-Coordinated
Vibration Control System	Yes
Advanced Rinse Technology	Yes
TimeWise® Technology	Yes
Ready/Clean™/Ready Steam™	
Fresh Water Rinse Option	Yes
Stay-Fresh™ Door Seal	Yes
Automatic Temperature Control	Yes
Automatic Water Level Adjustments	Yes
Auto Prewash Detergent Dispenser	
Auto Bleach Dispenser	Yes
Auto Detergent Dispenser	Yes
Auto Fabric Softener Dispenser	Yes
Time Remaining Indicator	Yes (LED Segment)
Cycle Status Lights	Yes
Cycle Signal/Cycle Signal "On/Off"	Chime/Yes
Cycle Signal/Volume Control	Yes
Door Lock Indicator Light	Yes
Control Lock/Stay-Put Door	Yes/Yes
Start/Pause/Cancel Buttons	Yes
Energy Saver Option	
Delay Start	Up to 14 Hours
Integral Water Heater	
Tumble Speed (RPM)	Variable
Spin Speed (Maximum RPM)	1100
Sound Package	SilentDesign™
Adjustable Leveling Legs	Yes
Cycles	
Wash Cycles/Specialty Cycles	5/0
Options	
Water Temperature Selections	6
Water Levels	Automatic
Spin Speed/Soil Level Selections	5/3
Allergen	
Optional Accessories	
Dryer Stacking Kit	PN # STACKIT4X
15" Frigidaire Affinity® Pedestal Drawers	
Classic Red (R)	
Classic Blue (N)	
Classic Silver (A)	
Classic Black (B)	
Classic White (W)	PN# GEPWD5W
Mobile Home Installation Kit	PN # 137067200
Drain Hose Extension Kit	PN # 137098000
Certifications	
ENERGY STAR® Most Efficient	Yes
NSF® Certified Sanitize / Allergen	
Specifications	
Power Supply/Connection Location	Right Top Rear
Water Inlet Connection Location	Left Top Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @120 Volts	3.0
Watts @ 120 Volts/ Amps @ 120 Volts	1000/9
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx)	222 Lbs.

Recognized as the Most Efficient of ENERGY STAR® in 2012.

For use on adequately wired 200V dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

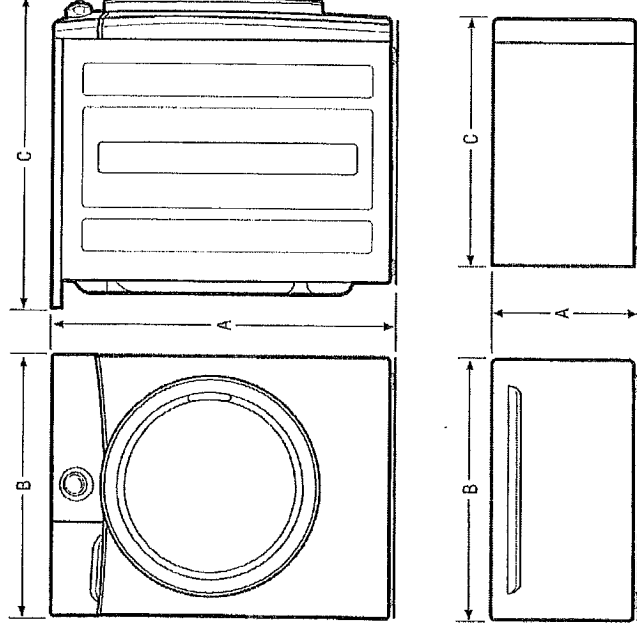NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

Product Dimensions	
A - Height (Single)	36"
Height (Stacked)	71-1/2"
B - Width	27"
C - Depth	29-3/4"
Depth with Door Open 90°	50-13/16"
Pedestal Dimensions	
A - Height	15-1/4"
B - Width	27"
C - Depth	26-1/2"
Depth with Drawer Fully Extended	42-1/2"

Accessories information available on the web at frigidaire.com

4422

FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28252 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FAFW3801L 10/13


© 2013 Electrolux Home Products, Inc.

Specifications subject to change.




Front



Side

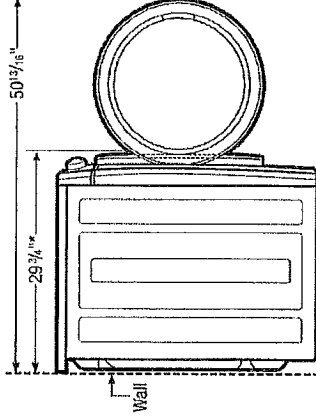

Rear




15" Drawer

Pedestal Installation
Elevates washer height to 51 1/4". For detailed pedestal installation, refer to instructions included with pedestal or on web.
Note: Pedestal installation requires modified utility hookup locations. For details, refer to Product Installation Guide on web.

Built-In Installations


For built-in installations, NO minimum clearance required around sides or backs of units. For closet installation, allow additional 1" clearance between fronts of units and door. Location of plumbing, exhaust and utility hookups **MUST** be considered in built-in installations. For additional installation details, refer to Product Installation Guides on web.

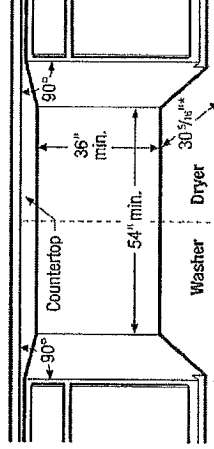

Side-by-Side Units in Under-Counter Installation

Can be installed with standard countertop and/or cabinetry.

*To achieve minimal installation depth dimensions, dryer **MUST** be vented straight back. For installation with quick-turn 90° elbow, refer to Product Installation Guide on web for approximate clearances incurred with multi-directional exhausting options in freestanding, pedestal-mounted, or stacked installation.



Stacked Units in Recessed or Closet Installation

For detailed stacked installation, refer to instructions included with Stacking Kit or on web. **Note:** Stacked installation requires modified utility hookup locations for dryer. For details, refer to Product Installation Guide on web.

Front Load Washer Specifications

- Product Shipping Weight (approx.) – 222 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances. (*Do not use same circuit as dryer*)
- Voltage Rating – 120V/60 Hz/15 Amps
- Amps @ 120 Volts = 9 Amps
- Equipped with 120V 3-wire power supply cord, approx. 60" long.
- Always consult local and national electric & plumbing codes.
- To maximize detergent effectiveness, ambient temperature should never be below 60° F.
- Can be installed alone, with or without optional 15" Pedestal Drawer, or stacked below matching Frigidaire® Affinity Dryer which requires installation of optional Dryer Stacking Kit. (*For installation details, refer to instructions included with optional pedestal or stacking kit or on web.*)
- Can be built in with matching Frigidaire® Affinity Dryer in under-counter, recessed or closet installation. (*Refer to Built-In Installations on this page for cutout dimensions. For additional installation details, refer to Product Installation Guide on web.*)
- Closet installation requires vented door with 2 unobstructed louvered openings, minimum 60 sq.in. each, located 3" from top and bottom of door. Full-length 120 sq.in. opening also acceptable. Allow additional 1" clearance between fronts of units and closed door.
- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.

- Floor **MUST** be solid with 1" maximum slope. To minimize vibration or movement, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Leveling legs supplied to level washer properly and reduce excessive noise and vibration.
- H/C water faucets **MUST** be installed within 42" of washer's water inlet and **MUST** be 3/4" to connect to 43" inlet hoses.
- Water pressure **MUST** be between 30 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain required with standpipe diameter of 1-1/4" min. and height of 24" min./96" max. above floor, capable of eliminating 17 gallons per minute. Attached 52" drain hose can reach 74"-high standpipe. For higher standpipe, optional Drain Hose Extension Kit available.

Note: For planning purposes only. Refer to *Product Installation Guide* on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Dryer Stacking Kit – (PN# STACKIT4X).
- 15" Classic White Pedestal Drawer – (PN# CFPWD15W).
- Mobile Home Installation Kit – (PN# 137067200).
- Drain Hose Extension Kit – (PN# 137098000).

444 122

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-255-8352 • frigidaire.ca
FAFW3801L 10/15

© 2013 Electrolux Home Products, Inc.



Specifications subject to change

FRIGIDAIRE
frigidaire.com



Frigidaire Affinity 7.0 Cu. Ft. Electric Dryer

MODEL: CAQE7001LW
27" W X 29-3/4" D X 36" H



Classic White



Shown with Optional Pedestal.

Specifications

Specifications

General

Product Code: CAQE7001LW

Product Type: Dryer

Power Type: Electric

Installation Type: Free-Standing

UPC Code: 0-12505-38304-5

Colour: Classic White

Dryer: Cycles

Cycle Count: 6

Normal: Yes

Casual: Yes

Quick Dry: No

Timed Dry: Yes - 30, 60, 90

Cycle Status Lights: Yes

Cycle Signal: Chime On/Off

Controls

Dryness Level Selections: 4

Control Lock: Yes, Key Combination

Dryer Specifications

Dryer Capacity (Cu. Ft.): 7.0

Drum Material: Painted Steel

Drum Back Type: Painted Steel

General Specifications

Literature: English/French

Sound Insulation Package: SilentDesign™

Adjustable Leveling Legs: Yes

Air Fluff (No Heat): Yes

High Dry: Yes

Less Dry: Yes

Normal: Yes

Damp Dry: Yes

Trim Tag Line: Wrinkle Release System - Ultra Capacity

Product Weight (lbs): 127

Shipping Weight (lbs): 140

Exterior Dimensions

Depth: 29-3/4"

Height: 36"

Width: 27"

Exterior Specifications

Cabinet Colour: White

Console Colour: White

Reversible Door: Yes

44 29

*Select Models. Based on 7.0 Cu. Ft. capacity on 36" installation platform.