

STANDARD APPLIANCE OPENINGS

The purchaser acknowledges the following standard spaces for kitchen appliances:

Range Conventional – 30" Width

Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)

Refrigerator $-36^{\prime\prime}$ W x 72 $^{\prime\prime}$ H (Approximate - height may change due to bulkheads)

Dishwasher – 24" Width

6" Exhaust Vent above stove

OTHER.

*Check all that apply - NON-STANDARD APPLIANCE OPTIONS **UPGRADED APPLIANCE OPENINGS**

NOTE: When upgrading appliances, **there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate** the appropriate size from the manufacturer specifications of each appliance.

Purchaser Signature	Purchaser Signature (1)	Applian	If specs not received, the <u>standard openings</u> as determined by Zancor Homes will be <u>provide</u> required due to late specs received, additional costs will be applied. Appliance Specifications are to be sent to the Zancor Décor Centre no later than EP	Purchaser acknowledges responsibility for providing coldeliver forthwith to the Builder the manufacturer's appopenings.			appliance will not butt up against cabinetry)	STOVE (clearance space will be left with this	Chimney hoods **CENTRE VENT ABOVE	8" Vent / 10" Vent	Hood Fan (may require larger vent, charges will apply 6" is standard)	Built-In Wall Oven	*(Gas/Electric – Cut-out Charge & Plug Required)	Cookton	Clab In C+000	same as per Ontario Building Code)	36") 42" Stove (Hood fan width will be the	I WANOFACI ORERS SPECIFI
Date	Date Systember 6, 2016	Appliance Specifications received	If specs not received, the <u>standard openings</u> as determined by Zancor Homes will be <u>provided</u> . If rework/repair is required due to late specs received, additional costs will be applied. RECEIVED Ince Specifications are to be sent to the Zancor Décor Centre no later than EP 106206	Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.	NOTE : It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.	Stackable Washer & Dryer	Front Load Washer & Dryer $*(Specs required if installing counter above)$	Cargo Waste Bin systems	Steam Oven / Built-In Coffee makers	Wine / Bar Fridge (electrical required)	to space accomodations *Note: Refrigerator Door Swing	door may be an issue if it is deeper than 24" *Applicable charges may apply if required to due	Built-in Refrigerator/Sub Zero — If purchasing a side by side or French Door, the wall beside the	OTR – Over The Range Microwave *Plug required	Warming Drawer	Built-In Microwave Drawer with Frim Kit	Built-In Microwave with Trim Kit	MANOFACTORERS SPECIFICATIONS MUST BE ATTACHED**

PROJECT

[O

30" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN



SO30TE/S/TH

10 cooking modes make meals easy

Three adjustable oven racks

FEATURES

Cobalt blue porcelain interior

Self clean, delayed start, timed cook, Sabbath mode and more

Installs flush with surrounding cabinetry

Dual convection oven for faster, more consistent cooking

Temperature probe lets you know when it's done

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Hidden bake element and recessed broil element

ACCESSORIES

30" baking sheet

Bake stone kit (stone, rack and peel)

Dehydration kit (racks and door stop)

Full-extension easy glide oven rack

Temperature probe and broiler pan

Set of three standard oven racks

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-woff.com/locator.

Z



RECEIVED SEP 0 6 2016

" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN



PRODUCT SPECIFICATIONS

Model SO30TE/S/TH

Dimensions 29 7/8"W x 27 7/8"H x 23 3/4"D

Oven 1 Interior 25"W x 16 1/2"H x 19"D

Oven 1 Interior Dimensions Overall Capacity

25"W × 16 1/2"H × 19"D

4.5 cu ft

Usable Capacity

Door Clearance

Weight

2.8 cu ft 22"

273 b

2³/4" →

--- 233/4" (603) --BEHIND FRAME

OPEN OVEN DOOR


-§2<u>2</u>-

240/208 VAC, 60 Hz 30 amp dedicated circuit

4 feet


Electrical Supply
Electrical Service
Conduit Length

ELECTRICAL





STANDARD INSTALLATION

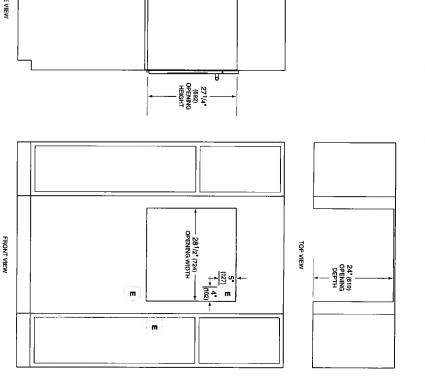

NOTE: Location of electrical supply within opening may require additional cabinet depth



36" CONTEMPORARY ELECTRIC COOKTOP

MOLE

CE365C/B

FEATURES

Five elements, nine zones accommodate different pan sizes

High-frequency pulsation technology for superior performance and control

True simmer setting for soups, sauces and more

Super-low Melt setting for fine chocolate and other delicate foods

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Illuminated touch controls

Hot surface indicator lights when temperature exceeds 150° F

Temperature limiter ensures that safe operating temps are never exceeded

Universal "off" turns all elements off

Control panel lock for safety

Automatic timer up to 99 minutes

Bridge zone creates larger 7"x16" cooking area

Ceran ceramic glass resists scratching, staining, impact and heat

Can be mounted flush with countertop



TOP CONFIGURATION



COOKTOP SPECIFICATIONS

- 1 10 1/2" Triple Element (1050/1950/2700W)
- 1 8" Dual Element (700/2200W)
- 1 5 1/2" Single Element (1200W)
- 2 7" Single Elements With Bridge (4400W)





36" CONTEMPORARY ELECTRIC COOKTOP



PRODUCT SPECIFICATIONS

Model

Dimensions

CE365C/B

Weight Electrical Supply

36"W x 4"H x 21"D

60 lb

Electrical Service

Conduit Length

3-wire, 240 VAC, 80 Hz


50 amp dedicated circuit

James Oct


ELECTRICAL


31/2*(89) E

DIMENSIONS




STANDARD INSTALLATION





COUNTERTOP CUT-OUT

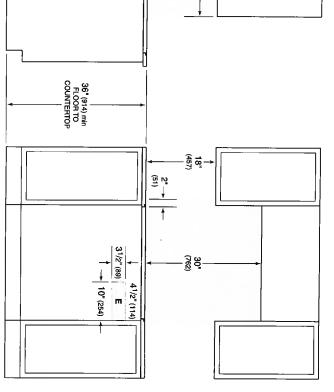

(330)

SIDE VIEW

FRONT VIEW

NOTE: Sheded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be focated within this area.

Electrical supply location only applies to installations with built-in oven.

Outside comer radius 7/16" (11).

36" LOW PROFILE WALL HOOD

PW362210

FEATURES

Heavy-duty stainless steel construction

Handfinished with hemmed edges and welded seams

Bright halogen lighting

Infinite speed blower control

Heat sentry for safety

Recessed controls for sleeker look

Blower required (internal, in-line or remote blowers available)

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES


38" high stainless steel backsplash with or without warming racks

6", 12", 18", 24" and 30" high stainless steel duct covers

lake-up air damper

Recirculating kit and filter for non-ducted applications (internal blower)

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.

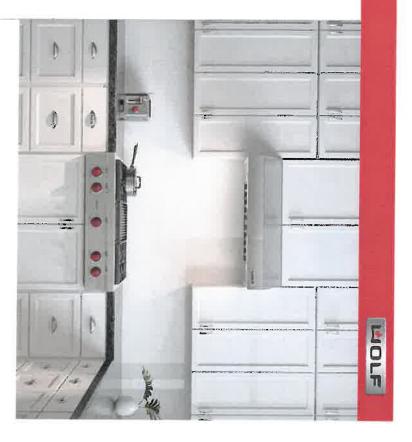

BLOWER OPTIONS

- 600 CFM Inline
- 600 CFM Remote
- · 900 CFM Remote
- 500 CFM Internal

05450

Sh6///





36" LOW PROFILE WALL HOOD



PRODUCT SPECIFICATIONS

Model PW362210

Dimensions $36\text{"W} \times 10\text{"H} \times 22\text{"D}$ Weight 44 lb

Weight 44 lb Electrical Supply 110/120 VAC, 60 Hz

Electrical Supply 110/120 VAC, 60 Hz
Electrical Service 15 amp dedicated circuit

Vertical or Horizontal Rectangle 14" x 3 1/4"


30" to 36"

Bottom of Hood to Countertop


Discharge Location


Discharge Dimensions

ELECTRICAL



DIMENSIONS





of. 450





E SERIES TRANSITIONAL DROP-DOWN DOOR MICROWAVE OVEN

30"



PRODUCT SPECIFICATIONS

Dimensions

29 7/8"W x 17 7/8"H x 20"D

MDD30TE/S/TH

Door Clearance

Electrical Supply

Electrical Service

Overall Capacity


Power Cord Length


15 amp dedicated circuit 120 VAC, 60 Hz 1.6 cu ft 14 3/16"

ELECTRICAL




DIMENSIONS





STANDARD INSTALLATION

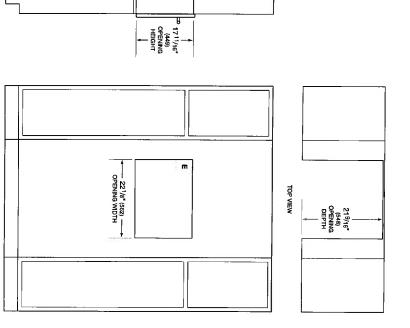





FRONT VIEW

30" E SERIES TRANSITIONAL DROP-DOWN DOOR MICROWAVE OVEN

MDD30TE/S/TH

FEATURES

Integrates into any kitchen

Matches E series ovens, coffee systems, convection steam over

900 watts of power

Generous 1.6. cu. ft. capacity

Quick-start controls for popular items

Gourmet mode cooks automatically from preset recipes

"Keep Warm" mode

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison








36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

SUB-ZERO


PRODUCT SPECIFICATIONS Model

35-120 psi	Plumbing Pressure
1/4" OD copper, braided stainless steel or PEX tubing	Plumbing Supply
15 amp dedicated circuit	Electrical Service
115 VAC, 60 Hz	Electrical Supply
5.3 cu ft	Freezer Capacity
16.4 cu ft	Refrigerator Capacity
515 lb	Weight
23 5/8"	Drawer Clearance
37 1/4"	Door Clearance
36"W x 84"H x 24"D	Dimensions
BI-36U/S	Model

ELECTRICAL




INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS










STANDARD INSTALLATION

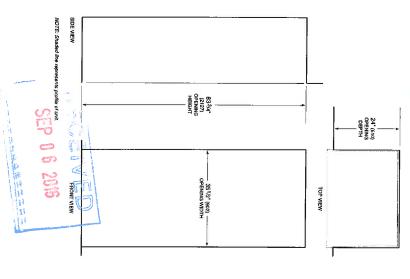

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

SUB-ZERO

BI-36U/S

FEATURES

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Microprocessor control assures peak performance

Water-filtration system for ice reduces contaminants, chlorine taste and odor

Freshness cards for maximum food preservation

Clear-view, triple-pane and UV-resistant glass door

Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use

Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory

"Soft bright" interior lighting

Over-and-under refrigerator/freezer storage

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

Adjustable shelves for maximum convenience

ACCESSORIES

Stainless steel kickplate

Grilles for 83" or 88" finished height (84" is standard)

Side panel mounting kit

Dual installation kit with or without dual wide grille—84" finished height

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.







PRODUCT DETAILS

REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with dividers
- 1 Storage drawer with dividers
- 2 Adjustable door shelves

1 Stationary door shelf

Adjustable dairy compartment

FREEZER

- Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- Automatic ice maker



WF42H5200A


Samsung Front-Load Washer

Installing Options









Stacked Depth


Installing Your Washer


Alcove or closet installation


Minimum clearances for closet and alcove installations:

Closet Front – 2"

If the washer and dryer are installed together, the closet front must have at least a 72" unobstructed air opening. Your washer alone does not require a specific air opening.







Rinse and Spin

9 Preset Wash Cycles: Normal, Heavy Duty, Permanent Press, Santize, Allergen, Bedding, Delicates, Quick Wash,

4.8 cu. ft. Capacity IEC

10 Options:

Steam, Self Clean+, Delay End, My Cycle, Extra Rinse, Extra Spin, Sound, Spin Only, Child Lock, Smart Care

4 Temperature Settings: Hot, Warm, Eco Warm, Cold

4 Spin Settings: High, Medium, I ow, No Spin

Heavy, Normal, Light 3 Soil Settings:

Dispenser Trays: Main Wash, Softener, Bleach

One (1) Year Parts and Labour Two (2) Years Control Board Warranty

Ten (10) Years Direct Drive Motor Three (3) Years Stainless Steel Drum

Product Dimensions & Weight (WxHxD)
Dimensions: 27" x 3811/16" x 33"
Weight: 194 lbs

Required Dimensions for Installation with Stacking Kit

Shipping Dimensions & Weight (WxHxD) Dimensions: 291/4" x 4111/16" x 345/8"

513/18 too

With optional pedestal base or stacking kit Required Dimensions for Installation with Pedestal

Dimensions

Weight: 203 lbs

Colour Platinum Model # WF42H5200AP **UPC Code** 887276963082

Platinum Matching Dryer (Electric/Gas) DV42H5200FP 887276957135

Platinum DV42H5200GP 887776963735

*Required spacing.

**External exhaust elbow requires additional space SEP CO 28



0

27

ي

δī

-57/6

533/8"

Actual colour may vary. Design, specifications and colour availability are subject to change without notice. Non-metric weights and measurements are approximate Minimum clearances are recommendations only. Samsung received the highest numerical score for front-bed weakhers in the proprietary JD. Power and Associates 2014. Laundry Appliance Satisfaction Study its based on more than 6.00 evaluations from customers who purchased oldness weakhers duning the past 24 months. The study was felded from lanuary through March 2014 40 members are very visit (plower com for more information. The ENERGY STAR Most Efficient 2014 designation recognizes the most efficient products among those that quality for the ENERGY STAR program. These exceptional clothes weakhers represent the leading edge in energy efficient products. © 2014 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

Washers & Dryers | Dryers | DV42H5200EW 7.5 cu.ft Electric Front-Load Dryer (White)... Page 1 of 2

Open Galaxy S5 Key Visual Home *Consumer > Home Appliances > Washers & Dryers > Dryers > DV42H5200EW 7.5 cu.ft Electric Front-Load Dryer (White)

DV42H5200EW/AC

₩HERE TO BUY

OVERVIEW FEATURES TECH SPECS GALLERY REVIEWS ACCESSORIES COMPATIBLE PRODUCTS



\$16/M

Table view

Features

Cycles

7.5 cu.ft Capacity

Smart Care available

Door Trim available

Quick Dry Manual Dry available

Air Fluff available 11 drying cycles

Interior Light available

LED Display

Bedding available Time Dry available

Heavy Duty available

Door Safety available Powder Coat

Filter Check Indicator available

4 Way

Neat White exterior color

Energy & Performance

Options & Settings

Wrinkle Away available Refresh available Delicates available Sanitize available Perm Press available Normal available

240 V

3.01 lbs/kWh

42 min drying cycle time

5300 W

Smart Care available Drum Light available Signal On / Off available

Child Lock available My Cycle available Adjust Time available Wrinkle Prevent available Mixed Load Bell available Number of Options x 10 ea

Physical Specifications

27 x 38.7 x 32.4" Net Dimension

57 kg Net Weight

Matching Washer Model

WF42H5100AW/A2





WF42H5200AP

Samsung Front-Load Washer

4.8 cu. ft. Capacity IEC

Features

- Steam Washing
 Smart Care™
- Self Clean+
- VRT® Vibration Reduction Technology
 Diamond Drum® Design
- Direct Drive Motor
- 1200 rpm Maximum Spin Speed
- Internal Water Fleater
 9 Preset Wash Cycles
- Garment 10 Options

Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Main Wash, Softener, Bleach



MEF=3.20 WCF=2.90 95 kWh/yr





Ranked "Highest in Customer Satisfaction with Clothes Washers" in 2013 & 2014 by J.D. Power and Associates.



Achieved the U.S. Environmental Protection Agency's 2014 ENERGY STAR®
"Most Efficient" designation.

C 24 00



Smart Care



Self Clean-

Available Colour:




Platinum (shown)

Signature Features

STEAM WASHING

- Powerful steam removes stains.
- No pre-treatment needed.



SMART CARE

Troubleshoot with your smartphone.
 Perform a quick d'agnosis of your washer right from your smartphone.
 **Readille on Geode Physiology and the Agnostical

SELF CLEAN+

- New self-cleaning technology.
- Keeps your front load washer fresh without the use of harsh chemicals.
 Reminds you to run Self Clean+ every 40 cycles.
 Additional cleaning of the gasket.



SAMSUNG



D5436XLS

Turbo Dying
Top tray for bowls and cuttery
Upper basket type: Premium
Lower basket type: Premium
Separate removable basket
Number of place settings: 16

Top tray functions
InstantLift*** - smart height adjustm
Divisible and removable trays
Divisible and utensits
Rack for knifes and utensits
Rack for bowls and cups
Telescopic rails

Upper basket functions
Tight mesh base
Multi position wine shelf left
Multi position wine shelf right
Fixed pin rows
Fixed glass support
Wide knife stand

Lower basket functions
Foldable/divisible pin rows rear
Separate removable basket

Options Delayed start

Cleaning systems
Number of spiray zones: 9
Number of spiray zones: 9
Number of spiray arms: 3
VildeCleanTM - extra washing power to
SCS - Super Cleaning SystemTM
Aqua LevelTM Sensor
Stainless steel spiray arms

Features
8 stainless steel parts
Time remaining indicator
voice signal for the end of was
Hidden heater
KldSafe - lockable controls

Water safety

Few sealing points outside the container
Long lasting seam welded tank

Waterproof external base
Exterior float
Aqua Detect™ Sensor
Aqua Level™ Sensor
Stand-by water protection

Max time water intake Sound alarm Anti-block drain pump



Installation
Adjustable feet
Multi fit outlet hose
Fixed high loop outlet hose
Trim kit

General

Product: Dishwasher
Mode of installation: Built-in
Size: XL (ADA height compliant)
Touch Screen Display
Number of programs: 7
Noise level: 46 dB(A)
Number of baskets: 3
EAN code: 3838942042188

Dimensions and Installation
Height: 32 5/16 (820 mm)
Width: 23 15/16 (808 mm)
Depth: 22 7/8 (581 mm)
Packaging height: 35 1/16 (890 mm)
Packaging width: 25 3/16 (640 mm)
Packaging depth: 26 3/16 (640 mm)
Packaging depth: 26 3/4 (880 mm)
Length electrical cord: 46 7/16 (1180 mm)
Length inlet hose: 66 1/8 (1680 mm)
Length outlet hose: 41 3/4 (1080 mm)
Weight net: 101 lbs
Weight gross: 109 lbs

Technical Information Voltage: 120 V Current: 15 A

Consumption Energy consumption/cycle: 0,87 RECEIVE

SEP G) 8