

## STANDARD APPLIANCE OPENINGS

The purchaser acknowledges the following standard spaces for kitchen appliances:

Range Conventional – 30" Width

Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)

Refrigerator – 36" W x 72" H (Approximate - height may change due to bulkheads)

Dishwasher – 24" Width

6" Exhaust Vent above stove

OTHER \_\_\_\_\_

*See Specs.*

### UPGRADED APPLIANCE OPENINGS

\*Check all that apply - NON-STANDARD APPLIANCE OPTIONS

**NOTE:** When upgrading appliances, there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate the appropriate size from the manufacturer specifications of each appliance.

**\*\*MANUFACTURERS SPECIFICATIONS MUST BE ATTACHED\*\***

36" / 42" Stove (Hood fan width will be the same as per Ontario Building Code)

Gas Stove

Slide-In Stove

Cooktop

\*(Gas/Electric – Cut-out Charge & Plug Required)

Built-In Wall Oven

Hood Fan (may require larger vent, charges will apply – **6" is standard**)

8" Vent / 10" Vent

**Chimney hoods \*\*CENTRE VENT ABOVE STOVE** (clearance space will be left with this appliance will not butt up against cabinetry)

Built-In Microwave with Trim Kit

Built-In Microwave Drawer with Trim Kit

Warming Drawer

OTR – Over The Range Microwave \*Plug required

**Built-in Refrigerator/Sub Zero** – If purchasing a side by side or French Door, the wall beside the door may be an issue if it is deeper than 24"

\*Applicable charges may apply if required to due to space accommodations

\*Note: Refrigerator Door Swing

Wine / Bar Fridge (electrical required)

Steam Oven / Built-In Coffee makers

Cargo Waste Bin systems

Front Load Washer & Dryer \*(Specs required if installing counter above)

Stackable Washer & Dryer

\_\_\_\_\_  
D.S **NOTE:** It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

\_\_\_\_\_  
D.S Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

\_\_\_\_\_  
D.S If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specifications are to be sent to the Zancor Décor Centre no later than mid-noon

sat. 5/16

Appliance Specifications received \_\_\_\_\_

Purchaser Signature \_\_\_\_\_  
D.S. Owen

Date \_\_\_\_\_  
Aug 30/16

Purchaser Signature \_\_\_\_\_

Date \_\_\_\_\_

PROJECT \_\_\_\_\_  
King Castle


LOT \_\_\_\_\_  
44

1000th




ASKO DISHWASHERS

Leoh44e

Overall Dimensions  
INTEGRATED HANDLE

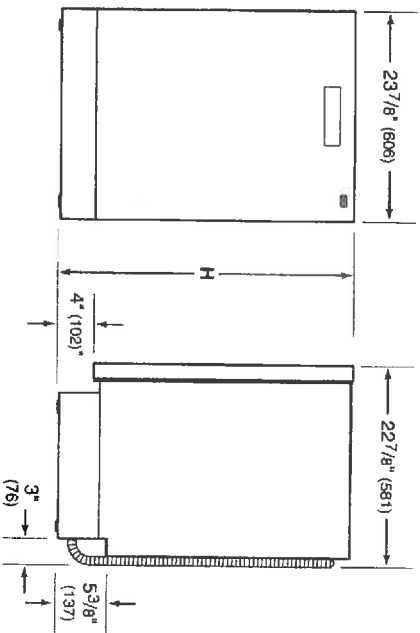

TUBULAR AND PRO HANDLE

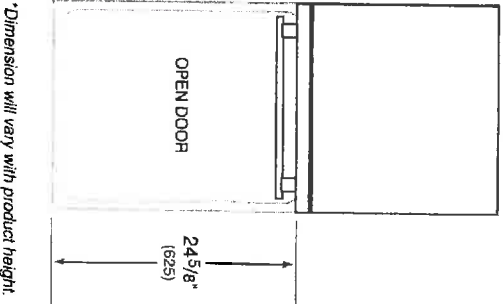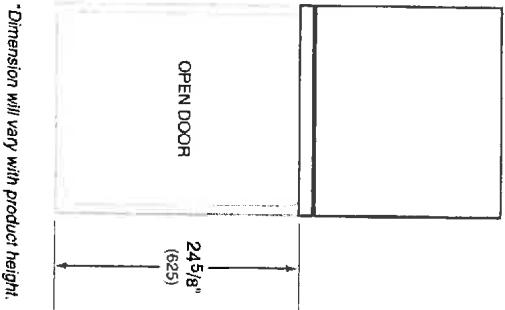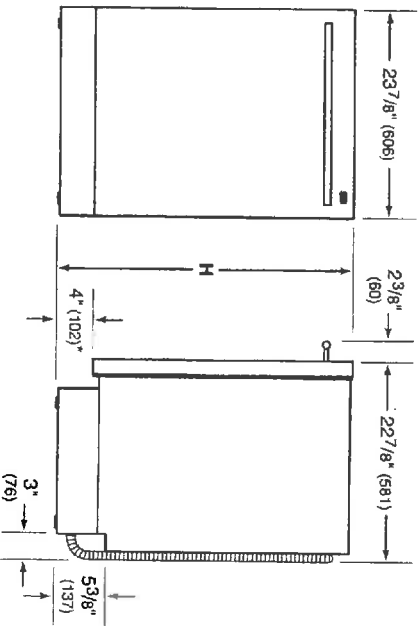

HEIGHT

INTEGRATED HANDLE  
XL Model  
XXL Model

H  
32 3/4" (832) – 34 3/4" (883)  
34" (864) – 35 3/4" (908)

\*Can be reduced to 32 1/4" (819) by removing top trim and lowering side trim.

HEIGHT

TUBULAR AND PRO HANDLE  
XL Model  
XXL Model

H  
32 3/4" (832) – 34 3/4" (883)  
34" (864) – 35 3/4" (908)

\*Can be reduced to 32 1/4" (819) by removing top trim and lowering side trim.


D. Senegas

ASKO DISHWASHERS


606 44C

Overall Dimensions


PANEL READY

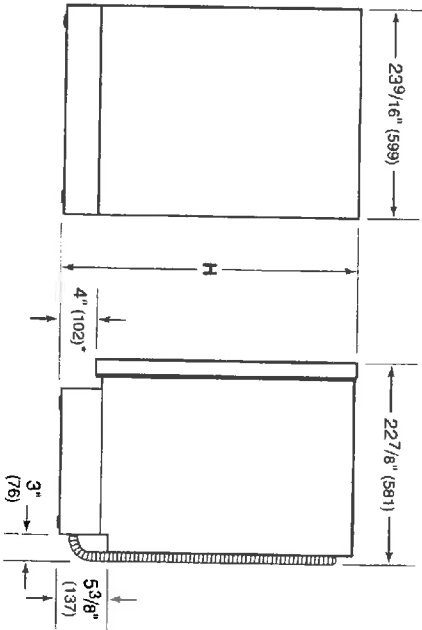


OUTDOOR

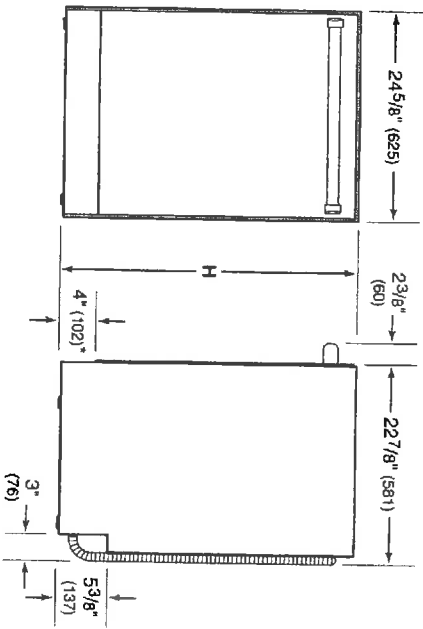

Aug 30/16

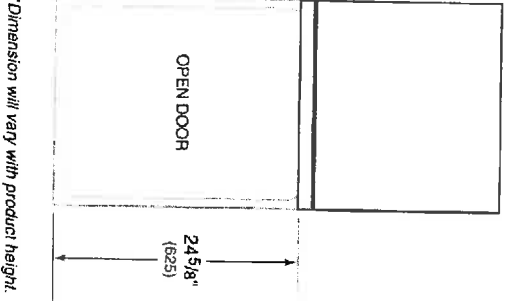

\*Dimension will vary with product height.

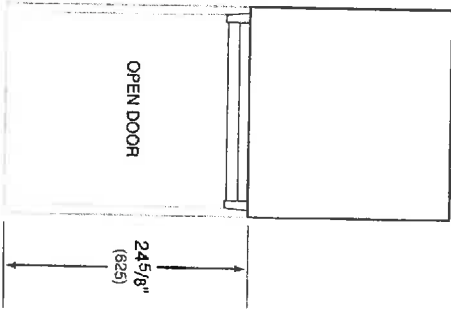

\*Dimension will vary with product height.

HEIGHT

PANEL READY	H
XL Model	32 3/4" (832) – 34 3/4" (883)
XXL Model	34" (864) – 35 3/4" (908)

\*Can be reduced to 32 1/4" (819).


HEIGHT

OUTDOOR	H
Outdoor Model	35" (889) – 35 3/4" (908)

**IMPORTANT NOTE:** Overall dimensions for panel ready models do not include panels or handles. Dimensions will vary with panel thickness.

ASKO DISHWASHERS

Opening Dimensions  
DISHWASHERS

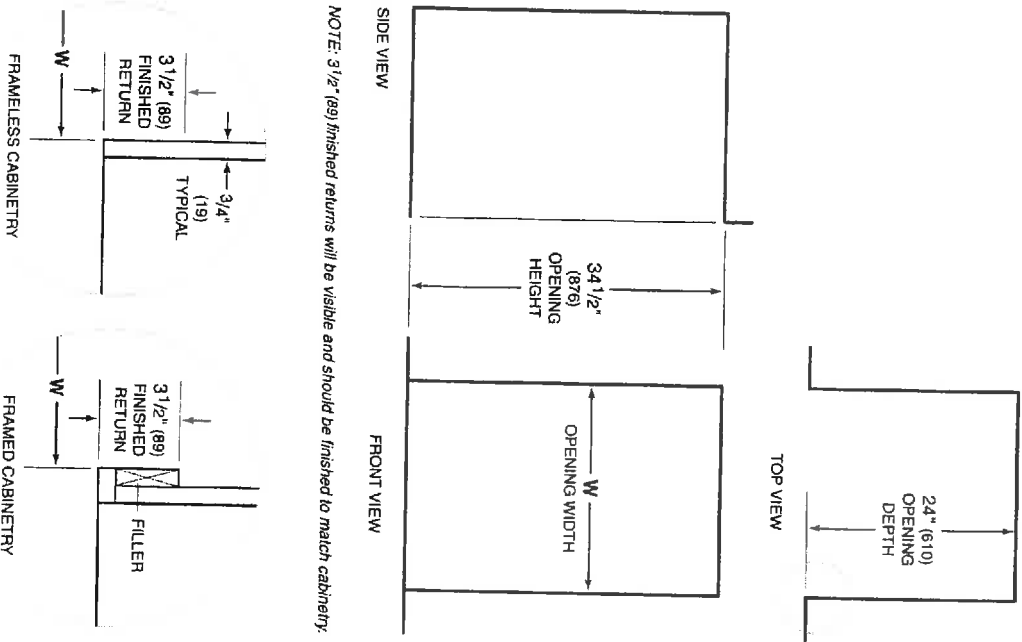

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry.

OPENING WIDTH	
MODEL	W
Integrated Handle	24" (610)
Tubular and Pro Handle	24" (610)
Panel Ready	23 5/8" (600)
Outdoor	24 7/8" (632)

A minimum 3 1/2" (89) finished return is required on all sides of the opening. Framed cabinets will require additional finished filler material behind the face frame for a proper installation. Refer to the illustration.

Integrated handle models and tubular and pro handle models include top and side trim to accommodate slightly larger or smaller openings. If top and side trim are removed, the opening width should be reduced to 23 5/8" (600) to achieve minimum reveals. Panel ready models do not include trim. Dimensions provide minimum reveals.

For ADA installations and height restricted openings, all XL models can be installed in a 32 1/4" (819) opening by removing top trim and lowering side trim.

BoncusH

ASKO DISHWASHERS

60644c

Electrical


The electrical supply should be located in an adjacent cabinet. If the supply cannot be located in an adjacent cabinet, it must be located within the shaded area shown in the illustration below. A separate circuit, servicing only this appliance is required.

**IMPORTANT NOTE:** For the outdoor model, a ground fault circuit interrupter (GFCI) is required to reduce the risk of electrical shock. A GFCI is not recommended for use with other models and may cause interruption of operation.

Installation must comply with all applicable electrical codes.

ELECTRICAL REQUIREMENTS

Electrical Supply	115 VAC, 60 Hz
Service	15 amp
Receptacle	3-prong grounding-type

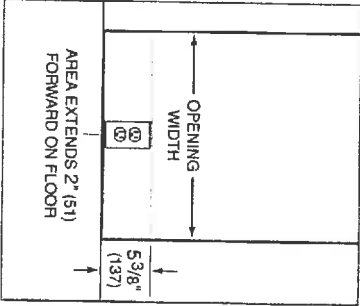

Electrical supply location.

Plumbing


1AUG30/16

The water supply and drain should be located in an adjacent cabinet. If they cannot be located in an adjacent cabinet, they must be located within the shaded area shown in the illustration below. The water supply line should be connected to a hot or cold house supply with an easily accessible shut-off valve between the supply and the unit.

Installation must comply with all applicable plumbing codes.

PLUMBING REQUIREMENTS

Water Connection	6\" (1.8 m) PEX tubing with 3/8\" NPT female connection
Pressure	4.2-140 psi (.3-9.7 bar)

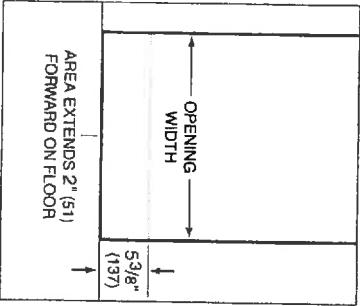

Water supply and drain location.

D.S

ASKO DISHWASHERS

Lob44C

Aug30/11


Custom Panel

PANEL READY

For panel ready models, a custom door panel and handle must be provided. Typical panel dimensions are based on a 23<sup>5</sup>/<sub>8</sub>" (600) opening width and 34<sup>1</sup>/<sub>2</sub>" (876) finished height, with a minimum 4" (102) toe kick and 1/8" (3) reveals. For all other opening widths, the panel should be 1/4" (6) less than the opening to achieve minimum reveals. Panel dimensions must be adjusted accordingly for all other installations. Refer to the chart and illustration below for panel dimensions and requirements.

Finish all sides of the custom panel. They may be visible when the door is open.

PANEL READY			
PANEL DIMENSIONS		W	H
Custom Panel		23 <sup>3</sup> / <sub>8</sub> " (594)	30 <sup>1</sup> / <sub>8</sub> " (765)
PANEL REQUIREMENTS			
Max Weight (including handle)		20 lb (9 kg)	
Min Thickness		3/4" (19)	



Panel dimensions.

D.S

## 36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

SUB-ZERO

BI-36 U/S



### FEATURES

- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Clear-view, triple-pane and UV-resistant glass door
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- "Soft bright" interior lighting
- Over-and-under refrigerator/freezer storage
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience

### ACCESSORIES

- Stainless steel kickplate
- Grilles for 83" or 88" finished height (84" is standard)
- Side panel mounting kit
- Dual installation kit with or without dual wide grille—84" finished height

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



### HANDLE OPTIONS

PRO



TUBULAR



### PRODUCT DETAILS

#### REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with dividers
- 1 Storage drawer with dividers
- 2 Adjustable door shelves
- 1 Stationary door shelf
- Adjustable dairy compartment

#### FREEZER

- Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- Automatic ice maker

10644C  
Aug 30/16


DES

**SUB ZERO**


## DIMENSIONS

6044C  
Aug 30/16

## PLUMBING

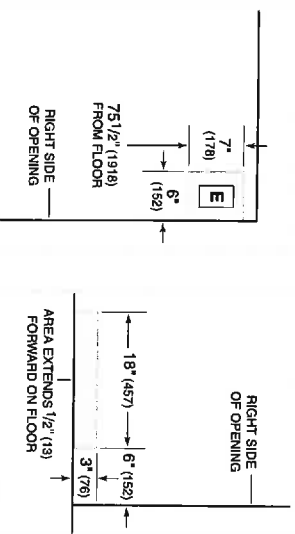


## STANDARD INSTALLATION

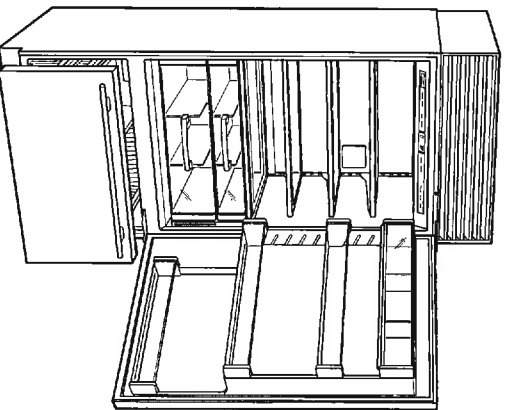

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

**FRONT VIEW**

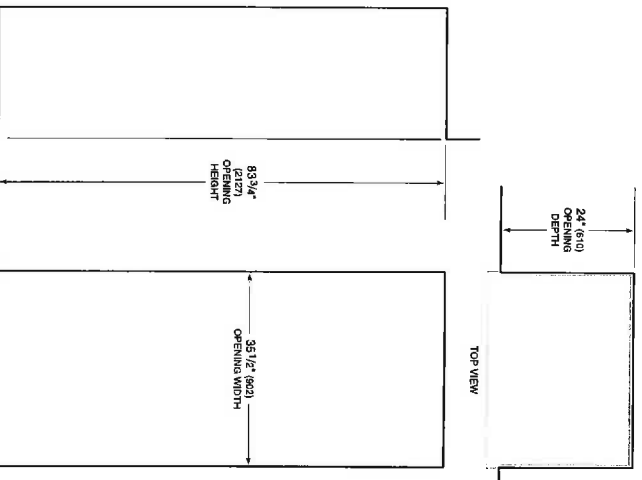

**NOTE:** Shaded line represents profile of unit.



## 36" GAS RANGE - 6 BURNERS

WOLF

GR366



### FEATURES

- 6 dual-stacked, sealed burners
- Dual-stacked, sealed burners for higher highs, lower lows
- Convection oven for faster, more consistent cooking
- Infrared broiler inside oven sears quickly and evenly
- Heavy-gauge stainless steel
- Enhanced views into oven
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Continuous cast-iron grates for easy movement of pots and pans
- Individual spark ignition system
- Adjustable legs for stability, plus rear casters

### ACCESSORIES

- Bake stone kit (stone, rack and peel)
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Full-extension easy glide oven rack
- Cast iron S-grates and wok grate
- Stainless steel kickplate
- Signature red, black or stainless steel control knobs
- Front leg covers
- 5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).




### KNOB OPTIONS



lot 44c

### TOP CONFIGURATION

Aug30/16

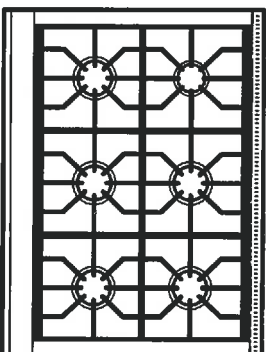

### RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners

D.8

MOLE

## DIMENSIONS

Technical drawing of the LG LDF60100 electric range, showing front and side views with dimensions in inches (") and millimeters (mm).

**Front View Dimensions:**

- Overall Width: 26 9/8" (721 mm)
- Top Panel Width: 27" (686 mm)
- Control Panel Width: 56" (1422 mm)
- Knob Diameter: 9 1/4" (235 mm)
- Control Panel Depth: 46" (1168 mm)
- Base Depth: 41" (1041 mm)
- Back Panel Width: 37" (940 mm)
- Back Panel Depth: 36" (914 mm)
- Back Panel Height: 21 1/2" (545 mm)
- Back Panel Width (at base): 25 3/8" (645 mm)
- Back Panel Depth (at base): 37" (940 mm)

**Side View Dimensions:**


- Overall Depth: 35 7/8" (911 mm)

**Model Number:** LDF60100


**Notes:**

- \*37" (940) MIN TO 38" (965) MAX

## GAS

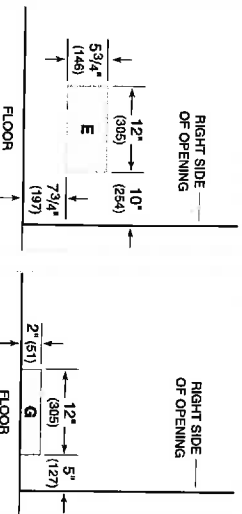

## STANDARD INSTALLATION

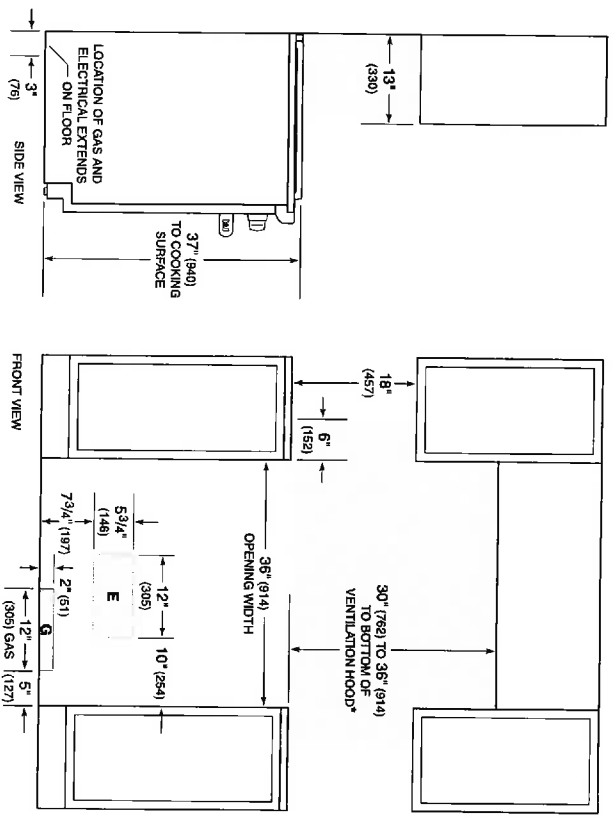

\*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler requires non-combustible material.  
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
For Island Installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.



16644.0

AUG30/16



SU901



## SU901


- Dual Motor (1100 CFM) - EBM
- Pressure: 800 Pa
- Noise level: 66 dBA/5.1 sones



- Lighting: 2x20W Dichroic lamps



- Control panel: 4 speed push-button + timer delay off timer + light switch
- grease filter: commercial style baffle filters

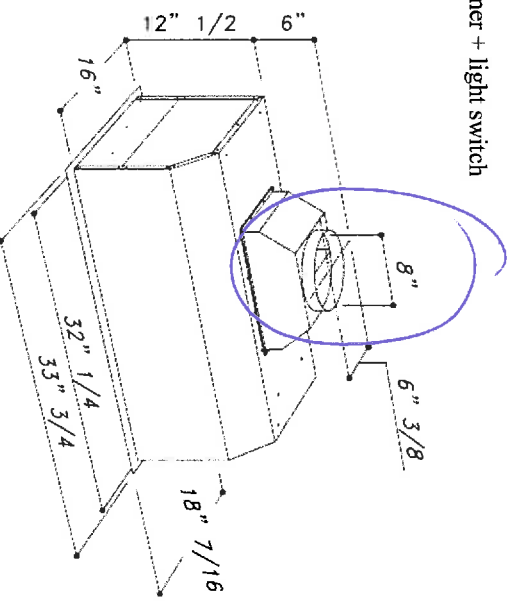

Sirius

D.B




## Electric Dryer


### PRODUCT MODEL NUMBERS

WED72HED, WED81HED, WED8740D, WED87HED, WED95HED, WED97HED


Front view:

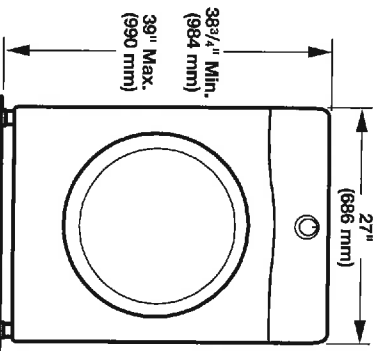

Side view:

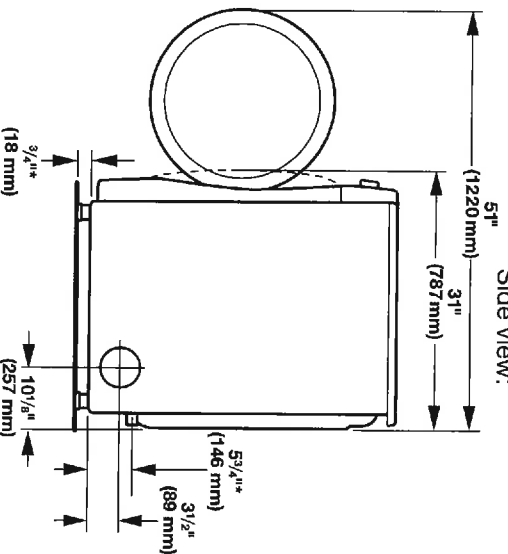

Back view:

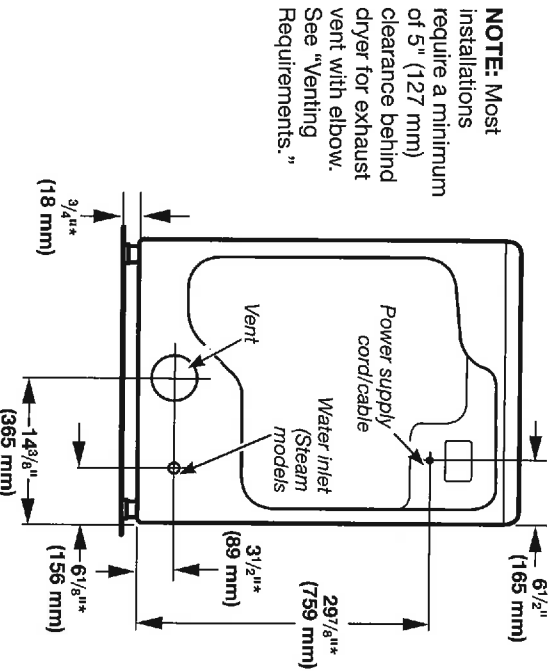


**NOTE:** Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

\* Approx. measurement.

### Installation spacing for recessed area or closet installation

The dimensions shown below are the recommended spacing for this dryer.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable. Companion appliance spacing should also be considered.

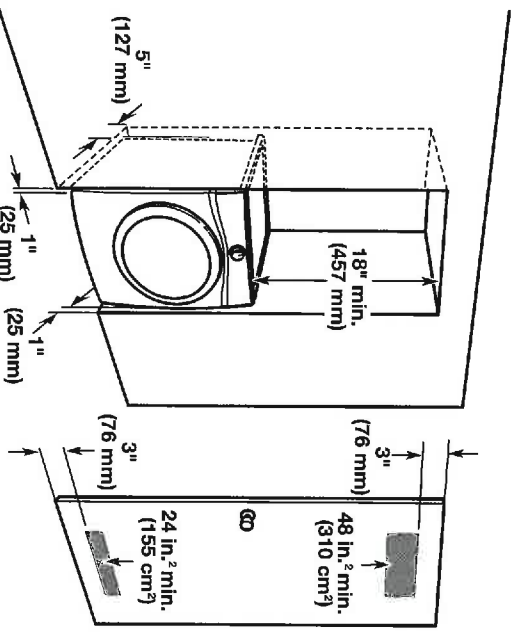

Recommended Installation Spacing:

# ELECTRICAL REQUIREMENTS

To supply the required 3 or 4 wire, single phase, 120/240 volt, 60 Hz., AC only electrical supply (or 3 or 4 wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended. Connect to an individual branch circuit.

Lot 44C  
Aug 30/16


## VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.


The Vent System Chart provides venting requirements that will help achieve best drying performance.

Whirlpool Vent System Chart				
Number of 90° elbows	Type of vent	Box/louvered hoods	Angled hoods	
0	Rigid metal	64 ft. (20 m)	58 ft. (17.7 m)	
1	Rigid metal	54 ft. (16.5 m)	48 ft. (14.6 m)	
2	Rigid metal	44 ft. (13.4 m)	38 ft. (11.6 m)	
3	Rigid metal	35 ft. (10.7 m)	29 ft. (8.8 m)	
4	Rigid metal	27 ft. (8.2 m)	21 ft. (6.4 m)	

**NOTE:** Bottom exhaust installations have a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.




Louvered Hood



Box Hood

### Acceptable Style:



Angled Hood

### Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

### Determine vent length and elbows needed for best drying performance:


- Use following Vent System Chart to determine type of vent material and hood combinations acceptable to use.
- NOTE:** Do not use vent runs longer than those specified in Vent System Chart. Exhaust systems longer than those specified will:
- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.




Front-Loading Washer

PRODUCT MODEL NUMBERS  
WFW88HEA, WFW94HEA, WFW96HEA,  
WFW95HED, WFW97HED

Washer Dimensions:

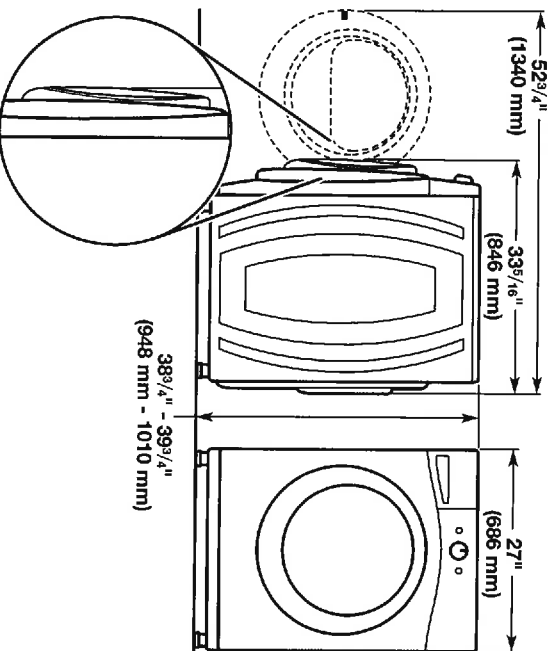

Recessed or closet installation -  
stacked washer and dryer

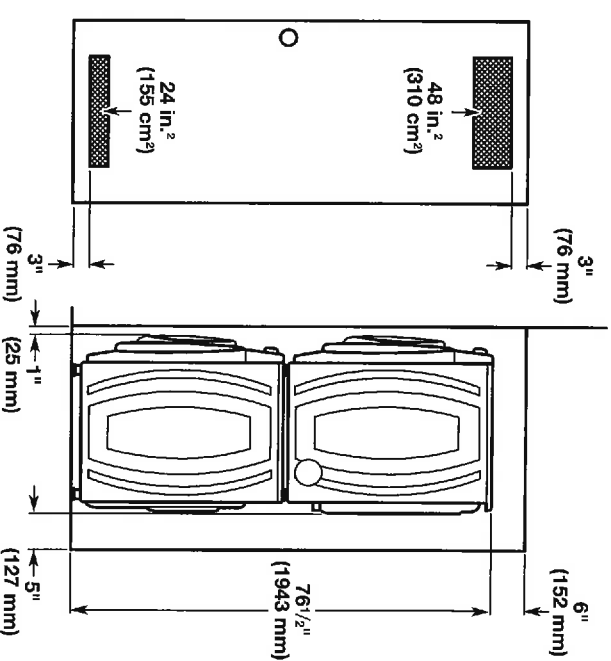


\* Add spacing of 1" (25 mm) on all sides of washer/dryer.


L06440  
A03016

PRODUCT MODEL NUMBERS  
WFW61HEB, WFW70HEB, WFW80HEB,  
WFW8640B, WFW86HEB, WFW72HED,  
WFW81HED, WFW82HED, WFW8740D,  
WFW87HED

Washer Dimensions:

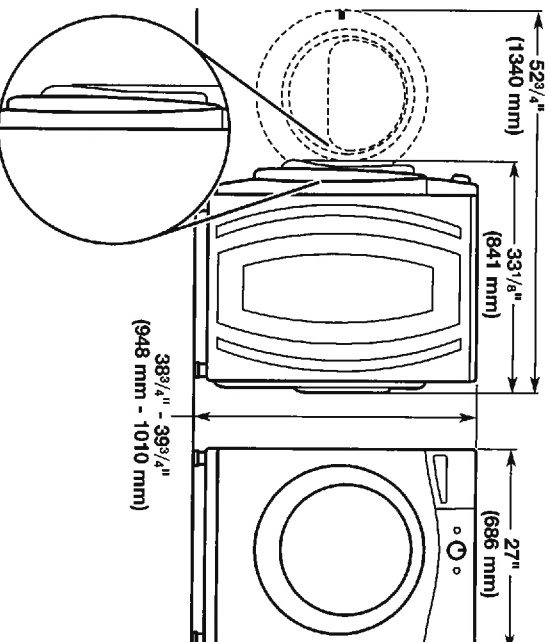


Recessed area or closet installation (washer only):

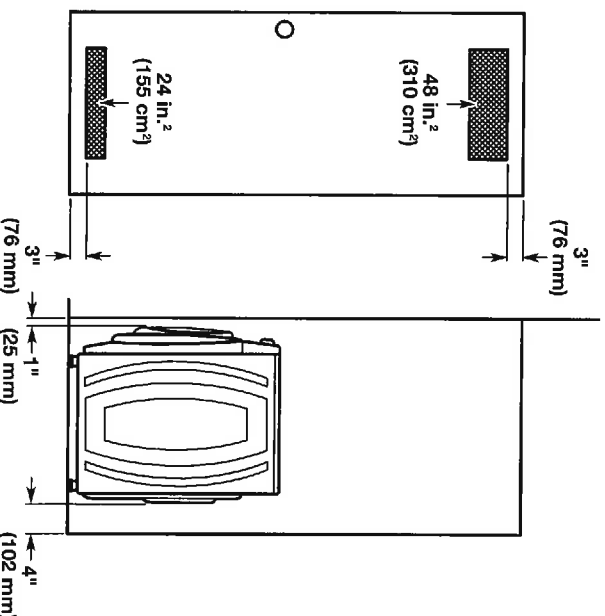

\* Add spacing of 1" (25 mm) on all sides of washer.




### Custom cabinet installation (washer only):

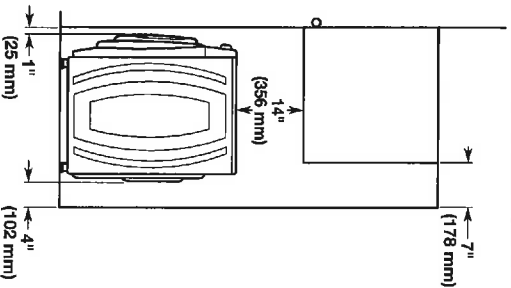

\*\* Recommended 4" (102 mm), minimum 1.5" (38 mm)

### Undercounter installation - washer only:

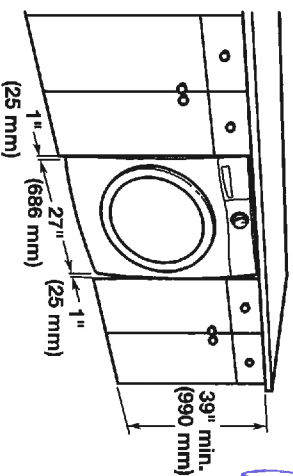

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

## ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

## DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system

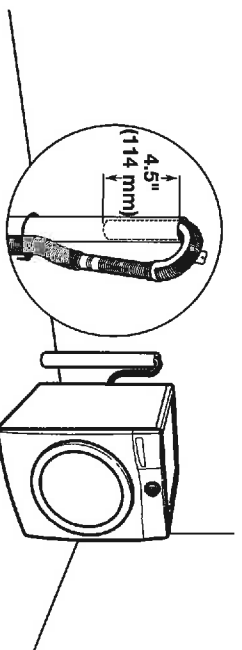


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

### Wall standpipe drain system

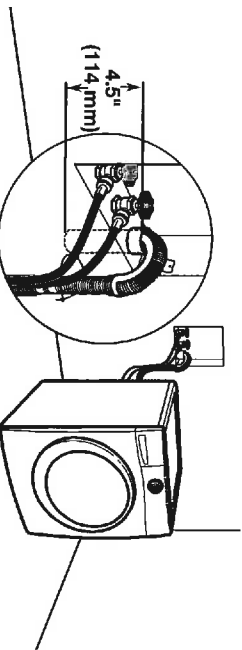


See requirements for floor standpipe drain system.

### Laundry tub drain system

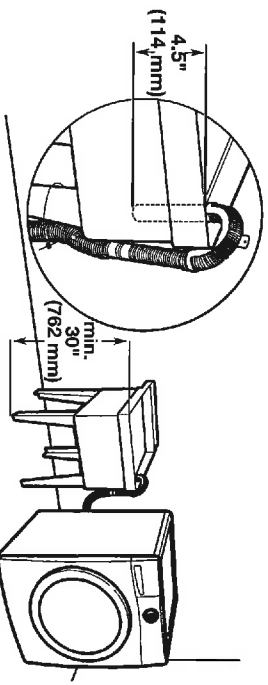

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

### Floor drain system

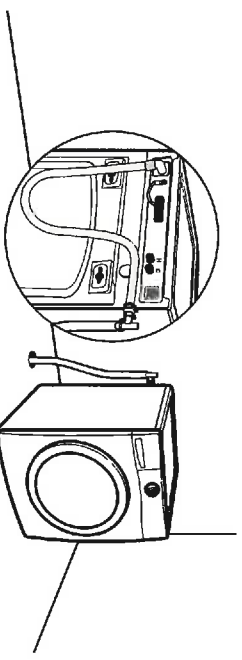

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

106444e

Aug 30/16

10.8