




All Refrigerator


FPRU19F8RF

18.6 Cu. Ft.

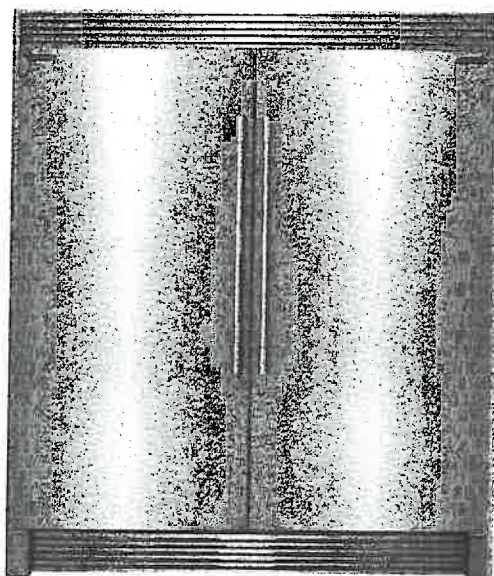

Shown with companion, All-Freezer model FPFU19F8RF and optional coordinated Dual 75" Louvered Trim Kit (TRIMKITE2).

Signature Features




PureAir Ultra[®] Filtration System
Fresh air offers great taste. PureAir Ultra[®] Filtration removes up to 7 times more odour than baking soda to keep ingredients tasting fresh.



SpacePro™ Shelving System
Offers quick access to fresh ingredients with organizational solutions designed for space optimization including SpacePro™ Door Bins, SpacePro™ Crisper Bins and SpacePro™ Full-Width Drawer.



Smudge-Proof™
Resists fingerprints and cleans easily.



Automatic Alerts
Alerts you if the door is left open, if the temperature rises or if the power goes out so your food stays at its optimal temperature.

Product Dimensions

Height (Cabinet Incl. Hinge)	70-5/8"
Width	32"
Depth (Including Door)	26-1/2"

More Easy-To-Use Features

SpacePro™ Crisper Bins

Keep a variety of foods fresh and easily accessible with our SpacePro™ Crisper Bins.

SpacePro™ Full-Width Drawer

Fits a variety of fresh foods for quick access.

SpacePro™ Shelving

Optimize your refrigerator space with adjustable shelving.

SpacePro™ Door Bins

Access fresh food from our adjustable gallon-size door bins quickly.

PowerBright™ LED Lighting

Find fresh foods quickly with PowerBright™ LED Lighting.

PrecisionPro Controls™

Adjust settings at the touch of a button.

Sabbath Mode (Star-K[®] Certified)

Available in:



Optional Trim Kits

Single 70" Louvered

or 75" Collar Trim Kit (TRIMKITE1)

Optional trim kit that is designed to provide a built-in look for the All Refrigerator. Install with louver for 70" fit or easy-to-remove louver for a 75" fitted collar look.

Dual 70" Louvered

or 75" Collar Trim Kit (TRIMKITE2)

Optional trim kit that is designed to provide a built-in look for the All Refrigerator and All Freezer when the units are installed next to each other. Install with louver for 70" fit or easy-to-remove louver for a 75" fitted collar look.

*Based on a six-hour closed door test of certain common produce in the fresh food compartment of a 21 Cu. Ft. refrigerator.

RECEIVED

SEP 06 2016

frigidaire.ca

39 Castles

FRIGIDAIRE

PROFESSIONAL.

All Refrigerator

FPRU19F8RF 18.6 Cu. Ft.

Features	
Door Design	Flat
Door Finish	Smudge-Proof™ Stainless Steel
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Hinge Covers	Hidden
Automatic Door Closer	Yes
Leveling System/Leveling Legs	Yes/4
Controls	
Controls	PrecisionPro™
Location of Controls	Inside Cabinet, on Top
Temperature Display C°/F°	Yes
Control Lock/Light	Yes/No
Temp Failure Alerts (Audible & Duration)	Yes
Door Ajar Alert (Audible)	Yes
Power Failure Alert (Duration)	Yes
Air Filter/Air Filter Change Indicator Light	PureAir Ultra®/Yes
Refrigerator Features	
Refrigerator Shelves	2 SpacePro™ Adjustable Glass
Full-Width Deli Drawer	1 SpacePro™
Full-Width Bottom Crisper	1 SpacePro™
Crisper Divider Quantity	2 (Per Crisper)
Full-Width Gallon Door Bin	2 Clear SpacePro™
Half-Width Litre Bin	4 Clear SpacePro™
Dairy Bin	1 Clear
Lighting	8-Point PowerBright™ LED
Optional Accessories	
Single Louvered Trim Kit	PN# TRIMKITEZ1
Dual Louvered Trim Kit	PN# TRIMKITEZ2
Certifications	
Sebbath Mode (Star-K® Certified)	Yes
Specifications	
Total Capacity (Cu. Ft.)	18.6
Shelf Area (Sq. Ft.)	20.6
Annual Energy (kWh)	331
Annual Energy Cost (12/kWh)	\$40
Power Supply Connection Location	Right Bottom Rear
Voltage Rating	115V/60Hz/20A
Connected Load (kW rating) @ 115 Volts¹	0.55
Amps @ 115 Volts	15
Minimum Circuit Required (Amps)	20
Shipping Weight (Approx.)	245 Lbs.

¹An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current local and national codes & ordinances.

Optional Trim Kits


Kits include top and side trim pieces, louvered grille, reversible kickplate and leveling system to fit 75" or 79" opening height.

Single 79" Louvered or 75" Collar Trim Kit
PN# TRIMKITEZ1

Dual 79" Louvered or 75" Collar Trim Kit
PN# TRIMKITEZ2

(Includes hardware to secure side-by-side units together.)

Note: Both kits attach directly to cabinetry through top trim piece or louvered grille to stabilize unit(s).

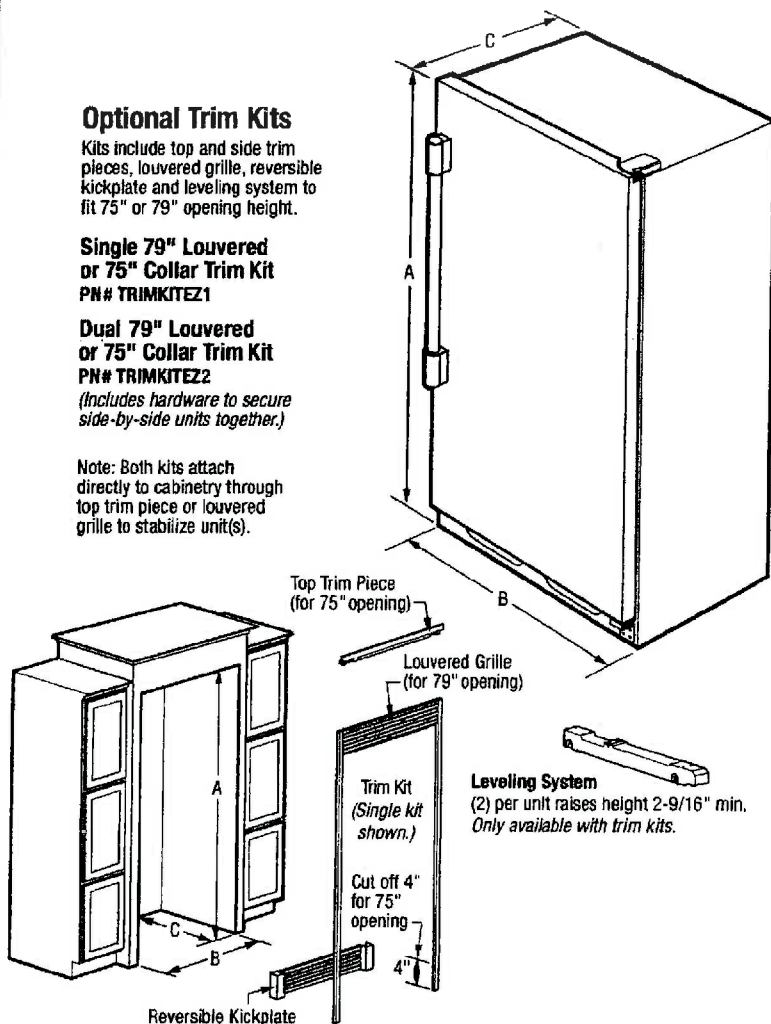

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Overall Exterior Dimensions

A-Height (Incl. Door)/(Cabinet Incl. Hinge)	71-3/8"/70-5/8"
B-Width	32"
C-Depth (Incl. Door)	26-1/2"
Depth with Door Open 90°	57-3/8"

Built-In Cutout Dimensions

Single Unit without Trim Kit -

A-Height	72"
B-Width	33"
C-Depth	25 1/4" min¹

Single Unit with Trim Kit & Leveling System

A-Height	75" or 79"
B-Width	33"
C-Depth	25 1/4" min¹

Built-In Cutout Dimensions

Dual Unit² without Trim Kit -

A-Height	72"
B-Width	66"
C-Depth	25 1/4" min¹

Dual Unit² with Trim Kit & Leveling System -

A-Height	75" or 79"
B-Width	66"
C-Depth	25 1/4" min¹

¹Minimum depth from face of cabinet side panels and requires recessed electrical outlet.

²Side-by-Side

39 Castles

Accessories information available on the web at frigidaire.ca

RECEIVED

SEP 06 2016

Specifications subject to change


Printed in Canada

FRIGIDAIRE

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FPRU19F8R 07/15

© 2015 Electrolux Major Appliances, NA

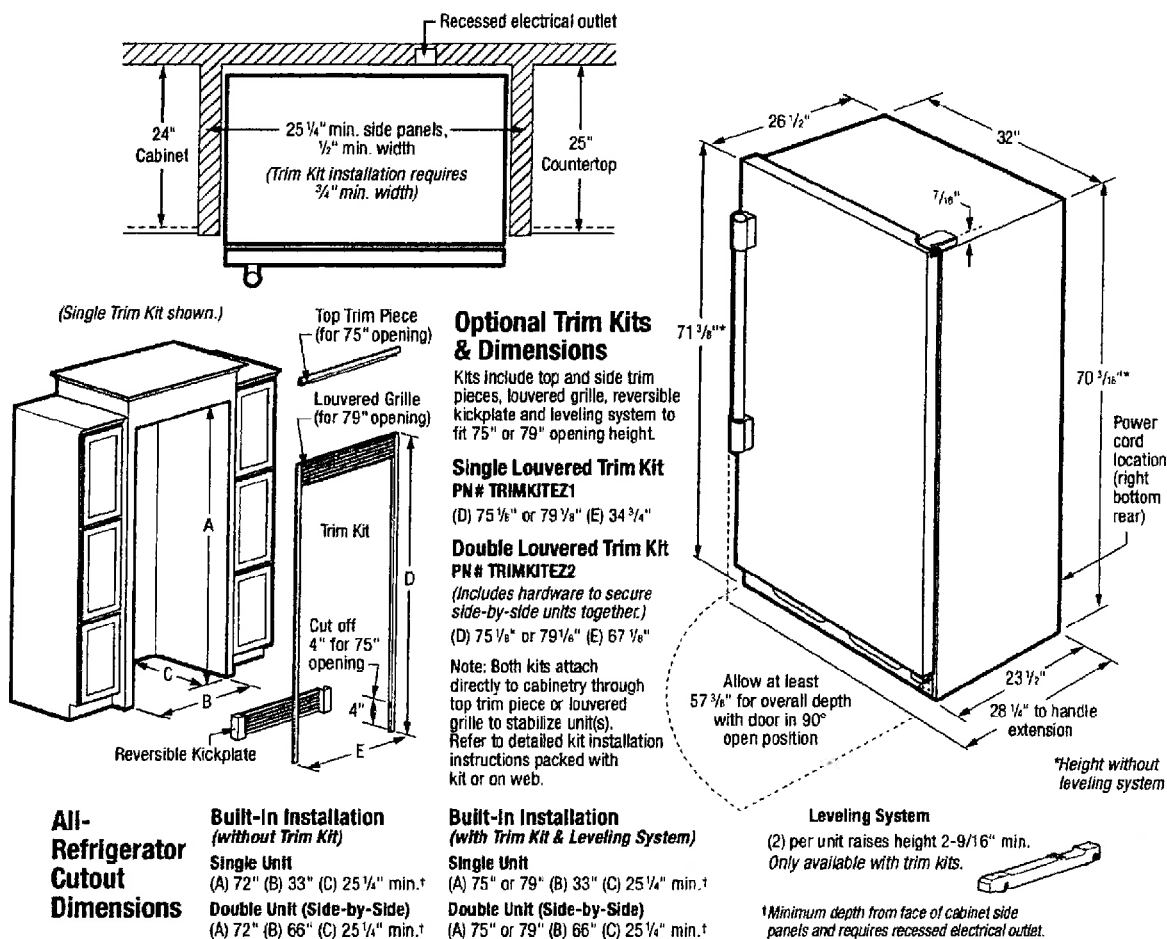

Built-In All-Refrigerator Specifications

- Product Shipping Weight - 245 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of *National Electrical Code (NECA 70)* and local codes & ordinances.
- Voltage Rating - 115V/60 Hz/20 Amps
- Connected Load (kW Rating) @ 115 Volts = 0.55 kW
- Amps @ 115 Volts = 15 Amps
- Always consult local and national electric codes.
- Minimum 25-1/4" depth requires recessed electrical outlet.
- To allow for ease of installation, tape excess power cord to back of unit.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete drawer / crisper access and removal. (Absolute 4" minimum clearance will ONLY allow for 90° door swing which will provide limited drawer / crisper access with restricted removal.)
- Minimum 3/8" clearance required for sides and top of refrigerator or freezer with 1" clearance at rear to allow for ease of installation, proper air circulation, and plumbing / electrical connections
- To ensure optimum performance, (do not install in areas where temperature drops below 55°F or rises above 110°F) and avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- Refrigerator must be placed on level surface of hard material, same height as flooring. Surface must support approximately 800 lbs. when fully loaded. Unit equipped with 4-point leveling

"Built-In Look" Specifications

- Minimum opening of 72" H x 33" W x 25-1/4" D required for single-unit "Built-In Look" installation; 66" W required for double-unit installation. (72" H to be measured from finished floor to underside of soffit or overhead cabinet.)
- Remove all wall / floor moulding prior to built-in installation

Optional Trim Kit Specifications

- If optional Single or Double Louvered Trim Kit is to be used, different cutout dimensions are required. Kit can be adapted to fit either 75" or 79" opening height (Refer to cutout dimensions on this page and detailed Louvered Trim Kit installation instructions included with kit or on web.)
- Remove all wall / floor moulding prior to built-in installation

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detailed instructions.

Optional Accessories

- Single Louvered Trim Kit - (PN # TRIMKITZ1).
- Double Louvered Trim Kit - (PN # TRIMKITZ2).
- PureAdvantage® Air Filter Replacement Cartridge - (PN # 241754001).



lot 39

Features	
Door Design	Flat
Door Finish	Smudge-Proof™ Stainless Steel
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Hinge Covers	Hidden
Automatic Door Closer	Yes
Leveling System/Leveling Legs	Yes/4
Controls	
Controls	PrecisionPro™
Location of Controls	Inside Cabinet, on Top
Temperature Display C°/F°	Yes
Control Lock/Light	No/Yes
Temp Failure Alerts (Audible & Duration)	Yes
Door Ajar Alert (Audible)	Yes
Power Failure Alert (Duration)	Yes
Air Filter/ Air Filter Change Indicator Light	PureAir Ultra*/Yes
Freezer Features	
Freezer Shelves	2 SpacePro™ Adjustable Glass
PowerPlus® Ice Maker	Yes
Ice Bin	Yes
Full-Width Mid-Level Basket	1 Plastic SpacePro™
Full-Width Bottom Basket	1 Plastic SpacePro™
Full-Width Gallon Door Bin	1 Clear SpacePro™
Half-Width Litre Bin	5 Clear SpacePro™
Soft Freeze™ Zone	Yes
Lighting	8-Point PowerBright™ LED
Optional Accessories	
Single Louvered Trim Kit	PN# TRIMKITEZ1
Dual Louvered Trim Kit	PN# TRIMKITEZ2
Certifications	
Sabbath Mode (Star-K® Certified)	Yes
Specifications	
Total Capacity (Cu. Ft.)	18.6
Shelf Area (Sq. Ft.)	20.9
Annual Energy (kWh)	593
Annual Energy Cost (12/kWh)	\$71
Power Supply Connection Location	Right Bottom Rear
Water Inlet Location	Left Bottom Rear
Voltage Rating	115V/60Hz/20A
Connected Load (kW rating) @ 115 volts ²	0.55
Amps @ 115 Volts	15
Minimum Circuit Required (Amps)	20
Shipping Weight (Approx.)	245 Lbs.

An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current local and national codes & ordinances.

Optional Trim Kits



Kits include top and side trim pieces, louvered grille, reversible kickplate and leveling system to fit 75" or 79" opening height.

Single 79" Louvered or 75" Collar Trim Kit PN# TRIMKITEZ1

Dual 79" Louvered or 75" Collar Trim Kit PN# TRIMKITEZ2

(Includes hardware to secure side-by-side units together.)

Note: Both kits attach directly to cabinetry through top trim piece or louvered grille to stabilize unit(s).

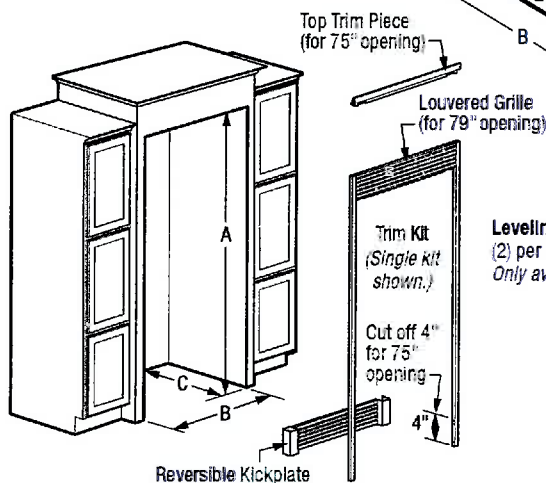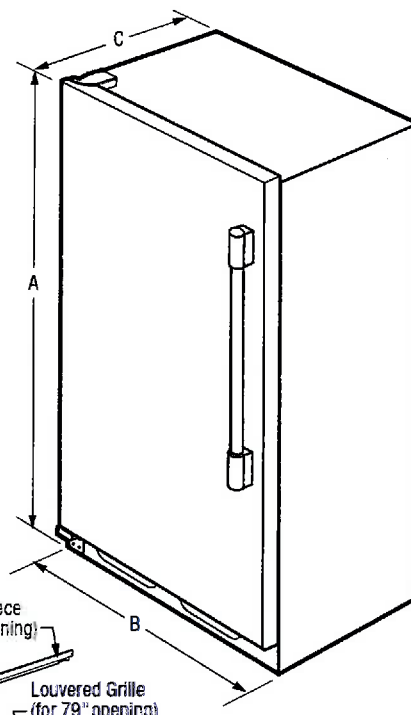

Leveling System
(2) per unit raises height 2-9/16" min.
Only available with trim kits.

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Overall Exterior Dimensions

A-Height (Incl. Door)/(Cabinet Incl. Hinge)	71-3/8"/70-5/8"
B-Width	32"
C-Depth (Incl. Door)	26-1/2"
Depth with Door Open 90°	57-3/8"

Built-In Cutout Dimensions

Single Unit without Trim Kit -	
A-Height	72"
B-Width	33"
C-Depth	25-1/4" min. ¹
Single Unit with Trim Kit & Leveling System -	
A-Height	75" or 79"
B-Width	33"
C-Depth	25-1/4" min. ¹

Built-In Cutout Dimensions

Dual Unit ² without Trim Kit -	
A-Height	72"
B-Width	66"
C-Depth	25-1/4" min. ¹
Dual Unit ² with Trim Kit & Leveling System -	
A-Height	75" or 79"
B-Width	66"
C-Depth	25-1/4" min. ¹

¹Minimum depth from face of cabinet side panels and requires recessed electrical outlet.

²Side-by-Side


Accessories information available on the web at frigidaire.ca

39 Castles





39 Castles

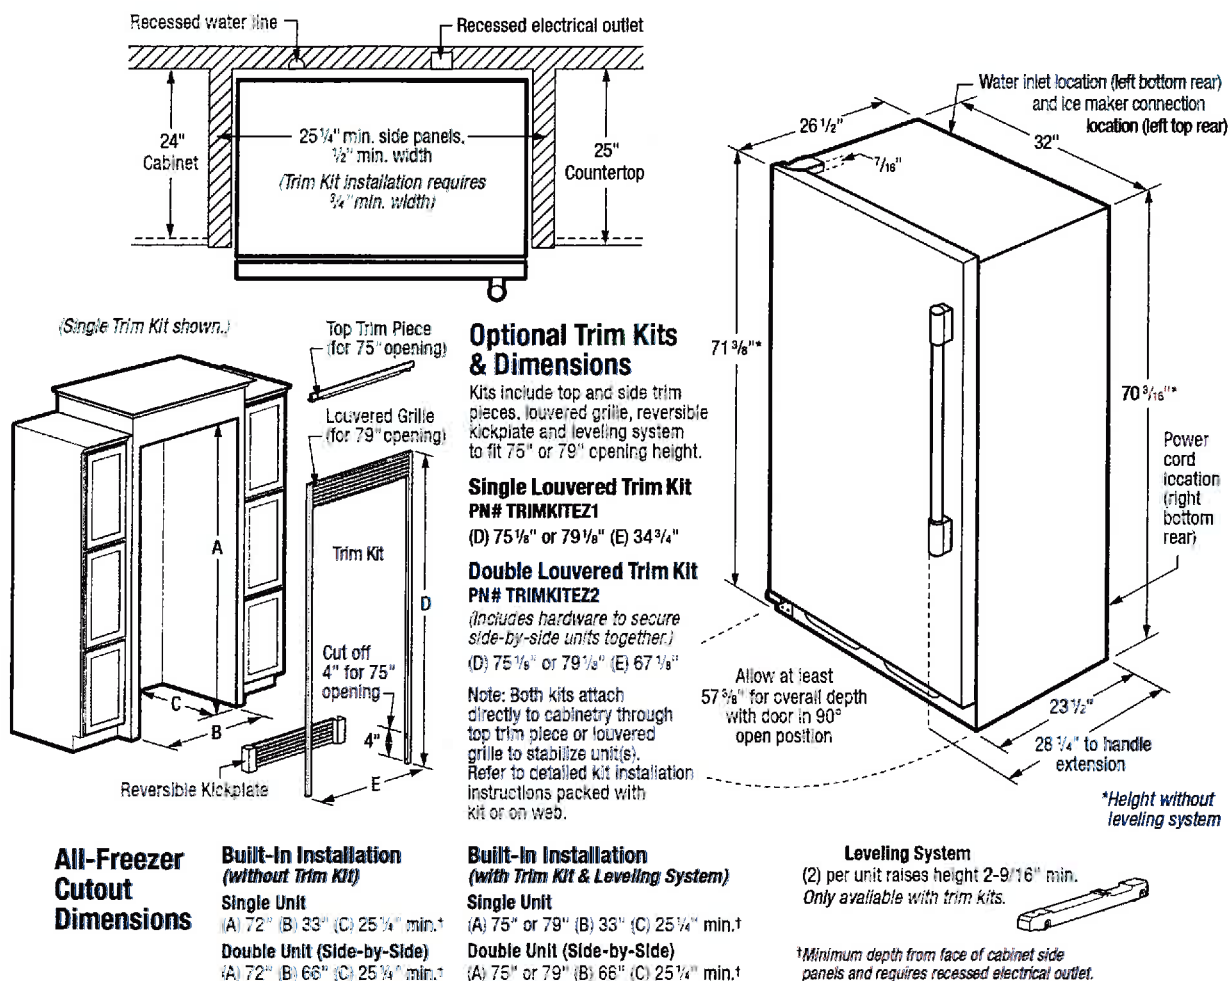

Built-In All-Freezer Specifications

- Product Shipping Weight = 245 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating = 115V/60 Hz/20 Amps
- Connected Load (kW Rating) @ 115 Volts = 0.55 kW
- Amps @ 115 Volts = 15 Amps
- Always consult local and national electric & plumbing codes.
- Water line for ice maker can enter opening through floor or rear wall. Copper tubing recommended between cold water line and water connection location. Water line tubing recommended is 48" minimum length by 1/4" diameter. Installation of easily accessible shutoff valve in water line required.
- Minimum 25-1/4" depth requires recessed electrical outlet and copper water line.
- To allow for ease of installation, tape excess power cord to back of unit.
- To allow for ease of moving out side-by-side units after installation, 84" minimum length of coiled copper tubing recommended.
- When installing freezer adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete drawer / crisper access and removal. (Absolute 4" minimum clearance will ONLY allow for 90° door swing which will provide limited drawer / crisper access with restricted removal.)
- Minimum 3/8" clearance required for sides and top of refrigerator or freezer with 1" clearance at rear to allow for ease of installation, proper air circulation, and plumbing / electrical connections.

- To ensure optimum performance, (do not install in areas where temperature drops below 55°F or rises above 110°F) and avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- Freezer must be placed on level surface of hard material, same height as flooring. Surface must support approximately 800 lbs. when fully loaded. Unit equipped with 4-point leveling.

"Built-In Look" Specifications

- Minimum opening of 72" H x 33" W x 25-1/4" D required for single-unit "Built-In Look" installation; 66" W required for double-unit installation. (72" H to be measured from finished floor to underside of soffit or overhead cabinet.)
- Remove all wall / floor moulding prior to built-in installation.

Optional Trim Kit Specifications

- If optional Single or Double Louvered Trim Kit is to be used, different cutout dimensions are required. Kit can be adapted to fit either 75" or 79" opening height. (Refer to cutout dimensions on this page and detailed Louvered Trim Kit installation instructions included with kit or on web.)
- Remove all wall / floor moulding prior to built-in installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detailed instructions.

Optional Accessories

- Single Louvered Trim Kit - (PN # TRIMKITEZ1).
- Double Louvered Trim Kit - (PN # TRIMKITEZ2).
- PureAdvantage® Air Filter Replacement Cartridge - (PN # 241754001).



Specifications
subject to change.
Printed in Canada

DO30PM/S/PH



FEATURES

10 cooking modes for predictably delicious results (Convection, Roast, Bake, Broil, Convection Roast, Stone, Gourmet, Warm, Proof and Dehydrate)

Advanced Dual VertiCross convection system for faster preheats and consistent cooking across all racks

Gourmet feature has menu of presets that automatically controls cooking of popular meals

Interactive color touchscreen for advanced cooking control

Quiet-close doors with spring-and-damper door hinge system

Can be installed flush with surrounding cabinetry for integrated look

Choose from signature red, black or stainless control knobs

5.1 cubic feet capacity to handle multiple dishes at once

Enhanced interior views with triple-pane glass and three halogen lights

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

Bake stone kit (stone, rack and peel)

Dehydration kit (racks and door stop)

Full-extension easy glide oven rack

Temperature probe and broiler pan

Set of three standard oven racks

Signature red, black or stainless steel control knobs

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS




39 Castles




PRODUCT SPECIFICATIONS

Model	DO30PM/S/PH
Dimensions	29 7/8"W x 50 7/8"H x 23"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 19 7/8"D
Oven 2 Interior Dimensions	25 1/4"W x 17 1/2"H x 19 7/8"D
Overall Capacity	5.1 cu ft
Usable Capacity	3.3 cu ft
Door Clearance	21 3/8"
Weight	466 lb
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Conduit Length	5 feet


DIMENSIONS

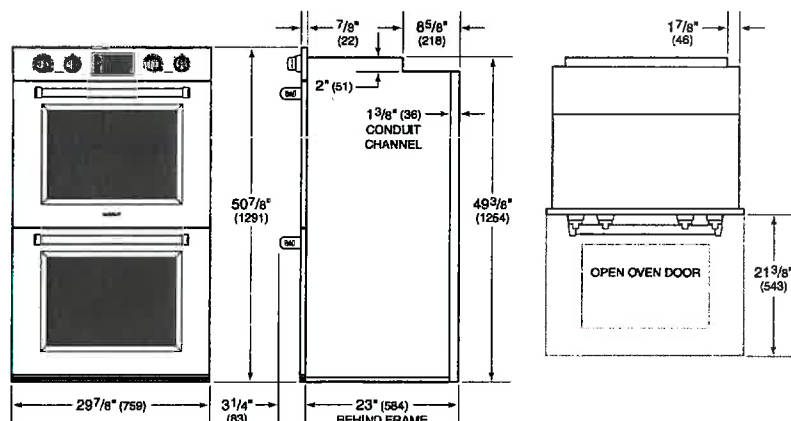

ELECTRICAL



STANDARD INSTALLATION

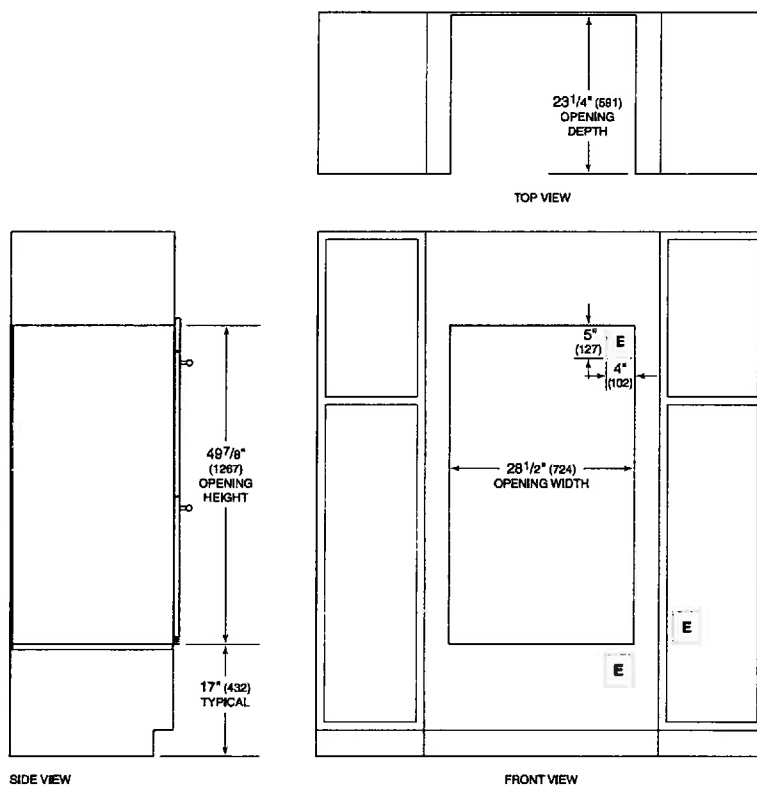

NOTE: Location of electrical supply within opening may require additional cabinet depth.

39 castles



DV56H9100EG

Samsung Front-Load Electric Dryer

9.5 cu. ft. Capacity IEC

Features


- Eco Dry
- Steam Drying Technology:
 - Steam Refresh
 - Steam Wrinkle Away
- Vent Sensor™
- Sensor Dry – Detects Moisture and Adjusts Drying Time
- Smart Care™
- Stainless Steel Drum
- 15 Preset Drying Cycles
- 11 Options
- 5 Temperature Settings
- 4-Way Venting
- Dual Heaters
- Drying Rack
- Dryer Drum Light
- Reversible See-Through Door

Convenience

- Child Lock
- My Cycle Option
- Lint Filter Indicator



9.5 cu. ft. Capacity

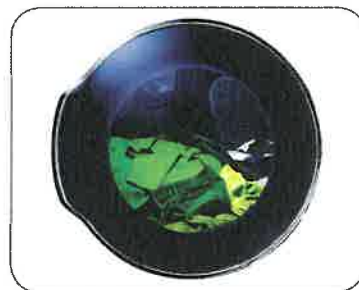

Eco Dry

Available Colour:



Onyx
(shown)



Signature Features

9.5 CU. FT. CAPACITY

- Our biggest capacity lets you dry 4 laundry baskets in a single load.*

*Based on an 8 lbs. load of laundry per basket.

ECO DRY

- 25% more energy savings*.
- With Eco Dry, save up to \$300 over lifetime of the dryer.**

*Saves 25% of energy based on U.S. Department of Energy standard test. Visit www.energy.gov for more information.

**Current Samsung dryers without Eco Dry use approximately 965 kWh while Eco Dry uses approximately 710 kWh. This provides a savings of \$25 annually, which, over the 12-year lifespan of the dryer, offers a saving of approximately \$300.

39 Castles

NSF

ENERGY STAR 2013
Emerging Technology Award

Awarded the U.S. Environmental
Protection Agency's 2013 ENERGY STAR®
Emerging Technology Award.

VENT SENSOR™

- Duct blockage sensing.
- Detects problems and reminds you when to clean your vent to avoid lint blockages.
- Cleaning vents regularly improves dryer performance.

SAMSUNG

SHARP

SMD2477ASC

24-INCH MICROWAVE DRAWER® OVEN



TAKE YOUR MICROWAVE TO A BETTER PLACE

It's your kitchen, your design and your lifestyle. Sharp's Microwave Drawer Oven allows you to focus on the design elements you prefer by removing the microwave from sightlines and enabling more design versatility. The Microwave Drawer offers flexible placement options below an island, peninsula, or standard cabinetry, and can also be installed adjacent to your wall oven. The Microwave Drawer allows you to showcase your design savvy and create a kitchen that flows with your lifestyle.

Sharp introduces the next generation of this successful appliance—model SMD2477ASC—a 24" microwave drawer with a simpler and a sleeker design to match more built-in appliances.

Design Flexibility

Sharp's Microwave Drawer product expands the option for microwave placement in almost any kitchen plan—it's a perfect choice for open-plan kitchens, islands, peninsulas, and a great addition to wet bars, family rooms and home theatres.

Location and Counter Space Saving

You may place the drawer under a counter, cooktop or wall oven or above a warming drawer without a built-in kit, additional trim or venting. Sharp microwave drawer provides the best solution for a cleaner, uncluttered counter space.

SHARP's Exclusive AutoTouch™ System

Sharp's exclusive AutoTouch™ system allows you to open and close the drawer automatically at one-finger operation by pressing a button on the control panel.

New Hidden Control Panel

The new SMD2477ASC model features a hidden control panel which gives a more integrated look and feel within the kitchen. The new tall control panel, angled at 45° degrees, is easy to see, easy to access and easy to use.

Specifications

TECHNICAL SPECIFICATIONS

Size	24" wide
Microwave Capacity	1.2 cu.ft
Microwave Power	950 watts
Control Panel	Digital LCD Display
Control Type	Hidden Control Panel
Drawer Opening	AutoTouch™ System
Power Level	11
Sensor Cook, Reheat, Popcorn Settings	13
Reheat Auto Settings	2
Defrost Auto Settings	6
Keep Warm Setting	Yes, up to 30 min.
Melt / Soften / Settings	Yes
Beverage Setting	Yes
Programmable Stages	Yes, 4
Digital Clock	Yes
Kitchen Timer	Yes
Child Lock	Yes
+30 sec	Yes
Interior Oven Light	Yes

TECHNICAL SPECIFICATIONS CONTINUED


Demonstration Mode	Yes
Built-in Ready	Yes
Available Colour	Stainless Steel
Accessory	SKMD24F0AS
DIMENSIONS/WEIGHT(Inches/lbs.)	
Cut-out Dimension	22 1/8" x 15 9/16"
Product Dimension	23 7/8" x 23 1/64" x 15 7/8"
Box Dimension	29.8" w x 27.9" x 21.9"
Net Weight	74 lb.
Gross Weight	85.8 lb.

POWER/SAFETY


Power / Ratings	120V, 60Hz
Ratings	1.67Kw, 14.5Amps
Safety Compliance	FCC, DHHS cUL

WARRANTY/UPC

Warranty	1 year parts & labour with in-home service; 4 additional years for magnetron tube only
UPC	074000619944

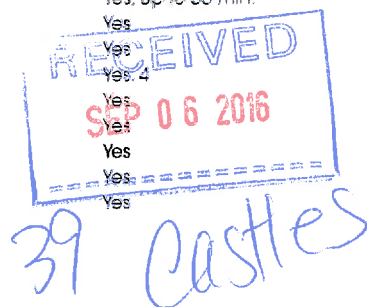

Installation Guide

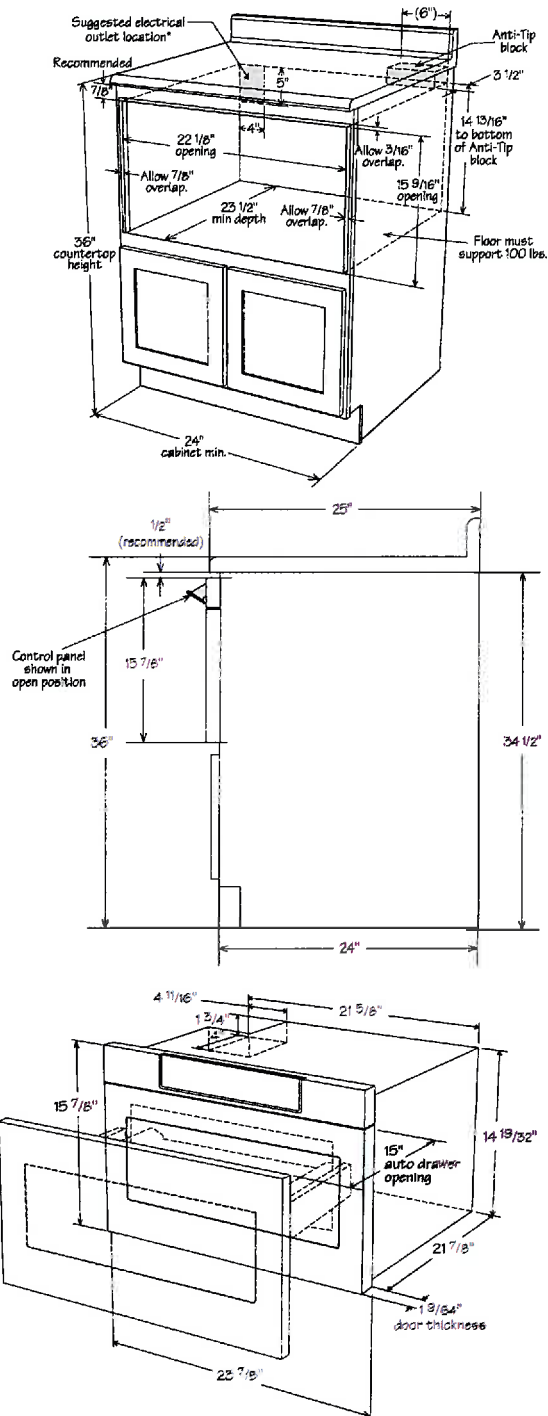

RECEIVED

SEP 06 2016

39 Castles

SRT366



FEATURES

6 dual-stacked, seamless burners

Dual-stacked burners go from 20,000 Btu down to a mere breath of flame

Continuous cast-iron grates for easy movement of pots and pans

Heavy-gauge stainless steel

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Signature red infinite control knobs

Individual spark ignition system

ACCESSORIES

Stainless steel, brass or chrome bezels

High altitude conversion kit

Cast iron S-grates and wok grate

Signature red, black or stainless steel control knobs

5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

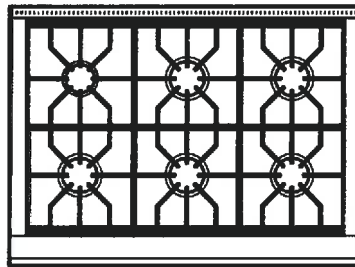

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner



39 Castles



SU901

SU901

- Dual Motor (1100 CFM) - EBM
- Pressure: 800 Pa
- Noise level: 66 dBA/5.1 sones



- Lighting: 2x20W Dichroic lamps




- Control panel: 4 speed push-button + timer delay off timer + light switch

- grease filter: commercial style baffle filters



39 Castles

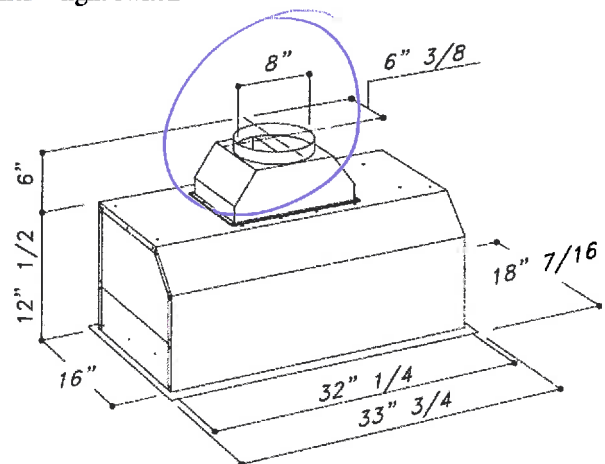

Sirius

WF56H9100AG

Samsung Front-Load Washer

6.5 cu. ft. Capacity IEC

Features

- PowerFoam™
- Steam Washing
- SuperSpeed
- Smart Care™
- Self Clean+
- VRT Plus®
- Eco Cold Wash
- Swirl Drum Design
- Direct Drive Motor
- 1300 rpm Maximum Spin Speed
- Internal Water Heater
- 15 Preset Wash Cycles
- 13 Options
- Garment+

Convenience

- Child Lock
- Door Lock
- Drum Light
- Dispenser Trays: Prewash, Main Wash, Softener, Bleach



ENERGY STAR® rated:
CEE Tier 3
MEF=3.55
WCF=2.5
100 kWh/yr



6.5 cu. ft. Capacity



PowerFoam

Available Colour:



Onyx
(shown)



Signature Features

39 Cycles

3x THE LAUNDRY, 1/3 OF THE TIME*

- Our biggest capacity lets you wash 4 laundry baskets in a single load.**

*Based on a 3 standard loads of laundry (based on baskets) at 60 minutes each, total clean time is equal to 180 minutes which is equivalent to 1 load in the 9100.
**Based on an 8-lb load of laundry.

SUPERSPEED

- 50% faster wash cycle.*
- Wash a full load in only 30 minutes.*
- Save over 3 hours of laundry time every week.**
- Laundry gets done quicker without loss of performance.

*Normal one-hour wash can now be completed in as little as up to 30 minutes as compared to Samsung WF511 washer without SuperSpeed. Based on DOE standard's average of 7.5 loads per week.

**DOE consumer average of 350-1000 loads per year with average normal wash cycle of 53 minutes equals a time savings of over 3 hours per week.

POWERFOAM

- Powerful washing performance.
- Creates a powerful yet gentle foam that easily penetrates through fabrics.
- Confidently wash even your largest loads.



Ranked "Highest in Customer Satisfaction with Clothes Washers" in 2013 & 2014 by J.D. Power and Associates.




Achieved the U.S. Environmental Protection Agency's 2014 ENERGY STAR® "Most Efficient" designation.

SAMSUNG


WF56H9100AG

Samsung Front-Load Washer


Installing Options




Stacked



Side by Side



On Pedestals



Stacked Depth


Installing Your Washer

1. Alcove or closet installation

Minimum clearances for closet and alcove installations:

Sides – 1"
Rear – 5 7/8"
Top – 17"
Closet Front – 2"


If the washer and dryer are installed together, the closet front must have at least a 72" unobstructed air opening. Your washer alone does not require a specific air opening.

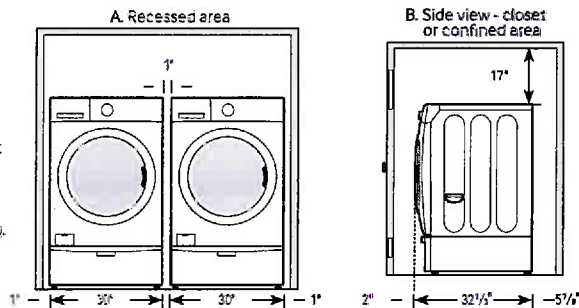


Dimensions

2. With optional pedestal base or stacking kit


Required Dimensions for Installation with Pedestal



Required Dimensions for Installation with Stacking Kit

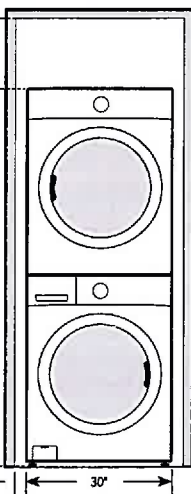

* Required spacing.
** External exhaust elbow requires additional space.

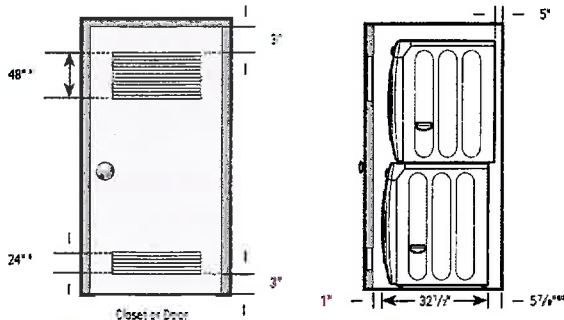

6.5 cu. ft. Capacity IEC

15 Preset Wash Cycles:

Eco Cold Wash, Normal, Heavy Duty, Permanent Press, Sanitize, Allergen, Towels, Bedding, Deep Steam, Whites, Active Wear, Delicates, Wool, Quick Wash, Rinse and Spin

13 Options:

SuperSpeed, Steam, Self Clean+, Delay End, My Cycle, Prewash, Extra Rinse, Extra Spin, Spin Only, Sound, Child Lock, Smart Care, Drum Light

5 Temperature Settings:

Extra Hot, Hot, Warm, Eco Warm, Cold

5 Spin Settings:

Extra High, High, Medium, Low, No Spin

5 Soil Settings:

Heavy, Heavy Medium, Normal, Low Medium, Light

Dispenser Trays:

Prewash, Main Wash, Softener, Bleach

Warranty

One (1) Year Parts and Labour

Two (2) Years Control Board

Three (3) Years Stainless Steel Drum

Ten (10) Years Direct Drive Motor

Product Dimensions & Weight (WxHxD)

Dimensions: 30" x 42 5/8" x 32 1/2"

Weight: 267 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 31 7/8" x 46 1/4" x 33 5/8"

Weight: 278 lbs

Colour

Onyx

Model

WF56H9100AG

UPC Code

887276963105

Matching Dryer (Electric)

Onyx


DV56H9100EG

887276857893

SAMSUNG

Actual colour may vary. Design, specifications, and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. Minimum clearances are recommendations only. Samsung received the highest numerical score for front-load washers in the proprietary J.D. Power and Associates 2014 Laundry Appliance Satisfaction Study. The 2014 Laundry Appliance Satisfaction Study is based on more than 6,600 evaluations from customers who purchased clothes washers during the past 24 months. The study was fielded from January through March 2014. Your experiences may vary. Visit jdpower.com for more information. The ENERGY STAR Most Efficient 2014 designation recognizes the most efficient products among those that qualify for the ENERGY STAR program. These exceptional clothes washers represent the leading edge in energy efficient products. © 2014 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd. used with permission.

39
Castles




DV56H9100EG

Samsung Front-Load Electric Dryer


Installing Options




Stacked



Side by Side



On Pedestals



Stacked Depth


Installing Your Dryer

1. Alcove or closet installation

Minimum clearances for closet and alcove installations:

Sides – 1"
Rear – 5 7/8"
Top – 17"
Closet Front – 2"



If the washer and dryer are installed together, the closet front must have at least a 72" unobstructed air opening. Your washer alone does not require a specific air opening.

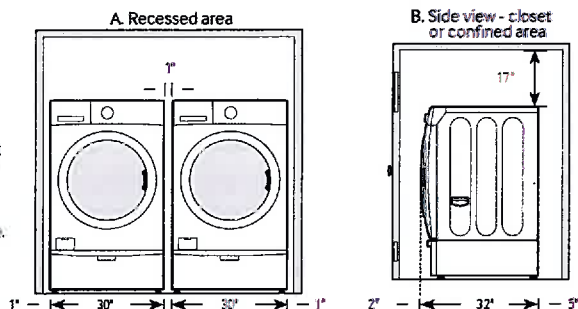


Dimensions

2. With optional pedestal base or stacking kit


Required Dimensions for Installation with Pedestal



Required Dimensions for Installation with Stacking Kit

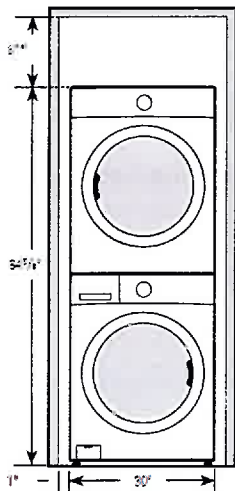

* Required spacing.
** External exhaust elbow requires additional space.

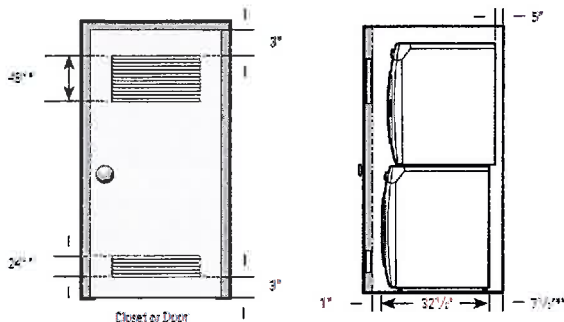

9.5 cu. ft. Capacity IEC

4-Way Venting

15 Preset Dry Cycles:

Steam Refresh, Steam Wrinkle Away, Eco Normal, Normal, Heavy Duty, Towels, Permanent Press, Active Wear, Bedding, Delicates, Wool, Sanitize, Time Dry, Air Fluff, Quick Dry

11 Options:

Mixed Load Bell, Wrinkle Prevent, Anti-Static, My Cycle, Rack Dry, Adjust Time, Eco Dry, Sound, Child Lock, Smart Care, Drum Light

5 Temperature Settings:

High, Medium, Medium Low, Low, Extra Low

5 Dry Levels:

Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

2 Signal Level Settings:

On/Off

Warranty

One (1) Year Parts and Labour
Two (2) Years Control Board
Three (3) Years Stainless Steel Drum
Ten (10) Years Direct Drive Motor

Product Dimensions & Weight (WxHxD)

Dimensions: 30" x 42 5/8" x 32"

Weight: 159 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 31 7/8" x 46 1/4" x 33 5/8"

Weight: 170 lbs

Electric

Onyx

Model

DV56H9100EG

UPC Code

887276857893

Matching Washer

Onyx

WF56H9100AG

887276963105



39 Castles

SAMSUNG

Actual colour may vary. Design, specifications, and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. Minimum clearances are recommendations only.

The Emerging Technology award recognizes innovative products that have the potential to significantly reduce greenhouse gas emissions.

© 2014 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

24" Marvel Professional Beverage Center with 3-in-1 Convertible Shelves and Display Wine Rack

Model #MP24BC****

- Dynamic Cooling Technology™ delivers rapid cool down and the industry's best temperature stability
- Thermal-efficient cabinet ensures optimum food preservation and energy efficiency while maximizing capacity
- Even quieter operation thanks to proprietary design enhancements to buffer and minimize sound
- With over 10 functions, MARVEL Intuit™ Integrated Controls allow you to select a precise cabinet temperature from 34°F to 42°F
- Audible and visual alarms signal when door is left ajar to protect food integrity and energy use
- Vacation/Sabbath mode conserves energy during times when the unit is not in use and complies with Star-K requirements
- Control Lockout prevents unintentional changes to settings
- System Indicator continuously monitors the unit
- Sleep/Wake Mode shuts off control display to conserve energy
- 3-in-1 Slide-Out Convertible Shelf™ features removable glass pane with wine rack option to store beverages, food or wine
- Cantilevered, fully adjustable shelving system
- Display wine rack glides out for easy access and holds 5 wine bottles, including magnum sizes
- Tinted, UV-resistant dual pane glass door protects wine from damaging ultra-violet light
- Professional styling: framed stainless steel door, sturdy full-length handle, sleek stainless steel shelf fronts and 4" stainless steel toe kick
- Soft-close integrated hinge provides zero clearance fit for a perfectly seamless built-in installation
- Two-stage, soft blue theatre-style LED lighting and sophisticated midnight black interior
- Optional panel-ready model blends seamlessly into cabinetry—no complicated kits or additional parts required
- Close Door Assist System™ gently and automatically draws door to a close, ensuring door is never left ajar

Door lock to protect your contents

Height adjustment up to 1" with leveling legs

4" black adjustable

Ordering Details	
Stainless Frame, Glass Door With Lock, Integrated Right Hinge	MP24BCG3RS
Stainless Frame, Glass Door With Lock, Integrated Left Hinge	MP24BCG3LS
Panel Overlay Frame Ready Glass Door with lock, Integrated Right Hinge	MP24BCF3RP
Panel Overlay Frame Ready Glass Door with lock, Integrated Left Hinge	MP24BCF3LP

No panel installation kit required.



39 Castles

Storage Capacity

Up to 19 wine bottles total (7 flat)

Up to (108) 12-oz cans

Storage Configuration

- (1) 5-bottle gallery roller-glide display wine racks
- (2) full-width cantilevered, fully adjustable coated steel-framed glass shelf

Product Dimensions

23 $\frac{3}{8}$ " W x 33 $\frac{3}{4}$ " minimum H x 25 $\frac{3}{8}$ " D (including handle)




Finish/Door Options





Stainless Steel



Wood Overlay
(Panel Ready)

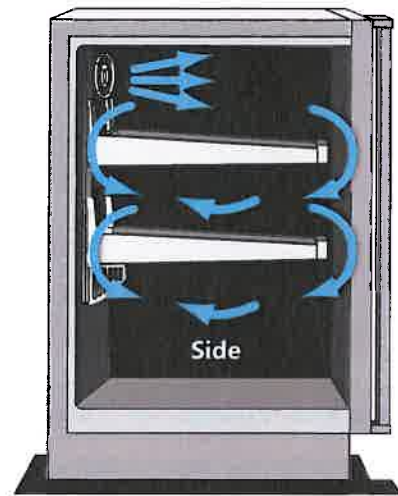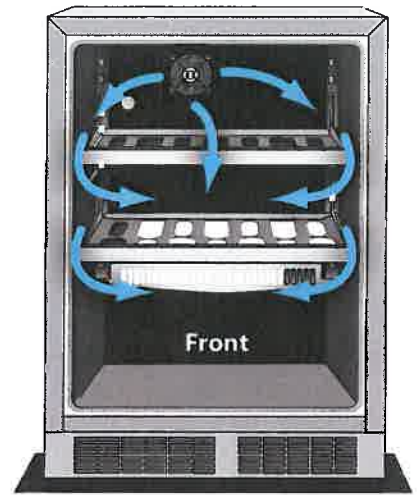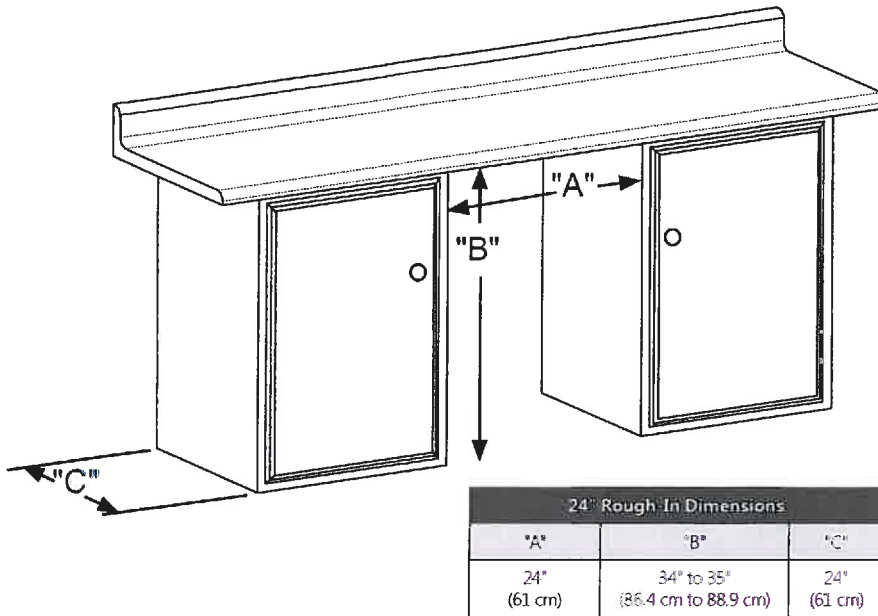

Cabinet Dimensions		
"D"	"E"	"F"
23 7/8" (60.7 cm)	33 3/4" to 34 3/4" (85.7 to 88.3 cm)	23 23/32" (60.2 cm)
"G"	"H"	"J"
26 7/32" (66.6 cm)	46 1 3/32" (117.9 cm)	26 7/16" (67.2 cm)

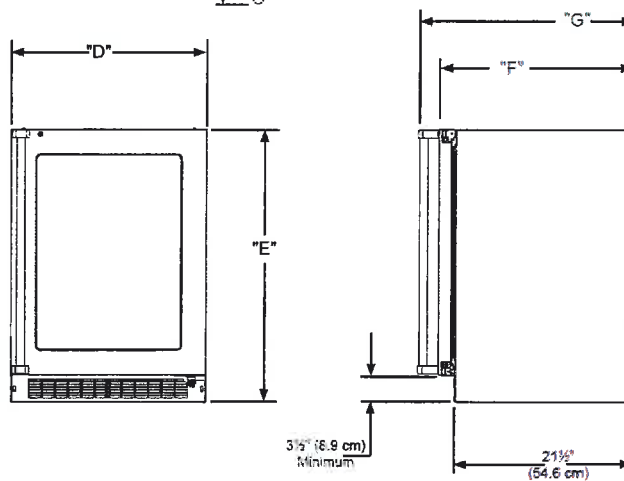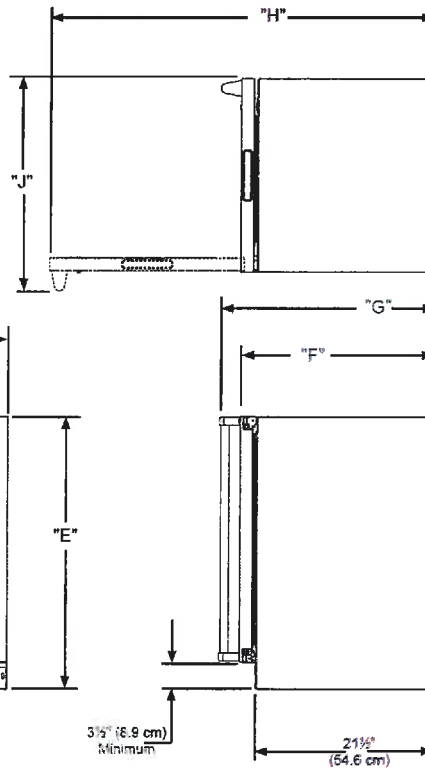

Dynamic Cooling Technology™ delivers rapid cool down and the industry's best temperature stability

The distinctive Marvel design features a thermal-efficient cabinet and door combined with Dynamic Cooling Technology™ for superior temperature stability, faster cooling times and speedy temperature recovery even with high frequency.

RECEIVED

SEP 06 2016

Width	23 7/8"
Interior Finish	Black
Capacity	Up to 19 wine bottles Up to 108 12-oz cans
Shelving System	Side Mount Bottle shape wine
Shelf Fronts	Stainless Steel
Other Storage	Display Wine Rack
Interior Lighting	2 LED Pods
Toe Grill Finish	Stainless Steel
Hinge	Soft Close Integrated Hinge
Handle	Professional

Control Type	Intuit™
Temperature Range	34° - 42° F
Lock	Yes
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	5'
Product Dimensions	23 7/8" W x 33 3/4" H x 21 1/2" D
Depth to Front of Door	23 23/32"
Depth to Handle	26 7/16"
Depth with door at 90°	46 7/16"
Shipping Weight	160 lbs






Finishes	SS, O
Vacation / Sabbath Mode	Yes
Agency Approvals	CSA

Finishes Key

SS = Stainless Steel
O = Overlay

39 Castles



Overlay Panels

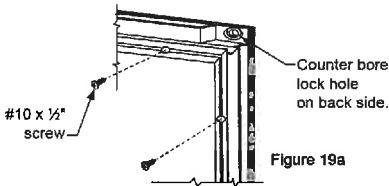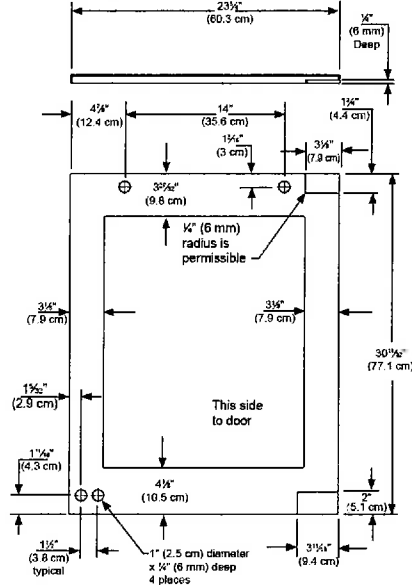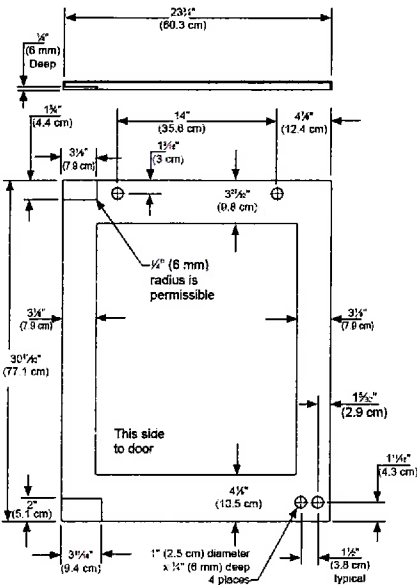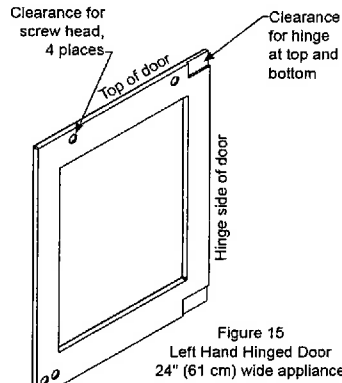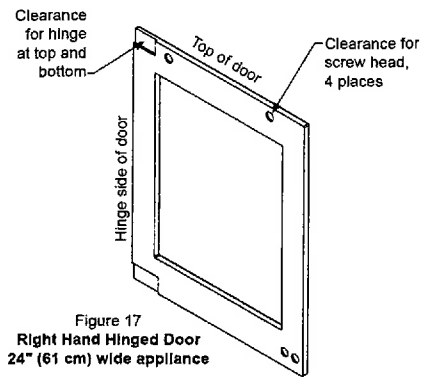

Material Type	#10 Wood Screw
Hardwood	1/4" (3.2 mm) Diameter. Pilot Hole
Softwood	3/8" (2.8 mm) Diameter. Pilot Hole

Table C

The preferred method of attaching the panel to the door is to clamp the panel to the door so it cannot move while drilling the screw pilot holes. Use bar clamps or "C" clamps with pads on the clamping surfaces that will not mar the panel or the door. The custom overlay panel should be flush with the top of the door and centered along the width of the door. See Figure 10a. Drill holes through the gasket extrusion using the 10 holes as pilot holes. Use the drill size from the chart in Table "C", being careful not to drill through the front surface of the panel, drill no deeper than 1/2" (12.7 mm) deep. If the overlay panel is thinner than 1/2" (16 mm) thick shorter screws will have to be obtained. Fasten the panel to the door with the 10 screws provided in the literature pack. (See Figure 19a). Remove the clamps and replace the gasket in the gasket extrusion channels of the door. Some force may be required to seat the gasket into the channels. Be sure the gasket corners are seated properly.

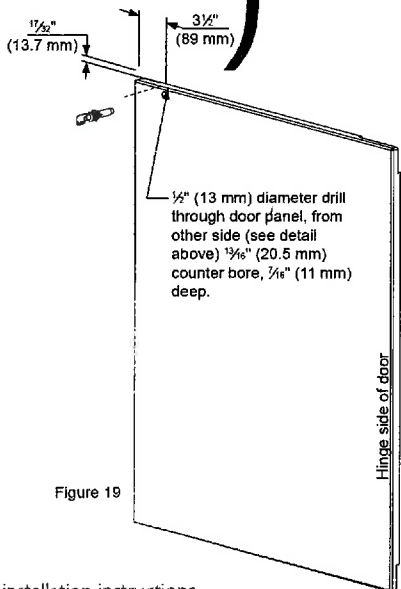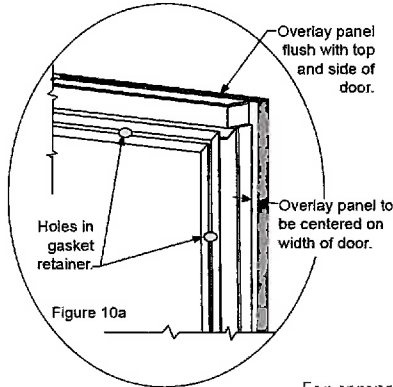

For comprehensive installation instructions, please visit www.marvelrefrigeration.com