

STANDARD APPLIANCE OPENINGS

The purchaser acknowledges the following standard spaces for kitchen appliances:

Range Conventional – 30" Width

Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)

Refrigerator – 36" W x 72" H (Approximate - height may change due to bulkheads)

Dishwasher – 24" Width

6" Exhaust Vent above stove

OTHER _____

See floor

UPGRADED APPLIANCE OPENINGS

***Check all that apply - NON-STANDARD APPLIANCE OPTIONS**

NOTE: When upgrading appliances, there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate the appropriate size from the manufacturer specifications of each appliance.

****MANUFACTURERS SPECIFICATIONS MUST BE ATTACHED****

- | | |
|---|--|
| 36" / 42" Stove (Hood fan width will be the same as per Ontario Building Code) | Built-In Microwave with Trim Kit |
| Gas Stove | Built-In Microwave Drawer with Trim Kit |
| Slide-In Stove | Warming Drawer |
| <u>Cooktop</u>
*(Gas/Electric – Cut-out Charge & Plug Required) | OTR – Over The Range Microwave *Plug required |
| Built-In Wall Oven <i>in use</i> | Built-in Refrigerator/Sub Zero – If purchasing a side by side or French Door, the wall beside the door may be an issue if it is deeper than 24" |
| Hood Fan (may require larger vent, charges will apply – 6" is standard) | *Applicable charges may apply if required to due to space accommodations |
| 8" Vent / 10" Vent | *Note: Refrigerator Door Swing |

Chimney hoods **CENTRE VENT ABOVE STOVE (clearance space will be left with this appliance will not butt up against cabinetry)

Wine / Bar Fridge (electrical required)

Steam Oven / Built-In Coffee makers

Cargo Waste Bin systems

Front Load Washer & Dryer *(Specs required if installing counter above)

Stackable Washer & Dryer

NOTE: It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specifications are to be sent to the Zancor Décor Centre no later than _____

Appliance Specifications received _____

Purchaser Signature _____ Date 10/23/16

Purchaser Signature _____ Date _____

PROJECT Carillon South LOT 285

D5434XLS

Turbo Drying
Capacity (max): 14 Place settings
Upper basket type: Premium upper basket
Lower basket type: Exclusive lower basket

Programs
Heavy wash
Normal programme
Quick wash
Eco wash
Rinse and hold
Sanitisation wash

Options
Delayed start: 24 h
High temperature
Long dry

Cleaning systems
Number of spray zones: 7
Self cleaning filters
AquaLevel™ Sensor


Drying system
Turbo Drying™

Features
8 stainless steel parts
Fault indication
Salt indication
Rinse-aid indication
Time remaining indicator
Voice signal for the end of washing cycle

Safety
AquaSafe™
SteamSafe™

Baskets
Upper basket type: Premium upper basket
Lower basket type: Exclusive lower basket

Product: Dishwasher
EAN code: 3838942489096

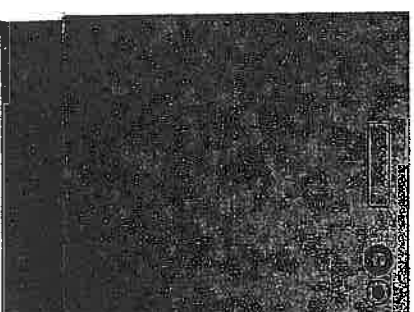

General
Size: XL (ADA height compliant)
Mode of installation: Built-in
Display type: Touch Screen Display
Number of programs: 6
Noise level: 48 dB(A)
Number of baskets: 2
Max loading height upper basket: 9 1/16 (230 mm)
Max loading height lower basket: 12 3/16 (310 mm)
Capacity (max): 14 Place settings

Dimensions and installation
Height: 32 1/4 (819 mm)
Width: 24 (610 mm)
Depth: 22 7/8 (581 mm)
Packaging height: 35 13/16 (910 mm)
Packaging width: 25 3/16 (640 mm)
Packaging depth: 28 3/4 (680 mm)
Length inlet hose: 66 1/8 (1680 mm)
Length outlet hose: 41 3/4 (1060 mm)
Cord length: 46 7/16 (1180 mm)
Weight net: 108 lbs
Weight gross: 112 lbs

Technical information
Connection rating: 1300 W
Current: 15 A
Voltage: 120 V

Consumption
Energy consumption/cycle: 1,07 kWh

PARIS KITCHENS
ESTABLISHED IN 1902

This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and approximate.

BUYER: Laura HOMES SITE: King City LOT: 285

Purchaser Signature: [Signature] Date: 12/08/2014

D5434XLS

XL DISHWASHERS (ADA COMPLIANT)


UNIT DIMENSIONS

	U.S.	Metric
Height (Adjustable)*	32-1/4" to 34"	819 mm to 864 mm
Width	24"	610 mm
Depth (Includes high loop)	22-7/8"	581 mm
Depth w/Handle	24-7/8"	632 mm
Depth w/Door Open	48-3/8"	1229 mm
Weight	108 lb	49 kg

* 32-1/4" (819 mm) height requires removal of top trim, and lowering side trim (2).

TECHNICAL DATA

Electricity	120V, 60Hz, 15 amp
Water pressure	4.2 - 140 psi, 0.03-1.0 MPa,
	0.3-10 Bar
Heating element	1200 watt
Max Loading	1300 watt

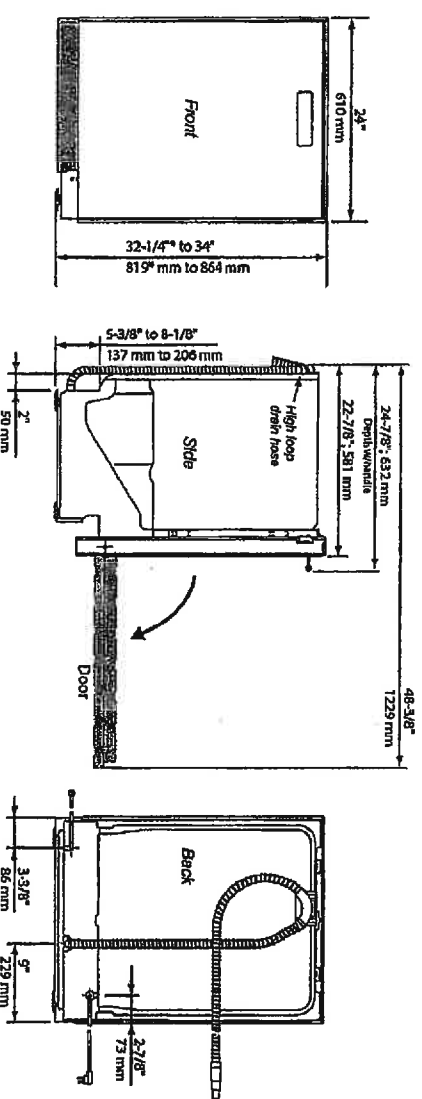


CUTOUT DIMENSIONS

	U.S.	Metric
Height*	32-1/4" to 34"	819 to 864 mm
Width	24"	610 mm
Depth	24"	610 mm

The best place for your dishwasher is in the kitchen near the sink. This makes it easier to connect the water and drain supply lines. A built-in dishwasher must be enclosed on the top, both sides and the back.

The power-supply receptacle for the appliance shall be installed in a cabinet or on a wall adjacent to the undercounter space in which the appliance is to be installed.

The electrical and water supplies should enter through the area indicated by the shading on the illustration at right. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 1-1/2" (38 mm) in diameter. If the partition is metal, it needs to be covered with an edge protector. Use caution when the appliance is installed or removed, to reduce the likelihood of damage to the power-supply cord.

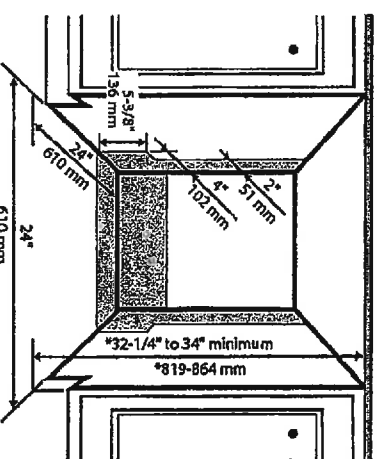


* 32-1/4" (819 mm) height requires removal of top trim, and lowering side trim (2).

PARIS KITCHENS
ESTABLISHED IN 1982

This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and approximate.

BUILDER **Zacor Homes** SITE **King City** LOT **285**

Purchaser Signature  Date **12/08/2016**

Specification Sheet


Model SU54

Professional Series Canopy wall mount range hood



Sirius
Range Hoods

Dimensions and installation measurements

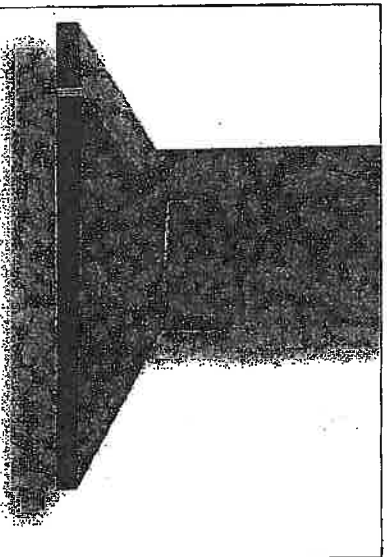


Product Features:

- Wall mount hood
- For use over domestic cooking equipment
- 8" round vertical ducting - not supplied
- 1200 cfm die-cast aluminum squirrel cage blower
- Very quiet operation at 66DBa / 5.1 sones maximum
- Commercial style baffle filters
- Brushed stainless steel
- 4 speed push button settings
- 10 minute timer
- Dishwasher safe baffle filter
- 2 x 20W halogen lamps in 36" version
- 4 x 20W halogen lamps in 48" version
- Heat sensor overload protection
- Telescopic decorative flue fits variable heights
- Bracket mounting template for ease of installation

Optional items:

- Replacement baffle filter - code BFSS
- Replacement halogen bulbs and lenses
- Flue extensions - SU 54-LX

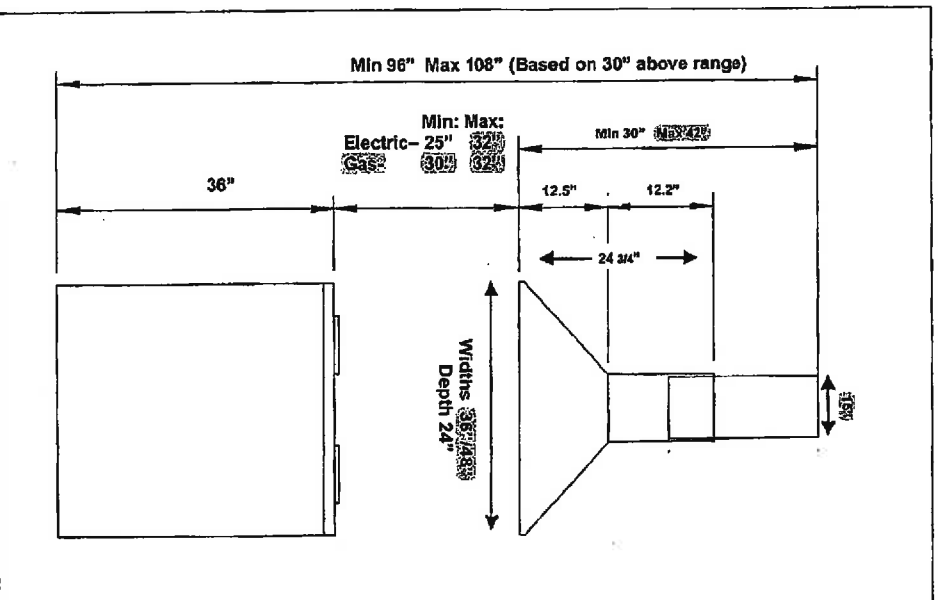

Notes and comments:



Sirius Range Hoods - USA and Canada
Tel: +866 528-4967 Fax: +866 365-9204 email: info@siriushoods.com



This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and approximate.

BUILDER: Zavor Homes

SITE:

King City

LOT:

285

Purchaser Signature:

Date:

12/08/2014

Specification Sheet

Model SU 54


Professional Series Canopy wall mount range hood




Sirius
Range Hoods

Sirius Range Hoods Ltd accepts no liability for any errors or omissions in this document and it is provided for guidance only - we reserve the right to change any information presented here in from time to time.

Preparation of wall structure to receive mounting bracket

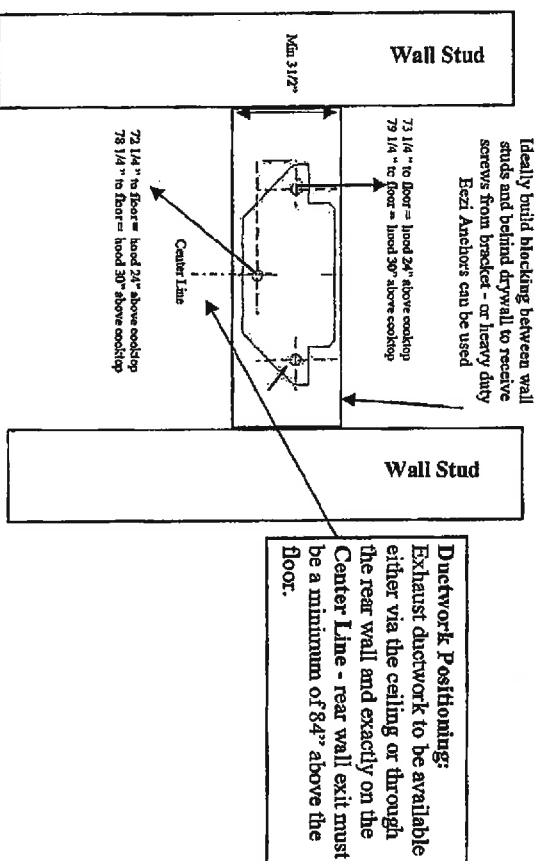

Preparation of Wiring location

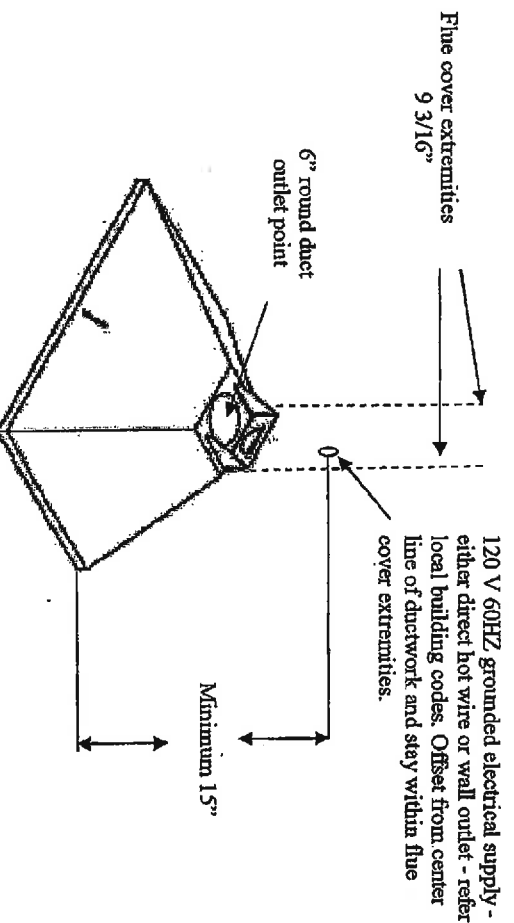

Sirius Range Hoods - USA and Canada
Tel: +866 528-4987 Fax: +866 365-9204 email: info@siriushoods.com



This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and appropriate.

BUILDER: **Senor TOMES**

SITE: **King City**

LOT: **285**

Purchaser Signature _____


Date: **12/08/2014**

36" Built-In Over-and-Under

subzero.com

FEATURES

- Four design options: framed, overlay, flush inset and stainless steel.
- Dual refrigeration system ensures the freshest food and energy efficiency.
- Electronic microprocessor constantly monitors entire unit to ensure proper food storage environment.
- Air purification system reduces odors, bacteria, viruses and ethylene gas.
- Advanced water filtration system.
- Illuminated touch control panel.
- Bright interior lighting throughout, including storage drawer area.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- Crisper and deli drawers form a lower-temperature zone ideal for produce and meats.
- Soft-close glide system on refrigerator storage drawers.
- Easy-access flip-up grille.
- Informational freshness cards.
- Full-extension, roll-out freezer drawer.
- Automatic ice maker with max ice feature temporarily increases production.
- ENERGY STAR® qualified.

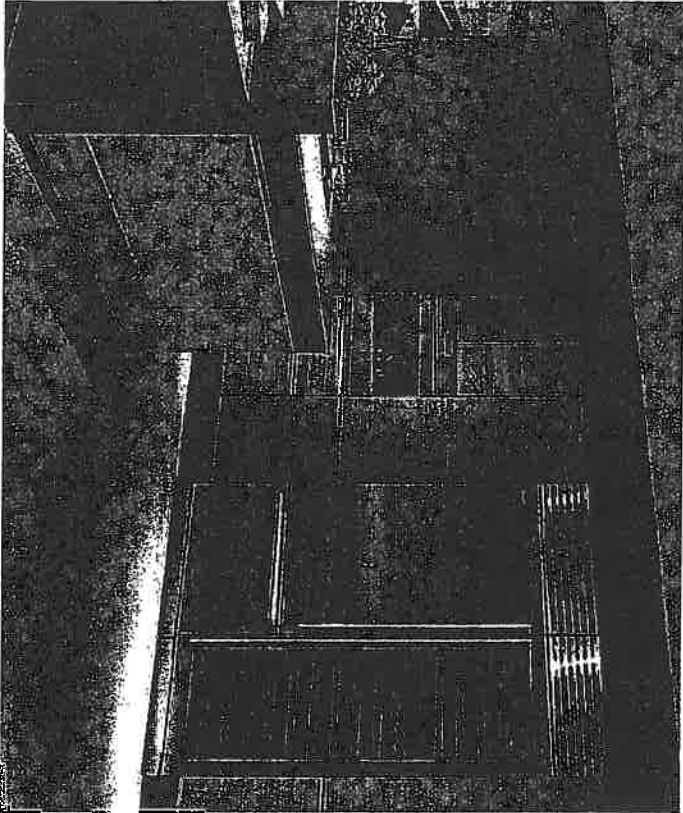


MODEL OPTIONS

Overlay, framed, flush inset	BI-36U/O
Stainless (flush inset handles)	BI-36U/S/INT
Stainless (pro handles)	BI-36U/S/PRO

Specify RH or LH door.

INTERIOR FEATURES

Flushed front
Adjustable glass shelves
Stainless sides shelf
High-tunnel drawer with dividers
Storage drawer with dividers
Adjustable door shelves
Stainless door handle
Adjustable dairy compartment
FREEZER
Full-extension, roll-out freezer drawer
Two wire storage baskets
Automatic ice maker

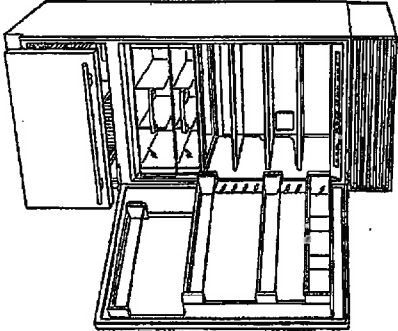

Model BI-36U



ACCESSORIES

- Grilles for 83" or 88" finished height (84" is standard).
- Framed front panels in white or stainless steel.
- Flush inset and dual flush inset panels in stainless steel with tubular or pro handles.
- Custom front panel mounting kit.
- Side panel in white or stainless steel.
- Stainless steel tubular and pro handles.
- Full-length standard and extended framed handles.
- Stainless steel kickplate.
- Dual installation kit with or without dual wide grille—84" finished height.
- Dozen egg container.
- Replacement air purification cartridge and water filter.

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.



This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and approximate.

BUILDER: *Lucas Homes*

SITE: *King City*

LOT: *285*

Purchaser Signature _____

Date _____

36" SEALED BURNER RANGETOP - 6 BURNERS

SRT366




FEATURES

- 6 dual-stacked, seamless burners
- Dual-stacked burners go from 20,000 Btu down to a mere breath of flame
- Continuous cast-iron grates for easy movement of pots and pans
- Heavy-gauge stainless steel
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Individual spark ignition system

ACCESSORIES

- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Cast iron S-grates and wok grate
- Signature red, black or stainless steel control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.

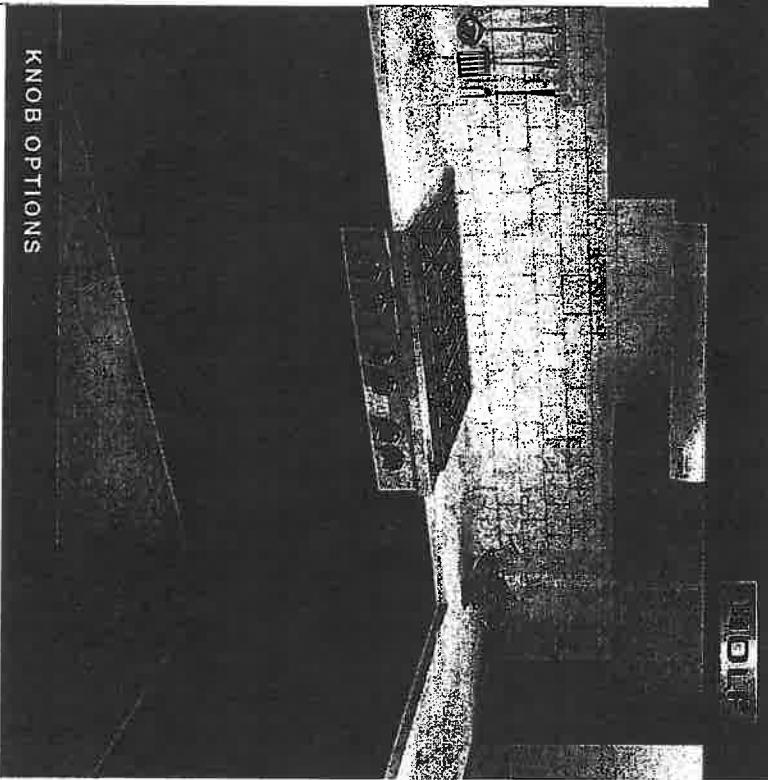

KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner

PARIS KITCHENS

ESTABLISHED IN 1916

This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and approximate.

BUILDER: Zanco SITE: King city LOT: 285

Purchaser Signature: [Signature] Date: Aug 19/16


36" SEALED BURNER RANGETOP - 6 BURNERS




PRODUCT SPECIFICATIONS

Model	SRT366		
Dimensions	35 7/8"W x 8 1/2"H x 28 1/2"D		
Weight	220 lb		
Electrical Supply	110/120 VAC, 60 Hz		
Electrical Service	15 amp dedicated circuit		
Gas Supply	3/4" rigid pipe		
Gas Inlet	1/2" NPT female		


ELECTRICAL AND GAS



DIMENSIONS

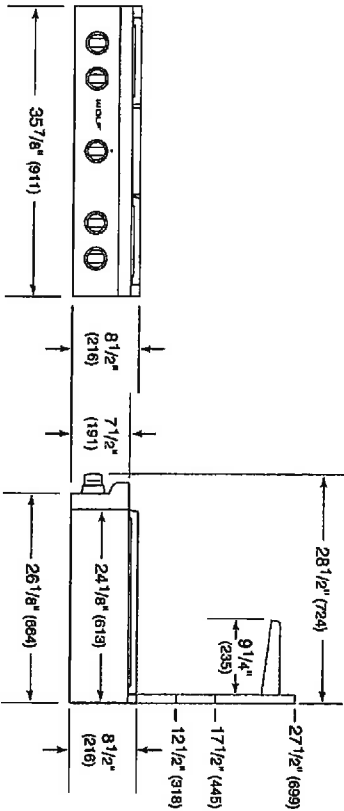

STANDARD INSTALLATION

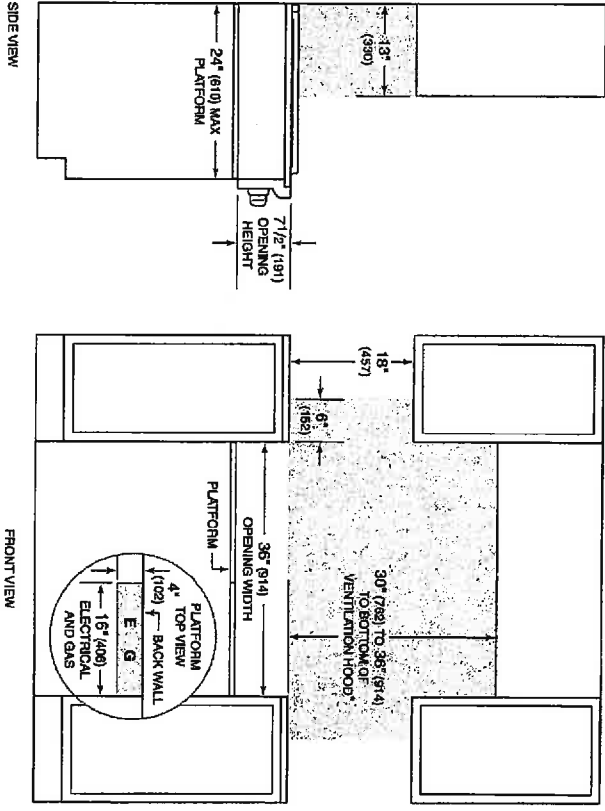

*Without ventilation hood, 36\" (914) minimum clearance countertop to combustible materials, 44\" (1118) for charbroiler.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical and gas supply located through bottom of platform.
For island installation, 12\" (305) minimum clearance back of range to combustible rear wall above countertop.

This sketch is provided solely for reference to those items noted on the accompanying "Upgrades" all other details, dimensions and layouts are for illustrative purposes only and may not be applicable to the purchaser's model. All dimensions, specifications, and locations are only if possible and approximate.


BUILDER Zacor SITE King City LOT 285
Purchaser Signature [Signature] Date 12/08/2016



FREE SHIPPING ON ORDERS OVER \$99. SEE DETAILS. ▶

Handwritten: May 10th 2016

Sears®

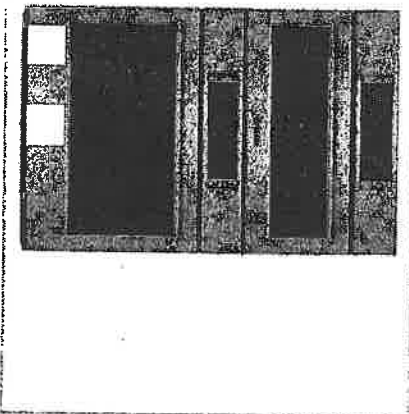

**Bosch® 800 Series 30" Speed
Combination Microwave/Wall Oven
- Stainless Steel**

\$4,749.99
★★★★★ 4.4 | (21)

Compare at \$5599.99

Additional Discounts in Store

Item #: 2236255610

Online Availability: In-stock

Product features

Pricing cannot be combined with any other offers. Whatever your kitchen design, Bosch wall ovens offer optimum design flexibility. They integrate seamlessly into your kitchen, installing flush for a sleek European look or proud for a more traditional look. Bosch wall ovens look great installed together or separately, and can be installed horizontally for perfect design alignment next to another oven, or in a vertical stacked configuration. The HBL8751UC is a newly designed and engineered Bosch combination oven featuring a Microwave speedoven and traditional convection walloven with elegant touch controls. The Bosch Speedoven cooks faster than a traditional oven and can also be used as a microwave. The speedoven can be used as a microwave, small footprint oven or even a toaster oven.W- 22255566
Touch control with SteelTouch™ Buttons for Easier Operation of the Oven. SteelTouch™ buttons give the Bosch oven a sleek, streamlined appearance, and let you control the oven with the lightest touch
The Bosch Speed Oven Cooks Faster than a Traditional Oven and can be Used as a Microwave
Meat Probe- This built-in temperature gauge is perfect for keeping tabs on large roasts and poultry dishes. When your dish reaches the preset internal temperature, the oven beeps and turns itself off
EcoClean™ -Delivers improved energy efficiency by running for the shortest period of time possible
QuietClose™ Door- Dampened hinges softly and quietly guide the QuietClose™ door shut. It's premium engineering that you'll appreciate each time you close your oven
Genuine European Convection- a third heating element is used around the convection fan to circulate warm air more evenly throughout the oven cavity
Now you can replace your old wall oven with a Bosch wall oven without making modifications to your cut out
Bake:2,400W Broil:3,800W Convection:2,000W, 10 Specialized Cooking Modes , Upper Cavity :
Microwave 1,000W/Bake600W, Broil 1,750/cnvctr1,700
Included Accessories : 2 racks lower, Other Features: Star-K Certified, Timer settings : Alarm, Off, On, Timer, Self Clean option, Internal Cavity Light
See more products by Bosch®

Featured Products


Nespresso® Prodigio Titan Coffee System	Nespresso® Prodigio & Milk Titan Coffee	Nespresso® Prodigio & Milk Silver	Nespresso® Prodigio Silver Coffee System
\$269.99	\$319.99	\$319.99	\$269.99



THIS SKETCH IS PROVIDED SOLELY FOR REFERENCE TO THOSE ITEMS NOTED ON THE ACCOMPANYING "UPGRADE/EXTRAS" ALL OTHER DETAILS, DIMENSIONS & LAYOUTS ARE FOR ILLUSTRATIVE PURPOSES ONLY AND MAY NOT BE APPLICABLE TO YOUR PURCHASE'S MODEL. ALL DIMENSIONS, SPECIFICATIONS AND CAPACITIES ARE ONLY IF POSSIBLE AND APPROXIMATE

LOT #: **285**
DATE: **07/04/2016**
PURCHASER'S SIGNATURE: *[Signature]*

800 Series - Stainless Steel HBL8751UC



Cooking modes – upper cavity	<p>Multiwave, 3D, Auto Programs (Inside/Outside, Defrost, Warm, Bake, Roast, Steam, Pizz), 9 sensor Cook Programs, 4 AutoChef Speed Programs, HiLo, 600W, Convection, Keep Warm, Frozen Foods.</p>
Cooking modes – lower cavity	<p>Bake, Variable Broil (Hi/Low), Roast, Warm, Steam, Pizz, Boil, Convection Bake, Convection Broil, Convection, Roast, Pizz, Multi Rack, Genuine European Convection, Convection Convection, Temperature Probe, Presentation.</p>
Cleaning type – lower	Self Clean
Telescopic rack	1
Illumination type	<p>Incandescent (upper and lower), (upward and lower).</p>

Bake, Variable-Broil (hi & low)
Roast, Warm Sabbath Proof
Dough, Convection Bake
Convection Broil, Convection

Self-Clean

1957

Incandescent

1. Upper/1 Lower

THE

2.45

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

1997

2.0000M

9725 W

DATE RECEIVED

10

Fixed Connection

Electric




HEZTR301
30" Telescopic Rack

Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in.)	49" x 29 3/4" x 15 1/2"
Required cutout size (HxWxD) (in.)	23 5/8" x 28 1/2" x 15 1/2"
Overall cavity size – upper	18 5/8" x 16 1/2" x 15 1/2"
Overall upper oven interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 15 1/2"
Turntable – Metal Max. Cookware – upper	12 5/4" dia.
Turntable – Ceramic Max. Cookware – upper	12 1/2" dia.
Rack – Rectangular Cookware Max. – upper	15" x 12"
Oven cavity size – lower	4 5/8" x 16 1/2" x 15 1/2"
Overall lower oven interior dimensions (HxWxD) (in.)	17 1/4" x 27 1/2" x 18"
Usable lower oven interior dimensions (HxWxD) (in.)	12 5/16" x 26 1/4" x 18 1/4"
Net weight (lbs)	268 lbs.


800 Series – Stainless Steel HBL8751UC



Installation Details

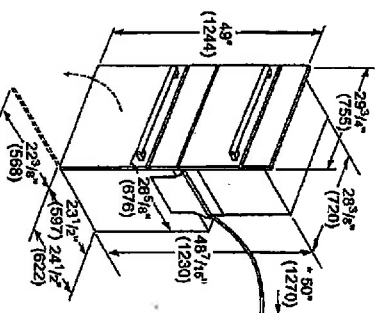


- Power conduit 50" (1270 mm) from the lower oven.



- * Junction box may be installed above, below, or to the left or right of the unit within range of the power conduit.

measurements in inches (mm)

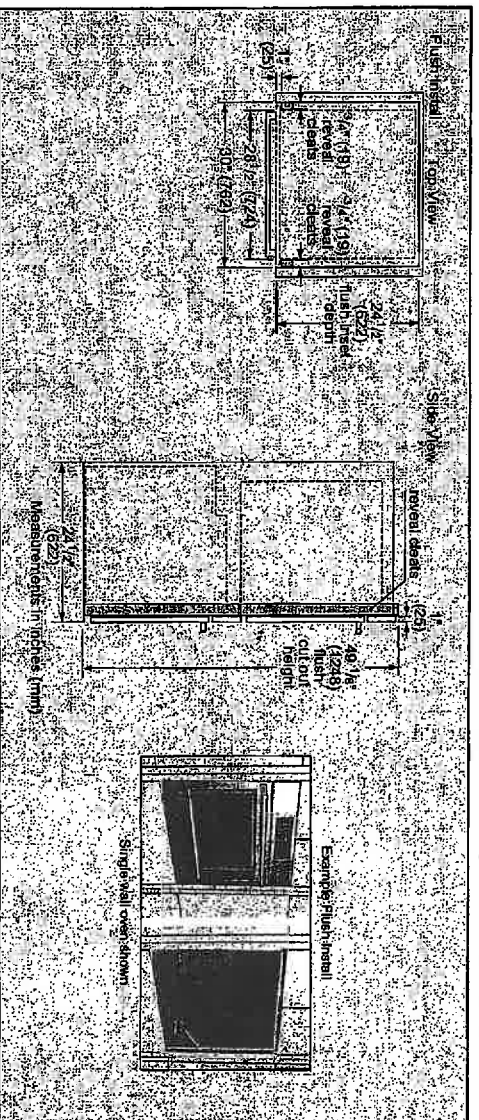

For help and assistance with Bosch power tools, please visit www.boschpower.com/usa/brand/usa or call 1-800-4-A-BOSCH. Money-Back Guarantee: Bosch power tools are backed by a 3-year, 100,000-hour warranty. All handheld and bench-mounted power tools are covered by this warranty. Bosch reserves the right to change product materials and specifications at any time without notice. All handheld and bench-mounted power tools are covered by this warranty. Bosch reserves the right to change product materials and specifications at any time without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cuts. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Both warranties state the Product is free from defects in materials and workmanship for a period of three hundred and sixty(360) days from the date of purchase. The Inception Warranty requires to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended; for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches or stainless steel, paint/powdercoat blemishes, chips, dings, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date of new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain panels. Any differences caused by flicking, lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, 7x5, 8" or 9" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/usa or call 1-800-944-2954

09/15



THIS SKETCH IS PROVIDED SOLEY FOR REFERENCE TO THOSE ITEMS NOTED ON THE ACCOMPANYING "UNCLASSIFIED" AND "ALL OTHER DETAILS, DIMENSIONS & LA QUOTES FROM THE PLATFOOS. ALL DIMENSIONS AND MAY NOT BE APPLICABLE TO PLATFOOS. ALL DIMENSIONS, SPECIFICATIONS AND DETAILS ARE ONLY IF POSSIBLE AND APPROXIMATE

SITE 20460172
PILCHASERS SIGNATURE:

LOT #: 285
DATE: 6/2/08

2016

