

STANDARD APPLIANCE OPENINGS

The purchaser acknowledges the following standard spaces for kitchen appliances:

Range Conventional – 30" Width

Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)

Refrigerator – 36" W x 72" H (Approximate - height may change due to bulkheads)

Dishwasher – 24" Width

6" Exhaust Vent above stove

OTHER _____

UPGRADED APPLIANCE OPENINGS

*Check all that apply - NON-STANDARD APPLIANCE OPTIONS

upgraded appliances

NOTE: When upgrading appliances, there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate the appropriate size from the manufacturer specifications of each appliance.

MANUFACTURERS SPECIFICATIONS MUST BE ATTACHED

36" / 42" Stove (Hood fan width will be the same as per Ontario Building Code)

Gas Stove

Slide-In Stove

Cooktop

*(Gas/Electric – Cut-out Charge & Plug Required)

Built-In Wall Oven

Hood Fan (may require larger vent, charges will apply – 6" is standard)

8" Vent / 10" Vent

Chimney hoods **CENTRE VENT ABOVE STOVE (clearance space will be left with this appliance will not butt up against cabinetry)

Built-In Microwave with Trim Kit

Built-In Microwave Drawer with Trim Kit

Warming Drawer

OTR – Over The Range Microwave *Plug required

Built-in Refrigerator/Sub Zero – If purchasing a side by side or French Door, the wall beside the door may be an issue if it is deeper than 24"

*Applicable charges may apply if required to due to space accommodations

*Note: Refrigerator Door Swing

Wine / Bar Fridge (electrical required)

Steam Oven / Built-In Coffee makers

Cargo Waste Bin systems

Front Load Washer & Dryer *(Specs required if installing counter above)

Stackable Washer & Dryer

NOTE: It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specifications are to be sent to the Zancor Décor Centre no later than

Reed

Appliance Specifications received

Purchaser Signature

[Signature]

Date

Sept 28/16

Purchaser Signature

[Signature]

Date

Sept 28/16

PROJECT

East York

LOT

40 South

46" PRO HOOD LINER - 22" DEPTH



PL462212

FEATURES

- Heavy-duty stainless steel construction
- Infinite speed blower control
- Recessed controls for sleeker look
- Heat sentry for safety
- Bright halogen lighting
- Blower required (internal, in-line or remote blowers available)
- Transition with backdraft minimizes backward flow of cold air
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

Make-up air damper

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



BLOWER OPTIONS

- 350 CFM Internal
- 450 CFM Internal
- 900 CFM Internal
- 1100 CFM Inline
- 900 CFM Remote
- 1200 CFM Remote
- 1500 CFM Remote
- 600 CFM Internal
- 1200 CFM Internal

HO South
Sept 23/16

22

46" PRO HOOD LINER - 22" DEPTH




PRODUCT SPECIFICATIONS


| | |
|-------------------------------|----------------------------|
| Model | PL462212 |
| Dimensions | 46 3/8"W x 12"H x 22 1/2"D |
| Weight | 60 lb |
| Electrical Supply | 110/120 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Discharge Location | Vertical |
| Discharge Dimensions | 10" Round |
| Bottom of Hood to Counter top | 30" to 36" |

ELECTRICAL

DECORATIVE
HOOD



DIMENSIONS

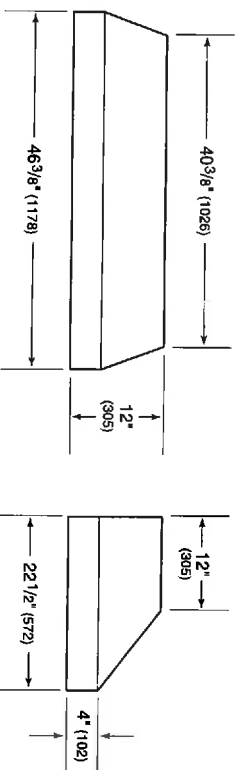

40 South
Sept 23/16

20

24" TRANSITIONAL DRAWER MICROWAVE



MD24TE/S

FEATURES

- 20% larger interior capacity
- Classic stainless steel
- Control panel lock
- Installs standard or flush inset
- 10 power levels and sensor cooking for easy meals
- "Keep Warm" mode
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

- Air vent for flush inset installations

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.



40 South
Sept 23/16

2-7

24" TRANSITIONAL DRAWER MICROWAVE



PRODUCT SPECIFICATIONS


| | | |
|--------------------|--------------------------------|--|
| Model | MD24TES | |
| Dimensions | 23 7/8"W x 15 1/8"H x 21 7/8"D | |
| Weight | 91 lb | |
| Electrical Supply | 120 VAC, 60 Hz | |
| Electrical Service | 15 amp dedicated circuit | |
| Overall Capacity | 1.2 cu ft | |
| Power Cord Length | 4 feet | |

ELECTRICAL


E ELECTRICAL
SUPPLY WITHIN OPENING
OR IN ADJACENT CABINET
WITHIN REACH OF
POWER CORD

E

DIMENSIONS

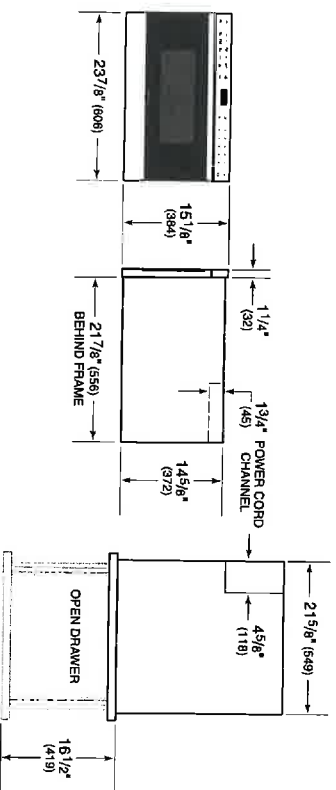

STANDARD INSTALLATION

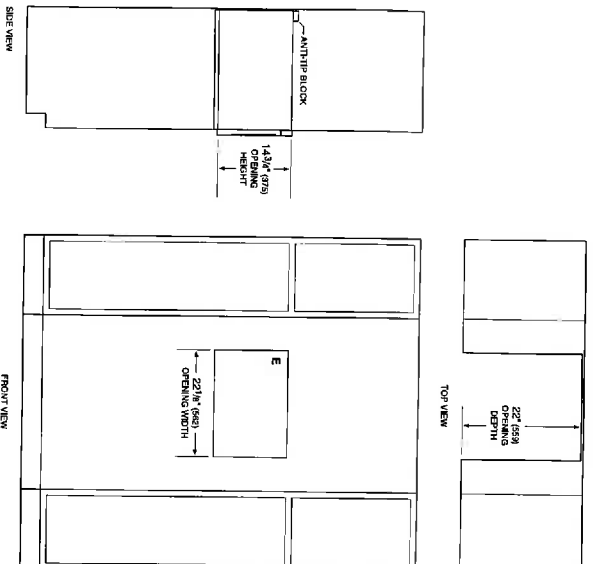

40 South
Sept 23/16

22A

48" BUILT-IN SIDE-BY-SIDE REFRIGERATOR/FREEZER

SUB•ZERO

BI-48S/S



FEATURES

- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- "Soft bright" interior lighting
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience

ACCESSORIES

- Stainless steel kickplate
- Grilles for 83" or 88" finished height (84" is standard)
- Side panel mounting kit

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.



HANDLE OPTIONS

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 4 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with divider
- 2 Storage drawers with divider
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

FREEZER

- 3 Adjustable wire shelves
- 1 Stationary solid shelf
- 3 Storage drawers
- 5 Adjustable door shelves
- Automatic ice maker

40 South
Sept 23/16

22

48" BUILT-IN SIDE-BY-SIDE REFRIGERATOR/FREEZER


SUB•ZERO

PRODUCT SPECIFICATIONS


| | |
|-----------------------|---|
| Model | BI-48S/S |
| Dimensions | 48"W x 84"H x 24"D |
| Door Clearance | 30" |
| Weight | 630 lb |
| Refrigerator Capacity | 19.1 cu ft |
| Freezer Capacity | 9.8 cu ft |
| Electrical Supply | 115 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Plumbing Supply | 1/4" OD copper, braided stainless steel or PEX tubing |
| Plumbing Pressure | 35-120 psi |

ELECTRICAL

PLUMBING

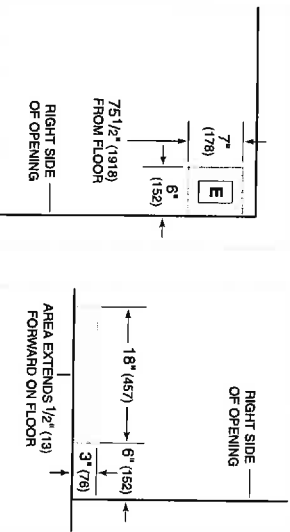


INTERIOR VIEW

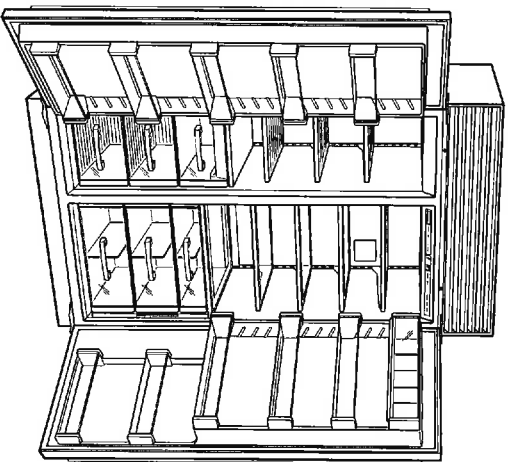


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

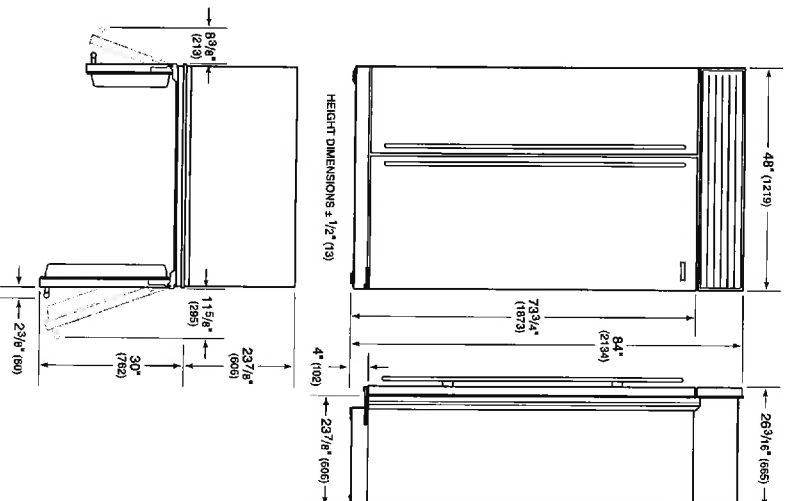

STANDARD INSTALLATION

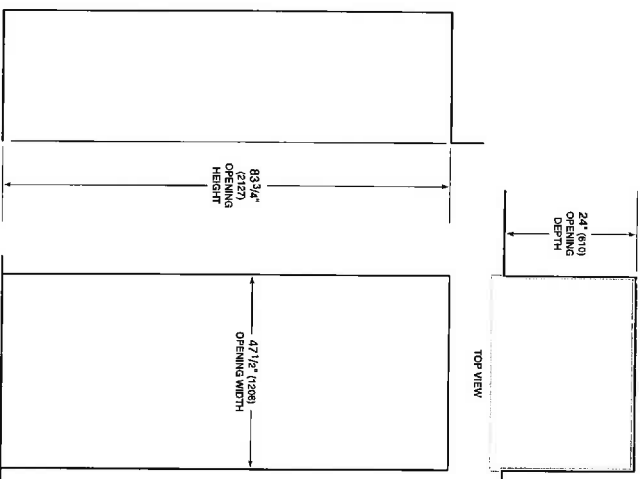

NOTE: Shaded line represents profile of unit.

160 South Sept 23/16
12

D5436XLS

Turbo Drying
Top tray for bowls and cutlery
Upper basket type: Premium
Lower basket type: Premium
Separate removable basket
Number of place settings: 16

Top tray functions
InstantLift™ - smart height adjustment of the top tray
Divisible and removable trays
Rack for knives and utensils
Rack for bowls and cups
Telescopic rails

Upper basket functions
Tight mesh base
Multi position wire shelf left
Multi position wire shelf right
Fixed pin rows
Fixed glass support
Wide knife stand

Lower basket functions
Foldable/divisible pin rows rear
Separate removable basket

Programs
Sanitation wash
Normal wash
Heavy wash
Quick wash
ECO wash


Options
Delayed start

Cleaning systems
Number of spray zones: 9
Number of spray arms: 3
WideClean™ - extra washing power for pots and pans
SCS - Super Cleaning System™
Aqua Level™ Sensor
Stainless steel spray arms

Drying system
Turbo Drying™

Features
8 stainless steel parts
Time remaining indicator
Voice signal for the end of washing cycle
Hidden heater
Kidsafe - lockable controls

Water safety
Few sealing points outside the container
Long lasting seam welded tank
Waterproof external base
Exterior float
Aqua Detect™ Sensor
Aqua Level™ Sensor
Stand-by water protection
Yes
Max time water intake
Sound alarm
Anti-block drain pump

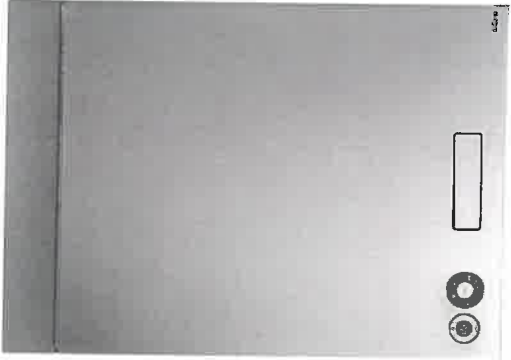

Installation
Adjustable feet
Multi fit outlet hose
Fixed high loop outlet hose
Trim kit

EAN code: 3838942042188
code: 492231

General
Product: Dishwasher
Mode of installation: Built-in
Size: XL (ADA height compliant)
Touch Screen Display
Number of programs: 7
Noise level: 46 dB(A)
Number of baskets: 3
EAN code: 3838942042188

Dimensions and installation
Height: 32 5/16 (820 mm)
Width: 23 15/16 (606 mm)
Depth: 22 7/8 (581 mm)
Packaging height: 35 1/16 (890 mm)
Packaging width: 25 3/16 (640 mm)
Packaging depth: 26 3/4 (680 mm)
Length electrical cord: 46 7/16 (1180 mm)
Length inlet hose: 65 1/8 (1680 mm)
Length outlet hose: 41 3/4 (1060 mm)
Weight net: 101 lbs
Weight gross: 109 lbs

Technical information
Voltage: 120 V
Current: 15 A

Consumption
Energy consumption/cycle: 0.87 kWh

40 South
Sept 23/16

20

30" E SERIES TRANSITIONAL BUILT-IN DOUBLE OVEN



DO30TE/S/TH

FEATURES

- 10 cooking modes make meals easy
- Three adjustable oven racks
- Cobalt blue porcelain interior
- Self clean, delayed start, timed cook, Sabbath mode and more
- Installs flush with surrounding cabinetry
- Dual convection oven for faster, more consistent cooking
- Temperature probe lets you know when it's done
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Hidden bake element and recessed broil element

ACCESSORIES

- 30" baking sheet
- Bake stone kit (stone, rack and peel)
- Dehydration kit (racks and door stop)
- Full-extension easy glide oven rack
- Temperature probe and broiler pan
- Set of three standard oven racks

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.



46 South

Sept 23/16


26




ELECTRIC DRYER

PRODUCT MODEL NUMBERS

WED7505F, WED7540F, WED7590F, WED75HEF,
WED7740F, WED77HEF, WED90HEF, WED92HEF, WED85HEF

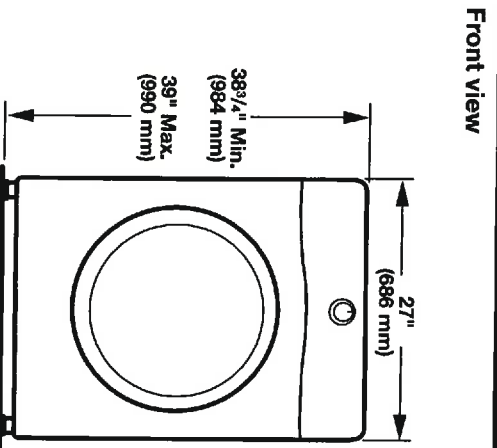


Front view

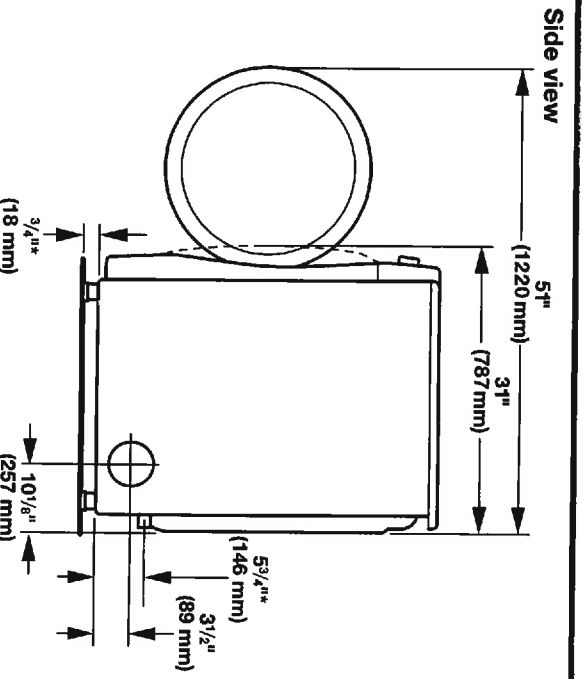

Side view


Back view

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

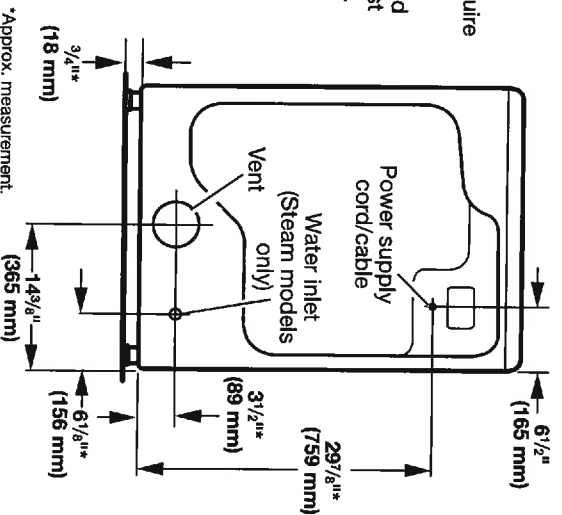

*Approx. measurement.

Recommended installation clearances

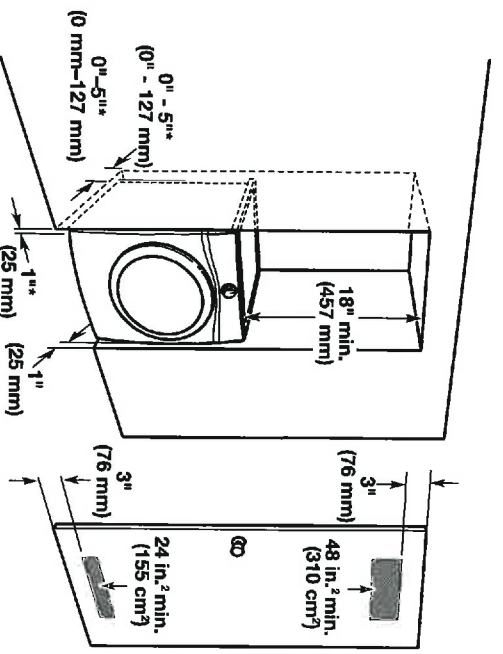

*0" (0 mm) spacing is allowed for straight-back venting only.
For steam models only, inlet hose must not be kinked.

Spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

INSTALLATION REQUIREMENTS

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit.

WATER (STEAM MODELS ONLY) REQUIREMENTS


The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses. Do not overtighten. Damage to the coupling can result.

VENTING REQUIREMENTS


Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

Exhaust hoods:

Recommended styles:




Louvered Hood



Box Hood

Acceptable style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.
- NOTE:** Do not use vent runs longer than those specified in "Vent System Charts."

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

| Standard Vent System Chart | | |
|----------------------------|--------------|-----------------|
| Number of 90° elbows | Type of vent | Angled hoods |
| 0 | Rigid metal | 64 ft. (20 m) |
| 1 | Rigid metal | 54 ft. (16.5 m) |
| 2 | Rigid metal | 44 ft. (13.4 m) |
| 3 | Rigid metal | 35 ft. (10.7 m) |
| 4 | Rigid metal | 27 ft. (8.2 m) |

| Long Vent System Chart | | |
|------------------------|--------------|------------------|
| Number of 90° elbows | Type of vent | Angled hoods |
| 0 | Rigid metal | 160 ft. (48.8 m) |
| 1 | Rigid metal | 150 ft. (45.7 m) |
| 2 | Rigid metal | 140 ft. (42.7 m) |
| 3 | Rigid metal | 130 ft. (39.6 m) |
| 4 | Rigid metal | 120 ft. (36.6 m) |

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXX-XX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

40 South
Sept 23/16

28




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW7590F, WFW75HEF, WFW90HEF,
WFW92HEF

Washer Dimensions:

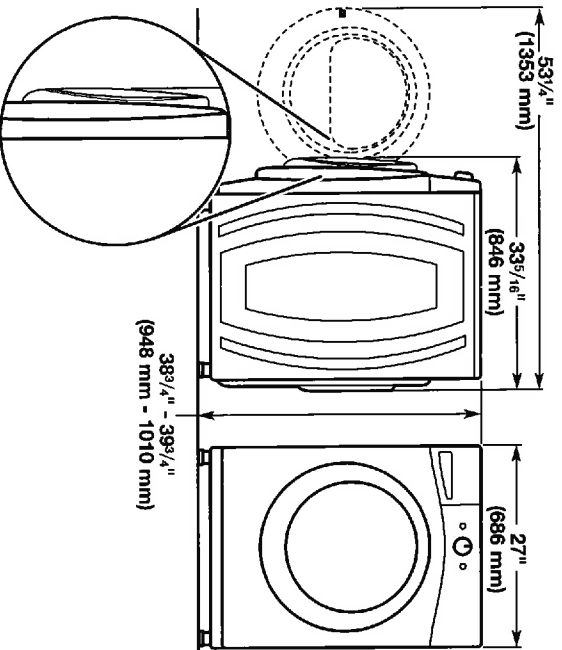

Recessed or closet installation -
stacked washer and dryer

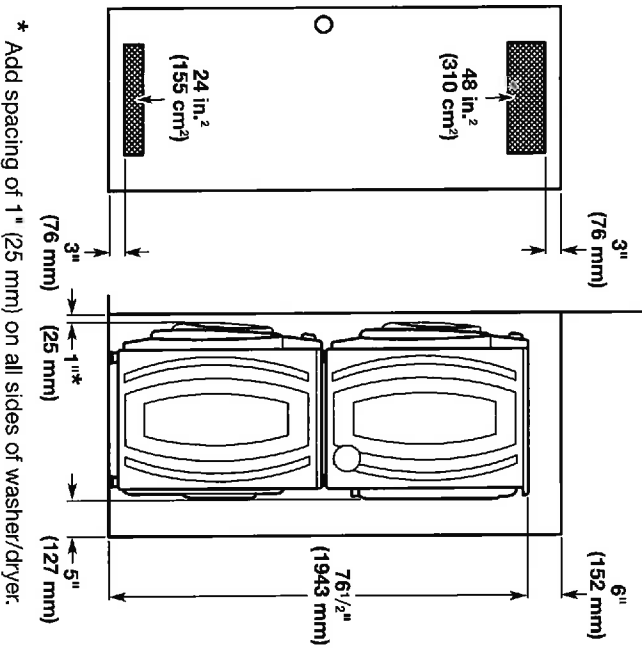


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F, WFW85HEF

Washer Dimensions:

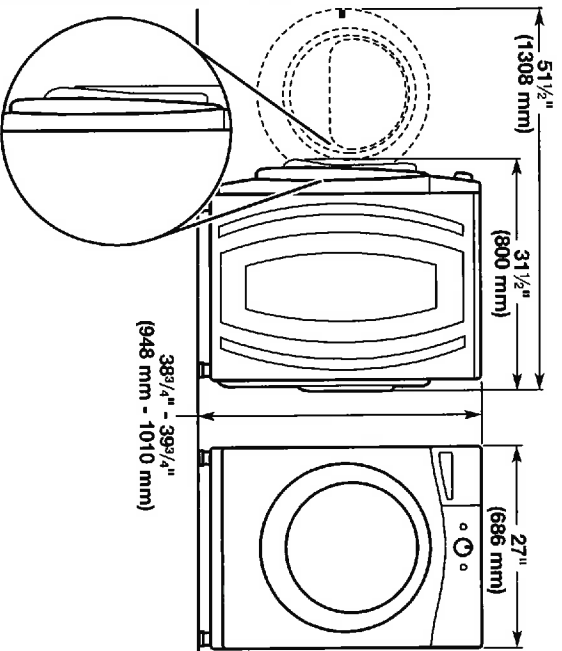


Recessed area or closet installation (washer only):

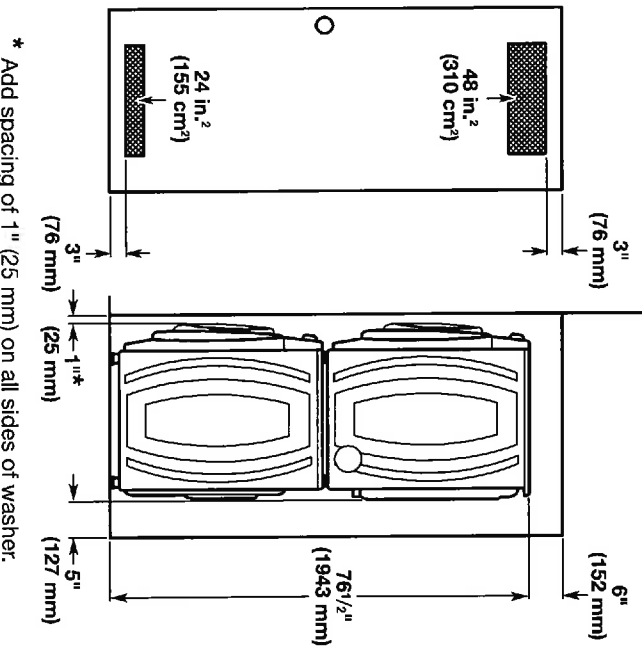


* Add spacing of 1" (25 mm) on all sides of washer.

Custom cabinet installation (washer only):

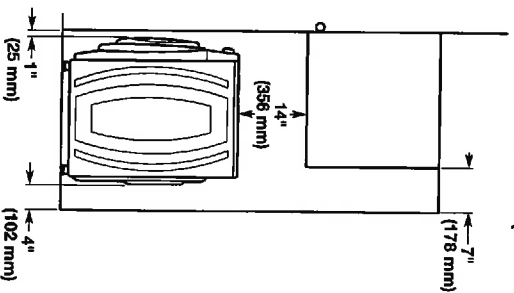

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

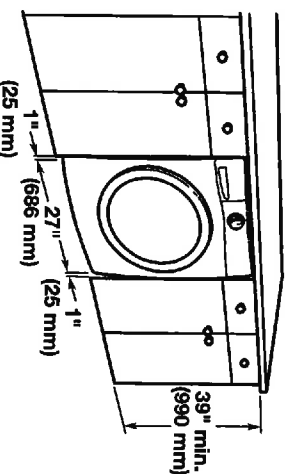

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

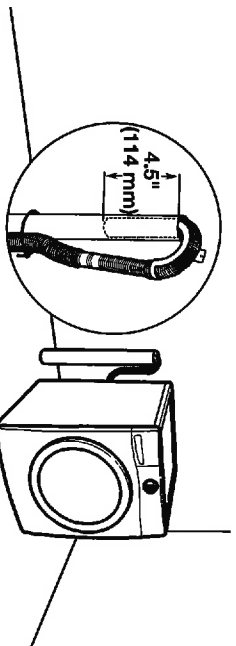


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2,44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2,44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

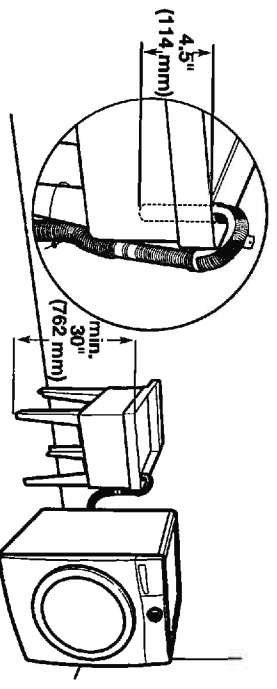

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2,44 m) from bottom of washer.

Floor drain system

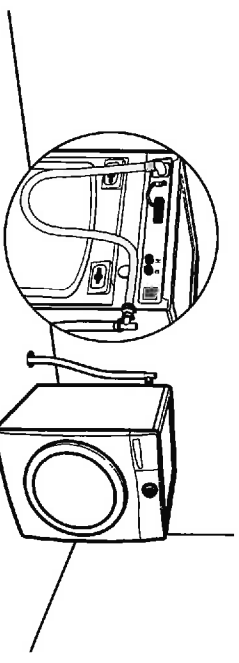

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

See requirements for floor standpipe drain system.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

48" SEALED BURNER RANGETOP - 6 BURNERS AND INFRARED GRIDDLE



SRT486G



FEATURES

- 6 dual-stacked burners plus 15,000 Btu infrared griddle
- Dual-stacked burners go from 20,000 Btu down to a mere breath of flame
- Continuous cast-iron grates for easy movement of pots and pans
- Heavy-gauge stainless steel
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Individual spark ignition system

ACCESSORIES

- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Cast iron S-grates and wok grate
- Signature red, black or stainless steel control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

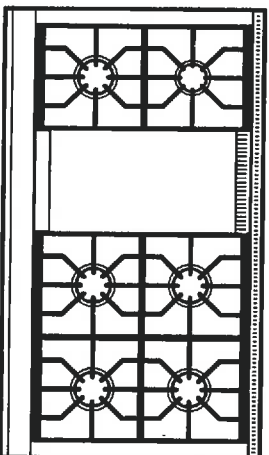

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner
- 1 - 15,000 Btu (13,000 Btu LP) Griddle

40 South
Castles
Sept 28/16


48" SEALED BURNER RANGETOP - 6 BURNERS AND INFRARED GRIDDLE




PRODUCT SPECIFICATIONS

| | | | |
|--------------------|-------------------------------|--|--|
| Model | SRT486G | | |
| Dimensions | 47 7/8"W x 8 1/2"H x 28 1/2"D | | |
| Weight | 280 lb | | |
| Electrical Supply | 110/120 VAC, 60 Hz | | |
| Electrical Service | 15 amp dedicated circuit | | |
| Gas Supply | 3/4" rigid pipe | | |
| Gas Inlet | 1/2" NPT female | | |


ELECTRICAL AND GAS



DIMENSIONS

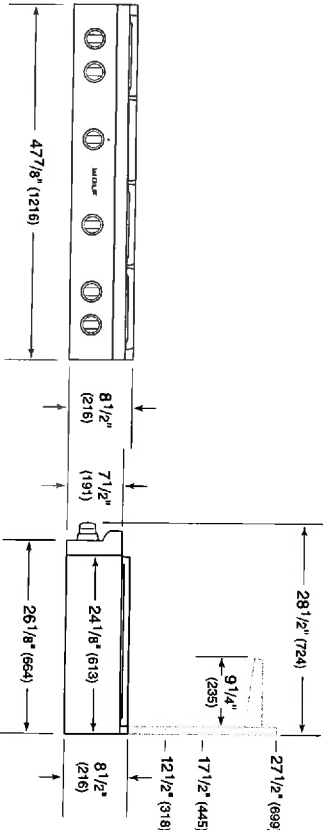

STANDARD INSTALLATION

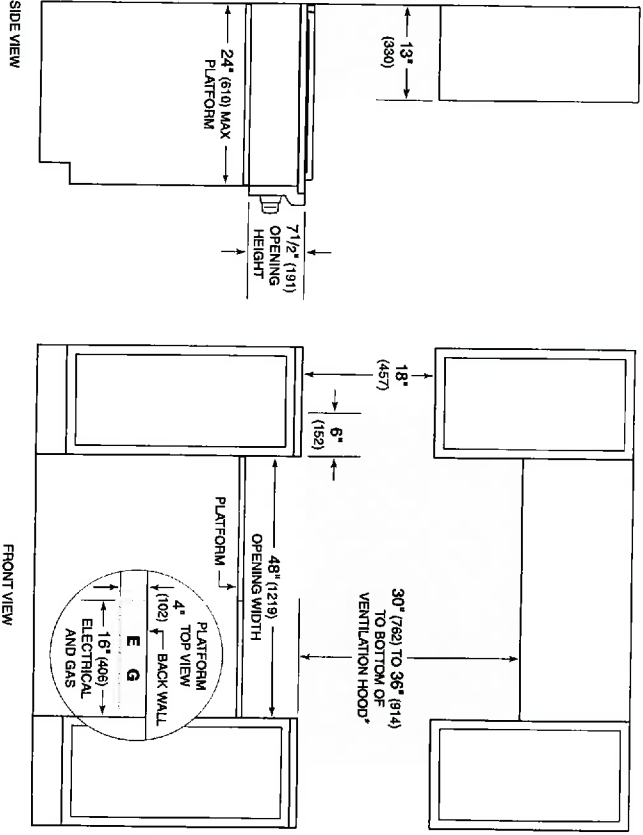

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charcoal.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces.
Combustible materials cannot be located within this area.
Electrical and gas supply located through bottom of platform.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

40 Stk

Sept 28/18

14