

BI-36 U/S




## FEATURES

- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Clear-view, triple-pane and UV-resistant glass door
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- "Soft bright" interior lighting
- Over-and-under refrigerator/freezer storage
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience

## ACCESSORIES

- Stainless steel kickplate
- Grilles for 83" or 88" finished height (84" is standard)
- Side panel mounting kit
- Dual installation kit with or without dual wide grille—84" finished height

Accessories are available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator)

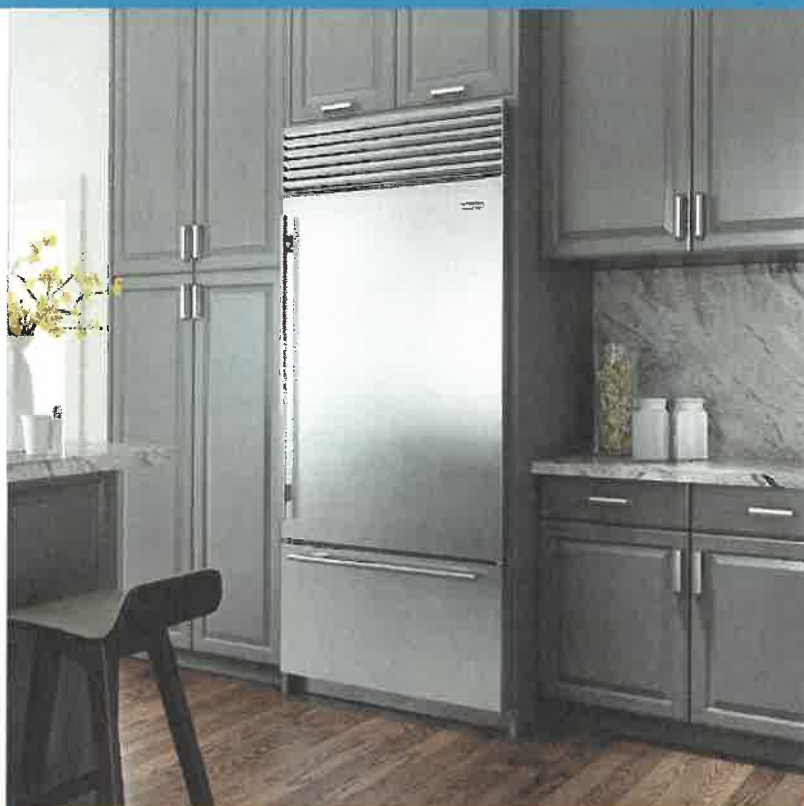

## HANDLE OPTIONS

### PRO



### TUBULAR



## PRODUCT DETAILS

### REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with dividers
- 1 Storage drawer with dividers
- 2 Adjustable door shelves
- 1 Stationary door shelf
- Adjustable dairy compartment


### FREEZER

- Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- Automatic ice maker


## PRODUCT SPECIFICATIONS

Model	BI-36U/S
Dimensions	36"W x 84"H x 24"D
Door Clearance	37 1/4"
Drawer Clearance	23 5/8"
Weight	515 lb
Refrigerator Capacity	16.4 cu ft
Freezer Capacity	5.3 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi


## ELECTRICAL




## PLUMBING



## DIMENSIONS

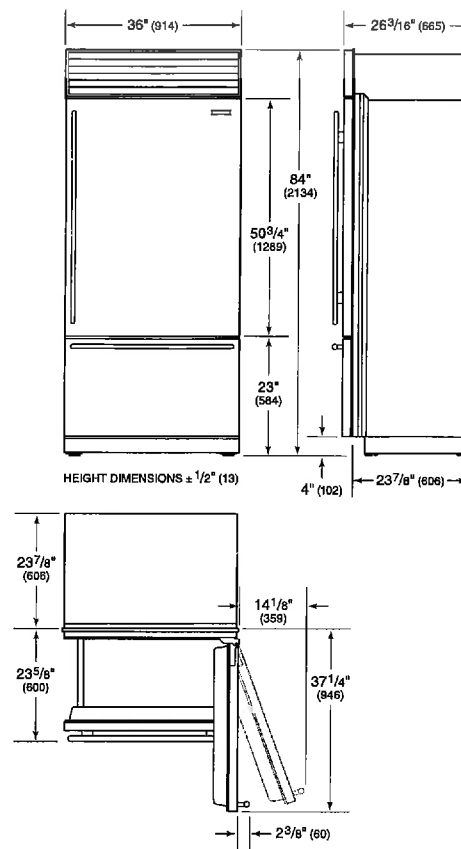


## INTERIOR VIEW

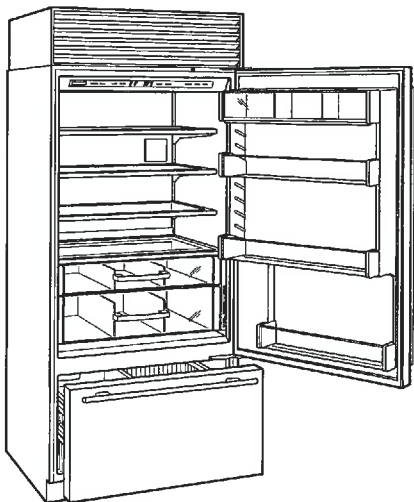

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

## STANDARD INSTALLATION

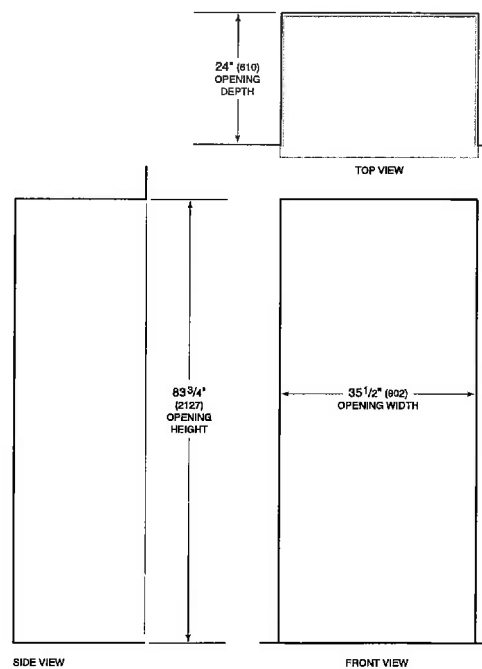

NOTE: Shaded line represents profile of unit.

SRT366



## FEATURES

- 6 dual-stacked, seamless burners
- Dual-stacked burners go from 20,000 Btu down to a mere breath of flame
- Continuous cast-iron grates for easy movement of pots and pans
- Heavy-gauge stainless steel
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Individual spark ignition system

## ACCESSORIES

- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Cast iron S-grates and wok grate
- Signature red, black or stainless steel control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## KNOB OPTIONS



## TOP CONFIGURATION

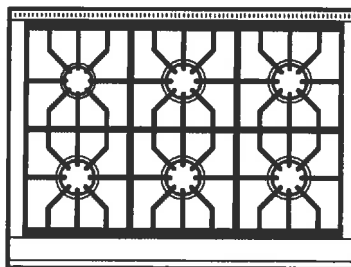


## RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner


# PRODUCT SPECIFICATIONS

Model	SRT366
Dimensions	35 7/8"W x 8 1/2"H x 28 1/2"D
Weight	220 lb
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" rigid pipe
Gas Inlet	1/2" NPT female


# ELECTRICAL AND GAS



# DIMENSIONS

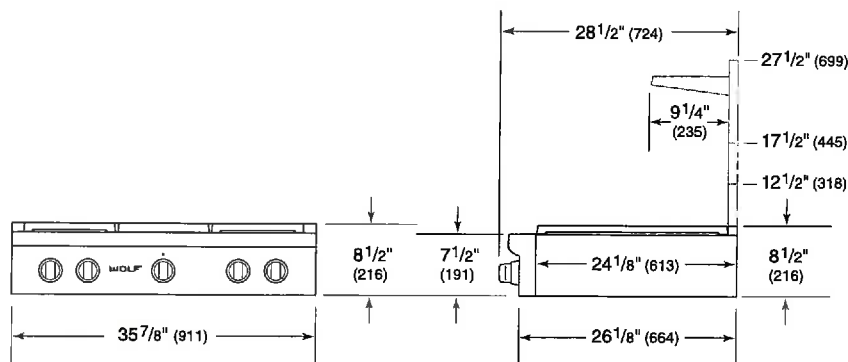

# STANDARD INSTALLATION

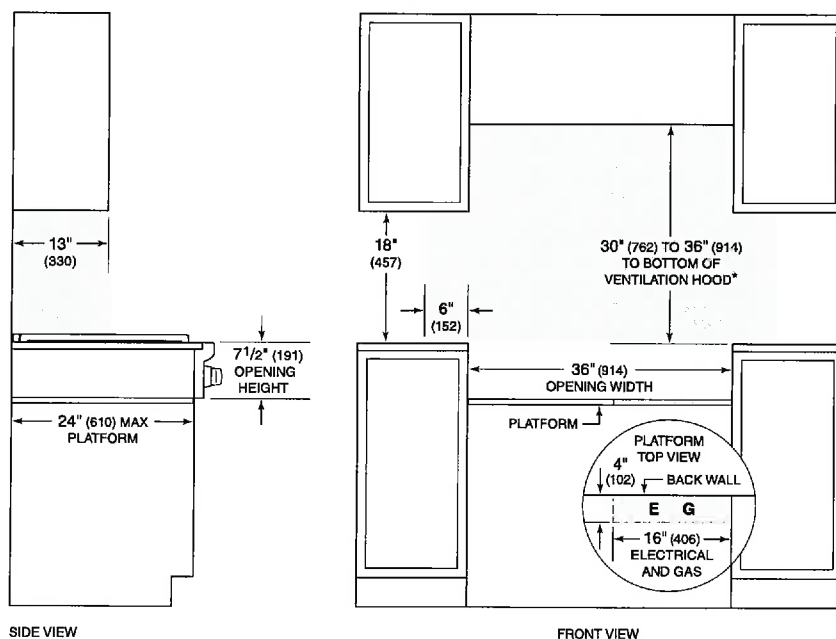

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charcoal.  
 NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
 Electrical and gas supply located through bottom of platform.  
 For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.



# SUTC-35

## SUTC 35

- SUTC35 36"-48" Dual Motor: **EBM 1100 cfm (Duct size 8")**
- SUTC35 30" One Motor: **EBM 600cfm (Duct size 6")**
- Pressure: **800 Pa**
- Noise level: **66 dBA – 5.1 sones**




- Lighting: 2x20W halogen lamps 30" version  
3x20W halogen lamps 36" version  
4x20W halogen lamps 48" version



- Red Control panel: 4 speed push-button + timer + light switch


- grease filter: commercial style baffle filters
- Stainless steel: AISI 430

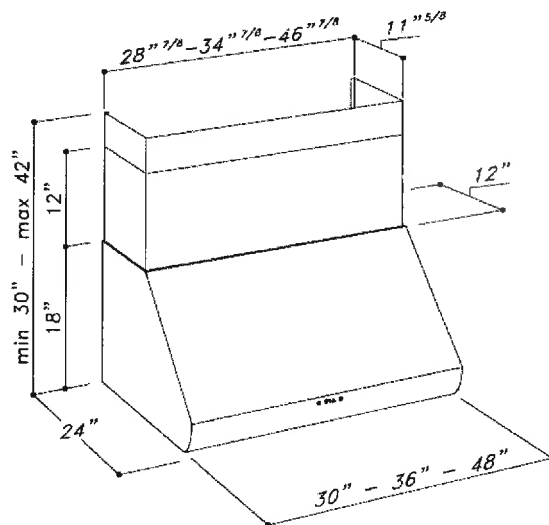

**Sirius**


SU TC 35

1 Motor top vented version

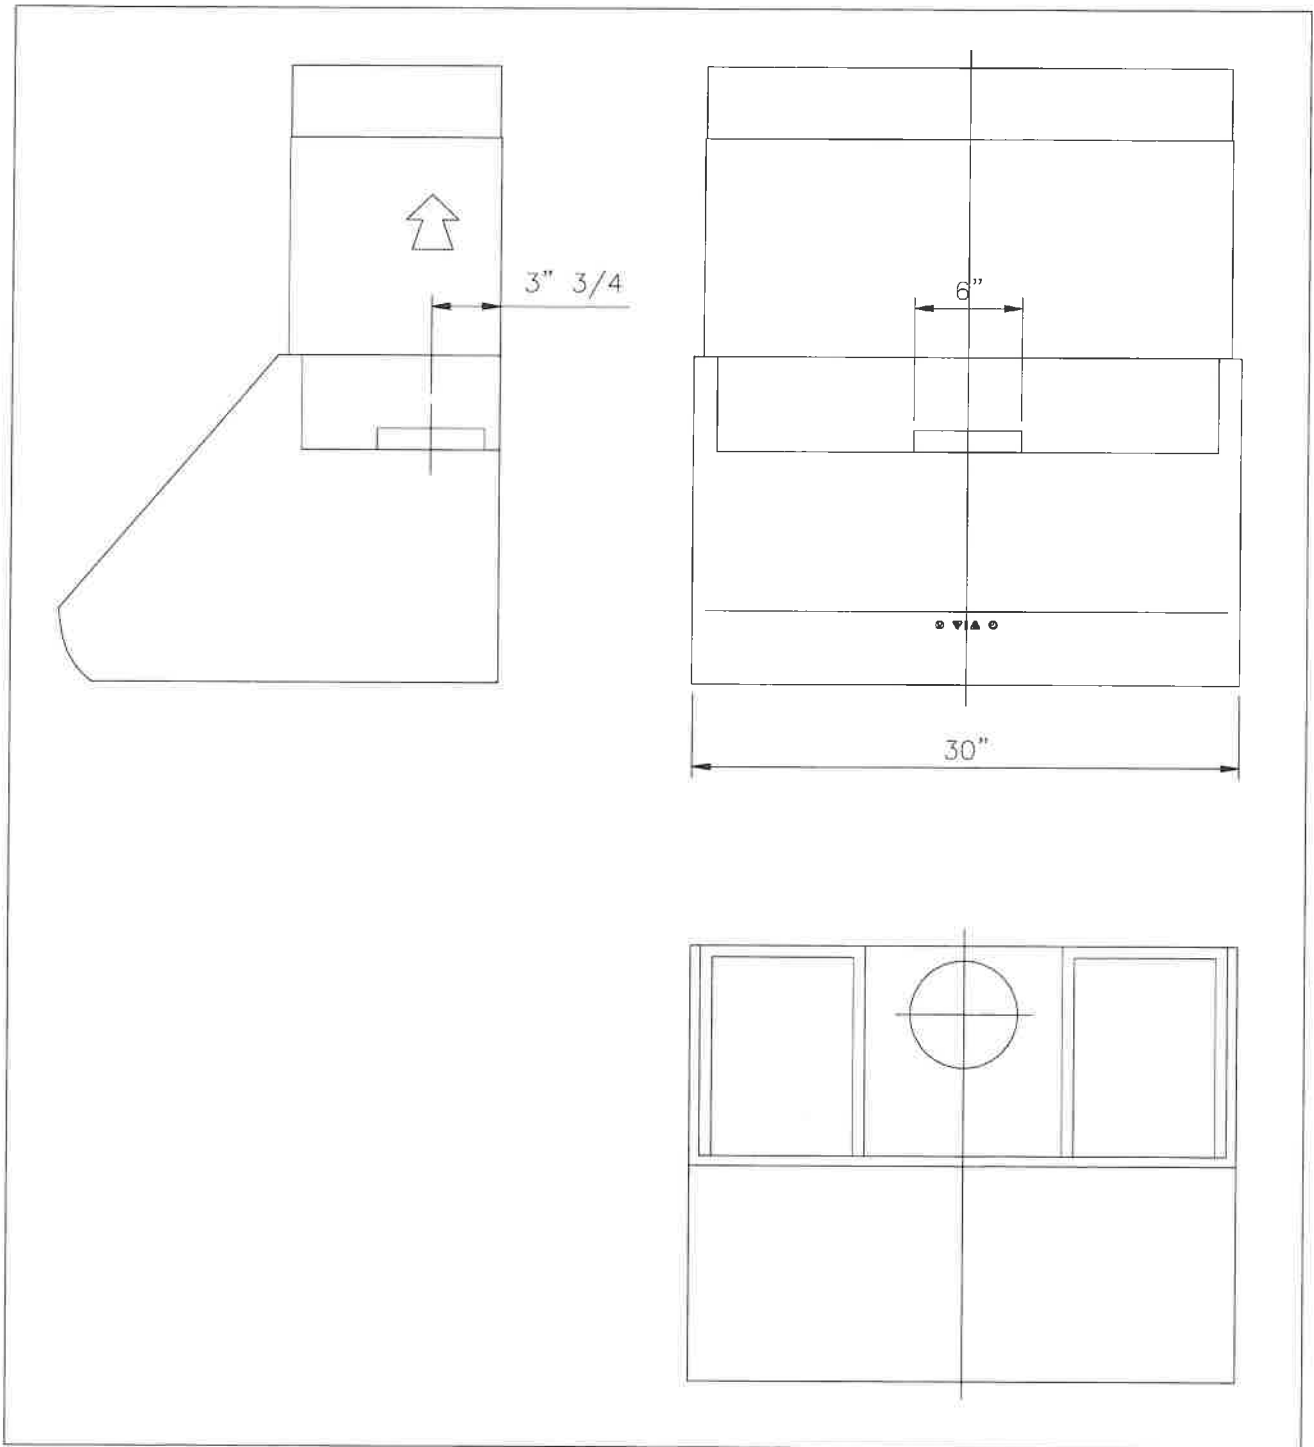


SU TC 35

1 Motor back vented version

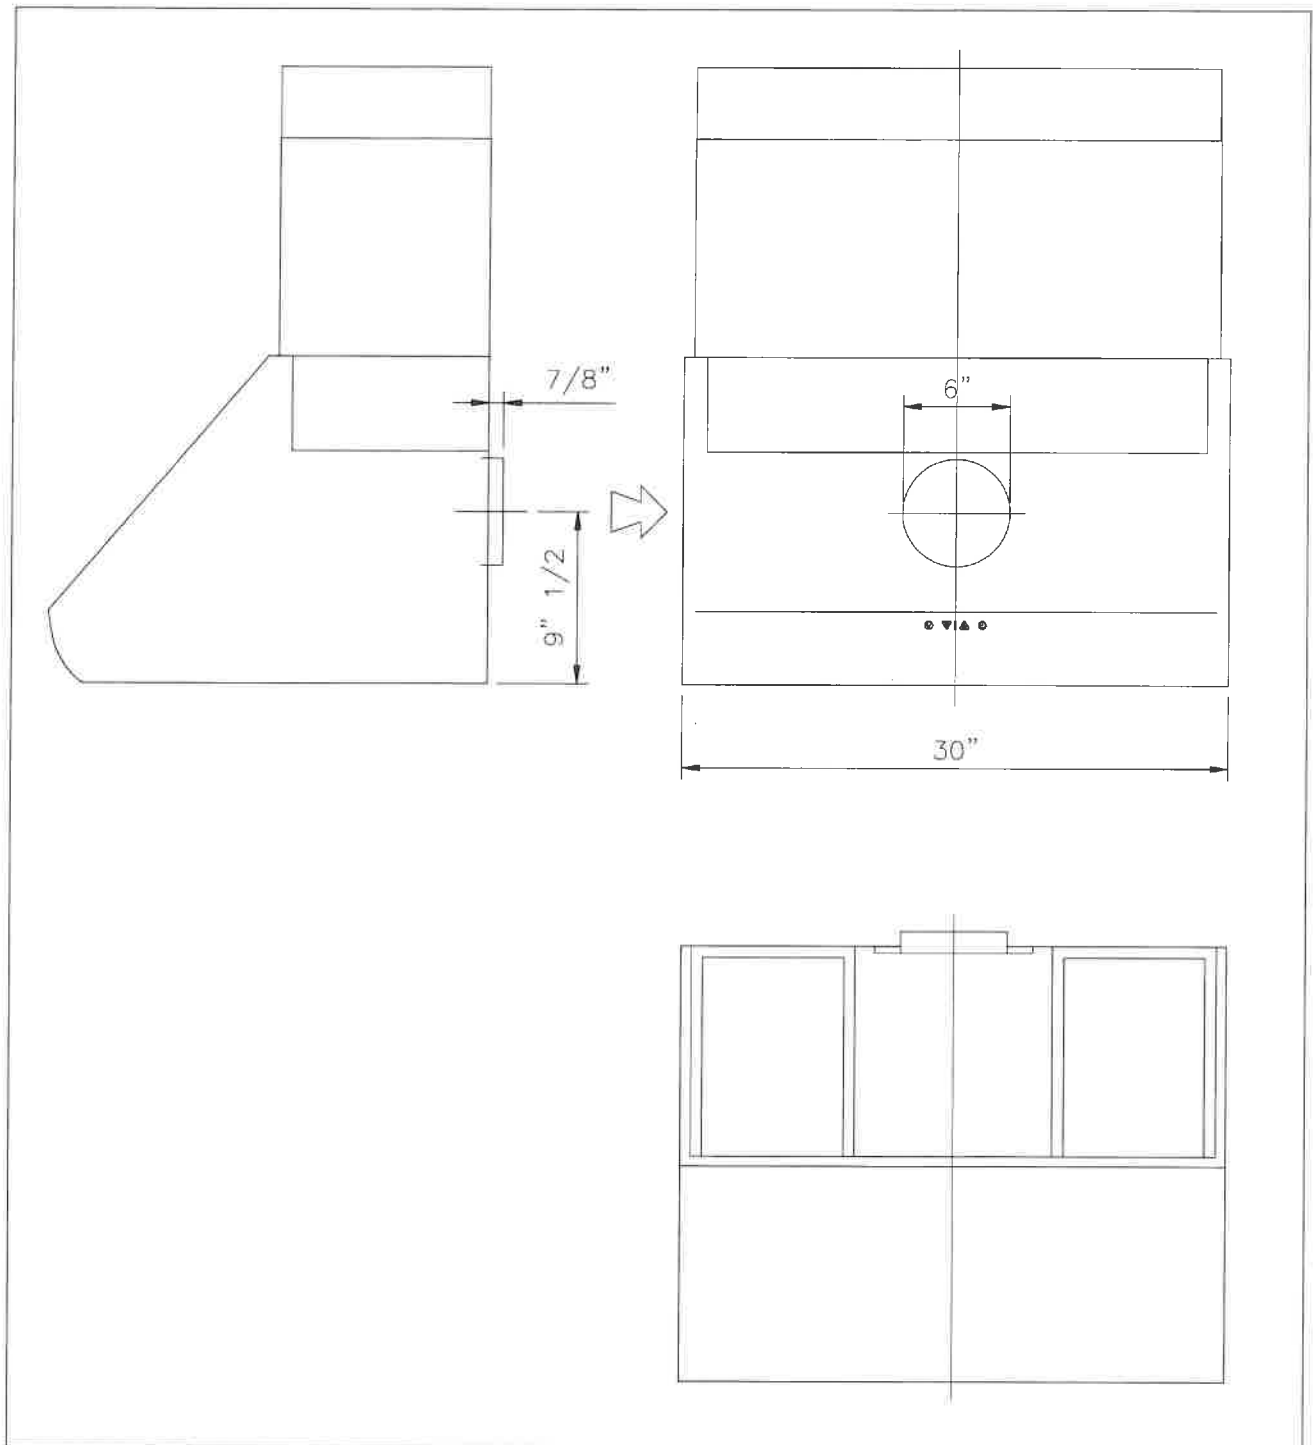

SU TC 35


2 Motors top vented version

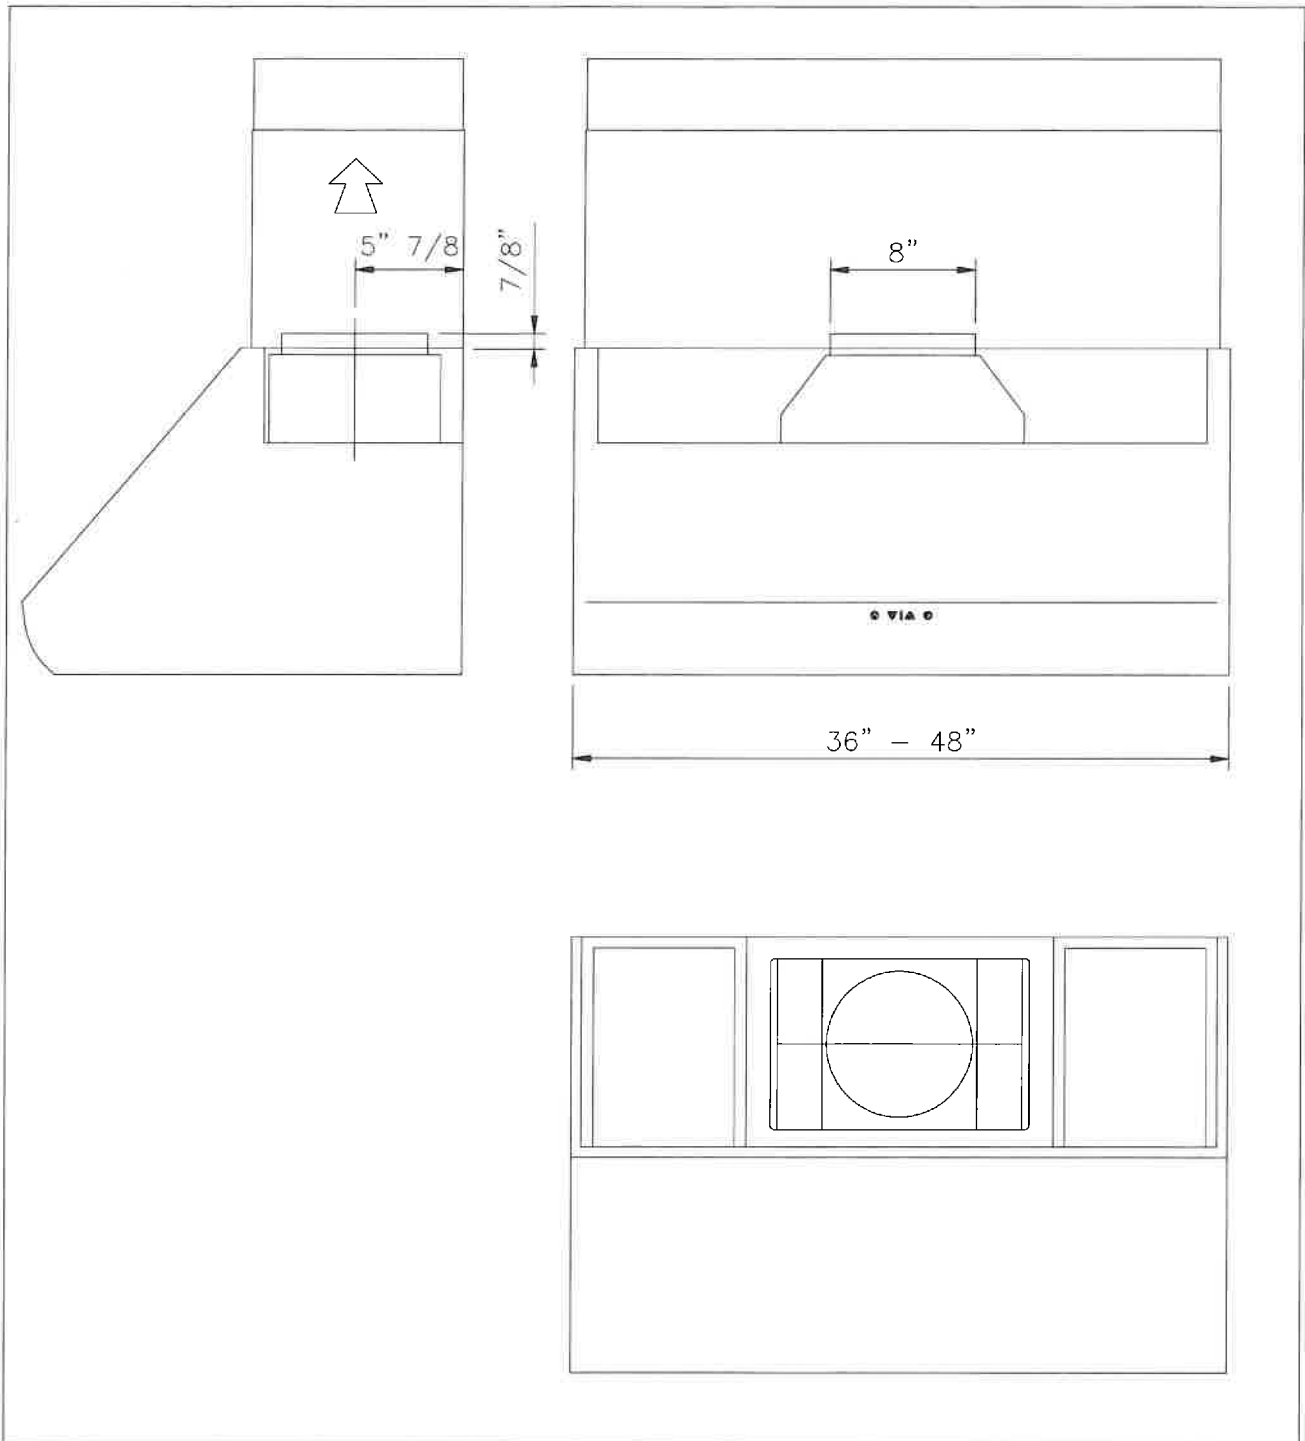



SU TC 35

2 Motors back vented version

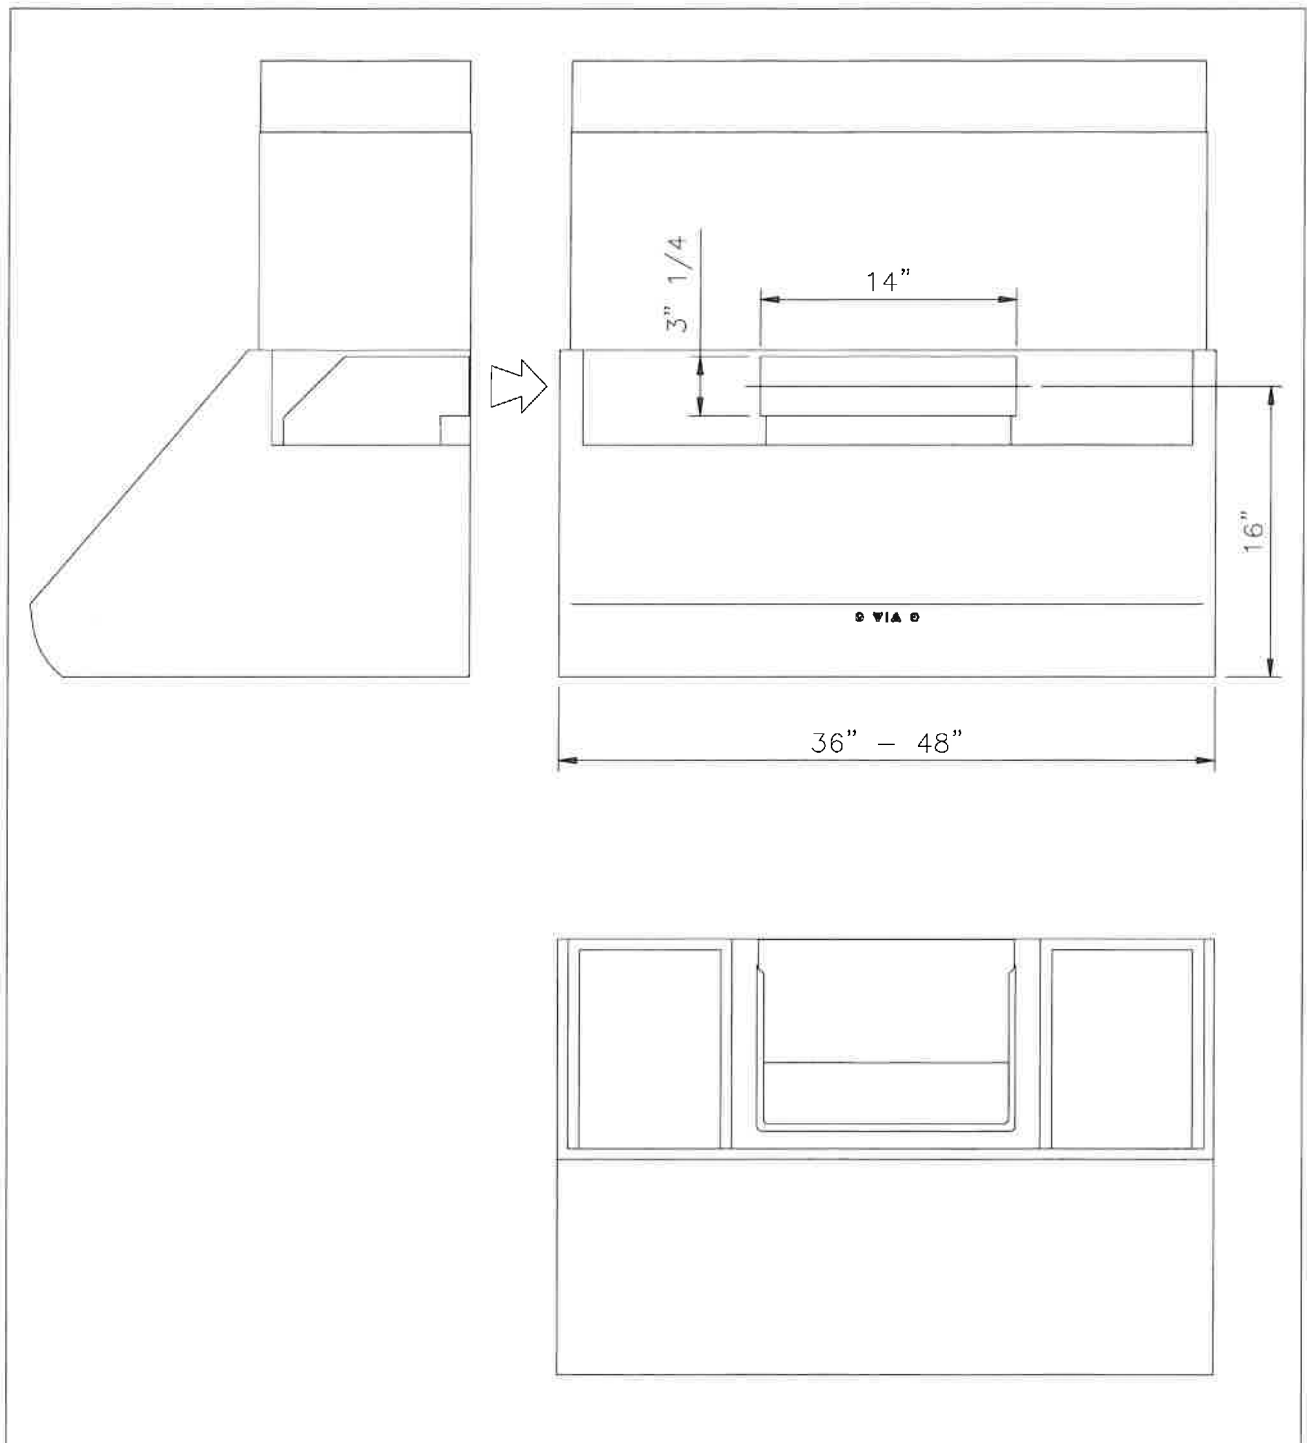

# D5436XLS

Turbo Drying  
Top tray for bowls and cutlery  
Upper basket type: Premium  
Lower basket type: Premium  
Separate removable basket  
Number of place settings: 16

## Top tray functions

InstantLift™ - smart height adjustment of the top tray  
Divisible and removable trays  
Rack for knives and utensils  
Rack for bowls and cups  
Telescopic rails

## Upper basket functions

Tight mesh base  
Multi position wine shelf left  
Multi position wine shelf right  
Fixed pin rows  
Fixed glass support  
Wide knife stand

## Lower basket functions

Foldable/divisible pin rows rear  
Separate removable basket

## Programs

Sanitization wash  
Normal wash  
Heavy wash  
Quick wash  
ECO wash

## Options

Delayed start

## Cleaning systems

Number of spray zones: 9  
Number of spray arms: 3  
WideClean™ - extra washing power for pots and pans  
SCS - Super Cleaning System™  
Aqua Level™ Sensor  
Stainless steel spray arms

## Drying system

Turbo Drying™

## Features

8 stainless steel parts  
Time remaining indicator  
Voice signal for the end of washing cycle  
Hidden heater  
KidSafe - lockable controls

## Water safety

Few sealing points outside the container  
Long lasting seam welded tank  
Waterproof external base  
Exterior float  
Aqua Detect™ Sensor  
Aqua Level™ Sensor  
Stand-by water protection  
Yes  
Max time water intake  
Sound alarm  
Anti-block drain pump



## Installation

Adjustable feet  
Multi fit outlet hose  
Fixed high loop outlet hose  
Trim kit

EAN code: 3838942042188  
code: 492231

## General

Product: Dishwasher  
Mode of installation: Built-in  
Size: XL (ADA height compliant)  
Touch Screen Display  
Number of programs: 7  
Noise level: 46 dB(A)  
Number of baskets: 3  
EAN code: 3838942042188

## Dimensions and installation

Height: 32 5/16 (820 mm)  
Width: 23 15/16 (608 mm)  
Depth: 22 7/8 (581 mm)  
Packaging height: 35 1/16 (890 mm)  
Packaging width: 25 3/16 (640 mm)  
Packaging depth: 26 3/4 (680 mm)  
Length electrical cord: 46 7/16 (1180 mm)  
Length inlet hose: 66 1/8 (1680 mm)  
Length outlet hose: 41 3/4 (1060 mm)  
Weight net: 101 lbs  
Weight gross: 109 lbs

## Technical information

Voltage: 120 V  
Current: 15 A

## Consumption

Energy consumption/cycle: 0,87 kWh