

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT. L4K 5V8 *** TOLL FREE 1-888-745-0622 PH:(905)856-0007 FX:(905)856-5325 TORONTO LINE:(416)745-0622



SALES ORDER

"Innovative Products for Builders, Designers & Home Owners"

Sold JOEY & MARIA D'ADDSE LOT 6S CASTLES OF KING

KING CITY
ON LOL OLO

Ship JOEY & MARIA D'ADDSE LOT 6S CASTLES OF KING

KING CITY
ON LOL OLO

Customer Class			Builders Allowance	Name /# /	Ship Via	Invoice #		
003 BLDR CUST SALES					#	\$	COAST	1339262
Sales Representatives			Address:		Terms	Prov.Tax #	Customer #	Order #
F8 WA	YNE W	18,7	LOT 6S CASTLES O	F KING	CASH SALES		GH106	1766871-01
			Shipping Location		Date Ordered	Date Allocated	Date Required	Order Type
			WOODBRIDGE WHS	E	10SEP16	02APR17		REGULAR ORDER
			Customer P.O.#		Job #:		Change Order #:	
Quantity	Quantity	Quantity	88 11/P 14					1
		Shipped	Model / Description		1		Price	Extension
1	1	1	IT-36CI-LH	SUBZER	O 36" INTEGRATED	TALL REFRIGERATOR		
	ĺ		/	/ FREEZ	ER WITH ICE LH			
1	1	\	DF366	WOLF 3	6" DUEL FUEL RANG	E SS		
					ES KNOBS			
1	1]	D5536XXLFI	ASKO FI	ULLY INTERGRATED	XXL TALL TANK		
		,			ASHER, REQUIRES PA			
1	1	✓	SU901X	SIRIUS F	PROFESSIONAL POWE	ER PACK HOOD FAN		
				SS,110	OCFM	•		
1	1		INSTALLATION - INSTA	INSTALL	ATION BY INSTALLE	R		
1	1		BA FRIDGE BASE	CONTRA	CT BUILDERS ALLOV	V FRIDGE BASE		
1	1		BA RANGE BASE	CONTRA	CT BUILDERS ALLOV	V RANGE BASE		
1	1		BA D/W BASE	CONTRA	CT BUILDERS ALLOV	V D/W BASE		
1	1		BA HOODFAN BASE	CONTRA	CT BUILDERS ALLOV	V HOODFAN BASE		
1	1		BA WASHER BASE	CONTRA	CT BUILDERS ALLOW	WASHER BASE		
1	1		BA DRYER BASE	CONTRA	CT BUILDERS ALLOW	V DRYER BASE		
1	1		BA HOSES	BA HOSE	S			
i	1	,	BA STACKER BASE	CONTRA	CT BUILDERS ALLOW	STACKER BASE		
			legend: *	= Eco Fee	Annlicable K - Ke	eep for future shipmen		
			Legenu.	- 200 66	repulcable, K - Ke	sep tot tuture stripitien	PAYMENT	
							SUBTOTAL	
		Ł					PST	
							DEL/FUEL S/C	
							HST	
				9			TOTAL	

Rep	ort to:					
	CR	Ol-:	Date Shipped	EXTENDED WARRANTY		
SM		Shipper		ACCEPTED	REJECTED	
1			1 1			

Date: 09/10/2016 Time: 09:30:30

NOW 15 LOCATIONS TO SERVE YOU

www.coastappliances.com

GST# 81398 6668

PAGE 1 OF 2

Customer Copy

1766871-01/0000001





#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT. L4K 5V8 *** TOLL FREE 1-888-745-0622 PH:(905)856-0007 FX:(905)856-5325 TORONTO LINE:(416)745-0622



SALES ORDER

"Innovative Products for Bullders, Designers & Home Owners"

Sold JOEY & MARIA D'ADDSE LOT 6S CASTLES OF KING

KING CITY
ON LOL OLO

Ship JOEY & MARIA D'ADDSE LOT 6S CASTLES OF KING

KING CITY ON LOL OLO

Customer Class			Builders Allowance Name /#	Ship Via	Invoice #		
003 BLDR CUST SALES				#	\$	COAST	1339262
Sales Representatives			Address:	Terms	Prov.Tax #	Customer #	Order #
F8 WAYNE W 18,7			LOT 6S CASTLES OF KING	CASH SALES		GH106	1766871-01
			Shipping Location	Date Ordered	Date Allocated	Date Required	Order Type
			WOODBRIDGE WHSE	10SEP16	02APR17		REGULAR ORDER
	}		Customer P.O.#	Job #:		Change Order #:	
uantity	Quantity	Quantity					
	BackOrd	Shipped	Model / Description	<u> </u>		Price	Extension
1	1		BA BUILDE	RS ALLOWANCE			
			CREDI	T FOR INSTALL STAN	DARD PACKAGE		
1	1			RO INSTANT REBATE		1	
			308 22	NO NOTANT REDATE			
							1
							1
	1						
							1
		1					
		ŀ					
		l				i	
	l						
ı		1					
1		- 1					
ľ	·	ł					1
	į						
	1	1					
1							
- 1		1					
-]	ļ					
	- 1	1	Legend: * = Eco Fee	Applicable, K = Ke	ep for future shipment		İ
			VISA 700.00		,	PAYMENT	700.00
15	15					SUBTOTAL	3,200.00
						PST	
		_				DEL/FUEL S/C	
						HST	416.00
			- Ti			TOTAL	3,616.00

Repo	ort to:					
dea	OD.		D . O	EXTENDED WARRANTY		
SM	M CR Shipper		Date Shipped	ACCEPTED	REJECTED	
					1	

Date: 09/10/2016 Time: 09:30:30

NOW 15 LOCATIONS TO SERVE YOU

www.coastappliances.com

GST# 81398 6668

PAGE 2 OF 2

Customer Copy

1766871-01/0000001





SU901

SU901

Dual Motor (1100 CFM) - EBM

Pressure: 800 Pa

- Noise level: 66 dBA/5.1 sones







- Lighting: 2x20W Dichroic lamps








grease filter: commercial style baffle filters







IT-36CI





FEATURES

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Water-filtration system for ice reduces contaminants, chlorine taste and odor

Automatic ice maker with "max ice" feature

Over-and-under refrigerator/freezer storage

Ready to be fitted with custom panels and handles to blend with cabinetry

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

ACCESSORIES

Air Purification Cartridge

Egg Container

Stainless steel tubular handles

Stainless steel pro handles

Dual installation kits

Stainless steel front panels with tubular or pro handles

Stainless steel kickplate

Stainless steel side enclosure

Stainless steel top enclosure

Reduced toe kick divider for toe kicks from 2" to 3.875"

Replacement water filter

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.



HANDLE ACCESSORIES

PRO



TUBULAR

PRODUCT DETAILS

REFRIGERATOR

- Three adjustable glass shelves
- · One stationary shelf
- · Crisper drawer with two adjustable dividers
- · Adjustable dairy compartment
- · Two adjustable door shelves
- · One stationary door shelf

FREEZER

- Three adjustable drawer dividers
- · Removable ice container
- · Automatic ice maker





PRODUCT SPECIFICATIONS

Model	IT-36CI
Dimensions	36"W x 84"H x 24"D
Door Clearance	34 1/2"
Drawer Clearance	18 3/8"
Weight	460 lbs
Refrigerator Capacity	13.3 cu. ft.
Freezer Capacity	6.4 cu. ft.
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi
Receptacle	3-prong grounding-type

ELECTRICAL

- LEFT SIDE OF OPENING 15¹/2" (394) 4¹/4" (108) 88


FLOOR

PLUMBING




INTERIOR VIEW


1/4" (6)




This illustration is intended for interior reference only and may not represent the exterior of the mode! being specified.

DIMENSIONS






STANDARD INSTALLATION









MOLF

DF366



FEATURES

10 cooking modes make meals easy

Dual convection oven for faster, more consistent cooking

6 dual-stacked, sealers burners

Dual-stacked burners produce up to 20,000 Btu

Burners capable of delivering less than 300 Btu for premier simmer performance

Continuous cast-iron grates for easy movement of pots and pans

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Cobalt blue porcelain interior

Spark ignition system re-ignites if flame goes out

Heavy-gauge stainless steel

Exclusive pivoting control panel

Red, black or stainless steel control knobs

Temperature probe lets you know when it's done

Self clean, delayed start, timed cook, Sabbath mode and more

ACCESSORIES

Bake stone kit (stone, rack and peel)

Stainless steel, brass or chrome bezels

Front leg and rear caster covers

High altitude conversion kit

Dehydration kit (racks and door stop)

Full-extension easy glide oven rack

Cast iron S-grates and wok grate

Stainless steel kickplate

Signature red, black or stainless steel control knobs

Temperature probe and broiler pan

5" and 10" stainless steel risers, and 20" riser with shelf

Set of three standard oven racks

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit <u>subzero-wolf_com/locator_</u>




KNOB OPTIONS







TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- · 1 9,200 Btu Burner
- · 2 = 15,000 Btu Burners
- 2 18,000 Btu Burners
- 1 20,000 Btu Burner







PRODUCT SPECIFICATIONS

Model	DF366
Dimensions	35 7/8"W x 36 7/8"H x 29 1/2"D
Oven 1 Interior Dimensions	30"W x 16 1/2"H x 19"D
Oven 1 Usable Capacity	3.5 cu. ft.
Oven 1 Overall Capacity	5.4 cu. ft.
Door Clearance	19 1/2"
Weight	470 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Gas Supply	3/4" rigid pipe
Gas Inlet	1/2" NPT female


ELECTRICAL AND GAS



DIMENSIONS

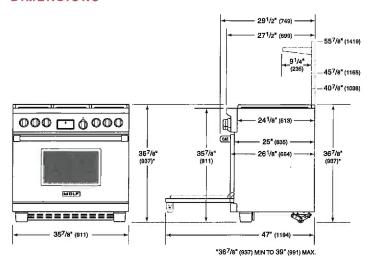

STANDARD INSTALLATION

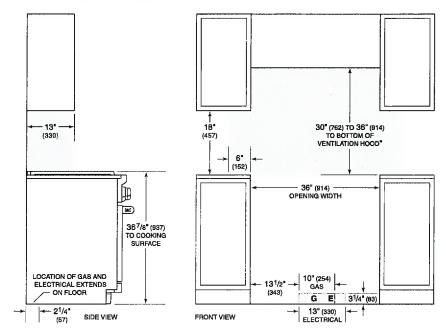

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces,

combustible materials cannot be located within this area.

For Island Installation, 12*(305) minimum clearance back of range to combustible rear wall above countertop.



MODEL D5536XXLFI askona.com

FEATURES

- Accepts custom panel and handle to integrate with surrounding cabinetry.
- Hidden controls.
- Turbo Drying™ system.
- 16 place-setting capacity.
- Quiet operation—46 dB(A).
- 9Spray[™] wash system; separate spray nozzles clean pot & pans and continuously spray cutlery basket.
- 10 wash programs.
- Delayed start—up to 24 hours.
- Heavy-duty stainless steel construction with nylon-coated steel racks.
- LED display.
- Remaining time and program end indicator.
- Accommodates 4" or 6" toe kick height.









MODEL

Panel Ready D5536XXLFI

INTERIOR FEATURES

Top tray with Instant Lift™

Premium upper rack

Premium lower rack

PROGRAMS

Sanitation Wash
Normal Wash

Heavy Wash

Quick Wash

Hygiene

Delicate Wash

Eco Wash

Upper Half Lower Half

Rinse and Hold

ACCESSORIES

- Stainless steel front panel with tubular or pro handle.
- Stainless steel tubular and pro handles.

Accessories available through an authorized Asko dealer. For local dealer information, visit the find a showroom section of our website, askona.com.





MODEL D5536XXLFI askona.com

SPECIFICATIONS

PRODUCT	
Width	23 ⁹ /16'
Height	34"- 35 ³ /4"
Depth	22 ⁷ /8"
Door Clearance	24 ⁵ /8"
Weight	115 lb
MAY LOADING HEIGHT	

MAX LOADING HEIGHT

Upper Rack	9"
Lower Rack	13 ⁷ /8"

ELECTRICAL

Supply 115 VAC, 60 Hz Service 15 amp circuit

PLUMBING

Supply 1/4" OD copper, braided stainless steel or PEX tubing Pressure 4.2–140 psi


Product dimensions do not include panel and handle. Dimensions will vary with panel thickness.


Electrical supply, plumbing supply and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations.

Specifications are subject to change without notice. Visit askona.com/specs for the most up-to-date information.

Dimensions may vary \pm^{1}/ϵ^{*} (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS





*Dimension will vary with product height.


ELECTRICAL



PLUMBING



INSTALLATION

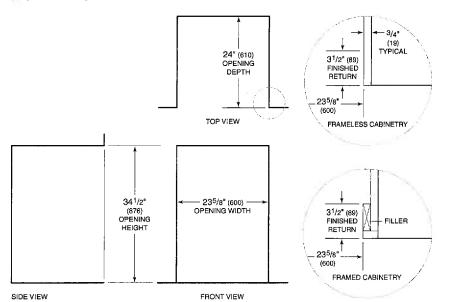

NOTE: 31/2" (89) finished returns will be visible and should be finished to match cabinetry.



©Asko, Inc. all rights reserved. 3/2016