



CONSTRUCTION SUMMARY

Belle Aire Shores - Zancor Homes (Innisfil) Ltd.

PURCHASERS: Joselyn Laquindann and Susan Oandasan

Tel: RES.: 647-989-0226 BUS.: 416-875-0192

LOT / PHASE	HOUSE TYPE	PRINT DATE
172 / 1	MASTHEAD (42-06) ELEV B	26-Apr-17

Ref#	Quantity	Description	Approved	Notes
2088	BONUS:	Granite kitchen countertops with undermount sink 3 Piece stainless steel appliances with white top loading washer and dryer Stainless steel under cabinet hood fan Extended uppers in kitchen (39-1/2")	26Apr17	
2089	BONUS:	BBQ Gas line Air Conditioning (42ft and 50ft lots ONLY) 9ft main floor ceilings, 8ft ceilings on second floor 3-1/4 inch by ¾ inch natural prefinished engineered hardwood on main floor in non-tiled areas, excludes bedrooms Natural finished oak stairs	26Apr17	
2090	MAIN FLOOR - 8 FOOT INTERIOR DOORS IN LIEU OF STANDARD		26Apr17	
2091	KITCHEN 8 FOOT GARDEN DOORS IN LIEU OF SLIDERS		26Apr17	
2092	ADMIN FEE FOR ADDITIONAL CHANGE		26Apr17	
2093	SMOOTH CEILINGS ON MAIN FLOOR		26Apr17	
2094	ADD BASEMENT WINDOW ON SIDE OF HOUSE 30 X 16 GRADE PERMITTING (LOCATION AS PER SKETCH)		26Apr17	
2095	BASEMENT - INCREASE 2 REAR BACK WINDOWS IN BASEMENT TO BE 30 X 24 IN LIEU OF STANDARD		26Apr17	
2096	GAS FIREPLACE IN GREAT ROOM WITH STANDARD MANTLE *COMES INTO ROOM		26Apr17	
2097	HEAT ACTIVATED FAN KIT, INCL. ELECTRICAL		26Apr17	
2098	TRIM - UPGRADE 1 TRIM - STEP STYLE 5-1/4" BASEBOARD		26Apr17	
2099	MASTER ENSUITE - FRAMELESS GLASS SHOWER IN LIEU OF STD		26Apr17	
2100	TILES - MASTER ENSUITE UPGRADE 4		26Apr17	
2101	COUNTERTOP - MASTER ENSUITE UPGRADE STD MARBLE **INCLUDES OVAL UNDERMOUNT SINKS		26Apr17	
2102	TILES - UPGRADE 4		26Apr17	
2103	TILES - POWDER ROOM UPGRADE 4		26Apr17	
2104	TILES - KITCHEN/BREAK UPGRADE 4		26Apr17	
2105	HARDWOOD - UPPER HALL UPGRADE 4 IN LIEU OF CARPET		26Apr17	
2106	HARDWOOD - MAIN HALL UPGRADE 4		26Apr17	
2107	HARDWOOD - KIDS PLAY ROOM UPGRADE 4		26Apr17	
2108	HARDWOOD - DEN UPGRADE 4		26Apr17	
2109	HARDWOOD - DINING ROOM UPGRADE 4		26Apr17	
2110	HARDWOOD - GREAT ROOM UPGRADE 4		26Apr17	
2111	STAIN STAIRS TO MATCH HARDWOOD		26Apr17	
2112	RAILINGS - UPGRADE 3 SINGLE COLLAR WITH ALT. PLAIN		26Apr17	



CONSTRUCTION SUMMARY

Belle Aire Shores - Zancor Homes (Innisfil) Ltd.

PURCHASERS: Joselyn Laquindann and Susan Candasan

TEL: RES.: 647-989-0226 BUS.: 416-875-0192

LOT / PHASE	HOUSE TYPE	PRINT DATE
172 / 1	MASTHEAD (42-06) ELEV B	26-Apr-17

Ref#	Quantity - Description	Approved	Notes
2113	ELECTRICAL - GREAT ROOM - (4) LED POTLIGHTS WITH SEP SWITCH *STANDARD LIGHT TO REMAIN	26Apr17	
2114	ELECTRICAL - MAIN HALL - (4) LED POTLIGHTS ON EXISTING SWITCH, DELETE STD LIGHTS	26Apr17	
2118	ELECTRICAL - KITCHEN - RELOCATE STD LIGHT TO BE OVER ISLAND	26Apr17	
2121	ELECTRICAL - KITCHEN / BREAKFAST - (5) POTLIGHTS WITH SEP SWITCH *STANDARD LIGHT TO REMAIN	26Apr17	
2122	CABINETRY - KITCHEN UPGRADE 1	26Apr17	
2123	CABINETRY - KITCHEN CROWN MOULDING	26Apr17	
2124	WATERLINE TO FRIDGE	26Apr17	
2125	CABINETRY - KITCHEN POT AND PANS DRAWERS	26Apr17	
2126	CABINETRY - KITCHEN DEEP UPPERS ABOVE FRIDGE WITH GABLES	26Apr17	
2139	CABINETRY - KITCHEN - BUILT IN MICROWAVE (SEE SKETCH)	26Apr17	
2143	ELECTRICAL - KITCHEN 15 AMP PLUG ON SEP CIRCUIT FOR MICRO	26Apr17	
2145	CABINETRY - KITCHEN - DELETE UPPERS ABOVE STOVE FOR FUTURE CHIMNEY HOOD	26Apr17	
2147	TILES - DELETE ALL CERAMIC WHITE ACCESSORIES	26Apr17	
2148	CREDIT FOR MULTIPPOINT LOCK NOT REQUIRED	26Apr17	

This Document is Extremely Time Sensitive - Printed 26 Apr 17 at 17:25

Jan


ZANCOR HOMES COLOUR CHART

CABINETRY / COUNTERTOPS						
	DOOR STYLE	HARDWARE	COUNTERTOP	EDGE		
Kitchen	UPG(1) 400 SERIES PVC WHITE	H800BC	GIALLO ORNAMENTAL LIGHT	"C"		
Island	UPG(1) 400 SERIES PVC WHITE	H800BC	GIALLO ORNAMENTAL LIGHT	"C"		
Master Ensuite	STD CONT SLAB PVC CHOCOLATE BROWN	H500C	BOTTICINO FIORITO 1	"C"		
Main/Ensuite	STD CONT SLAB MDF STONE GREY	H700P	PORTICAL MARBLE-7735-58	STD		
Twin	STD SHAKER OAK EXPRESSO STAIN	H700P	HIVERNA P-948 CA	STD		


ZANCOR HOMES COLOUR CHART

STAIRS, RAILING & PICKETS & STAIR STAIN				
Stair Stain / Species:	STAIRS TO BE STAIN TO MATCH FLOOR AS CLOSE AS POSSIBLE			
White Paint Req'd	N/A			
Main to 2nd Railing Details:	UPG (3) METAL (BLACK) SINGLE COLLAR W/ALT. PLAIN STB			
Main to Basement Railing Details:				
TRIM				
Casing/Baseboards	UPG (1) STEP INTERIOR TRIM 5"1/4"			
Interior Doors	STANDARD			
Interior Door Hardware	STANDARD			
Exterior Door Hardware	STANDARD			
PAINT				
Kitchen/Breakfast	OSTER WHITE	Master Beds	OSTER WHITE	
Kids Play Room	OSTER WHITE	Bedroom 2	OSTER WHITE	
Dining Room	OSTER WHITE	Bedroom 3	OSTER WHITE	
Great room	OSTER WHITE	Bedroom 4	OSTER WHITE	
Den	OSTER WHITE	Master Ens.	OSTER WHITE	
Main/Upper Hall	OSTER WHITE	Main/Ensuite	OSTER WHITE	
Laundry	OSTER WHITE	Twin	OSTER WHITE	
Powder Room	OSTER WHITE			
PLUMBING- UPGRADES TO BE DETAILED ON PES				
Fixtures	Faucets	Notes		
Kitchen	STANDARD			
Powder Room	STANDARD			
Master Ensuite	STANDARD			
Main/Ensuite	STANDARD			
Twin Bath	STANDARD			
ZANCOR APPLIANCE REQUIREMENTS-UPGRADES TO BE DETAILED ON PES				
Appliance Package received in 'Schedule E'		YES / NO Package Name:		
	UPG (SEE PES)	DECLINED	NOTES	
GAS LINE	NO	✓		
WATERLINE to Fridge	YES	✓		
Hood Fan Venting SIZE	YES 6"	✓		
ELECTRICAL for Built-in Oven	NO	✓		
ELECTRICAL for Built-in Micro / OTR	NO	✓		
ELECTRICAL for Gas Stove / Cooktop	NO	✓		
ELECTRICAL for Bar Fridge	NO	✓		
DISCLAIMER		INITIALS		
Colours of all materials are as close as possible to Builders selection but not necessarily identical due to dye lot variances in manufacturing/manufacturers. Due to construction progress some items may have been pre-selected or installed. In this event the Vendor's selection must be accepted by the purchaser				
Any changes to the colour chart after signing are subject to a \$5000 administration fee plus costs				
Purchaser has checked and acknowledged accuracy of colour and selections before signing.				
SITE:	INISFIL	LOT: 172		
PURCHASER(S):	SUSAN OANDSAN JOSELYN LAQUINDANUM		JL 03/28/17	
HOME #/CELL #	416-875-0912		Purchaser Signature SD 03/28/17	
EMAIL:	susandelacruz@me.com		Purchaser Signature SD 03/28/17	
DÉCOR NOTES		Purchaser Signature SD 03/28/17		
FOR TRADE USE		DÉcor Consultant Signature LH/LA/OKS 03/28/17		
Any upgrades in the colour chart must be accompanied with a PES.		Date		
It is the responsibility of all Trades to inform the builder of any discrepancies on sketches, PES and/or colour charts PRIOR to installation.		Date		
*** PAGE 2 OF 2 ***		Vendor Signature Date		

LOT 172 BELLE AIR SHORES - INNOVFL

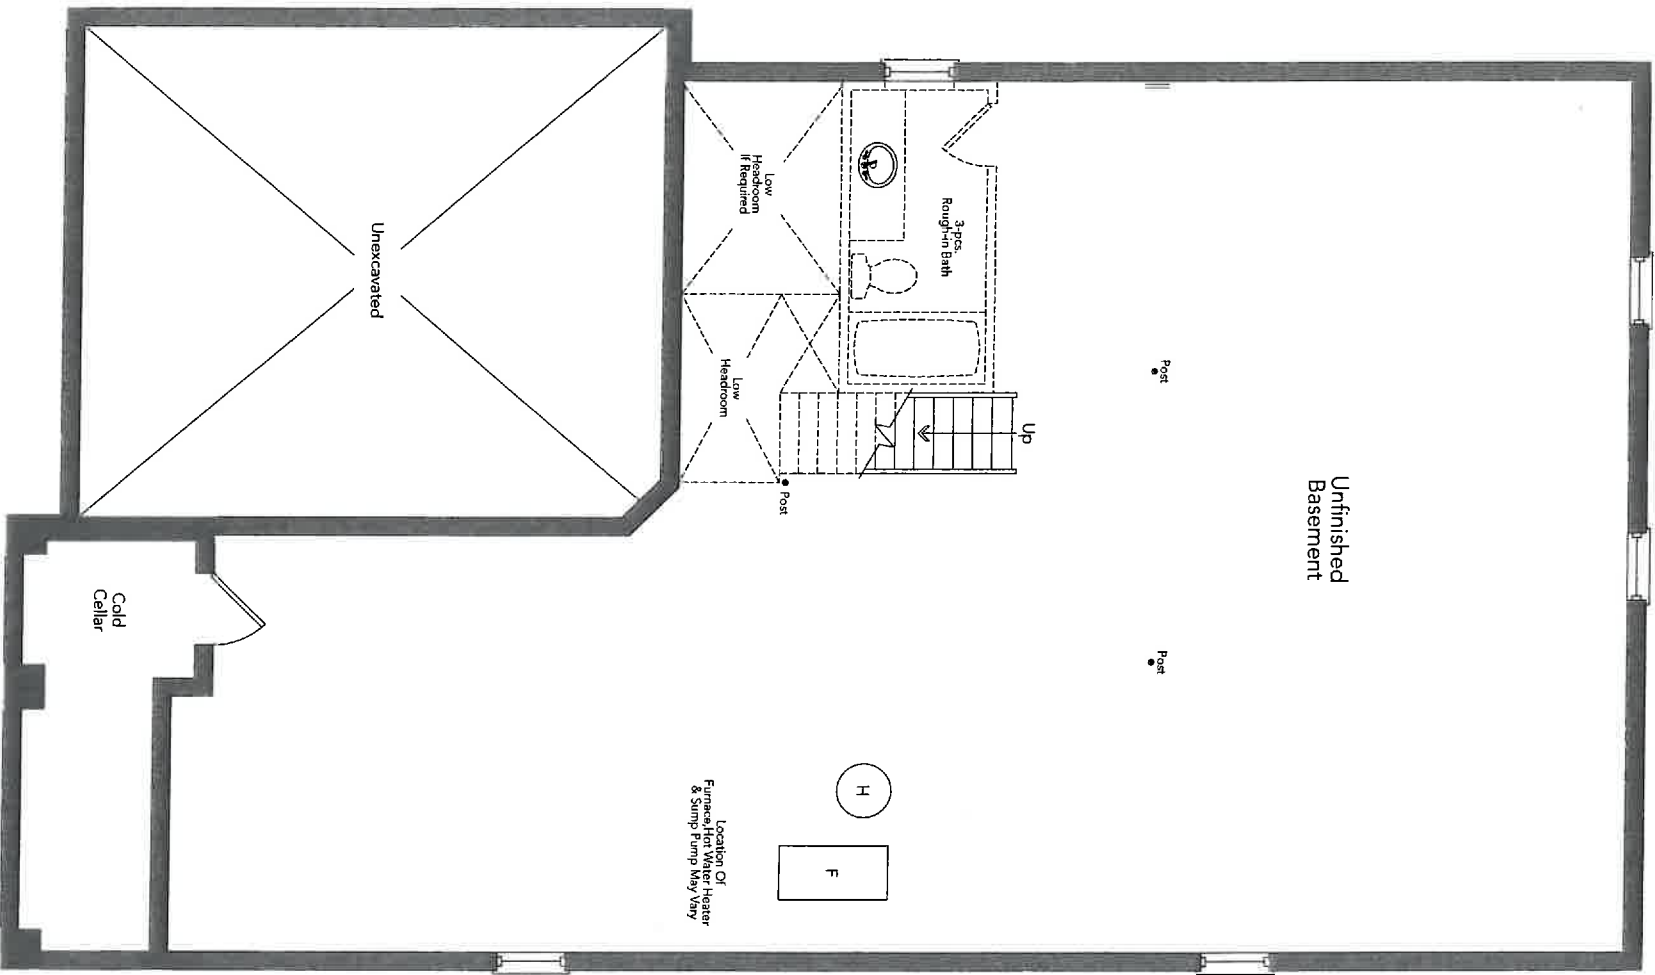

~~Basement~~
Elevation A

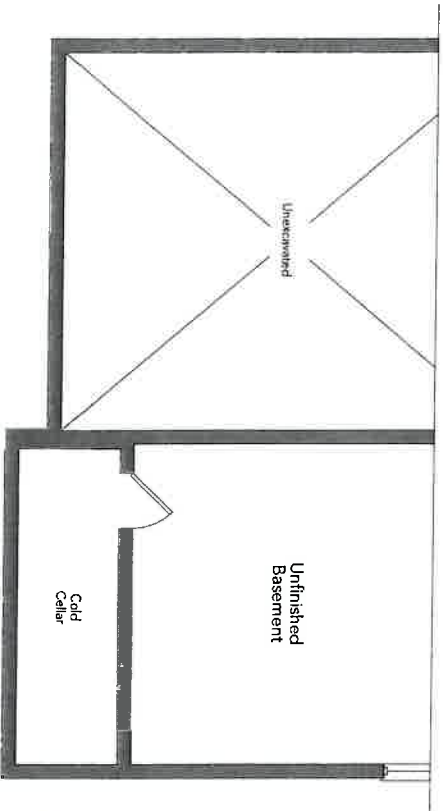

Partial Basement
Elevation B


MASTHEAD 42-06

128

LOT 172 B&E ARE MORE - 14457L

New Image Kitchens Inc.	
Scale:	Approved by:
Date: 10/10/15	Drawn by: MGER
	Revised:
BELLE AIR SHORES, INNISFIL	Drawing number:

MODEL: 42-06

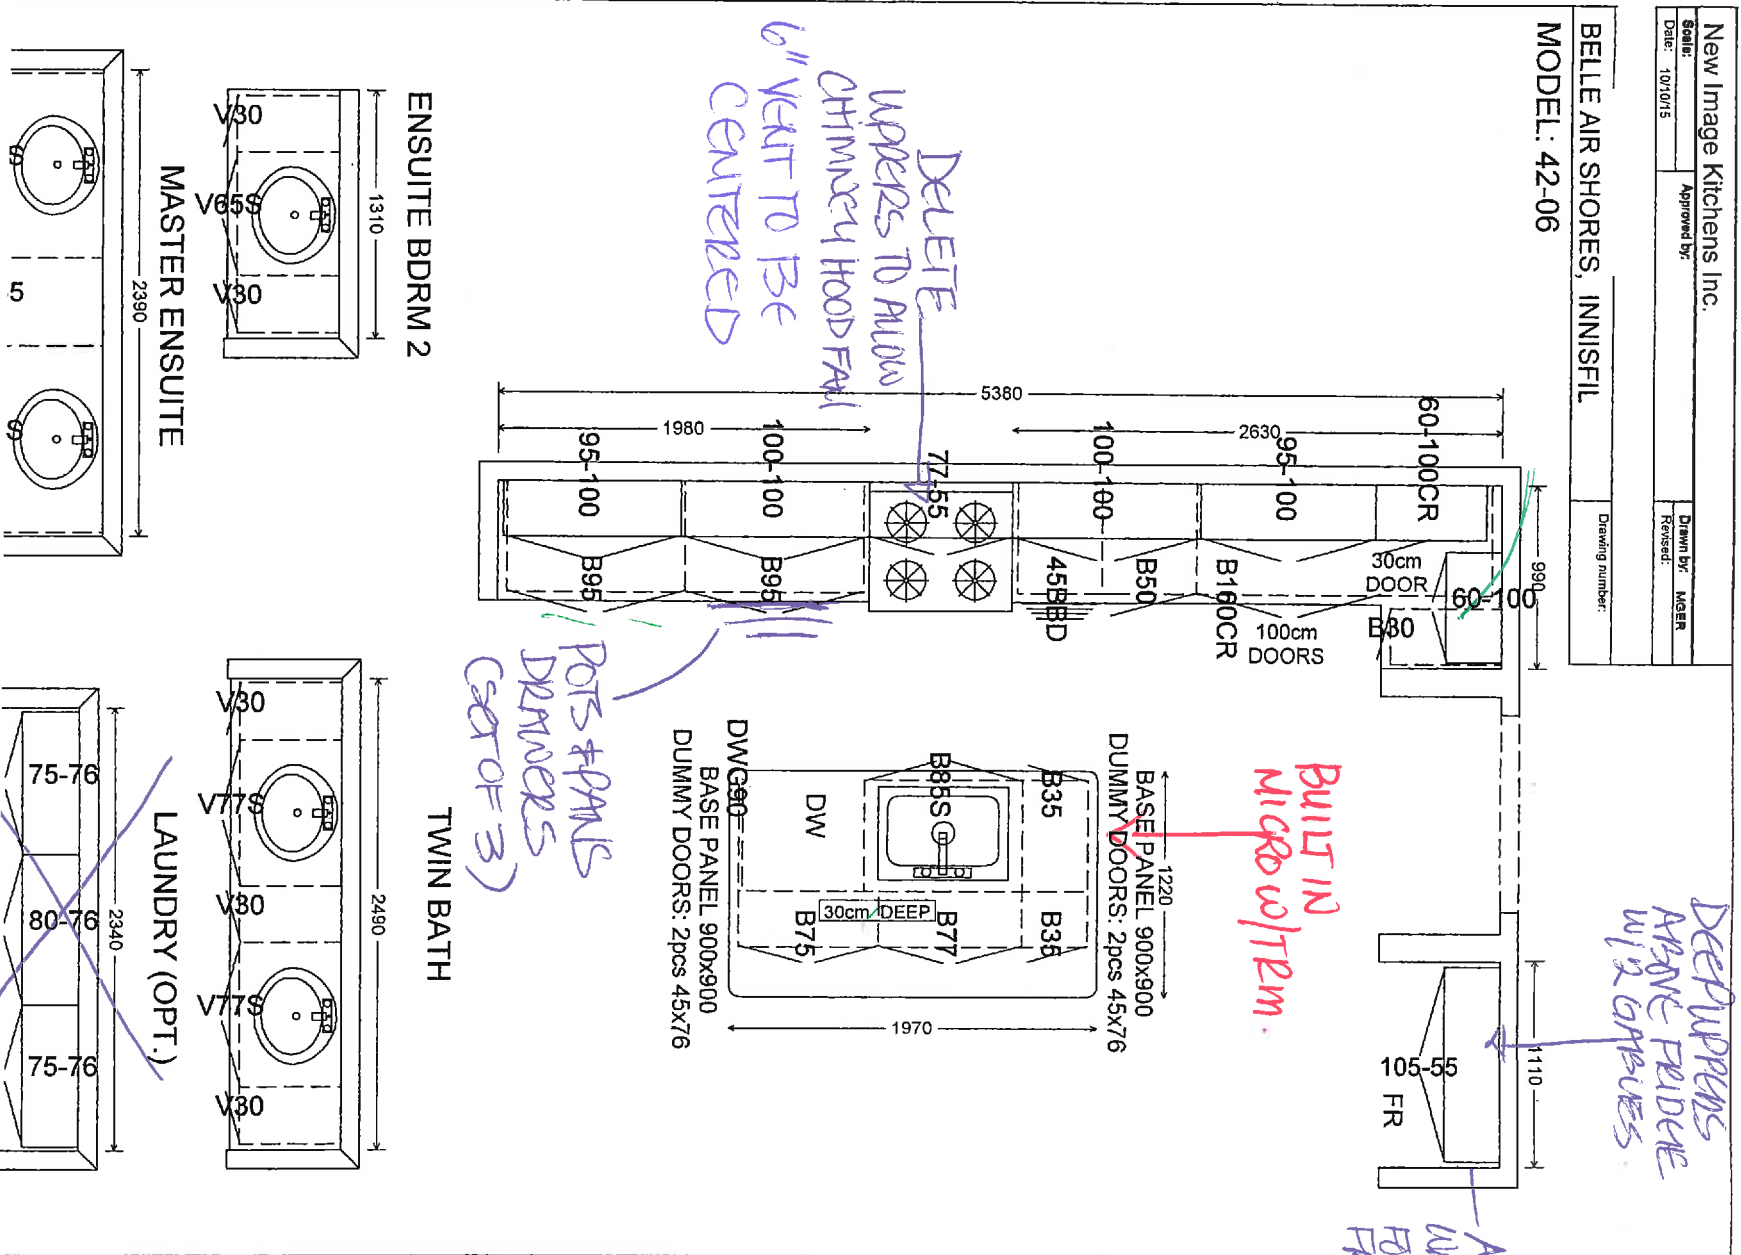

3

LOT 172 Belle Air Shores - INNISFIL.

New Image Kitchens Inc.

Scale:

Approved by:

Date: 24/02/17

Drawn by: MGER

Revised:

BELLE AIR SHORES, INNISFIL

Drawing number:

MODEL: 42-06



U 50

LOT 172 INKFILE.

STANDARD CABINET HARDWARE

(New Image Kitchens)



Main/
Trim
Bath.

Kitchen
& Island










Master
Ensuite

1149










ZANCOR HOMES

STANDARD

Washin
Dish
2/1/19
2/1/19



UPGRADES



LOT / SITE

PURCHASER SIGNATURE _____

INTERIOR FINISHES ACKNOWLEDGEMENT / HARDWOOD WAIVER

Purchaser accepts and acknowledges that the Builder reserves the right to substitute materials with those of equal or better quality where the manufacture, scheduling or delivery of materials may directly impact the Builder's ability to meet its' contractual obligations under the Agreement of Purchase and Sale.

PORCELAIN & NATURAL STONES: Due to the properties of natural stones including but not limited to **marble, granite, quartz**, no two pieces are exactly the same. Variations in colour, tone, granularity (pitting, fissures) and pattern are to be expected, including various lighting may affect the overall finished look. Stone should never be cleaned with lemon oil or vinegar. The purchaser acknowledges colour and product variations as well as natural imperfections that may exist with the selection of natural stone materials and shall not hold the Vendor liable for provision of same.

STONE COUNTERTOP JOINTS: Purchaser is aware that one joint will be at each corner and on either side of slide-in-range (if applicable). It will also be where the length of the counter top exceeds the length of a stone slab. Slabs are usually approximately 5' x 8'.

CERAMIC TILES: Due to manufacturing, shade (dye lots), product variations may exist that can affect the overall look of the finished product. Although every effort will be made to ensure the colours and materials selected are as close as possible to the samples, the purchaser acknowledges that the sample tiles supplied in the Design Centre may not be identical to the materials installed in the home.

STAIR STAINS: Due to the natural properties of wood, many variables can affect the overall look of the finished product. Factors including but not limited to wood type, knotting, graining, density, age, humidity, and air temperature can result in substantial variations in stain intensity. The purchaser accepts that although the Vendor will do their best to match stain the unfinished stairs as close as possible to the pre-finished floors, it is not possible to have an identical match and that there MAY be shade differences between the two products.

CABINETRY: Due to the natural properties of wood, slight variations apparent with cabinetry are to be expected. This includes but not limited to wood species, wood grain, colour, finish, product variations, and natural imperfections are all factors that may affect the overall look of the finished product. Such factors make exact colour matching impossible. The type and intensity of lighting in the areas of designated cabinetry placement may also highlight characteristics of cabinetry finish. All cabinets shall be finished with a white melamine interior box unless a finished interior is upgraded. Due to building specifications and/or on-site conditions, certain cabinetry upgrades may not be possible. The purchaser acknowledges that the Builder cannot guarantee the cabinetry finish or provision of certain upgrades and shall not hold the Builder liable for provision of same.

UPGRADES/EXTRAS: All upgrades and additional selections indicated on the colour chart must be accompanied by an upgrades/extras sheet (PES) and full payment otherwise the selection will be invalid. All colour charts and upgrades/extras will not proceed until verified and signed by an authorized signing officer at the Vendor's head office. **CHANGES WILL NOT BE PERMITTED UPON COMPLETION AND SUBMISSION OF THE COLOUR CHART.**

HARDWOOD FLOORING: Due to the natural properties of wood, many variables can affect the overall look of the finished product. Variations include but not limited to wood type, colour/stain and wood grain are significant factors that make exact colour matching impossible. The purchaser acknowledges that the hardwood flooring is a pre-finished product in a controlled environment. Expansion, compression and cupping are characteristics of hardwood flooring once installed in the home. The purchaser acknowledges these may become apparent over time and despite the Builders' efforts to install the hardwood flooring materials in keeping with good workmanship, the Builder shall not be responsible nor held liable for minor variances of fluctuation in hardwood flooring materials.

HARDWOOD WAIVER:

I/We understand hardwood flooring is classified as a porous material and as such not recommended by the Builder in certain areas. I/We understand there is a concern due to possible water and other substances being frequently splashed or spilled onto the floor and in contravention of Ontario Building Code Section 9.30.1.2(1).

"Finished flooring bathrooms, kitchens, public entrance halls, laundry & general storage areas shall consist of resilient flooring, felted-synthetic-fibre floor coverings, concrete, terrazzo, ceramic tile, mastic or other types of flooring providing similar degrees of water resistance."

I/We are prepared to assume full responsibility for any damage caused to the hardwood floor or subfloor due to moisture absorbency in the mentioned areas, and agree to waive any claims against the Township of residence, TARION and/or the Builder in relation to the matter.

****SEE COLOUR CHART FOR LOCATIONS****

SITE

Belle Preshores

LOT

172

DATE

March 28 2017.

144571



Dishwashers

24" Recessed Handle Dishwasher
Ascenta- Stainless steel
SHE3AR75UC



Bosch dishwashers incorporate 18 unique sound-reducing technologies, to make Bosch the quietest dishwasher brand in North America.

- **50 dBA:** Quietest Dishwasher Brand.
- **24/7** Overflow Protection System® helps prevent water leaks.
- Sanitize option eliminates bacteria and enhances drying results.
- Stainless steel tall tub with polypropylene bottom delivers durability.
- **50 dBA:** Quietest Dishwasher Brand.

Technical Data

Upper Rack :	300
Adjustable upper rack :	Single
Upper rack cup shelf :	3
Lower Rack :	300
3rd Rack :	None
Silverware Basket :	Standard
Optional accessories :	SGZ1010UC, SMZ4000UC, SMZ5002UC
SGZ1052UC, SGZPC001UC, SMZ4000UC, SMZ5002UC	825225899037
UPC code :	825225899037
Variant color :	Stainless steel
Panel ready :	No
Alternative colors available :	SHE3AR72UC, SHE3AR76UC
Silence level (dBA) :	50
Watts (W) :	1400
Current (A) :	12
Volts (V) :	120
Frequency (Hz) :	60
Energy Consumption {kWh/yr} :	269
Energy Star® qualified :	Yes
Plug type :	fixed connection
Required cutout size (HxWxD) (in) :	33 7/8 " x 23 5/8 " x 24 "
Required cutout size (HxWxD) (mm) :	860-890 x 600 x 610
Overall appliance dimensions (HxWxD) (in) :	33 7/8 " x 23 9/16 " x 23 3/4 "
Length outlet hose (in) :	90 1/2 "
Length outlet hose (cm) :	230.0
Product packaging dimensions (HxWxD) (in) :	35 7/8" x 26 7/8" x 26"
Tub material :	Plastic
Tub type :	TallTub
ADA Compliant :	No
Number of place settings :	14

Optional accessories

- SGZ1010UC : Drain hose extension kit
- SGZ1052UC : Dishwasher Accessory Kit
- SGZPC001UC : Powercord kit
- SMZ4000UC : silverware basket US Duo
- SMZ5002UC : Silverware box

LOT 172



Dishwashers

24" Recessed Handle Dishwasher Ascenta- Stainless steel SHE3AR75UC

Bosch dishwashers incorporate 18 unique sound-reducing technologies, to make Bosch the quietest dishwasher brand in North America.

Key Features

- Saves up to 280 gallons of water each year
- Self-Latching Door Stays Put and Latches
- Red Remaining Time Display
- Delicate Wash for Fine China

Design

- Stainless Steel TailTub w/ *PP
- Silver Colored Fascia in Stainless Steel
- Red Remaining Time Display

Performance

- 6 Wash Cycles and 2 Options
- Sanitize Option eliminates bacteria and enhances drying results
- Variable Spray Pressure

Efficiency

- Saves up to 280 gallons of water each year
- 279 kwh/yr - Energy Star®
- Exceeds ENERGY STAR Requirements for Water by 69%
- EcoSense™ Reduces Energy Usage by up to 20%

Convenience

- Bosch Exclusive 24/7 Overflow Leak Protection
- 3 H, 6 H, 9 H Delay Start Timer
- Express Wash - In 30 Minutes or Less
- Delicate Wash for Fine China
- Self-Latching Door Stays Put and Latches

Capacity


- 14 Place Setting Capacity
- 300 Series Racks
- Manual Height Adjustment for Upper Rack
- Long Silverware Basket

LOT 172



Dishwashers

24" Recessed Handle Dishwasher Ascenta- Stainless steel SHE3AR75UC

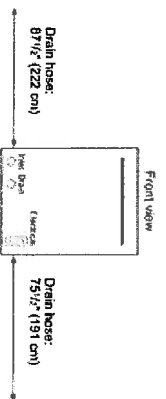

The electrical junction box and water inlet are at the front of the appliance, the drain at the rear.

LOT 172

NE58F9710WS

Flex Duo™ Slide-in Electric Range

Features

- Premium Slide-in Design
- Flex Duo™ Technology – traditional single cavity range and double oven in one; unique design easily switches from single cavity to two smaller cavities
- Five Electric Cooktop Elements, including a Triple and Bridge Burner
- Glass Touch Controls with Guiding Light System
- Dual Convection for Even Cooking
- Gliding Rack for Simplest Access to Food in the Oven
- Temperature Probe Ensures Best Cooking Results
- Large Oven Capacity—5.8 cu. ft.
- Warming Drawer: High, Medium, Low
- SteamQuick™ (20 min. oven cleaning) and Self Clean

Convenience

- Hot Surface Indicator Lights
- Auto Oven Light
- Proofing
- Sabbath Mode
- Kitchen Timer
- Delay Start
- Auto Shut-Off Option
- Child Safety Lock
- 5 Healthy Cook Presets



Ranked "Highest in Customer Satisfaction with Ranges, Cooktops and Ovens."*

—J.D. Power



Five Burner Cooktop



Guiding Light Controls

Available Color



Stainless Steel

Signature Features

GET A SLEEK, CUSTOMIZED, BUILT-IN LOOK FOR YOUR KITCHEN

- Sleek, slide-in design appears customized with cabinetry.
- Get a high-end look for your kitchen without having to remodel.
- Install easily and replace your freestanding range.

PREMIUM DESIGN WITH ILLUMINATED CONTROLS

- Intuitive controls offer simple, step-by-step instructions for choosing cooking options.
- Only illuminates cooking options that are able to be selected and goes from left to right eliminating back and forth.
- Control temperature and time settings, select cooking functions and program your favorite recipes.

SINGLE OVEN CAPACITY. DOUBLE OVEN EFFICIENCY

- Space-saving design leaves more room in the refrigerator.
- 5.8 cu. oven splits into two ovens (2.6 cu. ft. and 3.1 cu. ft.) with the Smart Divider.
- Two temperature controls cook dishes at different temperatures.
- No noticeable transfer of aroma.

107172

SAMSUNG


NE58F9710WS

Flex Duo™ Slide-in Electric Range

Installing Your Range



30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame retardant milboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

** 18" minimum between the countertop and the adjacent cabinet bottom.

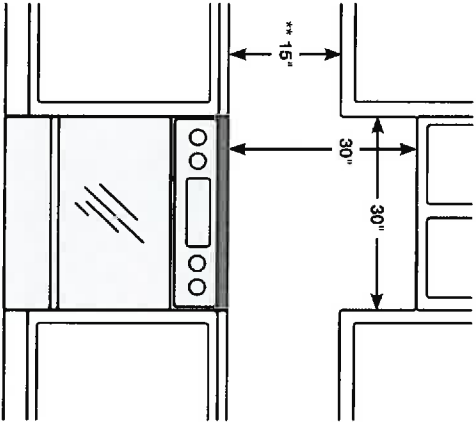


IMPORTANT: To eliminate the risk of burns or fire caused by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

Dimensions

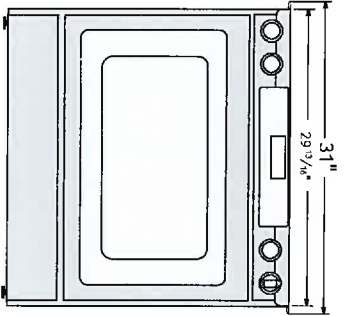

Glass cooktop overlaps and sits on top of your kitchen countertop to give a built-in look.
Cut out space for the range is 29 1/16".

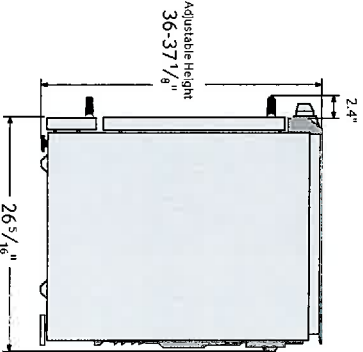

Electric Ceramic Cooktop

- Right Front: 6/9/12", 3.0 KW
- Left Front: 7", 1.8 KW (bridge)
- Right Rear: 6", 1.2 KW
- Left Rear: 7", 1.8 KW (bridge)
- Center: 7", 100 W

Dual Oven (with Divider)

- Hidden Bake Element: 3000 W
- Bake: 175°F - 550°F
- Convection Bake: 175°F - 480°F
- Convection Roast: 175°F - 480°F
- Variable Broil (Low - High)
- Convection Element/Heater: 1250 W
- Proofing
- Sabbath Mode

Warming Drawer

- Capacity - 0.7 cu. ft.
- Heating Performance: 600 W (4 pass)
- Temperature Settings: High, Medium, Low

Warranty

One (1) Year All Parts and Labor
Five (5) Years Electric Cooktop

Product Dimensions & Weight (WxHxD)

Outside Dimensions:

29 13/16" x 36-37 1/8" (Adjustable) x 26 5/16"

Weight: 209 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions:

32 7/8" x 43 45/64" x 30 1/8"

Weight: 234 lbs.

Color	Model #	UPC Code
Stainless Steel	NE58F9710WS	887276988153

SAMSUNG

*Samsung received the highest numerical score for ranges, cooktops and ovens in the proprietary J.D. Power 2014 Kitchen Appliance Study™. Study based on 15,380 total responses measuring 17 ranges, cooktops and oven brands and measures opinions of consumers about their new appliance purchases in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. VisitJdPower.com

Actual color may vary. Design, specifications and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2014 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660 Tel: 800-SAMSUNG samsung.com Samsung is a registered trademark of Samsung Electronics Co. Ltd.

LOT 172




Electric Dryer

PRODUCT MODEL NUMBERS


WED7505F, WED75HEF, WED7740F, WED77HEF, WED8540F,
WED85HEF, WED90HEF, WED92HEF

Dryer Dimensions


Front view:

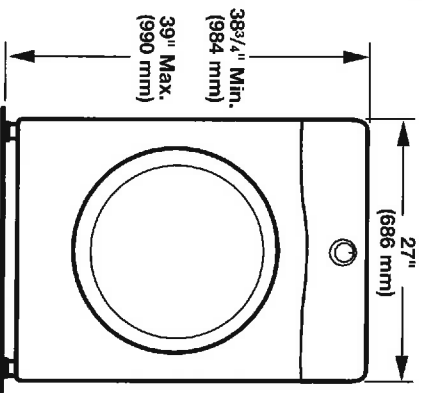

Side view:

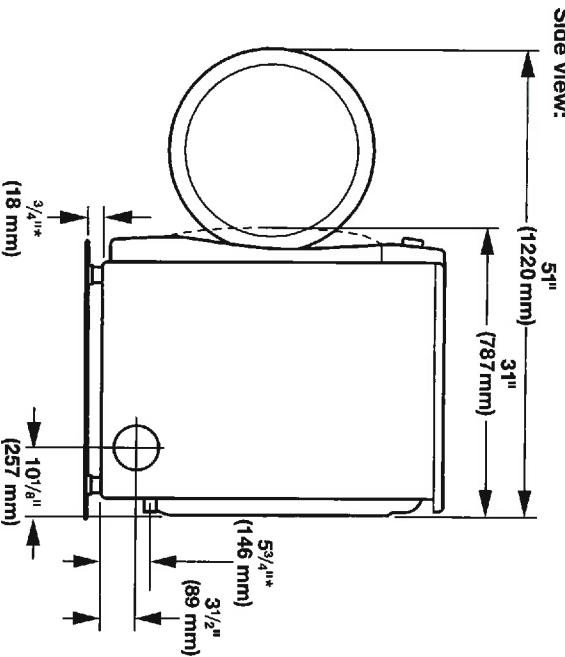

Back view:

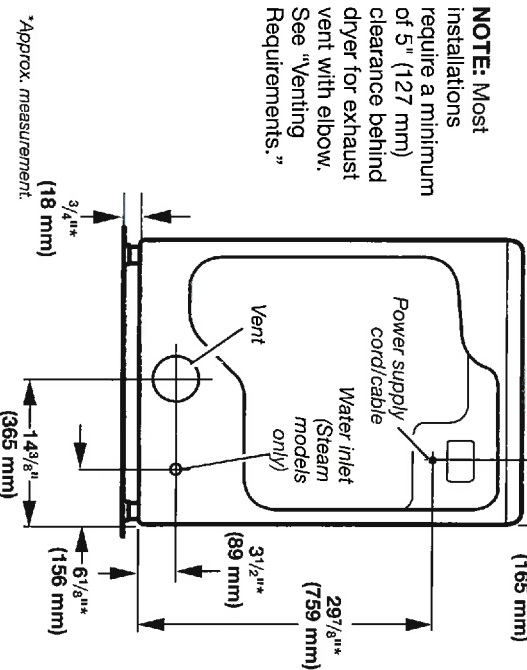


NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.

- Companion appliance spacing should also be considered.
- Recommended installation clearances (dryer only):**

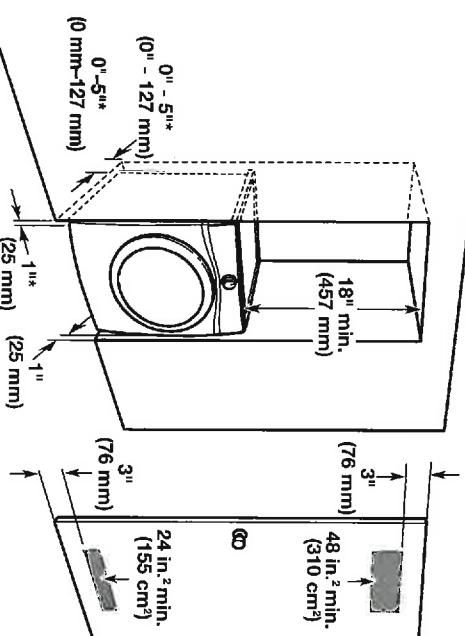


*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Minimum installation clearances (dryer only):

	Front	Sides	Rear	Top
Recessed	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Closet	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Under Counter	NA	1" (25 mm)	0" (0 mm)**	0" (0 mm)

**0" (0 mm) spacing is allowed for straight-back venting only.

Custom under counter installation:

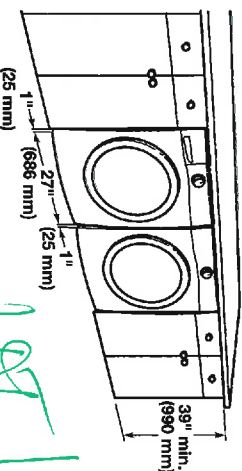

*Approx. measurement.

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

VENTING REQUIREMENTS


Exhaust venting: Exhaust your dryer to the outside, 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

WARNING: To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**


IMPORTANT: Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.

- Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.
- Do not use plastic or metal foil vent.

Exhaust hoods:
Recommended Styles:




Louvered Hood



Box Hood

Acceptable Style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.


The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

157 172

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.



Panasonic®

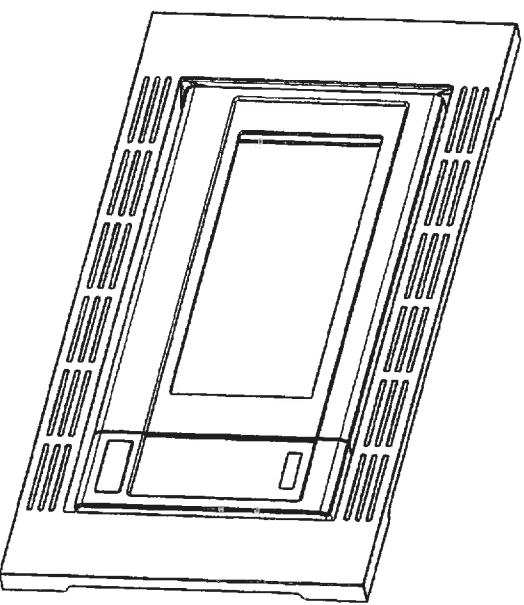

Installation Instructions

Notice d'installation

Instrucciones para la instalación

Cabinet Armoire Gabinete	Trim kit Nécessaire d'encastrement Juego de acabados
36" (762 mm) 30 po (762 mm) 36" (762 mm)	NN-TK932S NN-TK782S
27" (686 mm) 27 po (686 mm) 27" (686 mm)	NN-TK622S NN-TK722S


Read carefully and keep these installation instructions.
Lisez attentivement et conservez cette notice d'installation.
Lea cuidadosamente y guarde este instructivo de
instalación para su referencia.

© Panasonic Appliances Microwave Oven (Shanghai) Co., Ltd. 2012



101172

2. Installation Diagram
2. Schéma d'installation
2. Diagrama de instalación

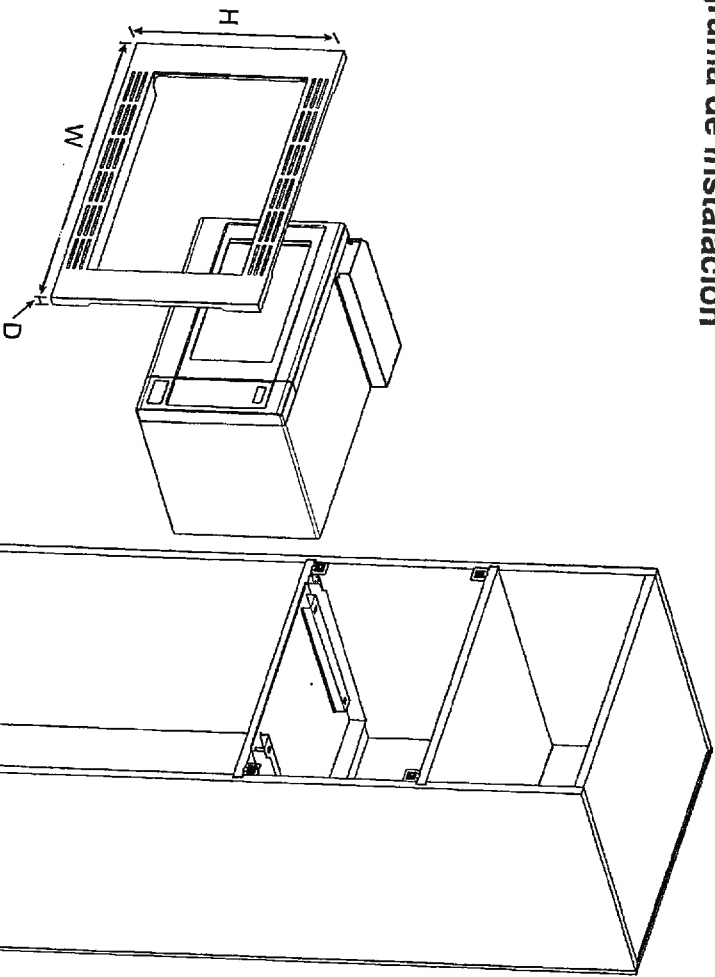

Trim Kit Dimensions				
Width	TK932S	TK922S	TK732S	TK722S
	30" (760 mm)	27" (684 mm)	30" (760 mm)	27" (684 mm)
Height	18 9/16" (472 mm)	18 9/16" (472 mm)	16 1/2" (419 mm)	16 1/2" (419 mm)
Depth (Thickness)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)


Dimensions du nécessaire d'encastrement				
	TK932S	TK922S	TK732S	TK722S
Largeur	760 mm (30 po)	684 mm (27 po)	760 mm (30 po)	684 mm (27 po)
Hauteur	472 mm (18 9/16 po)	472 mm (18 9/16 po)	419 mm (16 1/2 po)	419 mm (16 1/2 po)
Profondeur (épaisseur)	20 mm (3/4 po)	20 mm (3/4 po)	20 mm (3/4 po)	20 mm (3/4 po)

Dimensiones del juego de acabados				
Ancho	TK932S	TK922S	TK732S	TK722S
	30" (760 mm)	27" (684 mm)	30" (760 mm)	27" (684 mm)
Altura	18 9/16" (472 mm)	18 9/16" (472 mm)	16 1/2" (419 mm)	16 1/2" (419 mm)
Profundidad (grosor)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)

151172

3-4. Cabinet Diagram and Dimensions (For TK722S)
 3-4. Schéma de l'armoire et dimensions (Pour TK722S)
 3-4. Dimensiones y diagrama del gabinete (Para TK722S)

fig 1.

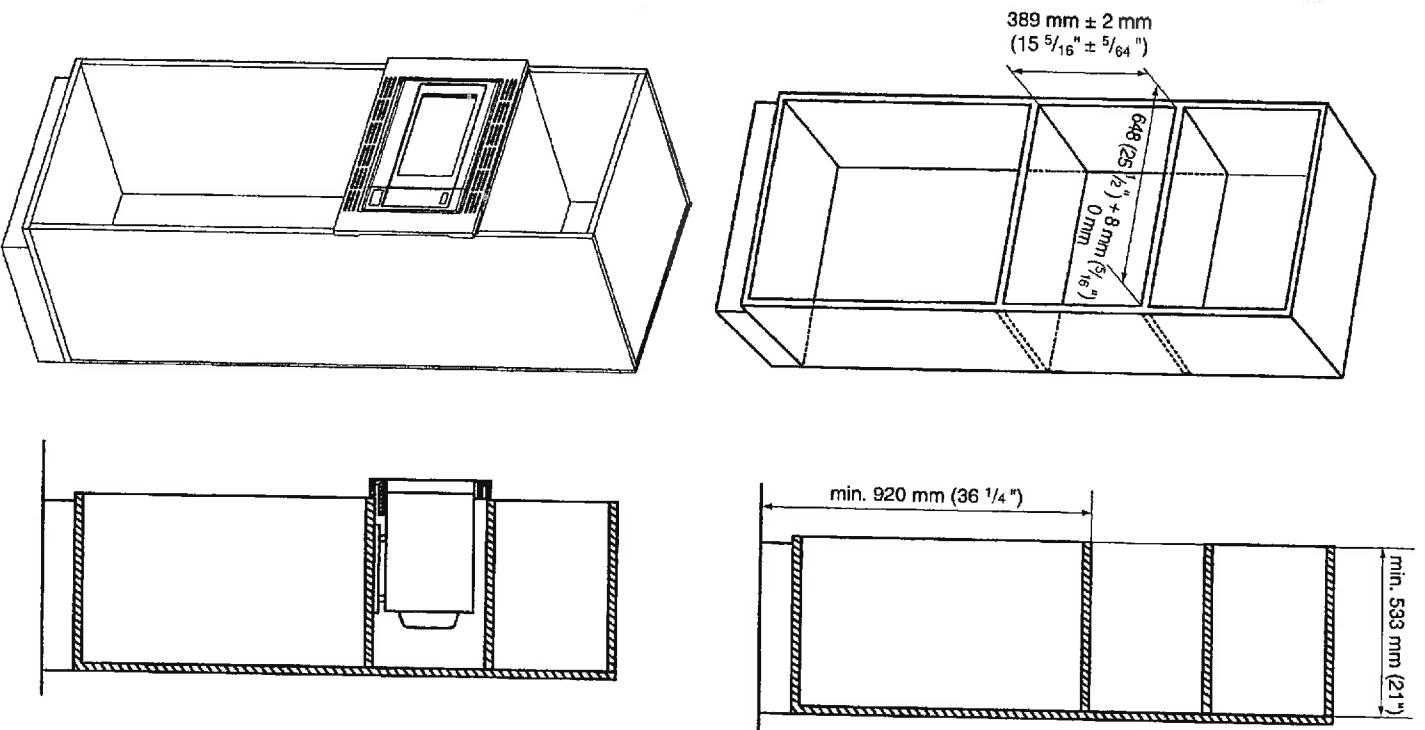

101172




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW75HEF, WFW85HEF,
WFW90HEF, WFW92HEF

Washer Dimensions:

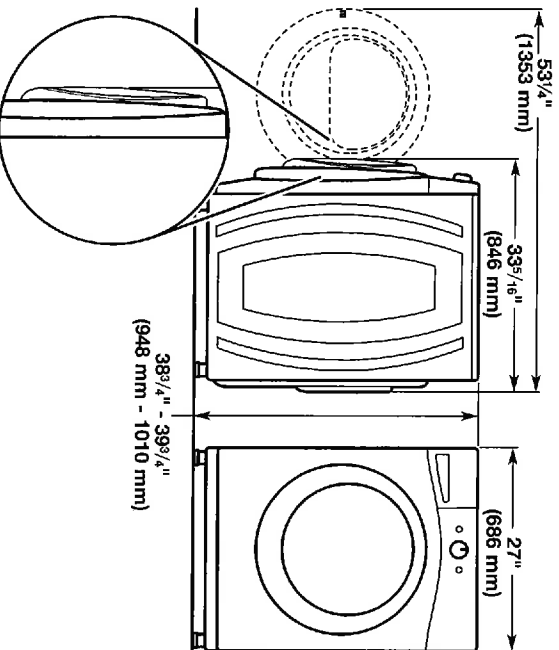

Recessed or closet installation -
stacked washer and dryer

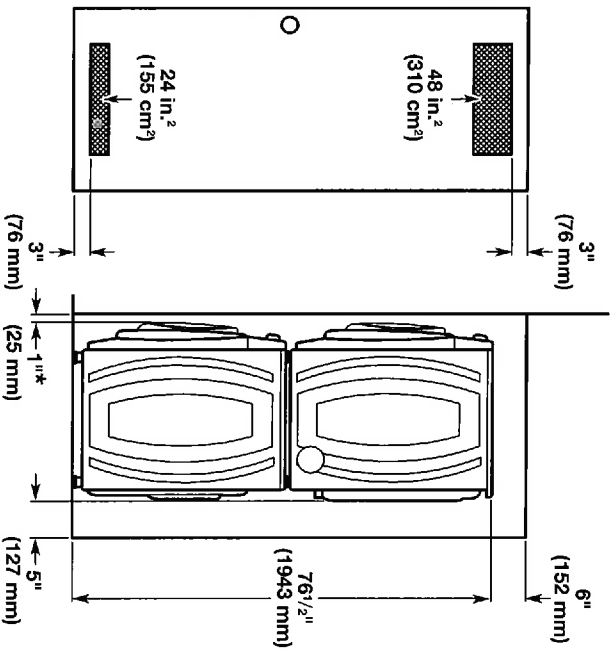


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F,

Washer Dimensions:

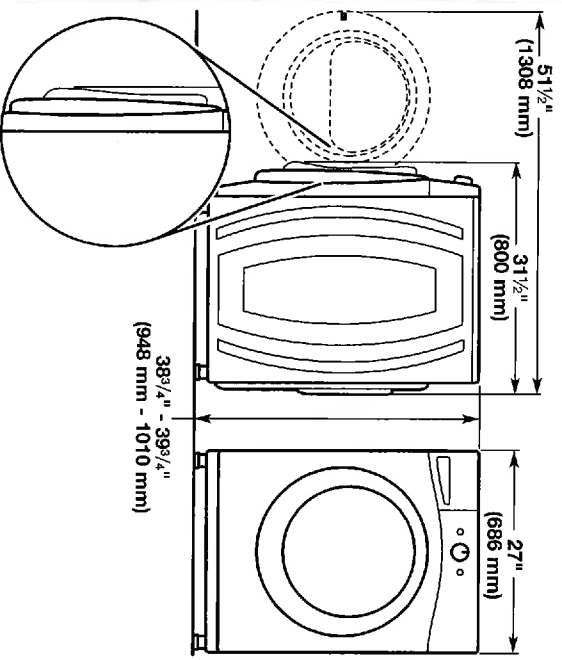

Recessed area or closet installation (washer only):

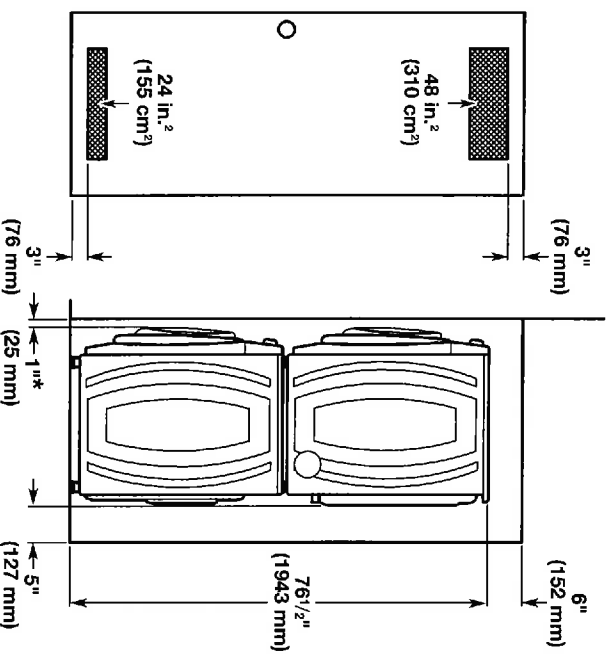


* Add spacing of 1" (25 mm) on all sides of washer.

W10775528A
9/2016


101172

Custom cabinet installation (washer only):

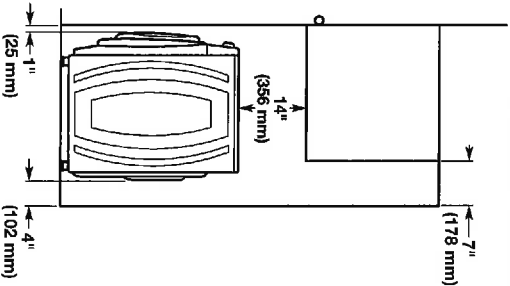

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

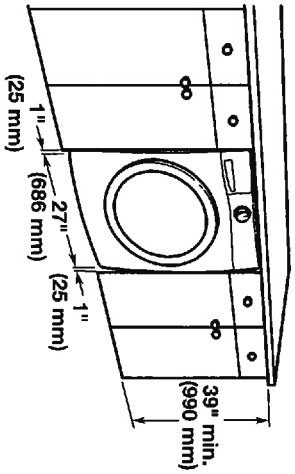

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

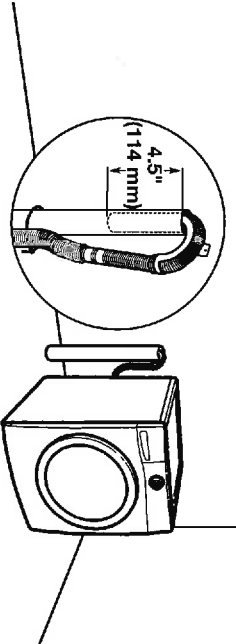


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

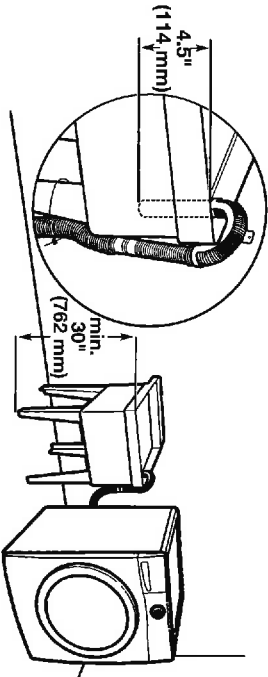


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

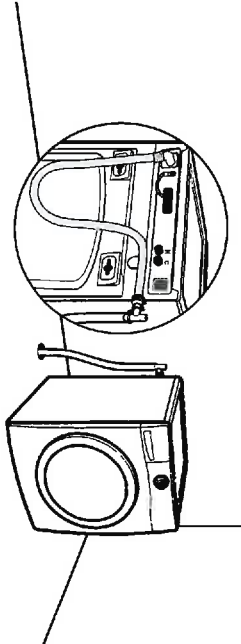

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Wall standpipe drain system

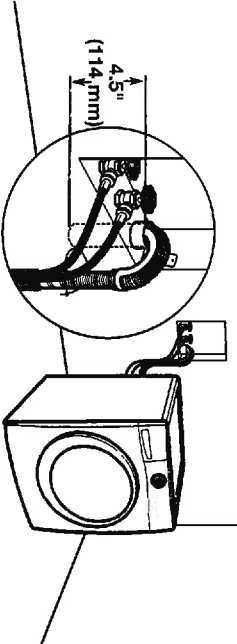

See requirements for floor standpipe drain system.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

601172

8/30/2016



Microwave Ovens Cyclonic Inverter™
Countertop NN-SD765S

MODEL & SIZE	Model Number	NN-SD765S
	Type	Family-size
	Installation	Countertop or built-in
	Oven Capacity	1.6 cu. ft.
	Cooking Power	1200W
	Turntable Diameter	380mm
	Panasonic Inverter	Cyclonic Inverter
	Genius Sensor	Genius®
PANASONIC TECHNOLOGY	Color	Stainless Steel
	Control Panel	Solid Dial + Button
	Display Panel	New 6 Digit LCD / Green
	Door Window	Smoked Glass
STYLE	Door Release	Push Open
	Oven Interior	Paint White
	Multi-stage Cooking	3 stage
PERFORMANCE	Sensor Cook	Yes
	Sensor Reheat	Yes
	Auto Cook/Reheat	Yes
	More / Less Control	Yes
	Inverter Turbo Defrost	Yes
	Keep Warm Button	Yes
	Popcorn Button	Yes
PROGRAMMABLE FEATURES		

LOT 172

8/30/2016

		Quick Minute	Yes
SPECIFICATIONS		Cavity Dimensions (W x D x H)	Approx. 418 x 470 x 228 mm 15.7 x 18.5 x 8.3 inch
		Unit Dimensions (W x D x H)	555 x 506 x 304 mm 21.9 x 19.9 x 12 inch
		Carton Dimensions (W x D x H)	627 x 540 x 360 mm
ACCESSORIES	TRIM KITS	27" Model Number	NN-TK722S
		30" Model Number	NN-TK732S
	Accessory		Glass Tray

Copyright ©Panasonic Canada Inc.

LOT 172

RH22H901OSR

36" Wide, 22 cu. ft. Counter Depth Side-by-Side Refrigerator with Food ShowCase Fridge Door


Features

- 22 cu. ft. Capacity in Counter Depth Category
- Food ShowCase Fridge Door
- Metal Cooling
- High-Efficiency LED Lighting
- External Filtered Water and Ice Dispenser
- Automatic In-Door Ice Maker
- Ice Case in the Freezer
- Fingerprint Resistant Coating
- ENERGY STAR® Compliant
- Power Freeze and Power Cool Options
- Tempered Glass Spill-Proof Shelves
- Stainless Lock Display
- 3 Crisper Drawers
- Gallon Door Bins

Convenience

- Cool Tight Door
- Dispenser Light
- Door Alarm
- Water Filter Indicator
- Child Lock

ENERGY STAR® rated:
635 kWh/yr

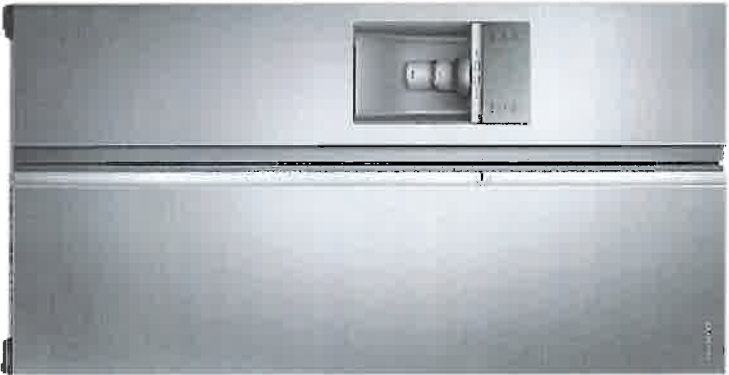

Food ShowCase Fridge Door



Metal Cooling

Available Color



Stainless Steel

Signature Features

FOOD SHOWCASE FRIDGE DOOR

- Door-in-door storage gives you easy reach of key items that are most often used, all visible in one glance.

METAL COOLING

- Locks in cold, seals in freshness.
- Stainless steel paneling helps maintain consistent temperature throughout the refrigerator.

COUNTER DEPTH

- More capacity, smaller floor space.
- Our 22 cu. ft. capacity Side-by-Side has enough room to fit up to 22 bags of groceries.*
- Stylish counter-depth design allows for more workable space in the kitchen.

*Grocery comparison based on each cubic foot of usable space equalling one paper bag.



Ranked "Highest in Customer Satisfaction with Refrigerators" by J.D. Power and Associates.

16172
SAMSUNG


RH22H9010SR

36" Wide, 22 cu. ft. Counter Depth Side-by-Side Refrigerator with Food Showcase Fridge Door


Installing Your Refrigerator

1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual on-line at samsung.com.

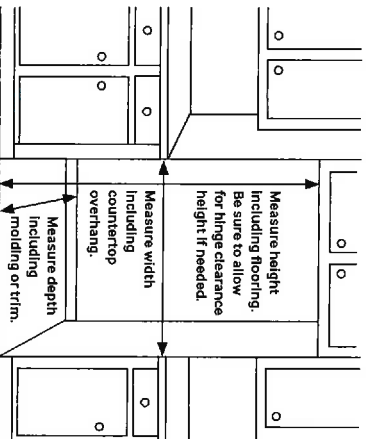

Dimensions

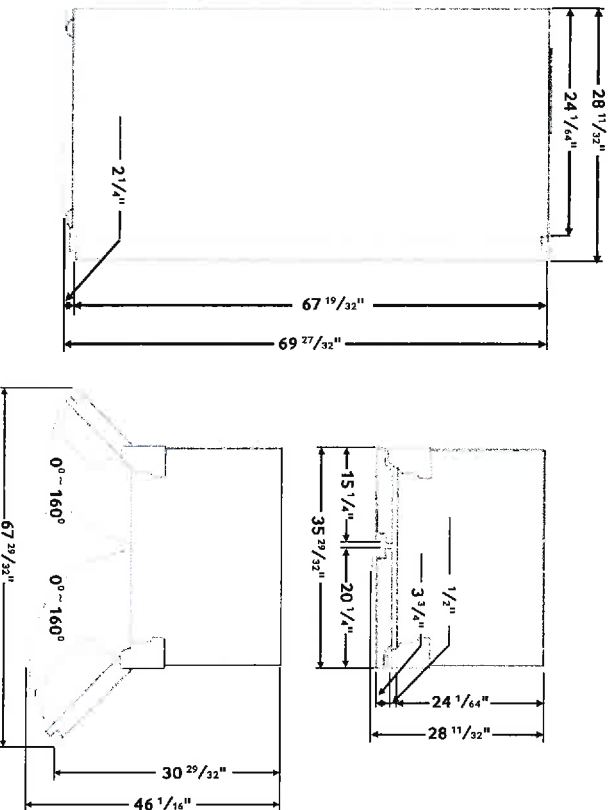

Total Capacity: 21.5 cu. ft.

Refrigerator: 14.3 cu. ft.

- Food Showcase Fridge Door
 - 2 Slide-out Door Bins
 - 1 Tilting Door Bin
 - 3 Fixed Door Bins
- 3 Tempered Glass Shelves
- 1 Foldable Half Shelf
- 6 Door Bins
- LED Lighting

Freezer: 7.2 cu. ft.

- 4 Tempered Glass Shelves
- 3 Clear Door Bins
- 2 Clear Drawers
- Automatic In-Door Ice Maker
- LED Lighting

Accessories

HAF-CIN/EXP Water Filter

Warranty

One (1) Year Parts and Labor on Refrigerator
Five (5) Years Parts and Labor on Sealed Refrigeration System Only*
Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor

*Compressor, evaporator, condenser, drier, connecting tubing

Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):

35 29/32" x 69 27/32" x 28 11/32"

Dimensions (WxHxD without hinges and door):

35 29/32" x 68 21/32" x 24 1/64"

Dimensions (WxHxD with hinge and door, no handle):

35 29/32" x 69 27/32" x 28 11/32"

Weight: 354.9 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 17/64" x 75 5/32" x 39 11/64"

Weight: 383.6 lbs.

Color	Model #	UPC Code
Stainless Steel	RH22H9010SR	887276956015

SAMSUNG

Samsung received the highest numerical score for refrigerators in the proprietary I.D. Power and Associates 2012 Kitchen Appliances Study.SM Study based on 12,013 total responses measuring 17 brands and measures opinions of consumers about their refrigerator obtained new in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-February 2012. Your experiences may vary. Visit idpower.com

Actual color may vary. Design specifications, and color availability are subject to change without notice.

Non-metric weights and measurements are approximate.

©2014 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660 Tel: 800-SAMSUNG samsung.com
Samsung is a registered trademark of Samsung Electronics Co., Ltd.

18172



MODELS

- ELG630S2 Lugano 30" Stainless
- ELG636S2 Lugano 36" Stainless

DIMENSIONS

- 30"W x 19 11/16"D x 5"H
- 36"W x 19 11/16"D x 5"H

With Lugano, a gently tapered stainless steel canopy that measures only 5" high, conveys understated elegance. Available in 30" or 36" widths, Lugano features include a powerful 600 CFM blower, halogen lighting with 2 light intensities, stainless steel microhole filters and a multi-function electronic control with LCD display that delivers convenience and safety. Designed for standard ducted installation, Lugano can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.



Halogen Lamps



Multi-function electronic controls with LCD display



Stainless Steel Micro Hole Filters

101172

FEATURES

Size (in) & Type Finish	30" or 36"Wide Wall-Mount Chimney Stainless Steel
Controls	Multi-function electronic controls with LCD display
Illumination	2, 40 Watt Halogen Lamps, 2 Light Intensities (bulbs included)
Installation Type	Ducted or Recirculating Installation Recirculating Kit Sold Separately
Blower Type	600 CFM, 4-Speed Internal
Blower Performance	Speed 1, 160 CFM, 1.4 Sones Speed 2, 280 CFM, 3.2 Sones Speed 3, 470 CFM, 6.0 Sones Speed 4, 600 CFM, 8.2 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole (2 w/ 30", 3 w/ 36")
Telescopic Chimney Extension	For heights 7'1" - 8'11" (ducted) For heights 7'5" - 9'4" (recirculating)
Duct Transition	6" Round with Back Draft Damper (top)
Electrical	120V-60Hz 530 Watts at 4/4 Amps
Warranty	2 Year Parts & Labor, In-Home Service

ACCESSORIES



Optional Recirculating Kit for 30" and 36" Units
CODE: KIT02721
MODEL: KIT02721



Optional Long Chimney Extension Kit
Reaches 8'5" - 12'0" (ducted)
Reaches 8'9" - 12'4" (recirculating)
CODE: KIT02785
MODEL: EXXCEK07

CONSUMABLE PARTS

Replacement Grease Filter (1) Replacement Carbon Filter (1) Replacement Light Bulb (1)
CODE: GF04YB CODE: KIT02667 CODE: 2006DX

Consumable parts are sold in units of one (1). Order accordingly.

SPECIAL FEATURES



Elica Heat Guard: A technology that protects the hood and cabinetry from excessive heat, by sensing extreme temperatures and automatically adjusting blower speeds accordingly.



Elica CRS: CFM Reduction System (CRS) is an exclusive feature to Elica hoods, which enables the installer to reduce the maximum blower CFM, to meet local code requirements.

107172

