

SITING:

 $oxedsymbol{oxedsymbol{eta}}$ Standard

Reverse

STE & LOT:

APPLIANCE SPEC INFORMATION SHEET

35N DATE: 1) / dy 26.

Purchaser Signature Date C	required due to late specs received, additional costs will be applied. Appliance Specs are DUE (if not received during appointment): 2 WEEKS FROM SIGNED DATE ABOVE — Specs received after this date and changes are required to accommodate the appliances, an administration fee of minimum \$250 will apply. *Changes must be approved by head office.	NOTE: It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing. Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.	arges may apply for cabinetry, electrical and plumbing	CHIMNEY (CENTRE VENT) UNDER CABINET FLUSH INSET DISHWASHER HOOD FANS 2 6 8 1	WALL OVENS SINGLE BOUBLE DOUBLE STEAM OVEN WARMING DRAWER MALL OVENS AMPS AMPS AMPS AMPS	RANGE 30" (STD) 36"
May 26/17	during appointment): this date and changes are required to e of minimum \$250 will apply. head office.	allation and hook up of appliances and to ensure ition for such appliances. The purchaser agrees to ations where the size exceeds the standard	FRONT LOADING SIDE BY SIDE STACKABLE TOP-LOAD in order to accommodate the specs given by the	&-MCH (STD) 8 INCH 10 INCH LAUNDRY	MICROWAVES BUILT IN MICRO	REFRIGERATOR STANDARD OPENING 36" X 72" BUILT IN FRIDGE WATERLINE REQUIRED PANELLED/INTEGRATED FLUSH INSET



COAST **APPLIANCES** Wholesale

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT. L4K 5V8 *** TOLL FREE 1-888-745-0622 PH:(905)303-6909 FX:(905)856-5325 TORONTO LINE:(416)745-0622



SALES ORDER

"Innovative Products for Builders, Designers & Home Owners"

Sold To:

PALLAVI JANAKAN LOT 35 NORTH BELLE AIRE SHORES INNISFIL ON L9L 9L9

Ship PALLAVI JANAKAN
To: INNISFIL
ON L9L 9L9
647-963-4918

			Legend: * = Eco Fee Applicable, K = Keep for future shipment	1 1 INSTALLATION-W/OVEN INSTALLATION WALL OVEN	1 LEVEL RANGE LEVEL RANGE	1 1 INSTALLATION HOOKUP INSTALLATION - HOOKUP WATERLINE TO FRIDG	2 2 48372 STEAM CHROME SHADOW EZ FLO STAINLESS STEEL BRAIDED 6'	13 CYCLES. CHROME SHADOW 1 YWED8500DC WHIRLPOOL CABRIO PLAT TOP LOAD DRYER	1 1 WTW8500DC WHIRLPOOL CABRIO PLAT 6.1CUFT WASHER	1 1 CLAS30SS600-B FABER CLASSICA PLUS 30" 600 CFM	1 1 FPID2498SF FRIGIDAIRE PRO SERIES DISHWASHER SS	1 1 MWTK30KF FRIGIDAIRE BUILT IN MICRO TRIM KIT 30"	1 1 CPMO209RF FRIGIDAIRE PRO MICROWAVE SS BUILT IN	1 1 FPEW3077RF FRIGIDAIRE PRO SERIES, SINGLE 5.1 CUFT	1 1 CPEH3077RF FRIGIDAIRE PRO SERIES FRONT CONTROL SS	1 1 FPBC2277RF FRIGIDAIRE PRO SERIES FRIDGE, 22,6 CUFT	Ordered BackOrd Shipped Model / Description	Ouantity Quantity Quantity	WHSE		F8 WAYNE W 18,7 LOT 35N BELLE AIRE SHORESCASH SALES	Sales Representatives Address: Terms	003 BLDR CUST SALES #	Customer Class Builders Allowance Name /# / Amount \$	
DEL/FUEL S/C	PST	SUBTOTAL	for future shipment			NE TO FRIDG	06"	1D DRYER	WASHER		HER SS	(IT 30"	IOILT IN	.1 CUFT	ONTROL SS	2,6 CUFT	Price	Change Order #:	15NOV17	Date Allocated Date Required		Prov.Tax # Customer #	COAST	Ship Via	
																	Extension		REGULAR ORDER	Order Type	1906224-01	Order#	1439954	Invoice #	

	SM CR	Report to:
; 	zí —	t to:
	Shippe	
9	Der	
	Date Shinned	
- 1	2	
CCEPTED	Ę.	
	EXTENDED WARRANT	
RE	ARR	

NOW 16 LOCATIONS TO SERVE YOU

www.coastappliances.com

GST# 81398 6668

PAGE 1 OF 3

Customer Copy

1906224-01/0000001



COAST **APPLIANCES** Wholesale

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT. L4K 5V8 *** TOLL FREE 1-888-745-0622 PH:(905)303-6909 FX:(905)856-5325 TORONTO LINE:(416)745-0622

CHBA MEMBER Since 1978

SALES ORDER

"Innovative Products for Builders, Designers & Home Dwners"

Sold To: PALLAVI JANAKAN LOT 35 NORTH BELLE AIRE SHORES INNISFIL ON L9L9L9

Ship PALLAVI JANAKAN
To: INNISFIL
ON L9L 9L9
647-963-4918

Customer Class 003 BLDR CUST SALES Sales Representatives F8 WAYNE W 18,7	Address: LOT 35N BELLE AIRE SHORE Shipping Location WOODBRIDGE WHSE Customer P.O.#	# \$ \$ Pro Date Ordered Date Ord	\$ Prov.Tax # Date Allocated 15NOV17	Ship Via COAST Customer # JK536 Date Required	Invoice # 1439954 Order # 1906224-01 Order Type REGULAR ORDE
Sales Representatives	Address:	Terms	Prov.Tax #	Customer #	Order#
F8 WAYNE W 18,7	LOT 35N BELLE AIRE SHORE	SCASH SALES		JK536	1906224-0
	Shipping Location	Date Ordered	Date Allocated	Date Required	Order Typ
	WOODBRIDGE WHSE	18MAY17	15NOV17		REGULAR
	Customer P.O.#	Job #:		Change Order #:	
Quantity Quantity Quantity					
Ordered BackOrdShipped Model / Description	Model / Description			Price	Extension
	INSTALLATION M/W INSTALL	INSTALLATION MICROWAVE			

										-1		<u> </u>	<u>-</u>		-1			<u>.</u>		Ordered BackOrd Shipped				F8 WAYNE W 18,7	Sales Representatives	003 BLDR CUST SALES	Customer Class
					Leger		8461	BA	BA HOSES	BA DRYER BASE	BA WASHER BASE	BA D/W BASE	BA RANGE BASE	BA FRIDGE BASE	PFA	INSTALLATION LAUNDRY	INSTALLATION/DISH	INSTALLATION/H/FAN	INSTALLATION M/W	ed Model / Description		WOODBRIDGE WHSE	Shipping Location	LOT 35N BELLE AIRE	s Address:		Builders Allowance
ě					Legend: * = Eco Fee Applicable, K = Keep for future shipment	(1500.00 - 2999.99)) FRIGIDAIRE FRIDGE FPBC2277RF	CREDIT FOR INSTALL STANDARD PACKAGE 4 YS EXTENDED SINGLE APPLIANCE	BUILDERS ALLOWANCE	BA HOSES	CONTRACT BUILDERS ALLOW DRYER BASE	CONTRACT BUILDERS ALLOW WASHER BASE	CONTRACT BUILDERS ALLOW D/W BASE	CONTRACT BUILDERS ALLOW RANGE BASE	CONTRACT BUILDERS ALLOW FRIDGE BASE	PACKAGE FREIGHT ALLOWANCE INCLUDED	' INSTALLATION LAUNDRY	INSTALLATION OF DISHWASHER	INSTALLATION OF HOOD FAN	INSTALLATION MICROWAVE		Job #:			SHORE	Terms	#	Builders Allowance Name /# / Amount \$
					= Keep for future shipment	2277RF	NDARD PACKAGE			OW DRYER BASE	OW WASHER BASE	OW D/W BASE	OW RANGE BASE	OW FRIDGE BASE	VANCE INCLUDED		SHER	AN	m			15NOV17	Date Allocated		Prov.Tax #	\$	
TOTAL	HST	DEL/FUEL S/C	PST	SUBTOTAL																Price	Change Order #:	-	Date Required	JK536	Customer#	COAST	Ship Via
																				Extension	;	REGULAR ORDER	Order Type	1906224-01	Order#	1439954	Invoice #

	SMCR	Report to:
الملامين	Shinner	
Date Omplea	Date Shinned	
ACCEPTED	EXTENDED WARRANT	
REJECTED	WARRANTY	

NOW 16 LOCATIONS TO SERVE YOU

www.coastappliances.com

GST# 81398 6668

PAGE 2 OF 3

Customer Copy

1906224-01/0000001

EMAIL



COAST **APPLIANCES** Wholesale

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT. L4K 5V8 *** TOLL FREE 1-888-745-0622 PH:(905)303-6909 FX:(905)856-5325 TORONTO LINE:(416)745-0622



SALES ORDER

"Innovative Products for Builders, Designers & Home Owners"

PALLAVI JANAKAN LOT 35 NORTH BELLE AIRE SHORES INNISFIL ON L9L 9L9

Sold To:

Ship PALLAVI JANAKAN
To: INNISFIL
ON L9L 9L9
647-963-4918

			32 32							د_							Ordered BackOrdShipped	Quantity Quantity Quantity			F8 WAYNE W 18,7	Sales Representatives	003 BLDR CUST SALES	Customer Class	
				Legend: * = Ecc			(600.01 WHIRL	4 YS E.		8460 4 YS E	(600.0 FRIGIT	8459 4 YS E	(1500) FRIGII	8461 4 YS E	(1500) FRIGII	8461 4 YS E	Model / Description	Customer P.O.#	WOODBRIDGE WHSE	Shipping Location	LOT 35N BELLE AIRE SHOR	Address:		Builders Allowance Name /# / Amount \$	
				Legend: * = Eco Fee Applicable, K = Keep for future shipment			(600.00 - 999.99)) WHIRLPOOL DRYER YWED8500DC	4 YS EXTENDED SINGLE APPLIANCE	(1000.00 - 1499.99)) WHIRLPOOL WASHER WTW8500DC	4 YS EXTENDED SINGLE APPLIANCE	(600.00 - 999.99)) FRIGIDIARE DISHWASHER FPID2498SF	4 YS EXTENDED SINGLE APPLIANCE	(1500.00 - 2999.99)) FRIGIDAIRE WALL OVEN FPEW3077RF	4 YS EXTENDED SINGLE APPLIANCE	(1500.00 - 2999.99)) FRIGIDAIRE RANGE CPEH3077RF	4 YS EXTENDED SINGLE APPLIANCE		Job #:	17		SHORESCASH SALES	Terms Pro	#	/ Amount \$	
				for future shipment				, Μ	6	ìή	98SF	Μ	7RF	ìπ		Ή			15NOV17	Date Allocated		Prov.Tax #			(
HST	DEI /EIIEI S/C	PST	SUBTOTAL														Price	Change Order #:		Date Required	JK536	Customer #	COAST	Ship Via	
																	Extension		REGULAR ORDER	Order Type	1906224-01	Order#	1439954	Invoice #	

1	SMCR	Rep
	CR R	Report to:
0600.	Shipper	
Pate Omplea	Date Shinned	
ACCEPTED	EXTENDED WARRAN	
REJECTED	WARRANTY	

NOW 16 LOCATIONS TO SERVE YOU

www.coastappliances.com

GST# 81398 6668

TOTAL

PAGE 3 OF 3

Customer Copy

1906224-01/0000001

PROFES SIONAL

10/35 M nandb,

ishwasher

FPID2498SF

24" Built-In

Product Dimensions

Height (Adjustable)
Width
Depth (Including Door) 33-3/4"-35-3/4" 24" 24-1/4"

More Easy-To-Use Features

Powerful Clean, Fast Get a powerful clean, fast with the best 30-minute clean³.

Smudge-ProofTM Resists fingerprints and cleans easily.

Automatically Adjusts Cycles DishSense" Technology automatically adjusts the cycle time based on the level of clean that your dishes need for an efficient clean. Know When Dishes Are Ready Lets you know when dishes are complete when the blue LED light appears with PowerBright™ Floor Light

Efficient Water Usage Cleans a full load of dishes using 15% less water⁴:

Delicate-Care^{TI} Soft Grips
Holds delicate dishes like glasses in place
so they don't move around during the
cleaning process.

二種

Consistent Cleaning Performance For a consistent, reliable clean, our dishwasher has a removable stainless steel filter that prevents re-depositing of food particles

Holds Up to 14 Place Settings
Clean up to 14 place settings in one cycle



ENERGY STAR®

NSF* International

Certification

Available in



'Then a traditional soray arm

"When used with mase aid

"Tasked against comparing models with comparable
quirk cycle times according to ANSI/AHAM DWH-2010
with only 6 place settings

"Ower a year when using our normal cycle in a stainless
tub compared to our plastic tub

frigidaire com



Signature Features







A Place for Everything
Experience the ultimate flexibility of the
SpacePro* Organization System. The
third rack offers easy access and fits
small cooking utensils, while the second
rack adjusts to fit tall pots and pans.




Cleans Hard-to-Reach Spots Clean hard-to-reach spots with our PrecisionPro Wash ZonesTM that target tough spots for the ultimate clean.

PROFESSIONAL.

Control Design Door Latch / Stay-Pul, Door Hinge Design Pro-Select Pro-Sele	Features	
Display Arich / Stay-Pull Door Hirigs Design / Yes / Yes Pressor / Indicator Light / Yes Yes / Yes Yes / Yes Yes / Yes Yes / Yes System	Control Design	Fully-Integrated
Jasch/Stay-Put Door Hrige Design Ves/Yes inse-Aud Indicator Light Arm Design/Interior Color Levels/Wash Speeds System Driect Feed Arm Orbit Clean Ves System System System System System Filter Trap Filter Trap System Filter Trap Filter Trap System Filter Trap Filter Trap Filter Trap Filter Trap System Filter Trap Filter Trap Filter Trap Filter Trap Filter Trap System Filter Trap Filter		Yes
ricesery/Interior Color Dissign/Interior Color Tall Tub/Stainless System Direct Feed Arm Levels/Wash Speeds System Ves Surgen Technology Ves Silent Cestor Plackage Solent Trap System System System Solent Control Lock Wash (30-Min)		Yes/Yes
System Direct Feed Arm Direct Feed Orbit Clean? Levels / Wash Speeds 5/Variable enset Technology 5/Variable spreads Levels / Wash Speeds 5/Variable enset Technology Yes Surget Technology Yes Speckage SilentDesign** Falter Trap 47 ped Ar 48 ped Ar 48 ped Ar 48 ped Ar 48 ped Ar 49 </td <td>Interior Design / Interior Color</td> <td>Tub/Stainless</td>	Interior Design / Interior Color	Tub/Stainless
Arm Lecknology Surge*** Technology Surge*** Technology I Package Falter Trap ood Disposer vel a System a System a System a System a System a System be of Cycles Plus** (Heavy) it c Crystal Only v Saver Plus Rack Wash Orly Indicator Light/Control Lock Complete Floor Beam Indicator ans No Heat Dry p Wash Complete Floor Beam Indicator ans No Heat Dry p Wash Complete Floor Beam Indicator ans System Design Coating Wise* Upper Pack K-Handles Ications S-Down Tines S-Down Tines S-Down Tines S-Down Tines S-Down Tines Il Items Cover Level Rack (Single Tray) ifications Inlet Location Usage (Gallons) Pressure (PSI) I Air Gap on Supply g Legs Supply Connection Location fication Supply Connection Location te Ratting cted Load (kW Rating)@120 Volts ig 120 Volts ig 120 Volts ig 19120 Volts	Wash System	
ense ^{em} Technology I Package Filter Trap bood Disposer vel 3 System 3 System 3 System 3 System Wash (30-Min.) ic Crystal Crys	Wash Arm Wash Levels / Wash Speeds	GrbitClean'
Felter Trap Folder Trap Sod Disposer Vel Is System 3 System 3 System 3 System Wash (30-Min) ie Crystal Only Wash (30-Min) ie Crystal Only Vash (50-Min) ie Crystal Only Vash (50-Min) ie System No Heat Dry 10 Wash Complete Floor Beam Indicator Ins No Heat Dry 10 Wash Conting Conting Conting No Heat Dry 10 Wash Conting No Heat Dry 10 Wash Conting Conti	DishSense™ Technology	Yes
ood Disposer vel ood Disposer vel a System as System ss splus** (Heavy) sl Crystal Only v Saver Plus v Saver	AquaSurge [®] Technology	res
ood Disposer vel vel a System a System ss er of Cycles Plus" (Heavy) it Crystal Only Vash (30-Min) it Crystal Only Rack Wash Orly Davin System System System Doating Doating Certified Sanitize Rinse Start System Doating Certified Sanitize Rinse Start System Doating Certified Sanitize Rinse Start System Soating Certified Sanitize Rinse Start System Doating Certified Sanitize Rinse Start System Doating Certified Sanitize Rinse Start System Doating Certified Sanitize Rinse Start System Doating Certified Sanitize Rinse System Doating Certified Sanitize Rinse System Doating Certified Sanitize Rinse System Doating Certified Sanitize Ring Doating Certified Sanitize Ring Doating	Sound Package Filter / Filter Trap	SilentiDesign** SilentiDesign**
vel y System y System y System plus** (Heavy) al Crystal Only y Saver Plus Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator Mo Heat Dry p Wash Contined Sanitize Rinse Start System System Pesign Doating Wise' Upper Rack K Handles System System Shelves/Stemware Grips S-Down Tines 3-Down Tines 1-Down Ti	Soft Food Disposer	
system ss er of Cycles Plus" (Heavy) al Crystal Conystal Only Saver Plus Y Saver Plus Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator Ons System Sesign Certified Sanitize Rinse Start System Shalves/Stemware Grips sa-Tray** Systale Rack Height Rack - Certifications 3-Down Tines 3-Down Tin	dB Level	47
Files** (Heavy) Il Wash (30-Min.) ic Crystal Only y Saver Plus Rack Wash Orly Indicator Light / Control Lock Complete Floor Beam Indicator Plus No Heat Dry Plus Wash System No Heat Dry Plus Wash System Soating No Heat Dry Plus Wash System Soating Tines Shelves/Stemware Grips Shelves/Stemware Grips Shelves/Stemware Grips Shelves/Stemware Basket Shelves/Stemware Basket Shelves/Stemware Basket Shelves/Silverware Grips Shelves/Silverware G	Drying System	EvenDry"
er of Cycles Pilus" (Heavy) Pilus" (Heavy) Wash (30-Min.) ie Crystal Only Saver Plus Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator Ins No Heat Dry In Mash Conting No Heat Dry In Mash Certified Sanitize Rinse Start System System Sosting S		
Wash (30-Min) ie Crystal Only Saver Plus Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator Ms No Heat Dry p Wash Certified Sanitize Rinse Start System System Sosting Coating Coating Sosting	Number of Cycles	7
ice Crystal Conly V Saver Plus P Rack Wash Only R Rack Wash Only No Heat Dry P Wash Complete Floor Beam Indicator Ins System System Design Coating Wise* Upper Rack R Handles Icrate-Care** Soft Grips S-Down Tines S-Down Tines S-Down Tines S-Down Tines Shelves/Stemware Grips S-Down Tines Shelves/Stemware Basket Cover Rack Level Rack (Single Tray) Fications Sy STAR? International Certification fications Inlet Location Usage (Gallons) Pressure (PSI) Il Air Gap on Supply Is Legs Supply Connection Location Exating Cted Load (kW Rating) @120 Volts @ 120 Volts @ 120 Volts Ing Weight (Approx)	Normal	Yes
Wash (30-Min.) ie Crystal Only V Saver Plus Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator MN Heat Dry P Wash Destign Coating Coating Coating System System Shart System Shart Shelves/Stemware Grips Shelves/Stemware Grips Shelves/Stemware Grips Shelves/Stemware Grips Shelves/Stemware Basket S-Down Tines Shelves/Stemware Basket S-Down Tines Shelves/Stemware Basket Shown Tines Shelves/Stemware Basket Shown Tines Shelves/Stemware Basket Coations Shelves/Sherware Basket Coations Supply Connection Grications Supply Connection Location Supply Connection Location Supply Connection Location Supply Connection Location Cted Load (kW Rating) @120 Volts gi 120 Volts gi 120 Volts gi 120 Volts	Light	
cic Crystal Corlystal Corlystal Corystal Corystal Corystal Corystal Corystal No Saver Plus No Heat Dry No Mahat Dry No Wash Cerufied Sanitize Rinse Start System System Vise' Upper Rack Lead Rack Start System Shelves/Stemware Grips Sa-Tray** Sa-Tray** Sa-Tray** Start Rack Start Rack Shelves/Stemware Basket Shelves/Stemware Basket Shelves/Silverware Basket S-Down Tines S-Down Tines Shelves/Silverware Basket S-Down Tines Sa-Tray* Startay Start Sover Level Rack (Single Tray) Floations Sy STAR? Tray Start Supply Connection Flications Supply Connection Location Supply Connection Location Supply Connection Location Searting Otted Load (kW Rating) @ 120 Volts @ 120 Volts On SWeight (Approx)	ash (30-	Yes
Crystal Chysial Chysial Conly Saver Plus Y Saver Plus Indicator Light/Control Lock Complete Floor Beam Indicator Pns No Heat Dry The Wash Certified Sanitize Rinse Start System Sesign Coating Wise' Upper Rack Handles Coating Wise' Upper Rack Handles Shelves/Stemware Grips Sa-Tray* Sa-Tray* Sa-Tray* Stable Rack Height Rack Cowlise' Silverware Basket S-Down Tines S-SHelves/Silverware Basket Gallons S-STAR* Greation Greation Greation Greation Greation Usage (Gallons) Plessure (PSI) Il Air Gap on Supply Supely Connection Location Rating Cted Load (kW Rating) @120 Volts @ 120 Volts @ 120 Volts Greating Order (Rapprox)	Favorite	Yes
V Saver Plus Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator Ins No Heat Dry In Wash Certified Sanitize Rinse Start System Sosting Coating Coating Sosting Coating Sosting	Rinse Only	Yes
Rack Wash Only Indicator Light/Control Lock Complete Floor Beam Indicator Ons No Heat Dry 10 Wash Certified Sanitize Rinse Start System System Sestign Coating Wise' Upper Rack - k Handles Icrate-Care''' Soft Grips 3-Down Tines 15 Shelves/Stemware Grips 15 Shelves/Stemware Grips 15 Shelves/Stemware Basket 15 Cown Tines 15 Shelves/Stemware Basket 15 Cown Tines 15 Shelves/Stemware Basket 16 Town Tines 16 Town Tines 17 Sy STAR Thown Tines 17 Sy STAR Thermational Certification Ifications 18 Jupaly Connection Location 18 Rating 18 Connection Location 18 Rating 18 Connection Location 18 Rating 19 Legs 19 Legs 19 120 Volts	Energy Saver Plus	Yes
Complete Floor Beam Indicator No Heat Dry No Meat Dry No Meat Dry Design Coating Coating Coating Coating System Vise' Upper Rack - K Handles Icrate-Care''' Soft Grips S-Down Tines S-Down Tines S-Down Tines S-Down Tines S-Lown Tines S-Lown Tines S-Lown Tines Itlems Cover Level Rack (Single Tray) Fications Fications Inlet Loration Usage (Gallons) Pressure (PSI) Il Air Gap on Supply Il Legs Supply Connection Location Supply Weight (Approx)		
No Heat Dry No Meat Dry No Mash Certified Santitze Rinse Start System System Doating Wise* Upper Rack - k. Handles crate-Care** Soft Grips 3-Down Tines 3-Down Tines Shelves/Stemware Grips 1-Down Tines Shelves/Stemware Basket 1-Down Tines Shelves/Stemware Basket 1-Down Tines Shelves/Stemware Basket 1-Down Tines Supply Contection fications il Items Cover Level Rack (Single Tray) irations il Y STAR* irations il Y STAR* irations il Jegs Supply Connection Location fications fications il Air Gap on Supply g Legs Supply Connection Location ficatoad (kW Rating) @ 120 Volts g 120 Volts g 120 Volts g 120 Volts	Cycle Complete Floor Beam Indicator	PowerBright ^{IN} LED
No Heat Dry p Wash Cerrufied Sanitize Rinse Start System Sesting Vise' Upper Rack k Handles crate-Care''' Soft Grips 1-Down Tines 1-Down Tines 1-Shelves/ Silverware Grips 1-Tay''' Ustable Rack Height Rack -cev/Ise' Silverware Basket 1-Down Tines 1-Town Ti	Options	
Certified Sanifize Rinse Start Start System Design Vise' Upper Rack - K Handles J-Down Tines	Heat/No Heat Dry	Yes
Start System System Doating Wilse* Upper Rack* K-Handles K-Handles Shelves/Stemware Grips S-Down Tines S-Down Tines Shelves/Stemware Basket Stable Rack Height Rack- Rack- Rack- Rack- Rack- Rack (Single Tray) Itations Sy STAR* Sy STAR* Inlet Location Inlet Location Inlet Location Jusage (Gallons) Plessure (PSI) Airr Gap on Supply I Airr Gap on Supply I Legs Supply Connection Location Rating Itational (kW Rating) @ 120 Volts @ 120 Volts @ 120 Volts Ing Weight (Approx)	Sanitze	Yes
pper Pack - es es Tines Tines Silverware Grips sck (Single Tray) sck (Single Tray) ns Cover cch (Single Tray) sp on Supply e (PSI) sp on Supply Connection Location Gallons) e (PSI) sp on Supply Connection Location Gallons) connection Location Gallons) da (kW Pating)@120 Volts ook ook connection Location ad (kW Pating)@120 Volts ook ook ook connection Location ad (kW Pating)@120 Volts ook ook ook connection Location	Start	1-24 Hour
pper Pack - es s re" Soft Grips Tines s/Stemware Grips - Silverware Basket Tines Cover tck (Single Tray) s Cover (Cover tck (Single Tray) s Cover (Single Tray) s Connection Connection Connection Location Co	Rack System	
pper Pack - es Tines 5/Stemware Grips 5/Stemware Grips 6/Stemware Basket 1 Tines 1 Cover 1 Cover 1 Silver ware Basket 1 Tines 1 Cover 1 Silver ware Basket 1 Cover 1 Silver ware Grips 1 Cover 1 Silver ware Grips 2 Cover 1 Silver ware Grips 2 Cover 1 Silver ware Grips 2 Cover 2 Silver ware Grips 2 Silver ware Grips 3 Silver ware Grips 4 Silver ware Grips 5 Silver ware Grips 5 Silver ware Grips 6 Cover 6 Silver ware Grips 7 Silver ware Grips 6 Cover 6 Silver ware Grips 7 Silver ware Grips 8 Silver	Rack Design	Deluxe
es Tines Sistemware Grips Sistemware Baskot Tines Cover Lick (Single Tray) Is Onal Certification Is Cation Callons) E (PSI) P on Supply Connection Location Is Gallow Connection Location A Connection Location Connection Location Connection Location A Connection Location A Connection Location A Connection Location A Connection Location Connection Location A Connection Location	SpaceVise* Upper Rack	Nylon TurRacks**
rre''' Soft Grips Tines \$ / Stemware Grips \$ Silverware Basket Tines Cover cok (Single Tray) 15 Onal Certification 16 17 18 Onal Certification 18 Comnection Location Gallons) 19 19 20 Connection Location 3 3 4 Connection Location 6 Connection Location 3 4 Connection Location 6 Connection Location 6 Connection Location 6 Connection Location 9 Connection Location 10 Co	Rack Handles	Yes
Tines s/Stemware Grips s/Stemware Basket Tines (Cover) (Cov	Delicate-Care ^m Soft Grips	Optional PN# 5304494157
s/Stemware Grips Rack Height Rack Height Tines r (Cover r (Single Tray) 15 R Rack (Single Tray) 15 R R R R R R R R R R R R R R R R R R	Fold-Down Tines	Yes
Rack Height Tines Cover Cover Is Silverware Basket Tray) Is Onal Certification Is Cation (Sallons) (PS!) Ip on Supply Connection Location Connection Location Connection Location Connection Location Ad (kW Pating)@120 Volts foits	Cup Shelves/Stemware Grips Versa-Tray™	2/6
'Silverware Basket Tines Cover cover cover romal Certification ns Cation (Sallons) g (PSI) p on Supply p on Supply Connection Location Connection Location ad (kW Pating)@120 Volts (o)ts	Adjustable Rack Height	Yes
Tines (Cover (Single Tray) 1s P Cation (Sallons) (Sallons) (PSI) p on Supply Connection Location Connection Location dd (kW Pating)@120 Volts (Ojts b) (Approx)	* Silverware	d Dinn call
Cover cck (Single Tray) Is onal Certification ns ccation (Gallons) e (PSI) p on Supply Connection Location 3 ad (kW Rating)@120 Volts folts folts	Tines	2 Full Rows
sck (Single Tray) 1s 1s Pr vonal Certification ns cation (callons) (callons) (p e (PS!) p on Supply p on Supply Connection Location g Connection Location g dickW Pating)@120 Volts foits foits	Small Items Cover	3
ns ns ns cation (callons) (e (PSI) p on Supply Connection Location g ad (kW Pating) @ 120 Volts foits ht (Approx)	Third-Level Rack (Single Trav)	Yes
onal Certification ns cation (Gallons) e (PSI) p on Supply Connection Location ad (kW Pating)@120 Volts folts folts	Certifications	
ns (cation (Callons) (e (PSI) (p on Supply Connection Location (Connection Location (kW Pating)@120 Volts (oits (kW Pating)	NSF' International Certification	Yes
Cation (Gallons) e (PSI) p on Supply Connection Location and (kW Pating)@120 Volts (o)ts Jhi (Approx.)	Specifications	
(callons) e (PSI) p on Supply Connection Location g ad (kW Pating)@120 Volts oolts folts j th (Approx)	Water Inlet Location	_
p on Supply Connection Location ad (kW Pating) @ 120 Volts (oits foits	Water Usage (Gallons) Water Plessire (PSI)	
Connection Location ad (kW Rating) @ 120 Volts foits Jht (Approx)	Integral Air Gap on Supply	
Volts	Leveling Legs	Yes
	Power Supply Connection Location	Right Bottom Front
	Connected Load (kW Rating) @ 120 Volts	120V/60Hz/15A
	Amps @ 120 Volts	15
	Shipping Weight (Approx)	75 Lbs

Dishwasher

EPID2498SF 24" Built-In





roduct Dimensions		Cutout Dimensions
\-Height (Adjustable)	33-3/4"-35-3/4"	Height (Min)
3-Width	24"	Height (Max.)
:-Depth (Including Door)	24-1/4"	Width (Min.)
)-Depth (To Tub Flange)	22-1/2"	Depth (Min.)
epih with Door Open 90°	50-1/4"	

34" 35-3/4" 24"

For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available on the web at frigidaire.com

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FPID24985 10/16





PROFESSIONAL

103352

Dishwasher

FPID2498SF 24" Built-In

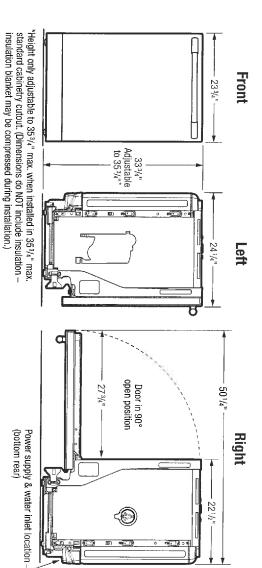





Dishwasher Specifications

- Product Shipping Weight (approx.) 75 Lbs.

 Voltage Rating 120V/60 Hz/15 Amps (maximum 20 Amps if connected with disposer)

 Connected Load (kW Rating) @ 120 Volts = 1,44kW

 (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- @ 120V = 15 Amps
- Always consult local and national electric & plumbing codes.
 Meets requirements of ASSE 1006—integral air gap on supply.
 Water Pressure Hot water line to dishwasher must provide between 20 and 90 pounds per square inch (psi) with at least 120°F not water temperature.
 Make sure location has correct drain, water and electrical outlets to make connections MUST be confined to shaded areas.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.

 If connecting drain hose to sink trap, local code may require installation of Air Gap Kit (not included).
- Leveling legs supplied to adjust height. (Note: Height only adjustable to 35-3/4" max. when installed in 35-3/4" max. standard cabinetry culout. 5/16" min. clearance required from top of unit to underside of countertop. Dimensions do NOT include insulation insulation blanket may be compressed during installation.)
 When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
 Floor should be flat and free of obstructions with carpet removed to provide motor clearance.
 When installing at end of cabinet line, sides and back must be fully enclosed.
 Do not install unit under a cooktop, damage will occur.
 Recommended to seal cabinets, enclosing all sides of dishwasher, including underside of countertop, with oil-based paint or moisture-proof polyurethane to prevent possible steam/moisture damage.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.





WED8500DC

61352

Dryer 8.8 cu. ft. Cabrio® High-Efficiency Electric Steam



http://www.whirlpool.com



Key Features:

- Advanced Moisture Sensing
- Quad Baffles
- Intuitive Touch Controls with Memory
- Estimated Time Remaining LED Display
- 8.8 cu. ft. Capacity
- EcoBoost™ Option
- Steam Refresh Cycle
- Wrinkle Shield™ Plus Option With Steam
- Static Reduce Option
- Sanitize Cycle
- Designed, Engineered and Assembled in the U.S.A.

Product Dimensions:

Height: 42 1/4

Width: 29

Depth: 32 1/4

Electrical Requirements:

30. 240 V.

Additional Information:

Use And Care Guide

Dimension Guide

Installation Guide

Warranty Certificate



Chrome

Red

Available in:

○White



©Registered trademark/TM Trademark of Whiripool, U.S.A. © 2013 Whiripool Corporation, All Rights Reserved All other trademarks are owned by their respective companies.

Because Whiripool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.


Created On: Friday, March 1.1, 2016 12:18:56

WTW8500DC

with Active Spray technology 5.3 cu. ft. Cabrio® High-Efficiency Top Load Washer



http://www.whirlpool.com

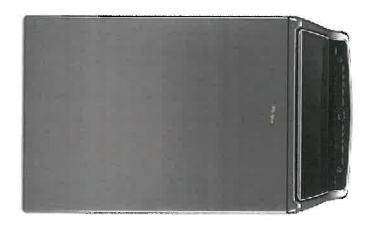

Key Features:

- Adaptive Wash Technology with Active Bloom™ Wash Action
- Steam Clean Option
- Active Spray Technology
- Precision Dispense
- Low-Profile Impeller
- Intuitive Touch Controls with Memory
- Estimated Time Remaining LED Display
- Smooth Wave Stainless Steel Wash Basket

ENERGY STAR® Qualified

Product Dimensions:

Height: 42 1/4

Depth: 28 Width: 27 1/2

Additional Information:

Use And Care Guide

Dimension Guide

Installation Guide

Energy Guide

Warranty Certificate





○White Cranberry/ Red Chrome Shadow





©Registered frademark/TM Trademark of Whirlpool, U.S.A. © 2013 Whirlpool Corporation. All Rights Reserved All other trademarks are owned by their respective companies.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.

Created On: Mondey, March 14, 2016 12:55:46

Classica Wall Range Hood

A value alternative in canopy wall hoods









a chimney style range hood for the price conscious customer. Traditional styling, designer features, and solid performance make the Classica a great value in canopy range hoods. Designed to offer a high-end look without the high-end price tag, the Classica offers a chimney style range hood for the price conscious customer. Traditional styling,

Model #	Size Color	Performance Range	Sound Levels
CLAS30SS CLAS36SS	30 Stainless	160 - 600 CFM 160 - 600 CFM	3.5 - 6.5 sones 3.5 - 6.5 sones



mayself


Lo/352

Feature Chart

Min. / Max. Ceiling Height	7'5"-9'23/4"
Canopy Depth / Height	19" D / 10 3/4"H
High Ceiling Kit	Yes - up to 11' 11/2"
Convertible to Recirculating	Yes - ductless chimney included, charcoal kit needed
Controls	3 Speed Push w/ Blue LED
Lighting	2 X 20 (W) Halogen
Ducting Top	6" Round
Ducting Direct Rear	N/A
Grease Filters	dishwasher safe mesh
10 Minute Intensive Speed	Yes
AC Input	120 V - 60 hz
AC Power	Max 370 W at 3.1 A
Annual Electricty Costs	\$6.17 / Year *

^{*} Note — ran 30 minutes a day on low speed, 365 days, using the North American average of 12.2 cents per kWh. p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com

(see installation instructions for more information) **Dimensional Diagrams**

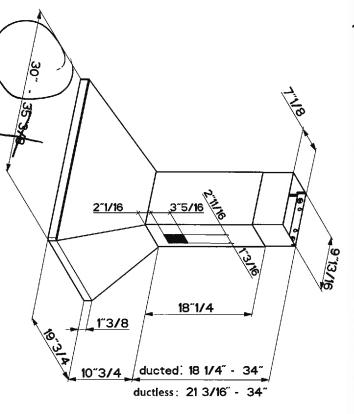

20135N may26/17

x = range hood height above cook top	min & max ceiling height examples
e cook top	examples

<u>max</u> 8' 8 3/4"	$\frac{\mathbf{x} = 24^{"}}{\frac{\min}{7' 5"}}$
max 9' 2 3/4"	$\frac{x = 30^n}{\min}$

replace the 15 3/4" upper chimney that came For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceiling installations, the High Ceiling Chimney Kit includes a 39" upper chimney which would with the hood

ACCESSORIES

High Ceiling Chimney Kit # HIGHCLAS
One 39" upper chimney to replace 15 3/4"
upper chimney that came with the hood



CFM Reducer Kit

For use in make up air environments where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300



Ductless Conversion Kit

DUCTCIAS


Includes: Ductless Diverter
Two Charcoal Filters





For ductless installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen. Replacement Charcoal Filter # FILTER1

















PROFESSIONAL.

60/35r mandb,

Freestanding Range

CPEH3077RF



30" Electric

Height (Min / Max.) Width Depth (Including Handle) **Product Dimensions** 36-1/8"/36-5/8" 29-7/8" 28-3/4"

More Easy-To-Use Features

SpaceProTM Bridge Element 2-in-1 cooktop element offers endless meal options. Cook two separate dishes at once, or combine two elements into one for large pots or griddle use.

Professional-Grade Design, Without the Remodel
Upgrade your kitchen and get the look of a built-in range, without the remodel.
The range slides into 30" cutouts!

Keep Warm Zone
Consistently keep dishes warm until the rest are ready for a delicious meal, every day

Convection Conversion
Automatically converts the convection oven to the ideal cooking time for evenly cooked dishes.

Sabbath Mode (Star-K* Certified)

Available in

Right Rear Left Front Left Pear Left Bridge Right Front Elements Keep Warm Zone SpacePro**
Bridge 9"/12" Expandable 1,200 1,800 1,800 100 Watts 1,800/3,000

Fits the cutout of a 30" fre ding range

Signature Features



PowerPius* Convection
Powerful performance delivers
consistent results. Evenly cooked
dishes, every time, with PowerPlus*
Dual-Fan Convection Bake and Roast.



PowerPlus® Preheat
With PowerPlus® Preheat, your oven is ready in a few minutes for a powerful start to every delicious meal.



Stainless (F)

PowerPlus* Temperature Probe
Ensures great results the first time.
Set and monitor dish temperature
with the PowerPlus* Temperature



Smudge-Proof™Resists fingerprints and cleans easily.

PROFESSIONAL


Features	
Oven Control/Timing System	PrecisionPro Controls**
Window	Extra-Large with Black-Tint Finish
Exterior Door Finish	Smudge-Proof ^{ra} Stainless Steel
Handle Design	Stainless Steel
Convection System	Power Plus* Dual-Fan Convection
Oven Cleaning System	Self Clean
Drawer Functionality	Storage
Oven Controls	
Effortless ^{In} Convection Conversion	Yes/Yes
Convection Bake/Broil/Roast	Yes/No/Yes
PowerPlus* Convection	Yes
PowerPlust Preheat	Yes
PowerPlus* Temperature Probe	řes
Self Clean	2.3.4 Hours
Rapid Clean Option	2 Hours
Kitchen Timer/Timed Cook Option	Yes (2)/No
Cooktop Features	8
Right Front Element (Watts)	SpaceWise* Expandable 9°/12" - 1,800/3,000
Right Rear Element (Watts)	6"-1,200
Left Rear Element (Watts)	7"-1,800
Bridge Element (Watts)	SpacePro™ Bridge - 800
Centre Elemient (Watts)	
Hot Surface/Element On Indicator Light	Yes/Yes
Oven Features	
Capacity (Cu Ft.)	51
Oven Light Hidden Bake Flement	2 Voc
Rack Configuration	1 PowerGlide™, 1 Handle,
Baking System	Even Baking Technology
Bake Element / Broil Element (Watts)	2,200/4,000
Optional Accessories	
Certifications	o the second
Sabbath Mode (Star-K': Cert.)	Yes
Specifications	
Oven Interior (H x W x D)	18-5/8" x 24-1/8" x 19-1/2"
Power Supply Connection Location	Left Bottom Rear
Connected Load (kW Rating)	130/98
Minimum Circuit Required (Amps)	40
Shipping Weight (Approx.)	300 Lbs
Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz	or 120/208 Volt, 60 Hertz AC

of the state of th

Freestanding Range

CPEH3077RF 30" Electric

L01352 May26/A



NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca



Product Dimensions

A-Height (Fin /Max.) 36-1/8" / 36-5/8"

B- Width 29-7/8"

C-Depth (Including Handle) 28-3/4"

Depth with Door Open 90" 46"

Capillet Cutout Dimensions	
Height (Standard)	36
Width (Min.)	30-1/8
Depth (Min.)	24"

Accessories information available on the web at frigidaire.ca

PROFESSIONAL FRIGIDAIRE

10/350

Microwave

CPMO209RF




Signature Features



PowerSenseTM Cooking
Technology
Results you can trust. PowerSenseTM
Cooking Technology automatically
senses ideal time and power levels.



Melt Setting
Offers a simple way to me't
ingredients like butter and chocolate
for consistent baking results.



Smudge-Proof™ Resists fingerprints and cleans easily.



Auto Defrost
Great results, even when you're
pressed for time. Automatically thaws
food like steaks and bacon based
upon their weight.

24" Built-In

Product Dimensions	
Height	13-3/8"
Width	24"
Depth	19-1/8

More Easy-To-Use Features

Adjustable Timer

Now you can adjust the cooking time of your dish while it's cooking. The adjustable timer allows you to add or remove 30 seconds on the timer

Built-In Trim Kit Available
Optional trim kit available in a
Smudge-Proof" stainless steel trim in
27" or 30" diameter.

Available in

Stainless (F)

PROFESSIONAL


Features	
Control/Timing System	Pro-Select
Exterior Door Finish	Sinudge-Proof™ Stainless St
Handle Design	Push Button
Microwave Capacity (Cu.Ft.)	20
'Watts (IEC-705 Test Procedure)	1,200
Interior Light	Yes
Interior Colour	White
Turntable Diameter	16"
Control Lock	Yes
Clock	Yes
Touch Pad Buttons	22
Power Levels	10
Microwave Control Options	
Popcom Button	Yes
Sensor Reheat Button	G
Melt & Soften Options	4
Auto Defrost Options	6
One-Touch Add-30-Seconds	Yes
Sensor Cooking Options	GI
Vegetable Cook Sensor	4
User Pieferences	O
Power Ratings	
Frequency (MHz)	2,450
Watts @ 120 Volts	1700
Amps @ 120 Volts	14.3
Optional Accessories	
30" Stainless Steel Trim Kit	PN# MWTK30KF
27" Stainless Steel Trim Kit	PN# MWTK27KF
Specifications	
Oven Interior (HxWxD)	10-1/2"×17-3/8"×18-5/8"
Power Supply Connection Location	Right Top Rear
Voltage Raung	120V/60Hz/15A
Connected Load (KW Rating) @ 120 Volts!	17
Minimum Circuit Required (Amps)	14.3
Shipping Weight (Approx.)	46 Lbs

For use on adequately wired 1201/, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Microwave

CPMO209RF 24" Built-In

Lo (35N) magab/4

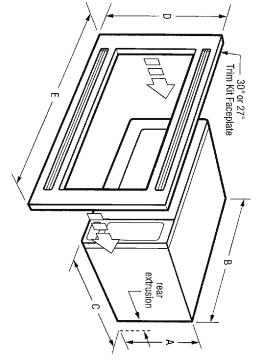

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product installation Guide for detailed installation instructions on the web at frig



A-Height 13-3/8"

B- Width 24"

C-Depth 19-1/8"

D-Height (Trim Kit Faceplate) 28-15/16"

E- Width (27" Trim Kit Faceplate) 29-15/16" Height (Min.)
Height (Max.)
Width (Min.)
Width (Max.)
Depth (Min.) **Cutout Dimensions**

16-3/4" '17" 24-3/4" 25" 20"


Accessories information available on the web at frigidaire.ca

PROFESSIONAL

rench Door Refrigerator

FPBC2277RF

22 Cu. Ft. Counter-Depth





Signature Features



PureAir Ultra* Filtration System Fresh air offers great taste. PureAir Ultra* Filtration removes up to 7 times more odour than baking soda to keep ingredients tasting fresh.



SpacePro[™] Slide-Under Shelf Slides under to fit a variety of tal[®] foods and beverages to optimize your space.



2

SpaceProTM Shelving System
Offers quick access to fresh ingredients
with organizational solutions designed
for space optimization like SpaceProTM
Slide-Under & Flip-Up Shelves and
SpaceProTM Adjustable Crisper Bins.



Smudge-Proof™ Resists fingerprints and cleans easily.

Product Dimensions

Depth (including Door)	Width (Doors)	Height (Including Hinges & Rollers)
28-1/2"	36"	69-7/8"

More Easy-To-Use Features

PureSource Ultra* II
Water Filtration
Drink and cook with Pure Water.
PureSource Ultra* II Water Filters remove
99.3% of lead and 99.99% of cysts from
your household water.2

Counter-Depth Design
Built-in look, maximize your space. Save
over 4 Inches of kitchen floor space with
our counter-depth design.³

SpaceProTM Adjustable Crisper Bins Optimize your space and keep food fresh with our crisper bins that adjust a variety of ways and keep produce at the ideal humidity level.

SpacePro⁷⁶ Flip-Up Shelves Adjusts to fit a variety of foods and beverages, big or small, for quick access,

SpaceProTM Freezer System
Optimize your freezer space with the
PowerGlideTM Freezer Drawer and the
SpaceProTM Freezer Basket with Adjustable
Divider, keeping frozen foods organized

Automatic Alerts
Alerts you if the door is left open, if the temperature rises or if the power goes out so your food stays at its optimal temperature.

SpacePro™ Full-Width Drawer keep a variety of foods fresh and easily accessible with our SpacePro™ Drawer.

SpacePro™ Door Bins Access fresh food from our gallon-size door bins quickly

Sabbath Mode (Star-K* Certified)

Available in

Based on a six-hour closed cloor test of certain common soburs in the fresh food comparationer of a common soburs in the fresh food comparationer of a close the representation of the common of the common of the common of the common of the comparation as Figurdane Standard-Depth French Door bottom mount terrigeneous

PROFESSIONAL


Door Design	Square Doors
Door Handle Design	Stainless Steel
Cabinet Finish	
Door Stops/Door Closers	Yes/Yes
Poor Hinge Covers Rollers - Front / Pear	Adjustable / Yes
Energy Saver Plus Technology	and an annual section of the section
Water Filter Location	Top-Right Fresh Food Section
Sound Package	Quiet Design
Dispenser	
Controls	PrecisionProm
Dispenser Design	Flush, Single-Paddle
Number of Dispenser Buttons	16
Crushed Ice/Cube Ice/Chilled Water	
Ice Option / Freeze Option Display On / Off Option	No/FowerPlus* Freeze
Lock/Light	No / Yes
Temp/Door Ajar / Power Failure Alerts	Yes/Yes/Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes
Refrigerator Features	
Lighting	PowerBright** LED
Water Filter Type	PureSource Ultrar II
Air Filter Type Quarter-Width Fixed Shelves	Space Drois
Half-Width Fixed Shelves	1 SpacePro TH Slide-Under
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	2 SpacePro™
SpacePro** Full-Width Drawer	1 Yes
Hanging Wine Rack/Can Dispenser	1 Clear/No
SpacePro ^{to} Adjustable	2 Clear/2
Dairy Compartment	1 Clear (Right Door)
SpacePro ^M Fixed Door Bins	2 White (1 per door)
2-Litre Fixed Door Bins	1 Clear
Gallon Adjustable Door Bins	1 Clear
2-Litre Adjustable Door Bins	
Non-Slip Bin Liner/Bottle Retainers	3 Grey/Yes (Dispenser Bin Only)
Freezer Features	
PowerGlide™ Pull-Out Drawer	Yes
Sliding Full-Width Freezer Baskets	2 SpacePro™
Basket Dividers	1 (Bottom Basket)
Automatic Ic. Malor Co. 11-1-1-1-1	PowerBright** LED
Automatic Ice Maker (2nd Ice Maker) Certifications	Yes
Sabbath Mode (Star-K ² Certified)	Yes
Total Capacity (Cu. Ft.)	22.6
Refrigerator Capacity (Cu Ft)	15.7
Freezer Capacity (Cu Ft)	69
Power Supply Connection Location	Right Bottom Rear
Voltage Rating	Left Bottom Rear
Connected Load (kW rating)	102
Amris @ 120 Volts	o n
Amps @ 120 voits Minimum Circuit Required (Amps)	15 85 5
Shipping Weight (Approx.)	345 Lbs


For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

French Door Refrigerator 101

FPBC2277RF



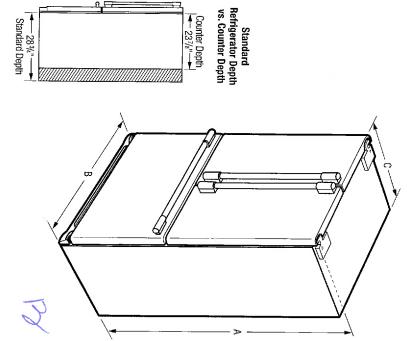



NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product installation Guide for detailed installation instructions on the web at frigidane.ca.



Product Dimensions		"Built-In Look" Cutout Dimensions
A-Height (Incl. Hinges & Rollers) 69-7/8"	69-7/8"	Height (Incl. Hinges and Rollers)
B-Cabinet Width/Door Width 35-7/8"/36"	35-7/8"/36"	Width
C-Depth (Incl. Door)	28-1/2"	Depth
Depth with Door Open 90°	42-1/2"	
Depth with Drawer Fully Extended (incl Handle)	45-1/2"	

70-1/4" 36" 25"

Accessories information available on the web at frigidaire.ca

FRIGIDAIRE
CANADA - 5855 Terry Fox Way - Mississauga, ON L5V 3E4 - 1-800-265-8352 - frigidaire.ca
FPBC2277R 05/15