



**COAST Wholesale  
APPLIANCES**

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT.  
L4K 5V8 \*\*\* TOLL FREE 1-888-745-0622  
PH:(905)303-6909 FX:(905)856-5325  
TORONTO LINE:(416)745-0622



*"Innovative Products for Builders, Designers & Home Owners"*

**Sold To:** NICK SIMSIRIS  
LOT 79N BELLE AIRE SHORES  
1010 LARTER STREET  
INNISFIL  
ON L9L 9L9

**Ship To:** NICK SIMSIRIS  
LOT 79N BELLE AIRE SHORES  
1010 LARTER STREET  
INNISFIL  
ON L9L 9L9

**SALES ORDER**

416-899-6591

| Customer Class        |                  |                  | Builders Allowance Name /# / Amount \$                       |              |                 | Ship Via            | Invoice #     |
|-----------------------|------------------|------------------|--|--------------|-----------------|---------------------|---------------|
| 003 BLDR CUST SALES   |                  |                  |  | #            | \$              | COAST               | 1512364       |
| Sales Representatives |                  |                  | Address:   | Terms        | Prov.Tax #      | Customer #          | Order #       |
| F8 WAYNE WJ18,7       |                  |                  | LOT 79N BELLE AIRE SHORES                                    | CASH SALES   |                 | KJ604               | 2006245-01    |
|                       |                  |                  | Shipping Location  | Date Ordered | Date Allocated  | Date Required       | Order Type    |
|                       |                  |                  | WOODBIDGE WHSE   | 01NOV17      | 15JUN18         |                     | REGULAR ORDER |
|                       |                  |                  | Customer P.O.#   | Job #:       | Change Order #: |                     |               |
| Quantity Ordered      | Quantity BackOrd | Quantity Shipped | Model / Description  |              |                 | Price               | Extension     |
| 1                     | 1                |                  | WRF540CWHZ WHIRLPOOL 20.0 CUFT FRENCH DOOR FRIDGE            |              |                 |                     |               |
|                       |                  |                  | INT WATER SS   |              |                 |                     |               |
| 1                     | 1                |                  | YWEE745H0FS WHIRLPOOL CERAM ELECTRIC RANGE SS                |              |                 |                     |               |
|                       |                  |                  | AQUA LIFT TRUE CONVECTION 6.2CUFT                            |              |                 |                     |               |
| 1                     | 1                |                  | WDF330PAHS WHIRLPOOL PLASTIC TUB D/WASHER S/S                |              |                 |                     |               |
|                       |                  |                  | 3 CYCLES   |              |                 |                     |               |
| 1                     | 1                |                  | NTW4516FW AMANA 4.0 CUFT TOP LOAD WASHER                     |              |                 |                     |               |
|                       |                  |                  | WHT  |              |                 |                     |               |
| 1                     | 1                |                  | YNED4655EW AMANA 6.5 CUFT DRYER 11 CYCLES,3 TEMP             |              |                 |                     |               |
|                       |                  |                  | WHT, AUTO DRY  |              |                 |                     |               |
| 1                     | 1                |                  | 48372 EZ FLO STAINLESS STEEL BRAIDED 6"                      |              |                 |                     |               |
|                       |                  |                  | WASHING MACHINE FILL HOSE                                    |              |                 |                     |               |
| 1                     | 1                |                  | INSTALLATION/DISH INSTALLATION OF DISHWASHER                 |              |                 |                     |               |
|                       |                  |                  |  |              |                 |                     |               |
| 1                     | 1                |                  | INSTALLATION LAUNDRY STANDARD INSTALLATION LAUNDRY           |              |                 |                     |               |
|                       |                  |                  |  |              |                 |                     |               |
| 1                     | 1                |                  | PFA PACKAGE FREIGHT ALLOWANCE INCLUDED                       |              |                 |                     |               |
|                       |                  |                  |  |              |                 |                     |               |
| 1                     | 1                |                  | BA FRIDGE BASE CONTRACT BUILDERS ALLOW FRIDGE BASE           |              |                 |                     |               |
|                       |                  |                  |  |              |                 |                     |               |
| 1                     | 1                |                  | BA RANGE BASE CONTRACT BUILDERS ALLOW RANGE BASE             |              |                 |                     |               |
|                       |                  |                  |  |              |                 |                     |               |
| 1                     | 1                |                  | BA D/W BASE CONTRACT BUILDERS ALLOW D/W BASE                 |              |                 |                     |               |
|                       |                  |                  |  |              |                 |                     |               |
|                       |                  |                  | Legend: * = Eco Fee Applicable, K = Keep for future shipment |              |                 | <b>PAYMENT</b>      |               |
|                       |                  |                  | MC 650.00  |              |                 | <b>SUBTOTAL</b>     |               |
|                       |                  |                  |  |              |                 | <b>PST</b>          |               |
|                       |                  |                  |  |              |                 | <b>DEL/FUEL S/C</b> |               |
|                       |                  |                  |  |              |                 | <b>HST</b>          |               |
|                       |                  |                  |  |              |                 | <b>TOTAL</b>        |               |

| Report to: |    |         |              |                   |          |
|------------|----|---------|--------------|-------------------|----------|
| SM         | CR | Shipper | Date Shipped | EXTENDED WARRANTY |          |
|            |    |         |              | ACCEPTED          | REJECTED |
|            |    |         |              |                   |          |

**GST# 79494 2516**

**PAGE 1 OF 2**

**Customer Copy**

2006245-01/0000001

**NOW 16 LOCATIONS TO SERVE YOU**

[www.coastappliances.com](http://www.coastappliances.com)



**COAST Wholesale  
APPLIANCES**

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT.  
L4K 5V8 \*\*\* TOLL FREE 1-888-745-0622  
PH:(905)303-6909 FX:(905)856-5325  
TORONTO LINE:(416)745-0622

LOT 79N  
INNISFIL



*"Innovative Products for Builders, Designers & Home Owners"*

**Sold To:** NICK SIMSIRIS  
LOT 79N BELLE AIRE SHORES  
1010 LARTER STREET  
INNISFIL  
ON L9L 9L9

**Ship To:** NICK SIMSIRIS  
LOT 79N BELLE AIRE SHORES  
1010 LARTER STREET  
INNISFIL  
ON L9L 9L9

**SALES ORDER**

416-899-6591

| Customer Class        |                  |                  | Builders Allowance Name /# / Amount \$                       |              |                 | Ship Via            | Invoice #     |
|-----------------------|------------------|------------------|--|--------------|-----------------|---------------------|---------------|
| 003 BLDR CUST SALES   |                  |                  |  | #            | \$              | COAST               | 1512364       |
| Sales Representatives |                  |                  | Address:   | Terms        | Prov.Tax #      | Customer #          | Order #       |
| F8 WAYNE W 18,7       |                  |                  | LOT 79N BELLE AIRE SHORES                                    | CASH SALES   |                 | KJ604               | 2006245-01    |
|                       |                  |                  | Shipping Location  | Date Ordered | Date Allocated  | Date Required       | Order Type    |
|                       |                  |                  | WOODBIDGE WHSE   | 01NOV17      | 15JUN18         |                     | REGULAR ORDER |
|                       |                  |                  | Customer P.O.#   | Job #:       | Change Order #: |                     |               |
| Quantity Ordered      | Quantity BackOrd | Quantity Shipped | Model / Description  |              |                 | Price               | Extension     |
| 1                     | 1                |                  | BA WASHER BASE CONTRACT BUILDERS ALLOW WASHER BASE           |              |                 |                     |               |
| 1                     | 1                |                  | BA DRYER BASE CONTRACT BUILDERS ALLOW DRYER BASE             |              |                 |                     |               |
| 1                     | 1                |                  | BA HOSES BA HOSES  |              |                 |                     |               |
| 1                     | 1                |                  | BA BUILDERS ALLOWANCE  |              |                 |                     |               |
|                       |                  |                  | CREDIT FOR INSTALL STANDARD PACKAGE                          |              |                 |                     |               |
|                       |                  |                  | Legend: * = Eco Fee Applicable, K = Keep for future shipment |              |                 | <b>PAYMENT</b>      |               |
| 16                    | 16               |                  | MC 650.00  |              |                 | <b>SUBTOTAL</b>     |               |
|                       |                  |                  |  |              |                 | <b>PST</b>          |               |
|                       |                  |                  |  |              |                 | <b>DEL/FUEL S/C</b> |               |
|                       |                  |                  |  |              |                 | <b>HST</b>          |               |
|                       |                  |                  |  |              |                 | <b>TOTAL</b>        |               |

| Report to: |    |         |  |              |                   |
|------------|----|---------|--|--------------|-------------------|
| SM         | CR | Shipper |  | Date Shipped | EXTENDED WARRANTY |
|            |    |         |  |              | ACCEPTED          |
|            |    |         |  |              | REJECTED          |

**GST# 79494 2516**

**PAGE 2 OF 2**

**Customer Copy**

2006245-01/0000001

**NOW 16 LOCATIONS TO SERVE YOU**  
**www.coastappliances.com**

# INSTALLATION REQUIREMENTS

## Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

### Tools Needed

- Tape measure
- Flat-blade screwdriver
- Phillips screwdriver
- Level
- Hand or electric drill
- Wrench or pliers
- Marker or pencil
- Masking tape
- 1/4" (6.4 mm) drive ratchet
- 1/4" (6.4 mm) nut driver
- 3/8" (9.5 mm) and 5/16" (8 mm) nut driver
- 1/8" (3.2 mm) drill bit (for wood floors)
- Tin snips or large wire cutters (for cutting ground strap if necessary)

### Parts Supplied

Check that all parts are included.

- 10-32 hex nuts (attached to terminal block) (3)
- Direct wire lugs (3)
- #10 x 1 5/8" (4.1 cm) screws (for mounting anti-tip bracket) (2)
- Anti-tip bracket (inside oven cavity)

Anti-tip bracket must be securely mounted to the back wall or floor. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

### For Models:

JES1450CD  
JES1450D  
KSEG700E  
KSEB900E  
KSIB900E  
MES8880D  
WEE760H0D  
YKSEG700E  
YKSEB900E  
YKSIB900E  
YMES8880D  
YWEE760H0D

WEC530H0D  
WEE730H0D  
YWEE730H0D

Oven Racks

3

## Parts Needed

If using a power supply cord kit:

- A UL listed power supply cord kit marked for use with ranges. The cord should be rated at 250 volts minimum, 40 amps or 50 amps that is marked for use with nominal 1 1/2" (3.5 cm) diameter connection opening and must end in ring terminals or open-end spade terminals with upturned ends.
- A UL listed strain relief.

Check local codes. Check existing electrical supply. See the appropriate "Electrical Requirements" section.

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

## Optional Parts

To purchase these or any other accessories, please reference the "Accessories" section of the User Guide for contact information.

- **Side Trim Kits:**
  - 5/8" (1.7 cm) White - Order Part Number W10675027
  - 5/8" (1.7 cm) Black - Order Part Number W10675026
  - 5/8" (1.7 cm) Stainless Steel - Order Part Number W10675028
  - 1 1/8" (2.9 cm) White - Order Part Number W10731885
  - 1 1/8" (2.9 cm) Black - Order Part Number W10731886
  - 1 1/8" (2.9 cm) Stainless Steel - Order Part Number W10731887
- **Backsplash Kits:**
  - High 6" (15.2 cm) White - Order Part Number W10655448
  - High 6" (15.2 cm) Black - Order Part Number W10655449
  - High 6" (15.2 cm) Stainless Steel - Order Part Number W10655450

## Location Requirements

**IMPORTANT:** Observe all governing codes and ordinances.

- It is the installer's responsibility to comply with installation clearances specified on the model/serial/rating plate. The model/serial/rating plate is located behind the oven door on the top right-hand side of the oven frame.
- The range should be located for convenient use in the kitchen.
- Recessed installations must provide complete enclosure of the sides and rear of the range.
- To eliminate the risk of burns or fire by reaching over the heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood or microwave hood combination that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.
- All openings in the wall or floor where range is to be installed must be sealed.

- Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.
- The anti-tip bracket must be installed. To install the anti-tip bracket shipped with the range, see "Install Anti-Tip Bracket" section.
- Grounded electrical supply is required. See the appropriate "Electrical Requirements" section.
- Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F (93°C).
- Use an insulated pad or ¼" (0.64 cm) plywood under range if installing range over carpeting.

**IMPORTANT:** To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

#### Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or with local codes.


#### Mobile Home Installations Require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards listed above.
- Four-wire power supply cord or cable must be used in a mobile home installation. The appliance wiring will need to be revised. See "Electrical Connection - U.S.A. Only" section.

#### Product Dimensions

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

#### Model KSEB900

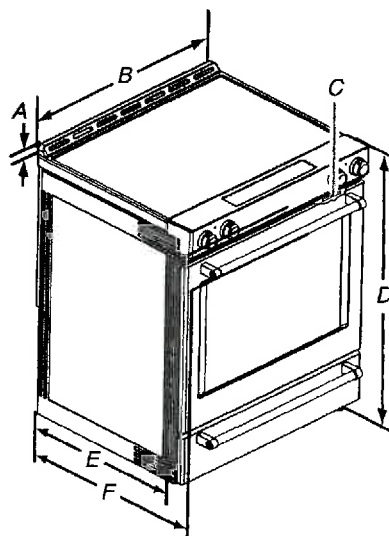

A. 1 3/8" (3.0 cm) height from cooktop to top of vent

B. 29 7/8" (75.9 cm)

C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in\*

E. 28 5/8" (71.9 cm) max. depth from front of console to back of range

F. 28 7/8" (73.3 cm) max. depth from handle to back of range

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

## Cabinet Dimensions


Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

**NOTE:** When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.

### Slide-In Cutout

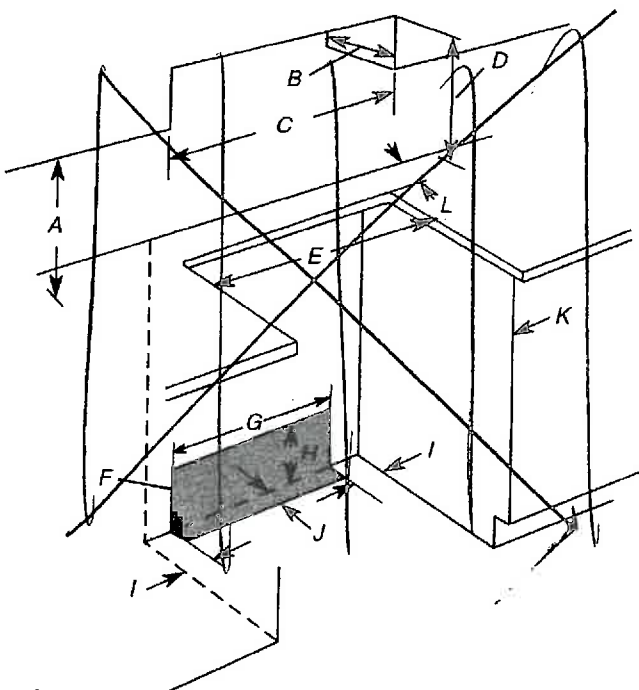


- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE.
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13 1/8" (33.3 cm)
- H. 7 1/16" (19.5 cm)
- I. 4 1/16" (12.2 cm)
- J. 3 1/16" (9.4 cm) plus measurement of L
- K. Cabinet door or hinges should not extend into the cutout.
- L. Remaining counter depth should not exceed 2 1/4" (5.7 cm).

**\*NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

### Freestanding Cutout

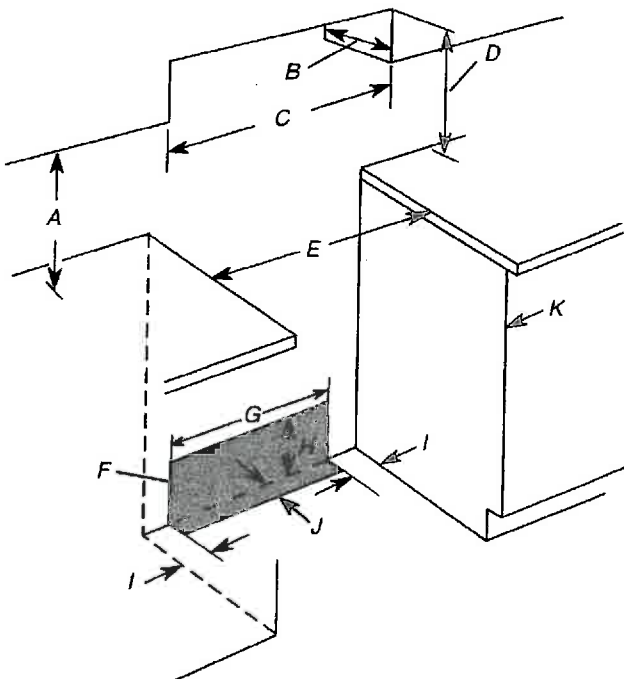

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE.
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13 1/8" (33.3 cm)
- H. 7 1/16" (19.5 cm)
- I. 4 1/16" (12.2 cm)
- J. 3 1/16" (9.4 cm)
- K. Cabinet door or hinges should not extend into the cutout.

## Electrical Requirements - U.S.A. Only

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Do not use an extension cord.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association  
1 Batterymarch Park  
Quincy, MA 02169-7471

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the appliance is properly grounded. Do not modify the power supply cord plug. If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

### Electrical Connection

To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Range must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located behind the oven door on the top right-hand side of the oven frame.
- This range is manufactured with the neutral terminal connected to the cabinet. Use a 3-wire, UL listed, 40- or 50-amp power supply cord (pigtail). See the following Range Rating chart. If local codes do not permit ground through the neutral, use a 4-wire power supply cord rated at 250 volts, 40- or 50-amps and investigated for use with ranges.

| Range Rating*  |                | Specified Rating of Power Supply Cord Kit and Circuit Protection |
|----------------|----------------|--|
| 120/240 Volts  | 120/208 Volts  | Amps   |
| 8.8 - 16.5 KW  | 7.8 - 12.5 KW  | 40 or 50**   |
| 16.6 - 22.5 KW | 12.6 - 18.5 KW | 50   |


\*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

\*\*If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1 1/2" (3.5 cm) diameter connection opening.

- A circuit breaker is recommended.
- The range can be connected directly to the circuit breaker box (or fused disconnect) through flexible or nonmetallic sheathed, copper or aluminum cable. See the "Electrical Connection - U.S.A. Only" section.
- Allow at least 6 ft (1.8 m) of slack in the line so that the range can be moved if servicing is ever necessary.
- A UL listed conduit connector must be provided at each end of the power supply cable (at the range and at the junction box).
- Wire sizes and connections must conform with the rating of the range.
- The tech sheet and wiring diagram are located on the back of the range in a plastic bag.

### If Connecting to a 3-Wire System:

Local codes may permit the use of a UL listed, 3-wire, 250-volt, 40- or 50-amp range power supply cord (pigtail). This cord contains 3 copper conductors with ring terminals or open-end spade terminals with upturned ends, terminating in a NEMA Type 10-50P plug on the supply end. Connectors on the appliance end must be provided at the point the power supply cord enters the appliance. This uses a 3-wire receptacle of NEMA Type 10-50R.



3-wire receptacle (10-50R)


### If Connecting to a 4-Wire System:

This range is manufactured with the ground connected to the neutral by a link. The ground must be revised so the green ground wire of the 4-wire power supply cord is connected to the cabinet. See "Electrical Connection - U.S.A. Only" section.

Grounding through the neutral conductor is prohibited for new branch-circuit installations (1996 NEC); mobile homes; and recreational vehicles, or an area where local codes prohibit grounding through the neutral conductor.

When a 4-wire receptacle of NEMA Type 14-50R is used, a matching UL listed, 4-wire, 250-volt, 40- or 50-amp, range power supply cord (pigtail) must be used. This cord contains 4 copper conductors with ring terminals or open-end spade terminals with upturned ends, terminating in a NEMA Type 14-50P plug on the supply end.

The fourth (grounding) conductor must be identified by a green or green/yellow cover and the neutral conductor by a white cover. Cord should be Type SRD or SRDT with a UL listed strain relief and be at least 4 ft (1.22 m) long.



4-wire receptacle (14-50R)

The minimum conductor sized for the copper 4-wire power cord are:

- 40-amp circuit
- 2 No.-8 conductors
- 1 No.-10 white neutral
- 1 No.-10 green grounding



WDF330PAHS

LOTTA  
INNISFIL

Whirlpool®

## Heavy-Duty Dishwasher with 1-hour Wash Cycle

<http://www.whirlpool.com>



### Key Features:

- 1-Hour Wash Cycle
- No One Has Fewer Repairs 20 Years in a Row
- Soil Sensor
- Normal Cycle
- Heavy Cycle
- High Temperature Wash Option
- Heated Dry Option
- Designed, Engineered and Assembled in the U.S.A. with American Pride

### Product Dimensions:

Height: 34 1/2

Width: 23 7/8

Depth: 24 1/2

### Additional Information:

[Use And Care Guide](#)

[Dimension Guide](#)

[Installation Guide](#)

[Energy Guide](#)

[Warranty Certificate](#)

INVESTED  
IN  
AMERICA



©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved.  
All other trademarks are owned by their respective companies.  
Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.  
Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.  
Created On: Wednesday, April 19, 2017 10:48:05




## Top-Loading Automatic Washer


### PRODUCT MODEL NUMBERS

NTW4501X, NTW4601X, NTW4600Y, NTW4610Y, NTW4630Y, NTW4650Y, NTW4700Y, NTW4750Y, NTW4601B, NTW4611B, NTW4631B, NTW4651B, NTW4701B, NTW4605E, NTW4635E, NTW4655E, NTW4705E, NTW4755E

### Washer dimensions

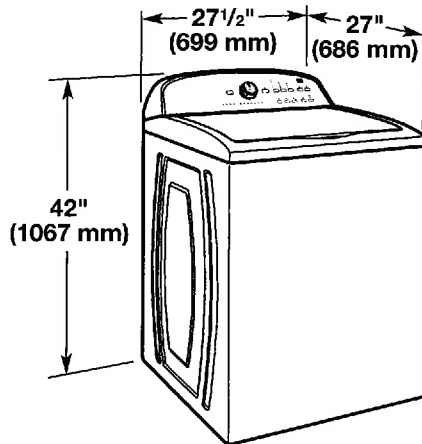

### Recessed area or closet installation

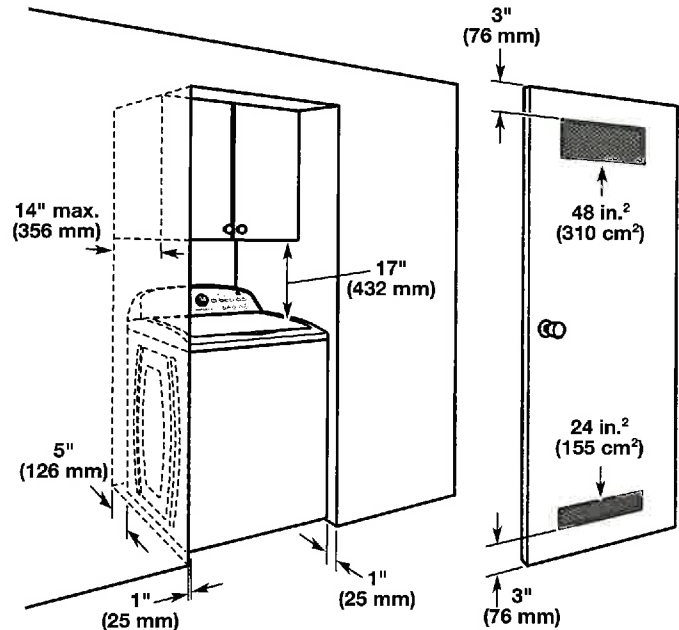

Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.




## ELECTRICAL REQUIREMENTS

A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

## DRAIN SYSTEM


Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.

### Floor standpipe drain system

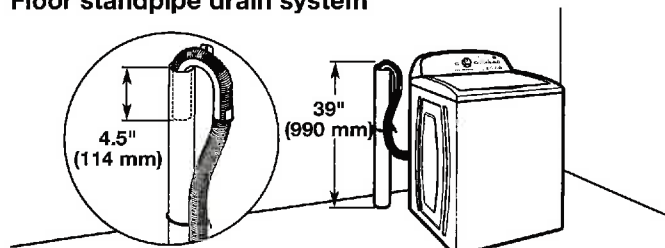


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. Top of standpipe must be at least 39" (990 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you must install higher than 96" (2.44 m), you will need a sump pump system.

### Wall standpipe drain system

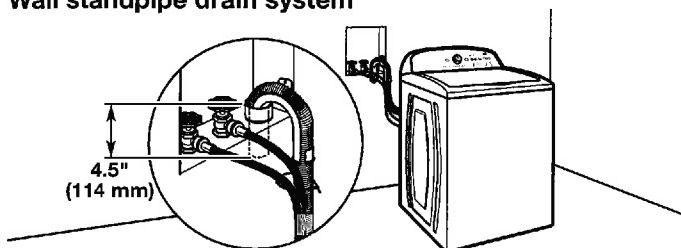


See requirements for floor standpipe drain system.

### Floor drain system

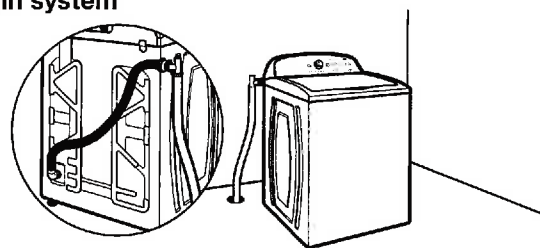

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. To order, please see toll-free phone numbers in your Use and Care Guide. Minimum siphon break: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

### Laundry tub drain system

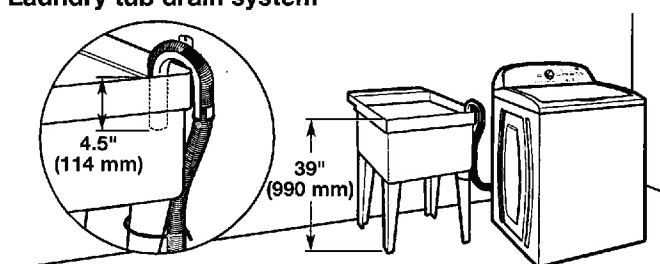

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 39" (990 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

**IMPORTANT:** To avoid siphoning, no more than 4.5" (114 mm) of drain hose should be inside standpipe or below the top of wash tub. Secure drain hose with cable tie.