

IC-36FI





FEATURES

Ready to be fitted with custom panels and handles to blend with cabinetry

Smart-touch controls for streamlined access to more settings

Uniform 84" height

All-freezer storage solves capacity problems

Water-filtration system reduces contaminants, chlorine taste and odor

Soft-on LED lights for varying degrees of brightness

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

ACCESSORIES

Integrated Dual Installation Kit Handle to Handle

Stainless steel tubular handles

S ass steel pro handles

Stainless steel front panels with tubular or pro handles

Stainless steel kickplate


Stainless steel side enclosure

Stainless steel top enclosure

Reduced toe kick divider for toe kicks from 2" to 3.875"

Replacement water filter

Accessories are available through an authorized Sub-Zero dealer For local dealer information, visit <u>subzero-wolf com/locator</u>.

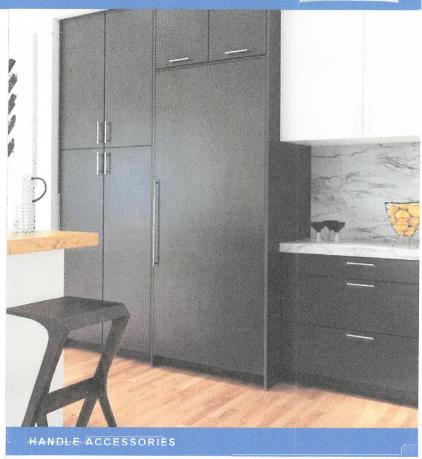

PRO




TUBULAR




IC-36FI Dimensions 36"W x 84"H x 24"D 34 1/2" Door Clearance Weight 460 lbs Freezer Capacity 20 cu. ft. Electrical Supply 115 VAC, 60 Hz Electrical Service 15 amp dedicated circuit Receptacle 3-prong grounding-type

ELECTRICAL

PLUMBING





ERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS





STANDARD INSTALLATION

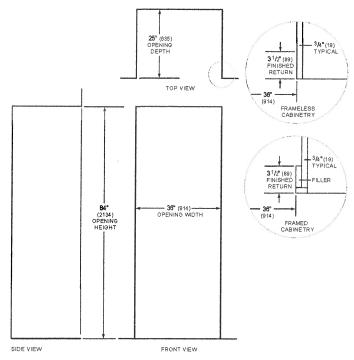



36" INTEGRATED COLUMN REFRIGERATOR WITH INTERNAL DISPENSER - PANEL READY









FEATURES

All-refrigerator storage solves capacity problems

Ready to be fitted with custom panels and handles to blend with cabinetry

Air purification system fights spoilage, odors

Internal water dispenser works with seamless design

Nano-coated spill-proof shelves for easy clean-up

Smart-touch controls for streamlined access to more settings

Water-filtration system reduces contaminants, chlorine taste and odor

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

Soft-close doors and drawers

ACCESSORIES

Air Purification Cartridge

F Container

Integrated Dual Installation Kit Handle to Handle

Stainless steel tubular handles

Stainless steel pro handles

Stainless steel front panels with tubular or pro handles

Stainless steel kickplate

Stainless steel side enclosure

Stainless steel top enclosure

Reduced toe kick divider for toe kicks from 2" to 3.875"

Replacement water filter

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.





TUBULAR

PRODUCT DETAILS

REFRIGERATOR

- · Three adjustable glass shelves
- · Two crisper drawers with dividers
- · Deli drawer with dividers
- · Three adjustable door shelves
- · Two stationary door shelves
- · Adjustable dairy compartment
- · Air purification system



 Mix
 IC-36RID

 Dimensions
 36"W x 84"H x 24"D

 Door Clearance
 34 1/2"

 Weight
 460 lbs

 Refrigerator Capacity
 21.4 cu. ft.


 Electrical Supply
 115 VAC, 60 Hz

Electrical Service 15 amp dedicated circuit


Receptacle 3-prong grounding-type

ELECTRICAL

PLUMBING





IN _RIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS





STANDARD INSTALLATION

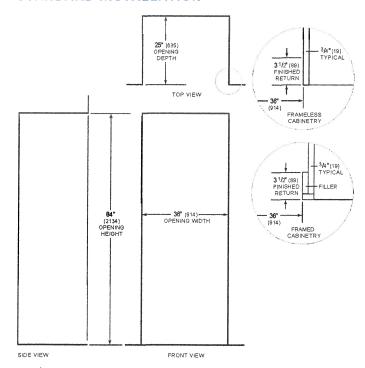

NOTE:31/Z*(99) finished returns will be visible and should be finished to metch cabinetry



MODEL D5526XLFI



FEATURES

Accepts custom panel and handle to integrate with surrounding cabinetry

Hidden controls

Condensation drying system

15 place-setting capacity

Quiet operation -46 dB(A)

7Spray™ wash system; separate spray nozzles clean pot & pans and continuously spray cutlery basket

8 wash programs

Heavy-duty stainless steel construction with nylon-coated steel racks

LEO display

ADA height compliant


Accommodates 4" or 6" toe kick height (6" requires 341/2" minimum opening height)

ACCESSORIES

Stainless steel front panel with tubular or pro handle

Stainless steel tubular and pro handles

Accessories available through an authorized Asko dealer. For local dealer information, visit the find a showroom section of our website, askona.com.

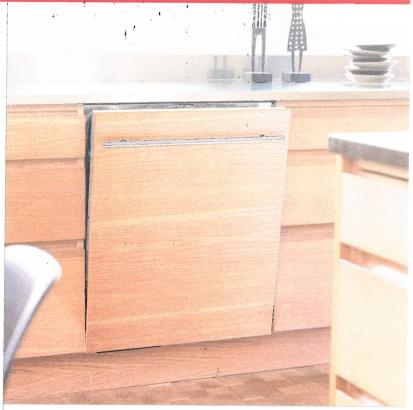

INTERIOR FEATURES

- Standard upper rack
- Standard lower rack

PROGRAMS

- Sanitation Wash
- Normal Wash
- Heavy Wash
- Quick Wash
- Hygiene
- Delicate Wash
- Eco Wash
- Rinse and Hold




Aodel .	D5526XLFI
Width	239/16"
Height	323/4"**- 343/4"
Depth	227/6"
Door Clearance	24 ⁵ /8"
Weight	115 lb
Max Loading Height Upper Rack	9 ⁿ
Max Loading Height Lower Rack	121/4"
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp circuit
Plumbing Supply 1/4" OD copp	er, braided stainless steel or PEX tubing
Pressure	4.2-140 psi


Product dimensions do not include panel and handle. Dimensions will vary with panel thickness.

Electrical supply, plumbing supply and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations below.

ELECTRICAL | PLUMBING




DIMENSIONS

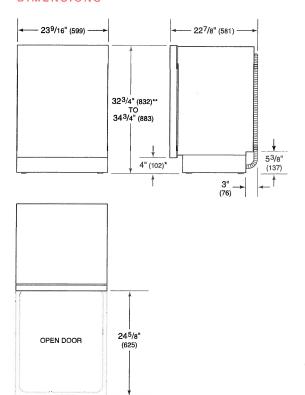

^{*}Dimension will vary with product height.

INSTALLATION

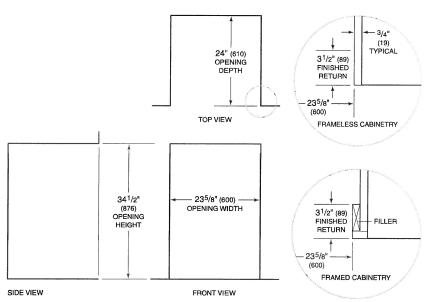

NOTE: $3^{1}/2^{*}$ (89) finished returns will be visible and should be finished to match cabinetry.



^{**}Can be reduced to 321/4" (819).

PL341912

FEATURES

Heavy-duty stainless steel construction

Infinite speed blower control

Recessed controls for sleeker look

Heat sentry for safety

Bright halogen lighting

Blower required (internal, in-line or remote blowers available)

Transition with backdraft minimizes backward flow of cold air

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES


600 CFM Internal Blower

900 CFM Internal Blower

1200 CFM Internal Blower

Make-up air damper

*ccessories available through an authorized Sub-Zero dealer. local dealer information, visit <u>subzero-wolf.com/locator</u>.

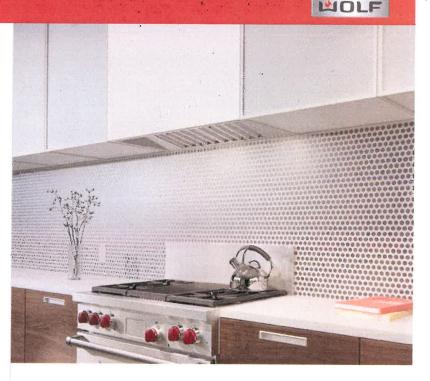


BLOWER OPTIONS

- 300 CFM Internal .
- · 450 CFM Internal
- 600 CFM Internal
- 900 CFM Internal
- 1200 CFM Internal .
- 600 CFM Inline
- 1100 CFM Inline
- 600 CFM Remote
- 900 CFM Remote
- 1200 CFM Remote1500 CFM Remote



odel	PL341912	
Dimensions	34 3/8"W x 12"H x 19 1/4"D	
Weight	45 lbs	
Electrical Supply	110/120 VAC, 60 Hz	
Electrical Service	15 amp dedicated circuit	
Discharge Location	Vertical	
Discharge Dimensions	10" Round	
Bottom of Hood to Countertop	30" to 36"	

DIMENSIONS

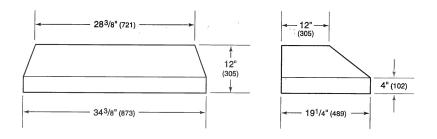

30" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN

MOLF

O30TE/S/TH



FEATURES

10 cooking modes make meals easy

Three adjustable oven racks

Cobalt blue porcelain interior

Self clean, delayed start, timed cook, Sabbath mode and more

Installs flush with surrounding cabinetry

Dual convection oven for faster, more consistent cooking

Temperature probe lets you know when it's done

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Hidden bake element and recessed broil element

ACCESSORIES

Dehydration Kit

30" Bake Stone Kit


Temperature Probe

ull-extension easy glide oven rack

Temperature probe and broiler pan

Set of three standard oven racks


Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.

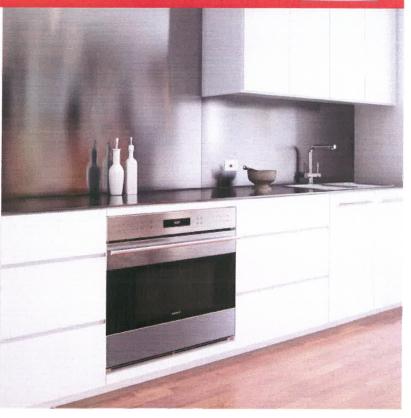




√odel	SO30TE/S/TH
Dimensions	29 7/8"W x 27 7/8"H x 23 3/4"D
Oven 1 Interior Dimensions	25"W x 16 1/2"H x 19"D
Overall Capacity	4.5 cu. ft.
Usable Capacity	2.8 cu. ft.
Door Clearance	22"
Weight	273 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Conduit Length	4 Feet


DIMENSIONS

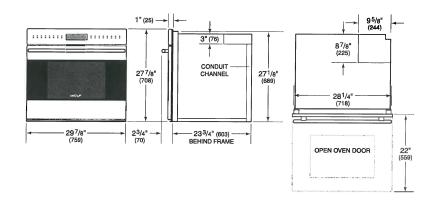

ELECTRICAL



FLUSH INSTALLATION

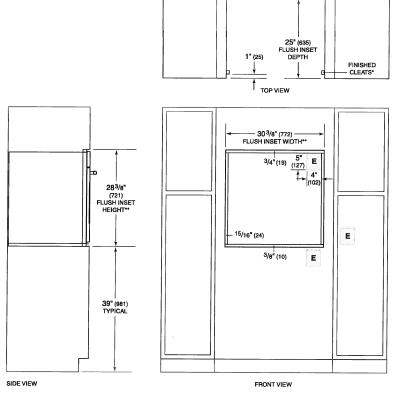

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.

NOTE: Location of electrical supply within opening may require additional cabinet depth.



LOTZO

30" E SERIES TRANSITIONAL DROP-DOWN DOOR MICROWAVE OVEN

MOLF

DD30TE/S/TH

FEATURES

Integrates into any kitchen

Matches E series ovens, coffee systems, convection steam oven

900 watts of power

Generous 1.6. cu. ft. capacity

Quick-start controls for popular items

Gourmet mode cooks automatically from preset recipes

"Keep Warm" mode

Rigorously tested in our U.S. manufacturing facilities for decades of use


Exceptional 24/7 support from our Customer Care team in Madison





wodel	MDD30TE/S/TH
Dimensions	29 7/8"W x 17 7/8"H x 20"D
Capacity	1.6 cu. ft.
Door Clearance	14 3/16"
Weight	80 lbs
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Overall Capacity	1.6 cu. ft.
Power Cord Length	4 Feet
Receptacle	3-prong grounding-type


DIMENSIONS

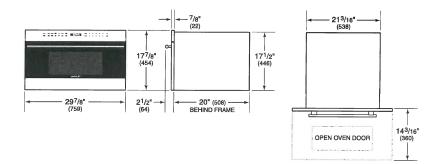

ELECTRICAL



FLUSH INSTALLATION

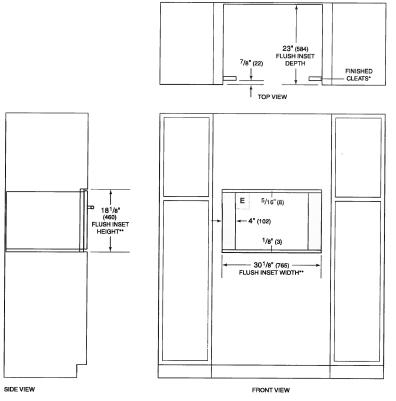

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.



36" TRANSITIONAL GAS COOKTOP - 5 BURNERS



3365T/S



FEATURES

Dual-stacked burners go from 18,000 Btu down to a mere breath of flame

Lower tier of dual-stacked burner lets you simmer and melt

Continuous cast-iron grates for easy movement of pots and pans

Easy-clean seamless burner pan

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Spark ignition system re-ignites if flame goes out


Stylish stainless control knobs capped in black

ACCESSORIES

Center burner wok grate

High altitude conversion kit

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.

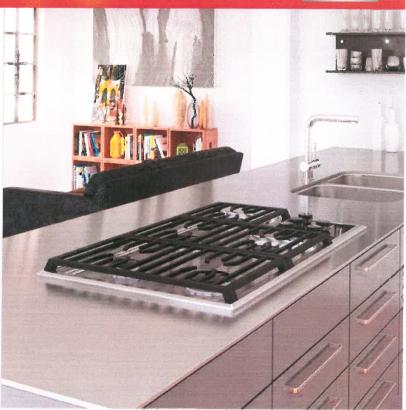

COOKTOP SPECIFICATIONS


- 3 9,200 Btu Burner
- 1 12,000 Btu Burner
- 1 18,000 Btu Burner




wodel	CG365T/S
Dimensions	36"W x 4"H x 21"D
Weight	67 lbs
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female

ELECTRICAL


GAS




DIMENSIONS



STANDARD INSTALLATION



COUNTERTOP CUT-OUT

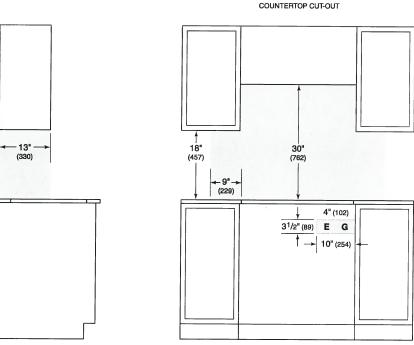

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical and gas supply location only applies to installations with built-in oven.

SIDE VIEW



FRONT VIEW

VWD30



FEATURES

Temperature range of 80°F to 200°F

30" wide, it's spacious enough for an entrée and several sides

Matches Wolf ovens and ranges, or accepts custom panel

Hidden electronic controls

Automatic shut-off

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

UL approved for warming towels

Four preset temperatures make it easy to warm favorite foods

Fan assist for even heat distribution that keeps juicy foods juicy, crisp

Removable rack lets you double-stack items

Full-extension drawer for easy access to foods

Removable stainless steel drawer pan for easy clean-up

\CCESSORIES

30" Contemporary E Series Front Panel

30" Contemporary Stainless M Series Front Panel

30" Professional Drawer Front - E Series

30" Professional Drawer Front - M Series

30" Stainless Professional Front Panel - 2" Thick

36" Stainless Professional Front Panel - 2" Thick

6-Piece Container Set

Contemporary Handle- E Series

Contemporary/Transitional Handle

Professional Handle-E Series

Professional Handle-M Series

Transitional Handle- M Series

Warming Drawer Front Panel - Integrated

Warming Drawer Front Panel - L Series

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.



FRONT PANEL OPTIONS



30' E SERIES TRANSITIONAL












30° M SERIES PROFESSIONAL



301 M SERIES CONTEMPORARY



30" M SERIEG CONTEMPORARY STAINLESS



30" LISERIES



30" INTEGRATED



WWD30 Model 29 7/8"W x 10 3/8"H x 22 3/4"D Dimensions Capacity 1.6 cu. ft. Weight 100 lbs **Electrical Supply** 120 VAC, 60 Hz Electrical Service 15 amp dedicated circuit Overall Capacity 1.6 cu. ft.

3 Feet

3-prong grounding-type

ELECTRICAL

Power Cord Length


Receptacle




INSTALLATION WITH FRONT PANEL

Accessory front panels may affect overall product dimensions and opening dimensions. Refer to Reveal for more information.

DIMENSIONS



FLUSH INSTALLATION

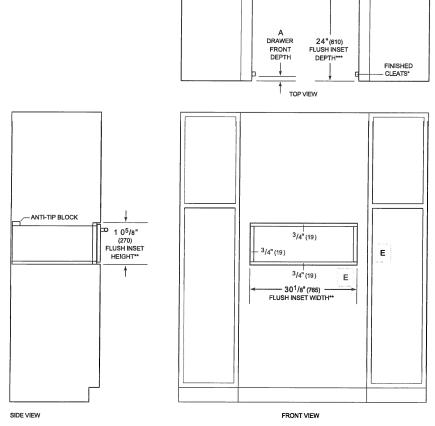

- *Will be visible and should be finished to match cabinetry
- **Dimension provides minimum reveals
 **24 1/8" (613) for E series contemporary drawer front

NOTE: Location of electrical supply within opening may require additional cabinet depth.



OTZO. KITCHEN



Home Products Coffee machines Product selection of coffee machines CVA 6805



CVA 6805

Built-in coffee machine with bean-to-cup system, versatile Miele coffee maker meets the highest demands.

- Perfect results and intense coffee flavour AromaticSystem (i)
- Fully automatic perfection OneTouch for Two (i)
- · Unique automatic sensing of cup height CupSensor (i)
- Innovative and convenient milk system EasyClick milk system (i)
- · Convenient cleaning for care and maintenance Cleaning programs



★★★★ 4.4 (12)

Price: \$5,799.00

* Excludes all applicable taxes and delivery charges

Find a ratailer







SAVE 10% and receive a FREE 5 Year Warranty on all Miele Cooking Appliances

Learn more

Downloads - CVA 6805

Installation drawings

Installation drawings

Whether you wish to replace an existing appliance or are planning a new kitchen - all relevant installation drawings for your Miele appliance can be found here. To download an installation diagram, please click on the corresponding image and the high resolution version will be displayed. Right click to download and save the image to your computer. Please note that our appliances should only be installed and serviced by an approved specialized company. Please call us if you have questions. We will gladly advise you.

Download installation drawings in PDF format

Electrical connection

Make sure that the power to the machine is OFF before installing or performing maintenance or repairs. All electrical work should be performed by a qualified electrician in strict accordance with national and local safety regulations. Installation, repairs and other work by unqualified persons could be dangerous.

Verify that the voltage, load and circuit rating information found on the data plate match the household electrical supply. This data must match to prevent damage to the coffee system. If in doubt, consult a licensed electrician.

The necessary connection information is given on the data plate inside your appliance.

The coffee system comes equipped with a 6 ft (1.8 m) power cord with a NEMA 5-15P molded plug for connection to a 120 V, 15 A, 60 Hz power supply.

Do not connect the appliance to a power inverter or directly to power produced outside of the normal electrical grid (i.e. direct solar or wind power source).


Direct connection to such power sources can cause power surges and tripped breakers when the appliance is turned on, and could damage the appliance.

Do not connect the appliance to energy saving plugs or outlets. The reduction of power to the appliance caused by these devices will cause the appliance to run hot and may damage it and/or shorten its usable life.

If there is any question concerning the electrical connection of this appliance to your power supply, please consult a licensed electrician or contact Miele's Technical Service Department. See back page for contact information.

WARNING: THIS APPLIANCE MUST BE GROUNDED


Coffee Machine

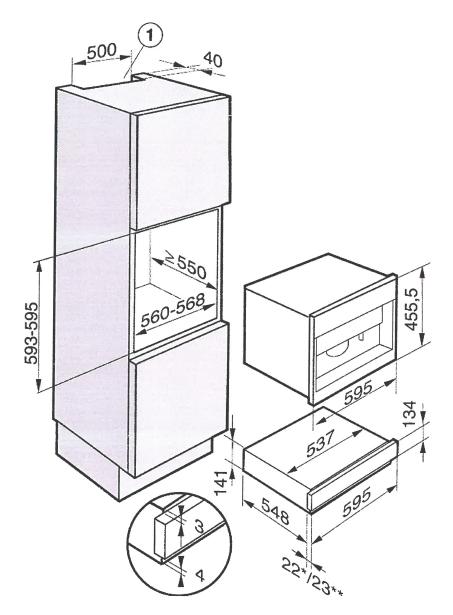

explanations

ESW 6114, ESW 6214 (Installation drawing)

- * appliances with glass front
- ** Appliances with metal front

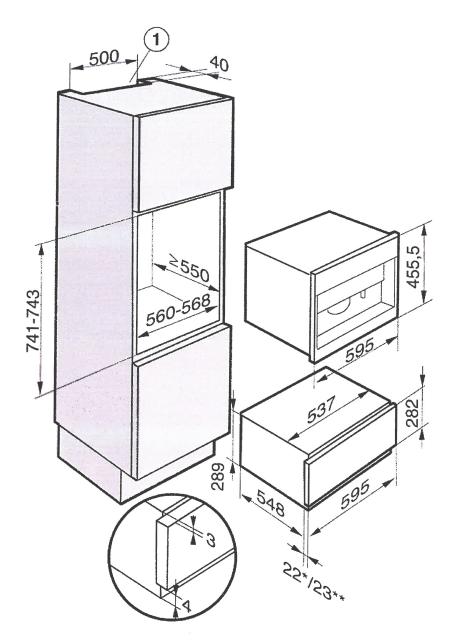

explanations

ESW 6129, ESW 6229 (Installation drawing)

- * appliances with glass front
- ** Appliances with metal front

For further installation details, please click the following link to access our Specification Library: Specification Library

*Excludes all applicable taxes and delivery charges

Subject to technical changes; no liability accepted for the accuracy of the information given!

24" UNDERCOUNTER REFRIGERATOR - PANEL READY

SUB*ZERO

1C-24R





FEATURES

Compact unit fits in anywhere

ENERGY STAR qualified

Temperature range from 34°F to 45°F

Easy-access touch control panel

Bright interior lighting

Clear utility bin for smaller items

Two-liter bottle storage in door

Spill-proof glass shelves for easy clean-ups

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

ACCESSORIES

Dual Installation Kit

Stainless steel pro handles

`tainless steel tubular handles


Stainless steel front panels with tubular or pro handles

Dual installation kits

Silver or black dual wide kickplate

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.





PRODUCT DETAILS


REFRIGERATOR

- · 2 Adjustable glass shelves
- 1 Stationary glass shelf
- · 2 Door shelves
- Utility bin




lodel	UC-24R	
Dimensions	23 7/8"W x 34"H x 24"D	
Door Clearance	25 3/8"	
Weight	130 lbs	
Refrigerator Capacity	5.7 cu. ft.	
Electrical Supply	115 VAC, 60 Hz	
Electrical Service	15 amp dedicated circuit	
Receptacle	3-prong grounding-type	

ELECTRICAL





'NTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS






STANDARD INSTALLATION



NOTE: 31/2" (89) finished returns will be visible and should be finished to match cabin



ELECTRIC DRYERS







DLEX3370V

Performance

 7.4 cu.ft. Ultra Large Capacity with Aluminized Alloy Steel Drum (Alcosta)

Intelligent Fabric Care

- TrueSteam[™] Technology
- SteamFresh™ Cycle
- SteamSanitary[™] Cycle
- ReduceStatic[™] Option
- Easylron[™] Option
- Sensor Dry System for Intelligent Fabric Care and Energy Efficiency
- Precise Temperature Control with Variable Heat Source
- NFC Tag On
- SmartDiagnosis™
- 10 Drying Programs
- 5 Temperature Settings
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Wrinkle Care Option
- Energy Saver Option
- Custom Program
- Damp Dry Signal

Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Chrome Rimmed Glass Door

Technology Benefits

• LoDecibel[™] Quiet Operation



ELECTRIC DRYERS

Harness the Power of Steam

LG's **TrueSteam™ Technology** uses a steam generator to produce real steam right into in the dyer giving you unique cycle options that remove wrinkles, odours, static and allergens.

The Quick Fix

Late for the party and no time to iron your favourite outfit? The **SteamFresh™ Cycle** refreshes and reduces wrinkles in up to five garments at a time with one 20-minute dryer cycle.

Refresh and Sanitize

SteamSanitary™ Cycle refreshes and sanitizes dry items in the steam dryer. The SteamSanitary™ Cycle kills bacteria on your clothes and is great for decorative pillows and other non-washable items.

Dry Big Loads

Accurately dry big and bulky loads with **7.4 cu.ft. ultra large capacity**. Less time in laundry room, more time for life.

NFC Tag On

Easily change and customize cycles with a **simple tap of** a **smart phone app**. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

Accurate Drying

LG's **Sensor Dry System** measures the moisture levels during the cycle and automatically adjusts the drying time, assuring you get dry laundry every time.





LG ELECTRONICS CANADA INC.
20 Norelco Drive, North York, Ontario, M9L 2X6
Tel: 647.253.6300 | LG.com
Customer Service & Parts
1-888-542-2623

	DLEX3370V
TYPE	
Front Loader	•
Design Look	Front Control
Intelligent Electronic Controls with Dual LED Display	9
Dial-A-Cycle™	•
Capacity	7.4 cu.ft.
Dry Linen Capacity	>10.2 kg
	7.0.2.189
DRYING PROGRAMS	
10 Programs ,	Sensor Dry: SteamFresh™, SteamSaniary™, Perm Press, Cotton/Normal, Delicates, Bulky/Large, Anti-Bacterial, Download/Super Dry
100	Manual Dry: Speed Dry, Air Dry
10 Options	More Time, Less Time, ReduceStatic™, EasyIron™, Custom Program, Damp Dry Signal, Wrinkle Care, Child Lock, Signal ON/OFF, Energy Saver
5 Temperature Settings	High, Medium High, Medium, Low, Ultra Low
5 Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time
FABRIC CARE FEATURES	
SteamFresh™ Cycle	8
SteamSanitary™ Cycle	
	65
ReduceStatic™ Option	
Easylron™ Option	⊕
Sensor Dry	0
Precise Temperature Control and Variable Heater CONVENIENCE FEATURES	•
NFC Tag On	•
SmartDiagnosis™	•
	•
FlowSense™ Duct Clogging Indicator	
Wrinkle Care Option	9
Remaining Time Display/Status Indicator(s)	9
End of Cycle Signal	•
Child Lock	•
Drum Light	•
Reversible Door	•
Leveling Legs	4 Adjustable Legs
Venting Option	4 Way Venting
3 Minute Installation Check	• Trusy tenning
.oDecibel™ Quiet Operation	•
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum (Alcosta)	6
Cabinet	Painted Steel
Control Panel	Plastic
op Plate	Painted
ransparent Glass Door	•
Door Rim	Chrome Rimmed Glass Door
Available Colours	Graphite Steel (V)
POWER SOURCE	
	10.15.
Ratings	UL Listed
lectrical Requirements	240V, 30 Amps
ype	Electric
OPTIONS	
'edestal	WDP4V
Pedestal (WxHxD)	27" x 13 3/5" x 28 2/5"
tacking Kit	KSTK1
DIMENSIONS	
roduct (WxHxD)	27" x 38 11/16" x 29 3/4"
	(51" D with door open)
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
al tori (VVXFIXD)	
	134 lbs/163.1 lbs
Veight (Product/Carton)	134 lbs/163.1 lbs
Veight (Product/Carton) JPC CODES	
Veight (Product/Carton) JPC CODES DLEX3370V	772454 062438
Veight (Product/Carton) JPC CODES LEX3370V VDP4V	772454 062438 772454 052866
Veight (Product/Carton) IPC CODES LEX3370V VDP4V STK1	772454 062438
Veight (Product/Carton) IPC CODES LEX3370V VDP4V	772454 062438 772454 052866

Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. All trademarks are property of their respective owners.



FRONT LOAD WASHERS

WM3770HVA

Performance

- 5.2 cu.ft. Ultra Large Capacity with NeveRust™ Stainless Steel Drum (IEC)
- Reliability with 10 Year Warranty
- 10° TilTub™ for Easy Reach into the Rear of the Drum
- 1300 RPM Powerful Spin for Efficient Water Extraction

Intelligent Fabric Care

- TurboWash™ Technology
- · Steam Technology
- ASC Certified Allergiene™ Cycle
- NSF Certified Sanitary Cycle
- ColdWash™ Technology
- 6Motion™ Technology
- NFC Tag On
- SmartDiagnoisis™
- TrueBalance™ Anti-Vibration System
- · Magnet Ventilation
- SenseClean™ System for Intelligent Fabric Care
- 12 Washing Programs and 5 Temperature Settings
- Delay Wash up to 19 hours for Washing Convenience


Style and Design

- · Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- · Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

Technology Benefits

- LoDecibel™ Quiet Operation
- · Highly Energy and Water Efficient



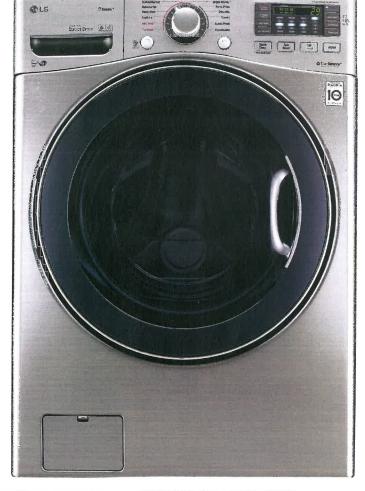















Fast Forward your Laundry

Tired of spending hours on end finishing your family's laundry? Now, those days are gone. LG's revolutionary TurboWash™ Technology allows you to save 20 minutes on larger loads, with outstanding cleaning performance! It's like pressing the fast forward button on your laundry.

Deep Clean with Steam

LG Steam Technology penetrate fabric to remove soil and enhance cleaning results, it also removes common household allergens. The Allergiene™ cycle gently removes over 95% of common household allergens, like dust mites and pet dander from even the most delicate fabrics. It's so effective it's certified by the Asthma Society of Canada (ASC).

More Free Time

Towers of towels, piles of sweatshirts, and a mountain of jeans? Go for it. The ultra large capacity (5.2 cu.ft.) washer lets you do more laundry in fewer loads. That's time well saved.

Count On It

When you buy a washer, you don't want to worry that it won't last. Because the DirectDrive™ Motor uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a 10-year warranty.

NFC Tag On

Easily change and customize cycles with a simple tap of a smart phone app. Can't find a cycle you need? There's anapp for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis[™] uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

All the Right Moves

With 6Motion™ Technology, each wash cycle combines up to 6 different wash motions to provide a revolutionary cleaning experience and ultimate fabric care.

PRODUCT FEATURES

TYPE		Child Lock	•
Front Loader	•	Auto Suds Removal	•
Design Lock	Front Control	Forced Drain System	The second
Intelligent Electronic Controls	** CONTROL OF THE CON	Internal Water Heater	•
with Dual LED Display		Easy Loading TilTub™	•
Dial-A-Cycle™	•	Leveling Legs	4 Adjustable Legs
Capacity	IEC 5.2 cu.ft.	LoDecibel™ Quiet Operation	•
TYPE		MOTOR AND AGITATOR	
Energy Star		Motor Type / Motor Speed / Axis	Direct Drive / Variable / Horizontal
WASH PROGRAMS		MATERIALS AND FINISHES	
12 Programs	Cotton/Normal, Bulky/Large, Perm. Press,	NeveRust™ Stainless Steel Drum	•
	Delicates, Download, Speed Wash, Tub Clean,	Cabinet	Painted Steel
	Sanitary, Allergiene™, Heavy Duty, Towels,	Control Panel	Plastic
	Bright Whites™	Top Plate	Painted
10 Options	Prewash, Rinse+Spin, TurboWash™, Extra Rinse,	Transparent Glass Door	•
To Options	Child Lock, ColdWash™, Steam, FreshCare™,	Door Rim	Large Chrome Rimmed Glass Door
	Delay Wash (up to 19 hours), Add Garment		with Dark Blue Tinted Cover
5 Wash/Rinse Temperatures	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)	Available Colours	Graphite Steel (V)
·		POWER SOURCE	
5 Spin Speeds	Extra High (1300 max), High, Medium, Low, No Spin	Ratings / Electrical Requirements / Type	UL Listed / 120V, 10 Amps / Electric
		OPTIONS	
No. of Water Levels	Automatically adjusts to the size of load	Pedestal	WDP4V
No. of Soil Levels	5	Pedestal (WxHxD)	27" x 13 3/5" x 25 2/5"
TIPRIC CLOS FRINCISCO		Stacking Kit	KSTK1
FABRIC CARE FEATURES		DIMENSIONS	
TurboWash™		Product (WxHxD)	27" x 38 11/16" x 29 3/4"
Steam			(51" D with door open)
Allergiene™ Cycle	•	Carton (WxHxD)	29 1/2" x 43 5/16" x 31 5/16"
ColdWash™	•	Weight (Product/Carton)	202.8 lbs/224.8 lbs
6Motion™	•	UPC CODES	
SenseClean™ System	and the first source of the first of the many source of the first of the second	WM3770HVA (Washer)	772454 067594
CONVENIENCE FEATURES		WDP4V (Pedestal)	772454 052866
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	KSTK1 (Stacking Kit) WARRANTY	772454 059896
TrueBalance™ Anti-Vibration System	0		1 Year Parts and Labour
NFC Tag On	•		5 Years Part on Drum
SmartDiagnosis™			10 Years Part on DirectDrive™ Motor
Load Sense	•		
Status Indicator(s)	9		
End of Cycle Signal			



LG ELECTRONICS CANADA INC.

20 Norelco Drive, North York, Ontario M9L 2X6 Tel: 647-253-6300 | LG.com Customer Service & Parts 1-888-542-2623

