CONSTRUCTION SUMMARY OF EXTRAS

Printed 2020-03-20 / 10:15 AM / Page 1 of 3

Site: COOKSTOWN 10

Model: Lot:

Phone/Email: Purchaser:

SOMERSTON (B) OPTIONAL GROUND DAGMAR SKALA & ALEXANDER STEFOU 416-574-2539 / LISTWITHDAGMAR@GMAIL.COM



Г	DESCRIPTION	DATE SELECTED
	BONUS PACKAGE: STAINLESS STEEL HOOD FAN	INCLUDED IN APS
#1	INCLUDED IN APS - OPTION GROUND FLOOR WITH 3RD BEDROOM	OCTOBER 24 2019
#2	INCLUDED IN APS - SIDE DOOR FROM GARAGE TO SIDE YARD	OCTOBER 24 2019
#3	INCLUDED IN APS - 10 FOOT CEILING ON THE MAIN FLOOR **INCLUDES 8 FOOT INTERIOR DOORS, FRONT DOOR, GARAGE MAN TO MUD, TRANSOMS ABOVE WINDOWS, WHERE POSSIBLE	OCTOBER 24 2019
#4	INCLUDED IN APS - 9 FOOT CEILINGS IN BASEMENT	OCTOBER 24 2019
#5	N/A	
#6	WINDOW - SEE LCOATION FOR WINDOW IN KITCHEN **WINDOW INCLUDED IN APS, APPROX 30 X 38 **SINK GOING UNDERNEATH	OCTOBER 24 2019
#7	RELOCATE DISHWASHER AND SINK TO BE UNDER WINDOW	OCTOBER 24 2019
#8	LARGER BASEMENT WINDOWS TO 30 X 24 (X5)	OCTOBER 24 2019
#9	ELECTRICAL - KITCHEN - RELOCATE THE STANDARD LIGHT TO BE ABOVE ISLAND, ADD 2 CAPPED ROUGINS **END BOXES TO BE APPROX 60" APART, LEAVING APPROX 15" ON EITHER END OF ISLAND ***NOTE TO SITE - ISLAND WILL SHIFTED OVER SLIGHTLY, LOOK FOR KITCHEN DRAWING (TOTAL 3 LIGHTS)	OCTOBER 24 2019
#10	ELECTRICAL - LED POTLIGHTS IN KITCHEN (4)	OCTOBER 24 2019
#11	ELECTRICAL - LED POTLIGHTS IN WAFFLE IN GREAT ROOM (6)	OCTOBER 24 2019
#12	ELECTRICAL - LED POTLIGHTS IN HALL IN FRONT OF CLOSET (1)	OCTOBER 24 2019
#13	REINFORCE LIGHT BOX IN DINING, HALL & MASTER & FOYER	OCTOBER 24 2019
#14	ELECTRICAL - LED POTLIGHTS IN HALL IN FRONT OF DINING ROOM (2), DELETE STANDARD	OCTOBER 24 2019
#15	ELECTRICAL NOTE - HALL POT LIGHTS TO BE CENTRED WITH FLAT ARCHES ***SEE DOTTED LINES ON DRAWING	OCTOBER 24 2019
#16	ELECTRICAL - PLUG ABOVE FIREPLACE FOR FUTURE TV	OCTOBER 24 2019
#16	ELECTRICAL - PLUG IN GARAGE, SEE LOCATION ON SKETCH	OCTOBER 24 2019
#17	ELECTRICAL - 2 PLUGS IN BASEMENT, LOCATION TO BE DETERMINED	OCTOBER 24 2019
#18	ELECTRICAL - STAIR LIGHTS (STYLE AND LOCATION LIKE LOT 19 COOKSTOWN) IN CENTRE OF RISER	OCTOBER 24 2019
	COLOURS	
#1	NOTE - ELECTRICAL - SINK AND DISHWASHER IS BEING RELOCATED, STD PLUG IN ISLAND IS TO REMAIN **LOCATION CLOSEST TO FRIDGE	FEBRUARY 20 2020
#2	NOTE - ELECTRICAL - COUNTERTOP PLUGS IN KITCHEN TO BE AS CLOSE TO THE ENDS AS POSSIBLE **SEE SKETCH	FEBRUARY 20 2020
#3	NOTE - ELECTRICAL - SWITCH FOR LIGHT ABOVE SINK TO BE BESIDE COUNTERTOP PLUG CLOSEST TO BREAKFAST AREA	FEBRUARY 20 2020
#4	NOTE: ELECTRICAL - SWITCH FOR UNDER CABINET LIGHTING TO BE LOCATED WHERE MAIN KITCHEN SWITCH IS	FEBRUARY 20 2020
#5	N/A	
#6	PAINT COLOUR - BENJAMIN MOORE BARREN PLAIN 2111-60 **INCLUDED IN APS	FEBRUARY 20 2020
#7	HARDWOOD - UPGRADE 3 - ALL STANDARD AREAS INCLUDING KITCHEN AND BREAKFAST **PRICE IS FOR DIFFERENCE UPGRADE 2 WHICH WAS INCLUDED IN APS, SCHEDULE E	FEBRUARY 20 2020
# #	HARDWOOD - DINING ROOM - INSTALL ON A 45 DEGREE WITH BORDER	FEBRUARY 20 2020
#9	BUILD-UP SUB-FLOOR FOR FLUSH TRANSITIONS BETWEEN TILE AND HARDWOOD	FEBRUARY 20 2020
#10	PLASTER MOULDING INSIDE EACH WAFFLE 102L IN GREAT ROOM	FEBRUARY 20 2020
#11	PLASTER MOULDING IN THE DINING ROOM 102L	FEBRUARY 20 2020
#12	PLASTER MOULDING IN THE MASTER BEDROOM 102L	FEBRUARY 20 2020
#13	PLASTER MOULDING IN THE FOYER 102L	FEBRUARY 20 2020
#14	RAILINGS - STANDARD METAL, UPGRADE TO SQUARE POST & GROOVED HANDRAIL	FEBRUARY 20 2020

CONSTRUCTION SUMMARY OF EXTRAS

Printed 2020-03-20 / 10:15 AM / Page 2 of 3

Site: COOKSTOWN

10

Lot:

Model: Purchaser: SOMERSTON (B) OPTIONAL GROUND DAGMAR SKALA & ALEXANDER STEFOU

Phone/Email:

416-574-2539 / LISTWITHDAGMAR@GMAIL.COM



FEBRUARY 20 2020	1
FEBRUARY 20 2020	#60 F2 - MOFN TOWEL BAR VR2418 & TOILET BABER HOLDER VR2408
FEBRUARY 20 2020	
FEBRUARY 20 2020	#5/ E2 - CHOWER - IDGRADE TO TOWEL BAR MITCHS (CHOOSE)
FEBRUARY 20 2020	3 12
FEBRUARY 20 2020	3 5
FEBRUARY 20 2020	
FEBRUARY 20 2020	#53 E2 - TILES - SHOWER FLOOR - MARBLE
FEBRUARY 20 2020	#52 E2 - TILES - SHOWER WALL - UPGRADE 1
FEBRUARY 20 2020	#51 E2 - CABINETS - CATEGORY 1
FEBRUARY 20 2020	ENSUITE 2
FEBRUARY 20 2020	#50 E3 - MOEN TOWEL BAR YB2418 & TOILET PAPER HOLDER YB2408
FEBRUARY 20 2020	#49 E3 - COUNTERTOP - STONE - UPGRADE 4 - INCLUDES RECTANGLE UNDERMOUNT SINK **INCLUDES LIP
FEBRUARY 20 2020	#48 E3 - SHOWER - UPGRADE TO TOWEL BAR MT6X18 (CHROME)
FEBRUARY 20 2020	#47 E3 - TOILET - UPGRADE TO CONTRAC CALI 4710BOV
FEBRUARY 20 2020	#46 E3 - FRAMELESS GLASS SHOWER IN LIEU OF FRAMED
FEBRUARY 20 2020	#45 E3 - ADD HANDHELD WITH SLIDEBAR
FEBRUARY 20 2020	#44 E3 - SHOWER JAMB - MARMOLINE ASH
FEBRUARY 20 2020	#43 E3 - TILES - 12" HORIZONTAL BORDER ON THREE WALLS (TUNDRA GREY MARBLE) **APPROX 2/3 THE WAY UP
FEBRUARY 20 2020	#42 E3 - TILES - SHOWER FLOOR - MARBLE
FEBRUARY 20 2020	#41 E3 - TILES - SHOWER WALL - INSTALL FLOOR TILE ON WALL
FEBRUARY 20 2020	#40 E3 - CABINETS - CATEGORY 1
FEBRUARY 20 2020	ENSUITE 3
FEBRUARY 20 2020	#39 KITCHEN ****HOMEOWNER TO TAG SLAB
FEBRUARY 20 2020	#38 KITCHEN - COUNTERTOP SLAB - FOR UPGRADE (5) MATERIAL
FEBRUARY 20 2020	#37 KITCHEN - COUNTERTOP - SUPER WHITE (UPGRADE 5) **NOTE ADDITIONAL HOLE 3/4" FOR FUTURE WATER FILTERATION
FEBRUARY 20 2020	#36 BE 8-1/2" SPACING ***REFER TO LOT 19 WINDOW
FEBRUARY 20 2020	#35 ELECTRICAL - KITCHEN - STANDARD PLUG IN THE ISLAND IS TO REMAIN (Even though the sink has moved)
FEBRUARY 20 2020	#34 KITCHEN - NOTE: DISTANCE BETWEEN CABINETS AND ISLAND AT FRIDGE LOCATION TO BE MINIMUM 43" SEE DWG.
FEBRUARY 20 2020	KITCHEN - WINDOW VALANCE BOX, SIMPLE SQUARE DESIGN
FEBRUARY 20 2020	#32 ELECTRICAL - PUCK LIGHTS IN KITCHEN WITH SWITCH
FEBRUARY 20 2020	_
FEBRUARY 20 2020	#30 KITCHEN - 54" HIGH SINGLE UPPER DOORS WITH TRIPLE STEP CROWN *OVERALL HEIGHT 120" FOR 10 FOOT CEILINGS
FEBRUARY 20 2020	#29 KITCHEN - SHIFT FRIDGE TO END (CLOSEST TO STOVE WALL) AND INCREASE PANTRY
FEBRUARY 20 2020	#28 KITCHEN - CANOPY ABOVE STOVE - LA POSITANO
FEBRUARY 20 2020	#27 ELECTRICAL - KITCHEN - FOR BUILT IN WALL OVEN/MICRO
FEBRUARY 20 2020	#26 KITCHEN - BUILT-IN OVEN AND MICROWAVE BESIDE PANTRY AT END OF STOVE WALL
FEBRUARY 20 2020	#25 KITCHEN - COUNTERTOP - CUT-OUT FOR COOKTOP
FEBRUARY 20 2020	#24 KITCHEN - COOKTOP WITH POTS & PANS BELOW
FEBRUARY 20 2020	#23 KITCHEN - ADD APPROX 1 FEET OF BASE CABINETS IN ISLAND **COUNTERTOP PRICED SEPARATELY
FEBRUARY 20 2020	#22 KITCHEN - ADD APPROX 2 FEET OF UPPER & LOWER CABINETS TO STOVE WALL CLOSEST TO BREAKFAST AREA **COUNTERTOP PRICED SEPARATELY
FEBRUARY 20 2020	#21 KITCHEN - INTERIOR PULLOUT DRAWERS FOR PANTRY ON FRIDGE WALL (x5)
FEBRUARY 20 2020	#20 KITCHEN - ADD TOP DRAWERS IN ISLAND
FEBRUARY 20 2020	#19 KITCHEN - UPGRADE 3 CABINETS
FEBRUARY 20 2020	KITCHEN
FEBRUARY 20 2020	#18 TRIM - UPGRADE INTERIOR DOOR STYLE TO SHAKER 1 PANEL THROUGHOUT
FEBRUARY 20 2020	#17 TRIM - UPGRADE DOOR HANDLES TO WEISER HALIFAX IN BRUSHED FINISH
FEBRUARY 20 2020	#16 TRIM - SHAKER PANELLING TO 2 THICK ARCHWAYS AT FOYER / MAIN HALL (REFER TO LOT 12 FOR SAME DESIGN)
FEBRUARY 20 2020	#15 TRIM - UPGRADE 1, STEP STYLE
DATE SELECTED	DESCRIPTION
ייים כבו בכדבי	DESCRIPTION

Printed 2020-03-20 / 10:15 AM / Page 3 of 3 **CONSTRUCTION SUMMARY OF EXTRAS**

Site: COOKSTOWN

Lot:

Model: Purchaser:

Phone/Email:

SOMERSTON (B) OPTIONAL GROUND DAGMAR SKALA & ALEXANDER STEFOU 416-574-2539 / LISTWITHDAGMAR@GMAIL.COM




FEBRUARY 20 2020	187 LAUNDRY - BACKSPLASH - UPGRADE 2 - COLOURS & DIMENSIONS 4 X 16	#87
FEBRUARY 20 2020		#86
FEBRUARY 20 2020		#85
FEBRUARY 20 2020		#84
FEBRUARY 20 2020	183 LAUNDRY - TILES - UPGRADE 6	#83
FEBRUARY 20 2020	LAUNDRY	
FEBRUARY 20 2020	82 SHOWER NICHE IN ALL BATHROOMS	#82
FEBRUARY 20 2020	181 ELECTRICAL - FOR BUILTIN OVEN 20 AMP / MICROWAVE 20 AMP	#81
FEBRUARY 20 2020	80 ELECTRICAL - FOR COOKTOP 40AMP	#80
FEBRUARY 20 2020	KITCHEN FAUCET - MOEN 7594SRS	#79
FEBRUARY 20 2020	178 KITCHEN SINK - BLANCO R15 (401518)	#78
FEBRUARY 20 2020	FIREPLACE - ADD FAN KIT	#77
FEBRUARY 20 2020	DELETE MIRRORS AND CERAMIC ACCESSORIES THROUGHOUT ALL BATHROOMS	#76
FEBRUART 20 2020		
FEBRUART 20 2020		#75
FEBRILARY 20 2020		#74
FEBRUARY 20 2020	#73 M/E - COUNTERTOP - STONE - UPGRADE 4 - INCLUDES RECTANGLE UNDERMOUNT SINK **INCLUDES LIP	#73
FEBRUARY 20 2020	72 M/E - SHOWER - UPGRADE TO TOWEL BAR MT6X18 (CHROME)	#72
FEBRUARY 20 2020	71 M/E - TOILET - UPGRADE TO CONTRAC CALI 4710BOV	#71
FEBRUARY 20 2020	770 M/E - SHOWER JAMB - MARMOLINE ASH	#70
FEBRUARY 20 2020	69 M/E - TILES - FLOOR UPGRADE 4	#69
FEBRUARY 20 2020	69 M/E - TILES - SHOWER FLOOR - MARBLE	#69
FEBRUARY 20 2020	68 M/E - TILES - SHOWER WALL - FLOOR TILE ON WALL - UPGRADE 4	#68
FEBRUARY 20 2020	67 M/E - CABINETS - CATEGORY 2	#67
FEBRUARY 20 2020	MASTER ENSUITE	
FEBRUARY 20 2020	71LES - MAIN FOYER - UPGRADE 6	#66
FEBRUARY 20 2020	71LES - BASEMENT - UPGRADE 6	#65
FEBRUARY 20 2020	BASEMENT FOYER & MAIN FOYER	
FEBRUARY 20 2020	64 POWDER - SINK - PEDESTAL SINK IN LIEU OF CABINET **AVENUE ST. CLAIR	#64
FEBRUARY 20 2020	POWDER - MOEN TOWEL BAR YB2418 & TOILET PAPER HOLDER YB2408	#63
FEBRUARY 20 2020	POWDER - TOILET - UPGRADE TO CONTRAC CALI 4710BOV	#62
FEBRUARY 20 2020	POWDER - TILES - UPGRADE 6	#61
FEBRUARY 20 2020	POWDER ROOM	
DATE SELECTED	DESCRIPTION	

ZANCOR HOMES COLOUR CHART


Vendor	er Initial	Purchaser			** PAGE 1 OF 2 **	
	×	*	lity of <u>all Trades</u> s <u>PRIOR to</u>	ne responsibi colour charts	Any upgrades in the colour chart must be accompanied with a PES. It is the responsibility of <u>all Trades</u> to inform the builder of any discrepancies on sketches, PES and/or colour charts <u>PRIOR to</u> <u>installation.</u>	Any upgrades in the colour char to inform the builder of a
10	COOKSTOWN	соокѕ			***FOR TRADE USE***	
07	SITE & LOT				Purchaser has reviewed the colour chart	Pu
S	SEE EXTRAS			Location	DELETE	Bathroom Accessories
	YES			Opt. Crown Moulding	DELETE	Mirrors
	Ž	PLASTER MOULD	3.63		RS & ACCESSORIES	MIRRORS
	NF8		MANTLE		GREAT ROOM	LOCATION
		(0)		FIREPLACES	FIRE	
		INCH (3)	VINTAGE WHITE OAK UV - ZEUS S INCH	GF WHITE	VINIA	Bedroom 3
		INCH (3)	VINTAGE WHITE OAK OV - ZEUS S INCH (3)	GE WHITE C	VINIA	Redroom 2
		INICH (2)	N/A	GE WHITE O	VINTA	Master Bedroom
			N/A			Library
		INCH (3)	VINTAGE WHITE OAK UV - ZEUS 5 INCH (3)	GE WHITE	VINTA	Main hall
DER	NAL w/BORDER	L ON DIAGO	CH (3) **INSTAL	- ZEUS 5 IN	VINTAGE WHITE OAK UV - ZEUS 5 INCH (3) **INSTALL ON DIAGONA	Dining Room
		ZEUS 5 INCH (3)	DAK UV - ZEUS 5	VINTAGE WHITE OAK UV -	VINTA	Family Room
			N/A			Servery/Pantry
						Kitchen/ Breakfast
					HARDWOOD /	
			MARMOLINE - ASH	MARN		Ensuite 3 Shower Jamb
	ווור אאטרר)	REY	2 X 2 MARBLE - TUNDRA GREY	2 X 2 MARB		Ensuite 3 Shower Floor
	THE WALL	CNED 2/3 III	NDRA GREY 12" (INSTAIL APPROX	ORA GREY 1	2 X 2 MARRIE - TIINDRA GREY 12" (INSTAIL APPROX 2/3 LIP THE WALL)	Ensuite 3 Shower BORDER
		SCR.	GENESIS TALIDE 12 V 24 *STACKE	JEINESIS TALL		Finalite 3 Shower Wall
		200	MARMOLINE ASH	MAR!		Ensuite 3 Floor
		DER MARBLE	HONEYCOMB THASSOS & GREY BORDER MARBLE	MB THASS	HONEYCO	Ensuite 2 Shower Floor
)	WEAVE WHITE 8 X 10 (1)	WEAVE V		Ensuite 2 Shower Wall
		Ç	LOFT WHITE 12 X 24 **BRICK	LOFT WHIT		Ensuite 2 Floor
			MARMOLINE - SNOW	MARM		Master Shower JAMB
			2 X 2 MARBLE - ICEBURG	2 X 2 MA		Master Shower Floor
		4) **BRICK	ETERNA CALCATTA GREY 12 X 24 (4) **BRICK	CALCATTA	ETERN	Mstr Ensuite Shower WALL
		R WHITE) (5	SLAB TO MATCH COUNTERTOP (SUPER WHITE) (5) ETERNA CALCATTA GREY 12 X 24 (4) ***RRICK	A CALCATTA	SLAB IO I	Mstr Ensuite Floor
			HARDWOOD	HA		Breakfast
			HARDWOOD	НА		Kitchen
	X 16 (2)	POLISHED 4	ARCTIC WHITE	MENSIONS	COLOURS AND DIMENSIONS ARCTIC WHITE POLISHED 4 X 1	LAUNDRY BACKSPLASH
		(6)	MEXICANA GREY 24 X 24 (MEXICAN/		Mud Room/ LAUNDRY
	-	6)	MEXICANA GREY 24 X 24 (6)	MEXICAN/		Powder Room
		6) BRICK (4)	MEXICANA GREY 24 X 24 (6)	MEXICANA	וואוברבט	Basement Foyer
		4		IILES	-	Mais Eggs
ONE TUNDRA GREY (4)		CEASARST	DH00010		1022 LAM - TUNDRA (CAT 2)	Laundry
CAESARSTONE - GEORGIAN BLUFF (4)	TONE - GEORG	CAESARS	DH00010	「1)	1022 LAM - OLMO CARISMA (CAT 1)	Ensuite 3
SHELL (3)	CAESARSTONE EGGSHELL (3)	CAES	DH00010		1022 BIANCO (CAT 1)	Ensuite 2
NE GREY (4)	CAESARSTONE TURBINE GREY (4)	CAESAI	DH00010	2)	2501 MAPLE - PISTACHIO (CAT 2)	Master Ensuite
	N/A				NOW A PEDESTAL	Powder Room
E (5)	SUPER WHITE (5)		DH00010	3)	3801 FB - OXFORD WHITE (CAT 3)	Island
r	SUPER WHITE (5)		DH00010	3)	3801 FB - OXFORD WHITE (CAT 3)	Kitchen
EDGE	NTERTOP	COLINT	HARDWARF	COOR	DOOR STYLE	
			1000	COLIMITED.	CARINETBY / COLINITERTORS	


ZANCOR HOMES COLOUR CHART

Date	Vendor Signature	Vendor		PAGE 2 OF 2 ***	**
Date	Décor Consultant Signature	Décor Consu	<u>M.</u>	PES and/or colour charts PRIOR to installation. ANCOR HOMES	PES and/or co
			th a PES. It is the	***FOR TRADE USE*** Any upgrades in the colour chart must be accompanied with a PES. It is the possibility of all trades to inform the builder of any discrepancies on shoth	***FOR TRADE USE*** Any upgrades in the colour chart must be accompanied with a PES. It is the responsibility of all trades to inform the huilder of any discrepancies on sketches.
Date	Purchaser Signature	Purchase			DÉCOR NOTES
			GMAIL.COM	LISTWITHDAGMAR@GMAIL.COM	EMAIC:
Date	Purchaser Signature	Purchase	39	416-574-2539	HOME #/CELL #
		×	ANDER STEFOU	DAGMAR SKALA & ALEANDER STEFOU	PURCHASER(S):
			LOT: 10	COOKSTOWN	SITE:
	7		signing.	accuracy of colour and selections before	Purchaser has checked and acknowledged accuracy of colour and selections before signing
	×		on fee plus costs	ng are subject to a \$5000 administrati	Any changes to the colour chart after signing are subject to a \$5000 administration fee plus costs
	s's selection	ariances in d. In this event the Vendor:	arily identical due to dye lot va	ible to Builders selection but not necess struction progress some items may have	colours of all materials are as close as possible to Builders selection but not necessarily identical due to dye lot variances in manufacturing/manufacturers. Due to construction progress some items may have been pre-selected or installed. In this event the Vendors's selection must be accepted by the purchaser
S	INITIALS		R	DISCLAIMER	
				NO	ELECTRICAL for Bar Fridge
				YES	ELECTRICAL for Cooktop
				TR YES	ELECTRICAL for Built-in Micro / OTR
				YES	ELECTRICAL for Built-in Oven
				6 INCH	Hood Fan Venting SIZE
			8	STANDARD	WATERLINE to Fridge
				NO	GAS LINE
	NOTES	DECLINED		UPG (SEE PES)	
		Vame:	YES / NO Package Name:	n 'Schedule E'	Appliance Package received in 'Schedule E'
	ON PES	S TO BE DETAILED	REMENTS-UPGRADE	ZANCOR APPLIANCE REQUIREMENTS-UPGRADES TO BE DETAILED ON PES	
ĒT	UPGRADE RECTANGLE SINKS & TOILET	UPGRADE	STANDARD	UPGRADE	Ensuite 3
ET		UPGRADE	STANDARD	UPGRADE	Ensuite 2
ET		UPGRADE	STANDARD	UPGRADE	Master Ensuite
	PEDESTAL SINK AVENUE	PE	STANDARD	UPGRADE	Powder room
	SINGLE SINK BLANCÓ 401518	SING	UPGRADE	UPGRADE	Kitchen
	NOTES		FAUCETS	FIXTURES	
		AILED ON PES	PLUMBING- UPGRADES TO BE DETAILED ON PES	PLUMBING- U	
	OUT 2111-60	REN PLAIN THROUGHO	BENJAMINE MOORE BARREN PLAIN THROUGHOUT 2111-60	38	THROUGHOUT
			PAINT		
		STANDARD	ST		Exterior Door Hardware
	E ROSETTE)	IN NICKEL (SQUARE	WEISER HALIFAX - SATIN NICKEL (SQUARE ROSETTE)	W	Interior Door Hardware
	PANEL	8 FOOT INTERIOR DOORS - SHAKER 1 PANEL	8 FOOT INTERIOR		Interior Doors
		UPGRADE 1 - STEP STYLE	UPGRAD		Casing/Baseboards
			TRIM		
	ROOVED HANDRAIL	NRE OAK POSTS & G	UPGRADE TO SQUARE OAK POSTS & GROOVED HA		Main to Basement Railing Details:
	H ALT PLAIN	METAL - SINGLE COLLAR WITH ALT PLAIN	METAL - SI		Main to Basement Railing Details:
	AS CLOSE AS POSSIBLE	TCH HARDWOOD A	STAIN STAIRS TO MATCH HARDWOOD AS CLOSE AS		Stair Stain / Species:
		STAIR STAIN	STAIRS, RAILING & PICKETS & STAIR STAIN	STAIRS, RAII	

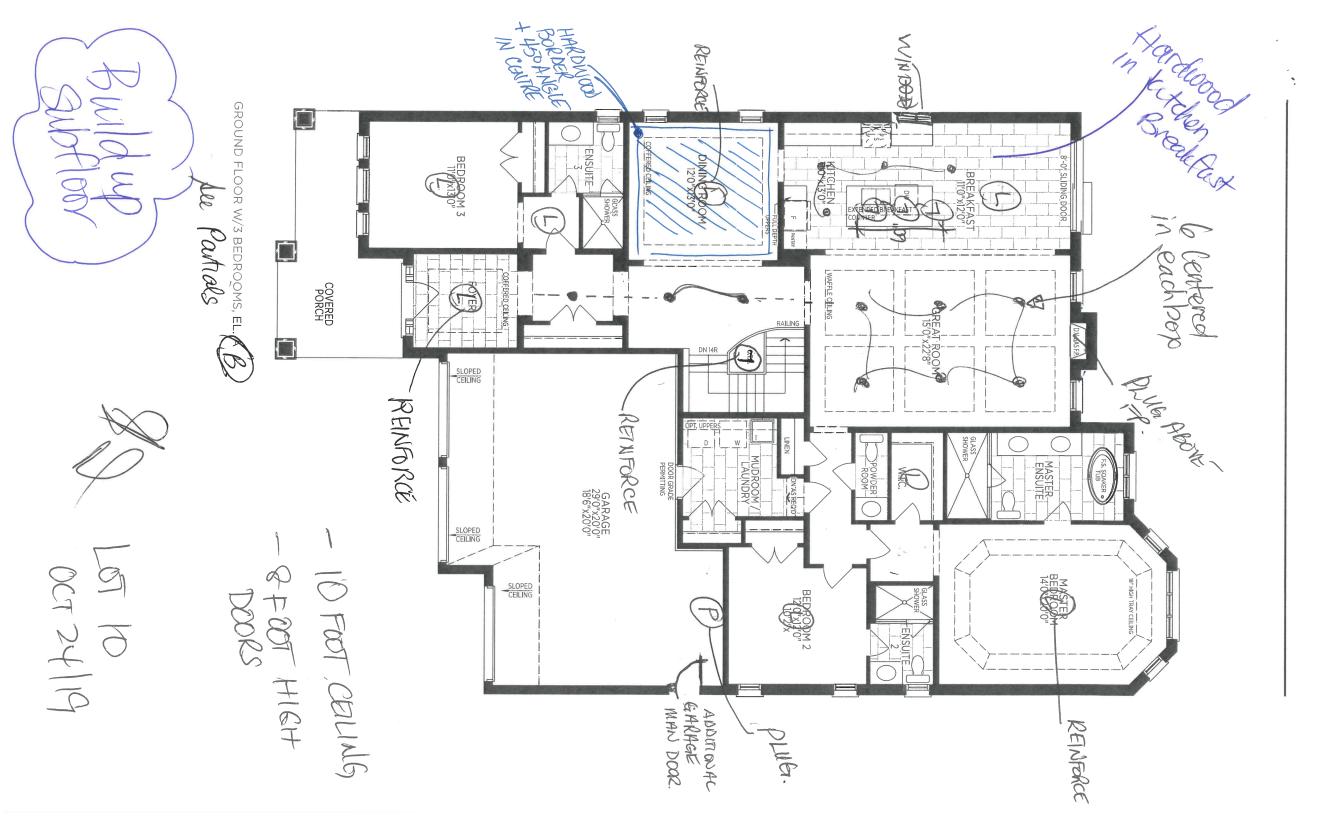



ptional Plans & Part

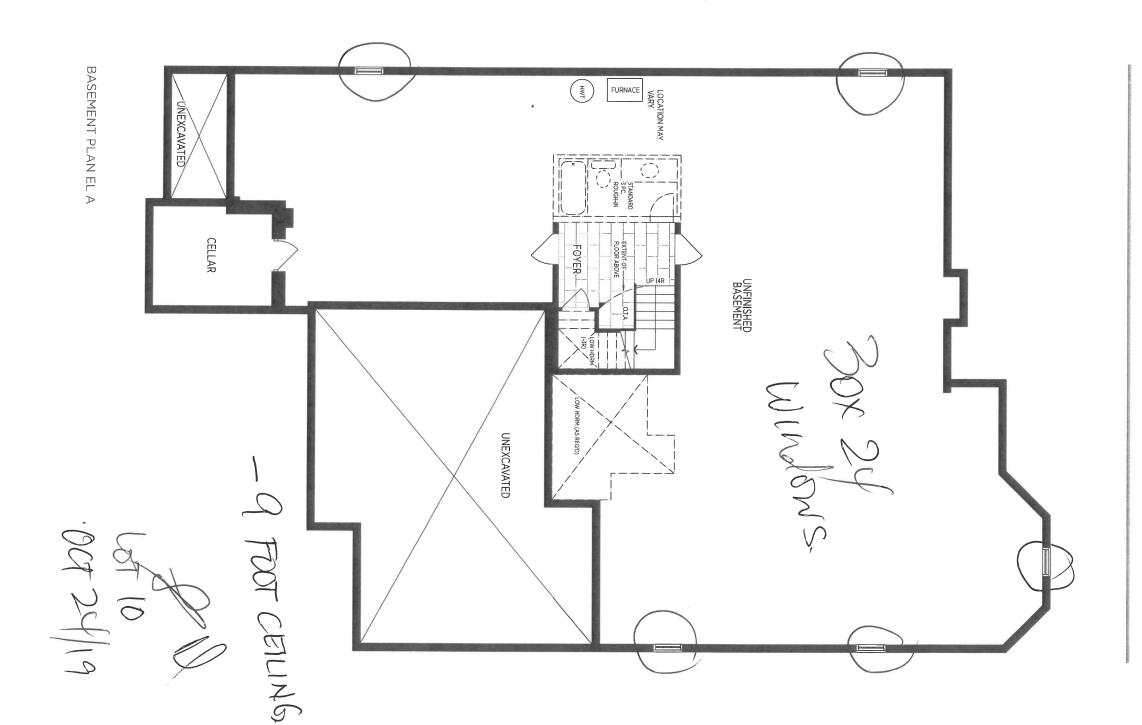

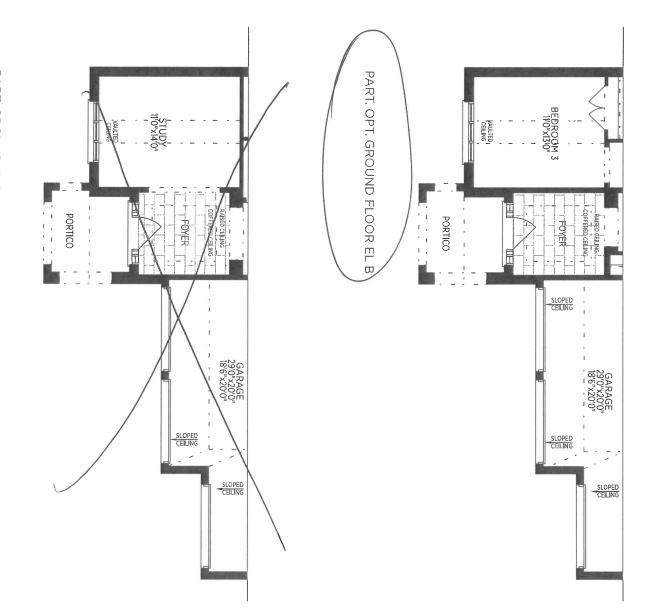


PART. GROUND FLOOR EL B

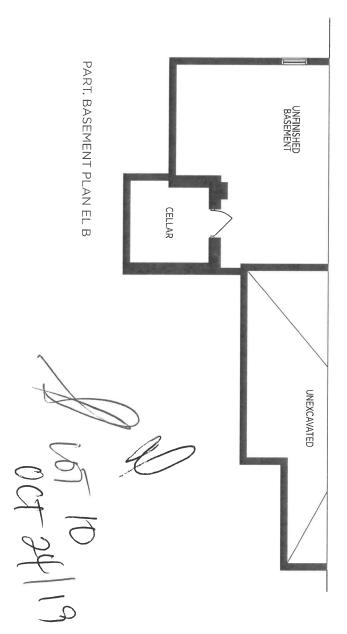


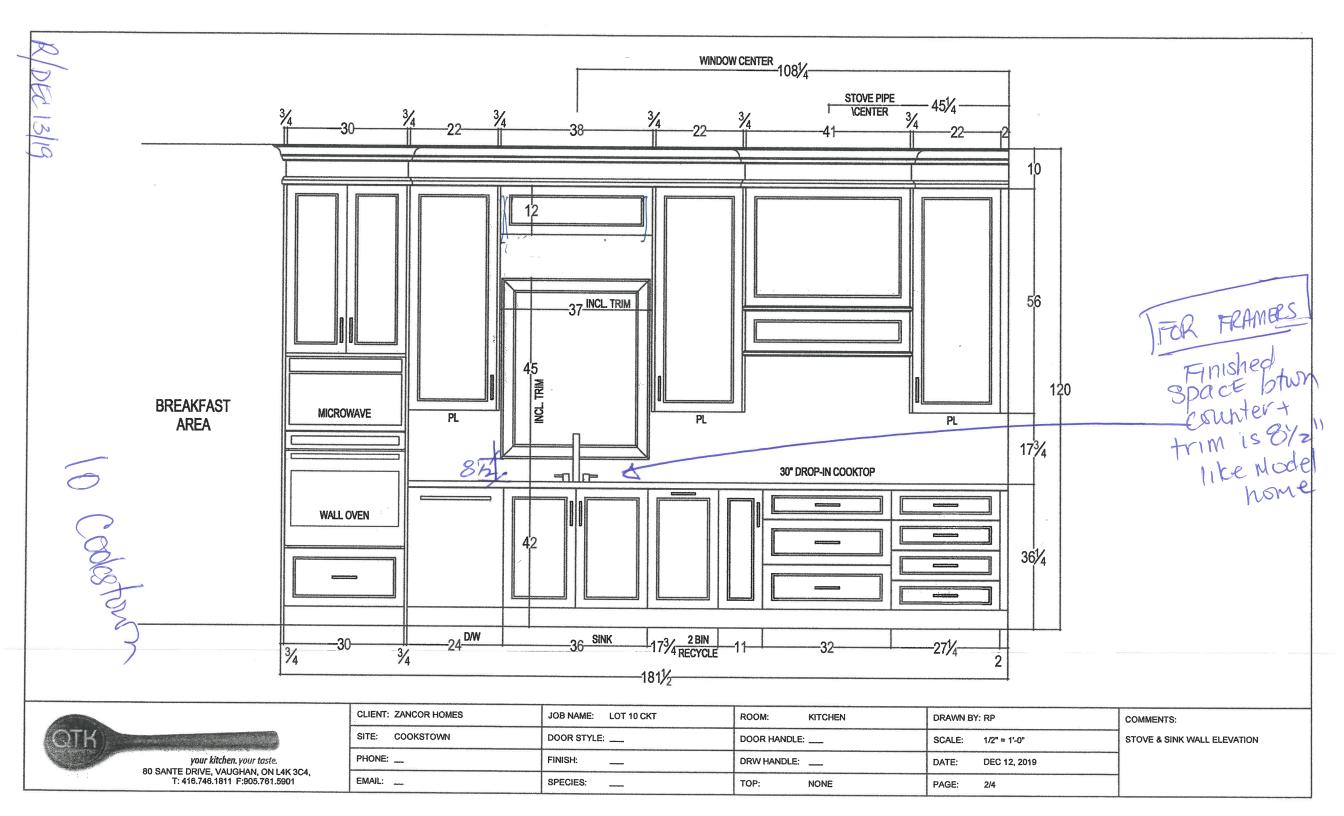

R/082/3/19

10 Codostan

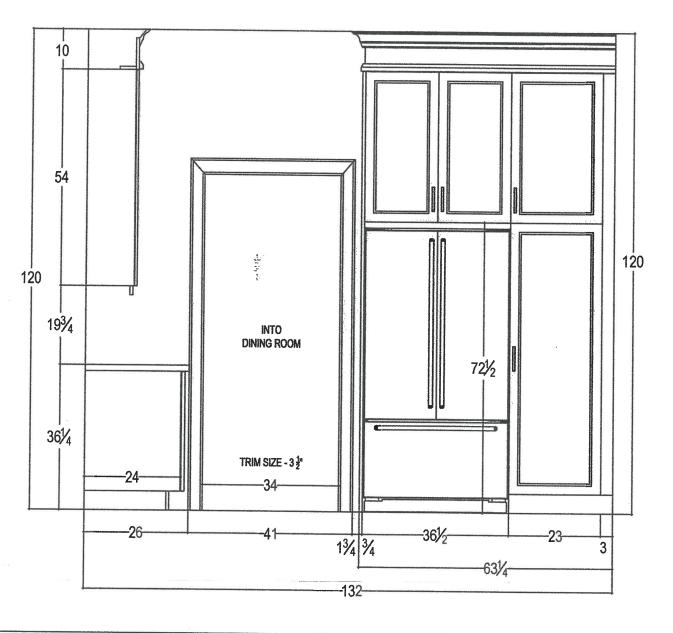

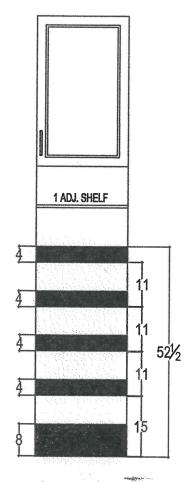


PANTRY INTERIOR w/ PULL OUT DRAWERS

*your kitchen. your taste.*80 SANTE DRIVE, VAUGHAN, ON L4K 3C4,
T: 416.746.1811 F:905.761.5901

CLIENT: ZANCOR HOMES	JOB NAME: LOT 10 CKT	ROOM: KITCHEN	DRAWN BY: RP
SITE: COOKSTOWN	DOOR STYLE:	DOOR HANDLE:	SCALE: 1/2" = 1'-0"
PHONE:	FINISH:	DRW HANDLE:	DATE: DEC 13, 2019
EMAIL:	SPECIES:	TOP: NONE	PAGE: 3/4

COMMENTS: FRIDGE WALL ELEVATION

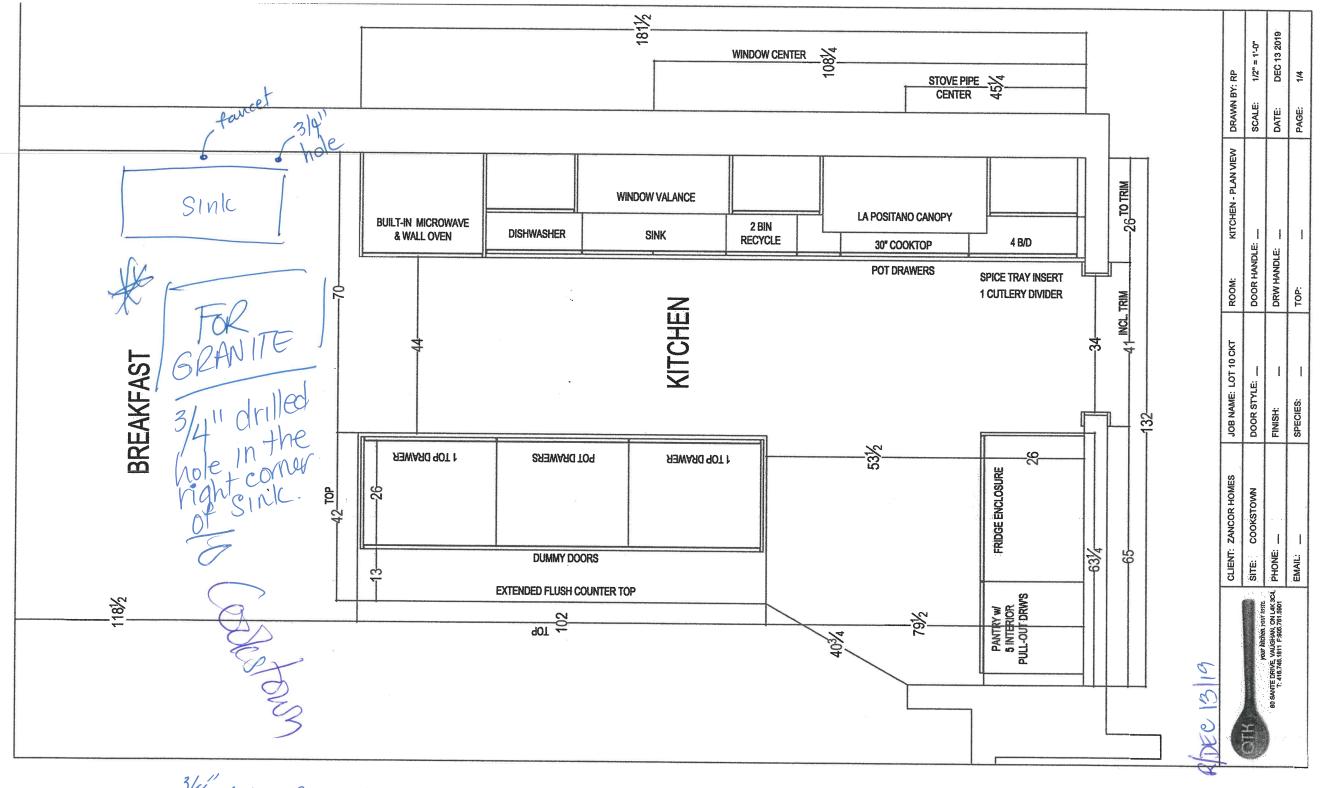

3/4" LEVERSE OSMOSIS TAP

	PAGE: 4/4	TOP: NONE	SPECIES:	EWAIL:	80 SANTE DRIVE, VAUGHAN, ON L4K 3C4, T: 416.746.1811 F:905.761.5901
	DATE: DEC 12, 2019	DRW HANDLE:	EINISH:	PHONE:	your kitchen your taste.
ISLAND ELEVATION	2CALE: 1/2" = 1'-0"	DOOR HANDLE:	DOOR STYLE:	SITE: COOKSTOWN	
COMMENTS:	DRAWN BY: RP	воом: кітснеи	JOB NAME: LOT 10 CKT	CLIENT: ZANCOR HOMES	
	SIDE AIEM	36/4	₹601 - Z(C)	BACK VIEW 100	
		SIDE NIEM		FRONT VIEW	
		. +	Z /00		† † /
	82	Z	33 33		*
	3 <u>401</u> 24				\$\frac{1}{2}

RBEISH

F-1505A-W (Single hole)


F-1505A-8W (8" Center)


1505A-W (Leg)





PEDESTAL







PRODUCT FEATURES:

Prim Rim profile Mounting hardware included Rear overflow Single hole or 8" faucet Micropolish Glaze on interior of sink Facuet not included Ceramic self-click pop-up included Avenue White



OVERALL DIMENSIONS: 227%" (W) × 173/4" (D) × 34" (H) 580mm (W) × 450mm (D) × 865mm (H)



COMPLIANCE CERTIFICATIONS:

IAMPO CUPC ASME A112.19.2 / CSA B45.1-2013 Meets or exceeds the following:



2¾" (69mm)

le hole or 204n

Ø1%" (Ø35mm)

SHIPPING: Cube: 3.51 GW: 44 lbs

22%" (580mm) 6%" (175mm) 28%" (735mm)

1 (2%")

Ø43mm (1%")

17¾" (450mm)



0 5970 Chedworth Way Unit B, Mississauga Ontario, Canada LSR 4G5







Sink Specifications

Colour SKU

brushed finish 401802

Design and planning tips

- Min cabinet size: 685 mm
- Bowl Depth: 12 in (305.0 mm)

Specifications: Sink template, Mounting clips, Installation instructions, 3 1/2" (90 mm) stainless steel strainers

Sink can be installed as a topmount or undermount.


Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

Optional Accessories

Laundry Rack CapFlow

401952 517666

Stainless steel brushed finish **QUATRUS R15 LAUNDRY**





Warranty Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos: https://www.blanco.com/fr-canada/service/how-to-videos/



Tel & Fax Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

) Codestawn

COLLETTE215%" RECTANGULAR UNDERMOUNT SINK

☐ 4220CIY

Undermount Sink

PRODUCT SPECS

- Vitreous china
- Front overflow hole
- Template and mounting hardware

- ASME A112.19.2 / CSA B45.1

DIMENSIONS

550mm W x 350mm D x 190mm H 21%" W x 13%" D x 7½" H

GW


500mm W x 300mm D x 140mm H 19%" W x 11%" D x 5½" H




SHIPPING 25 lbs

TO BE SPECIFIED

NOTEs: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard AII2.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

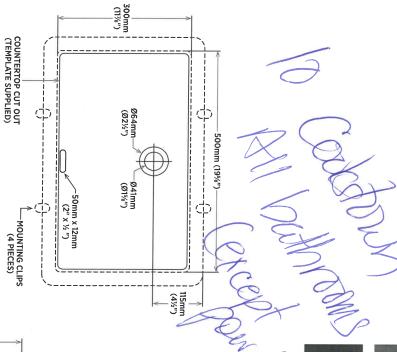


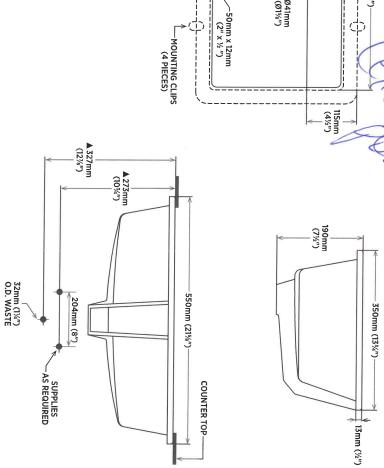

DETAIL OF MOUNTING CLIP

▲ Dimensions shown for location of supplies and "P" trap are suggested.

Cookstown

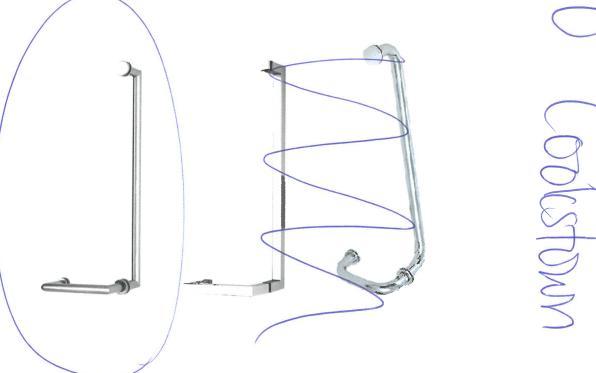


Master ensure MT6X18



Tel: 1-877-565-8533 Ext. 101 Fax: 1-877 689-8284 www.daytechled.com 151 Aviva Park Dr, Woodbridge, ON L4L 9C1

LED STEP LIGHTS

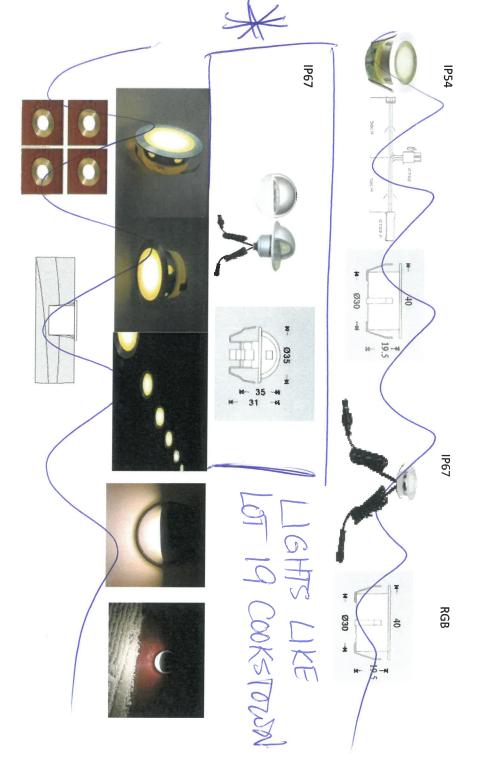

Other Styles Available



Distributed by DayTech LED Inc.
*All specifications subject to change without notice.

LOT 10 Codestown

_OT 10 COOKSTOWN

INTERIOR DOORS & HANDLES

One Panel Shaker (96"H) on main floor One Panel Shaker (80"H) on 2nd floor Weiser Halifax – Stain Nickel Finish



GALLERY Y

SITE	FFZ40 VB40	FV40 FZ40 FZ40 VX40 LZ40	Option 2 Edge in Kitchen – Custom \$\$	Upgrade 2 – Countertop Edges	FE40 Upgrade 1 — Countertop Edges Optional Edge in Kitchen — See book for model specific pricing H40 T40 T40 C40 FE20 FE20 Option Vanity — S model specific pricing H20 C40 H20	**Where applicable as per site specifications** Standard Countertop Edge in Kitchen Edge in Kitchen
O KSTOWN 10		F20	Optional 2 Edge in Vanity — Custom \$\$	Intertop Edges	Optional Edge in Vanity – See book for model specific pricing c20 H20	er site specifications** Standard Countertop Edge in Vanity

Homeowner(s) Initials

DATE



RELEASE FORM BRICK/JOINT PATTERN INSTALLATION

LOT / SITE: 10 COOK	COLSTOWN
HOMEOWNERS: SKALA	NOTAL
DATE:	

(Large tiles installation for floor and wall) - 1/4 Brick

occurrence with all suppliers and manufacturers. Please be advised it has come to our attention, that due to production, many of the over-sized and odd shaped, man-made tiles (i.e. porcelain & ceramic), have been found to have a slight bow in the tile. It is a standard

It is therefore recommended, that if and when a purchaser requests to install one of these tiles in a brick-joint pattern, that it be installed o='[n a ½ brick pattern, to try to avoid lippage. Attached with this letter, you will find a layout of the ½ brick installation that has been recommended.

ZANCOR

Homeowner(s) Initial

^{*}Brick installation requires an additional charge and will be included on the extras if selected



(Cable, CAT5, Telephone) **HOME AUTOMATION**

HOMEOWNERS: LOT / SITE:

JOOKSTON

OPTION 1

the locations of the rough-ins for Cable, CAT5, Telephone as included in our Agreement I/we the Homeowner(s) have chosen to contact the Home Automation Company to select

of Purchase Sale.

to select locations of the standard rough-ins review other optional products for purchase. I/we the Homeowner(s) will contact the trade within 4 weeks of the date of this release

Trade: **Artistic Smart Homes**

(905) 850-9386

Location: 8601 Jane St.

Vaughan, Ont. L4K 5N9

the rough-ins as mentioned above will be installed in locations at the Vendor's discretion. Should the homeowner not make these selections within the sufficient time provided,

Homeowner(s) Initial

OPTION 2

the Homeowner(s) have selected the locations for the standard rough-ins for Cable, CAT5, I/we the Homeowner(s) have chosen to not contact the home automation company. I/we Telephone that are included in the Agreement of Purchase and Sale directly with a décor

Homeowner(s) Initial





APPLIANCE ACKNOWLEDGEMENT

CONTACT: Wayne @ Coast Appliances (905) 303-6909 / 1748 Credit Stone Circle, Vaughan

- NOTE: Any upgraded appliances are to be paid by the Purchaser, directly to the appliances company.
- homeowner Additional charges to the Purchaser may apply for cabinetry, electrical and plumbing in order to accommodate the specs given by the
- It is the Purchaser's responsibility to provide Zancor Homes with the correct specification for each appliance where it exceeds the standard openings. Zancor Homes will not be responsible for applinaces not fitting due to late changes.
- It is the Purchasers responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per
- been made to the cabinetry. Manufacturers specifications after closing.

 Standard appliance openings are approximate and the minimum required. Sizes may vary due to onsite condition and/or when modifications have

ı	4	
NAME AND ADDRESS OF TAXABLE PARTY AND ADDRESS OF TAXABLE PARTY.	STANDARD	
THE RESIDENCE OF THE PARTY OF T	OPENINGS .	
THE R. LEWIS CO., LANSING, MICH. LANSING, SQUARE, SQUA	ACCEPTED I	
The same and the s	ANDARD OPENINGS ACCEPTED BY PURCHASER:	



**Space above the fridge is required due to proper air flow

Hood Fan Vent Hood Fan Opening \blacksquare 6" 30"

Dishwasher Opening

Stove Opening

30" 24"

36" (+/-) x 74" (+/-)

Fridge Opening

Appliance Specs are DUE 2 WEEKS FROM SIGNED DATE (if not received during appointment)

Specs that require changes/modifications after this date will not be accepted

Single Oven Warming Drawer

^{**} Any upgrades checked in this appliance form must be accompanied with specs provided by the Puchaser.

^{**}It is the responsibility of the trade to inform the Builder of any discrepancies with specs, sketches, extras and/or colour chart PRIOR to production/installation.



INTERIOR FINISHES ACKNOWLEDGEMENT / WAIVER

Purchaser accepts and acknowledges that the Builder reserves the right to substitute materials with those of equal or better quality where the manufacture, scheduling or delivery of materials may directly impact the Builder's ability to meet its' contractual obligations under the Agreement of Purchase and Sale.

UPGRADES/EXTRAS: All upgrades and additional selections indicated on the colour chart must be accompanied by an upgrades/extras sheet (PES) and full payment otherwise the selection will be invalid. All colour charts and upgrades/extras will not proceed until verified and signed by an authorized signing officer at the Vendor's head office. **CHANGES WILL NOT BE** PERMITTED UPON COMPLETION AND SUBMISSION OF THE COLOUR CHART.

PORCELAIN & NATURAL STONES: Due to the properties of natural stones including but not limited to **marble, granite, quartz,** no two pieces are exactly the same. Variations in colour, tone, granularity (pitting, fissures) and pattern are to be expected, including various lighting may affect the overall finished look. Stone tops are sealed at time of installation and should never be Vendor liable for provision of same. product variations as well as natural imperfections may exist with the selection of natural stone materials and shall not hold the Stone countertops require regular cleaned with lemon oil or vinegar. Stones are porous materials, therefore any spilled substance require immediate attention. seal re-application as part of home maintenance. Purchaser acknowledges colour and

approximately 5'x 8' applicable). It will also be where the length of the counter top exceeds the length of a stone slab. Slabs are usually STONE COUNTERTOP JOINTS: Purchaser is aware that one joint will be at each corner and on either side of slide-in-range (if

materials installed in the home finished product. Although every effort will be made to ensure the colours and materials selected are as close as possible to CERAMIC TILES: Due to manufacturing, shade (dye lots), product variations may exist that can affect the overall look of the samples, the purchaser acknowledges that the sample tiles supplied in the Design Centre may not be identical to the

including but not limited to wood type, knotting, graining, density, age, humidity, and air temperature can result in substantial variations in stain intensity. The purchaser accepts that although the Vendor will do their best to match stain the unfinished stairs as close as possible to the pre-finished floors, it is not possible to have an identical match and that there MAY be shade differences between the two products. STAIR STAINS: Due to the natural properties of wood, many variables can affect the overall look of the finished product

but not limited to wood species, wood grain, colour, finish, product variations, and natural imperfections are all factors that may affect the overall look of the finished product. Such factors make exact colour matching impossible. The type and intensity of lighting in the areas of designated cabinetry placement may also highlight characteristics of cabinetry finish. All cabinets shall the cabinetry finish or provision of certain upgrades and shall not hold the Builder liable for provision of same be finished with a white melamine interior box unless a finished interior is upgraded. Due to building specifications and/or on CABINETRY: Due to the natural properties of wood, slight variations apparent with cabinetry are to be expected. This includes conditions, certain cabinetry upgrades may not be possible. The purchaser acknowledges that the Builder cannot guarantee

not proceed until verified and signed by an authorized signing officer at the Vendor's head office. CHANGES WILL NOT BE PERMITTED UPON COMPLETION AND SUBMISSION OF THE COLOUR CHART. **UPGRADES/EXTRAS:** All upgrades and additional selections indicated on the colour chart must be accompanied by an upgrades/extras sheet (PES) and full payment otherwise the selection will be invalid. All colour charts and upgrades/extras will

pre-finished product in a controlled environment. Expansion, compression and cupping are characteristics of hardwood flooring once installed in the home. The purchaser acknowledges these may become apparent over time and despite the Builders' efforts to install the hardwood flooring materials in keeping with good workmanship, the Builder shall not be responsible nor significant factors that make exact colour matching impossible. The purchaser acknowledges that the hardwood flooring is a HARDWOOD / LAMINATE FLOORING: Due to the properties of wood and laminate, many variables can affect the overall look held liable for minor variances of fluctuation in hardwood flooring materials. of the finished product. Variations include but not limited to wood type or laminate finish, colour/stain and wood grain

HARDWOOD / LAMINATE WAIVER:

the floor and in contravention of Ontario Building Code Section 9.30.1.2(1) areas. I/We understand there is a concern due to possible water and other substances being frequently splashed or spilled onto I/We understand hardwood flooring is classified as a porous material and as such not recommended by the Builder in

flooring, felted-synthetic-fibre floor coverings, concrete, terrazzo, ceramic tile, mastic or other types of flooring providing "Finished flooring bathrooms, kitchens, public entrance halls, laundry & general storage areas shall consist of resilient similar degrees of water resistance.

I/We are prepared to assume full responsibility for any damage caused to the hardwood floor or subfloor due to moisture absorbency in the mentioned areas, and agree to waive any claims against the Township of residence, TARION and/or the Builder in relation to the matter.

SEE COLOUR CHART FOR LOCATIONS

DATE	
SITE	COOKSTOWN
LOT	0

RIGID RE

R O Ш S 0 Z A L

FPBG2278UF



Smudge-Proof



FRENCH DOOR COUNTER-DEPTH REFRIGERATOR

22.3 CU. FT.



≤

ght (Cabinet Including Hinge)

69-7/8"

Smudge-ProofTM Stainless Steel Resists fingerprints and cleans easily.

EvenTemp™ Cooling System
Our EvenTemp™ cooling system keeps food
cool without breaking a sweat, distributing
air effectively so groceries stay at the
right temperature.

SIGNATURE FEATURES

PureSource Ultra*II Ice & Water Filtration

Remove 99.3% of lead and 99.9% of cysts from your household water with a genuine water filter.



Professional ade Design

Durable hardware and professional-grade design features including smoky door bins, door bin liners, edge-to-edge glass shelving with metallic trim, and a distinctive handle lend a high-quality look to your kitchen.



Get a built in counter-dept

counter-depth design
Our counter-depth refrigerator gives you the built in look without the remodel, and gives you over 4 inches of kitchen floor space back.



PRODUCT DIMENSIONS

Width	36"
Depth (Including Door)	27-1/8"
MORE EASY-TO-USE FEATURES	EATURES
Smildge-DroofM Stainless Steel	cc Stool

Full-Width Deli Drawer Easily store anything from meats and cheeses to sheet cakes and large platters in our fullyextendable, large capacity deli drawer.

Multi-level LED Lighting
Find fresh foods quickly with bright multi-level
LED Lighting.

SpaceWise® Freezer Organization System

Our SpaceWise* Freezer Organization System keeps frozen foods organized and accessible with deep freezer storage and an adjustable divider.

PureAir Ultra® II Air Filter
Fresh air offers great taste. Our PureAir Ultra® II air
filters effortlessly keep the food in your refrigerator
tasting fresh by removing odor particles with fastacting, highly absorbent carbon technology.

Our SpaceWise* Organization System makes it easy to keep food organized and accessible, with adjustable door bins and shelves that offer storage capacity and flexibility.

rganiz



FPBG2278UF COUNTER-DEPTH FRENCH DOOR

22.3 CU. FT. REFRIGERATOR

FRIGIDAIRE


v R O F E SSIONAL


FEATURES	
Door Design	Square Doors
Door Handle Design	Stainless Steel
Cabinet Finish	Gray
Door Stops / Door Closers	No / Yes
Door Hinge Covers	Hidden
Rollers - Front / Rear	Adjustable / Yes
Energy Saver Plus Technology	
Water Filter Location	Top-Right Fresh Food Section
Sound Package	Quiet Design
DISPENSER	
Controls	LED Controls
Dispenser Design	
User Interface Buttons	11 Side Control
Crushed Ice / Cube Ice / Water	
Ice Option / Freeze Option	PowerPlus* Ice / PowerPlus* Freeze
Display On / Off Option	
Lock / Light	
Temp / Door Ajar / Power Failure Alerts	Yes / Yes / Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes
REFRIGERATOR FEATURES	
Lighting	Multi-Level LED
Water Filter Type	PureSource Ultra* II
Air Filter Type	PureAir Ultra [®] II
Quarter-Width Fixed Shelves	
Half-Width Fixed Shelves	4
Quarter-Width Sliding Shelves	
Cantilever Shelves	Yes
Full-Width Deli Drawer	_
Wine Rack / Can Dispenser	Yes/No
CrispSeal™ Crispers with Humidity Control	2
Dairy Compartment	1 Smoky (Right Door)
Gallon Fixed Door Bins	2 Smoky (1 per Door)
2-Liter Fixed Door Bins	
Gallon Adjustable Door Bins	4 Smoky
2-Liter Adjustable Door Bins	1 Smoky
Dispenser Bin	
Non-Slip Bin Liner / Bottle Retainers	7 Gray / No
FREEZER FEATURES	
Effortless* Glide Freezer Drawer	Yes
Sliding Full-Width Freezer Baskets	_
7	2 (Upper and Lower

De De C

- Height (Incl. Hinges & Rollers)	69-7/8"
- Cabinet Width / Door Width	35-7/8" / 36"
- Depth (Incl. Door)	27-1/8"
epth with Door Open 90°	42-1/2"
epth with Drawer Fully Extended (Incl. Handle)	44-7/8"

SICI-IN COLOOL DIFICIONS	
eight (Incl. Hinges & Rollers)	70-1/4"
ridth	36"
epth	25"

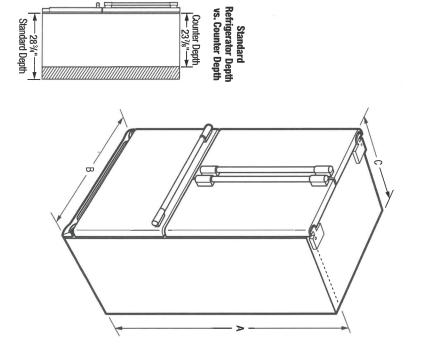



Total Capacity (Cu. Ft.)
Refrigerator Capacity (Cu. Ft.)
Freezer Capacity (Cu. Ft.)
Power Supply Connection Location
Water Inlet Connection Location
Voltage Rating
Connected Load (kW rating)
@ 120 Volts
Minimum Circuit Required (Amps)
Shipping Weight (Approx.)
For use on adequately wired 1201/ dedicated circuit has with a separate ground wire Appliance must be gro

22.3 15.5 6.8 Right Bottom Rear Left Bottom Rear 120V / 60Hz / 15A

having 2-wire service unded for safe operation

8.5 15 347 Lbs.

1.02

Basket Dividers

2 (Upper and Lower Basket)


Automatic Ice Maker

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FPBG2278UF COUNTER-DEPTH FRENCH DOOR REFRIGERATOR 22.3 CU. FT.

FRIGIDAIRE ROFESSIONAL

U

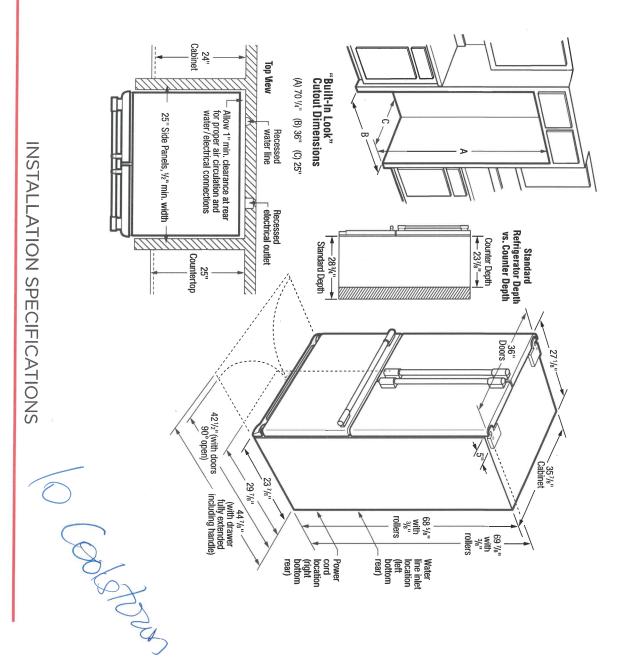

- Product Shipping Weight (approx.) 347 Lbs.
 An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
 Voltage Rating 120V / 60 Hz / 15 Amps
 Connected Load (kW Rating) @ 120 Volts = 1.02 kW
 Amps @ 120 Volts = 8.5 Amps
 Always consult local and national electric & plumbing codes.
 Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.

- loaded refrigerator.

 Minimum 3/8" clearance required for sides and top of refrigerator or freezer with 1" clearance at rear to allow for ease of installation, proper air circulation, and plumbing / electrical connections.

 When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120" to 180° door swing, providing complete drawer / crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer / crisper access with

- restricted removal.)

 To ensure optimum performance, (do not install in areas where temperature drops below 55° F or rises above 110° F) and avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

 For proper ventilation, front grille MUST remain unobstructed.

 Recess electrical outlet when possible.

 Water recess on rear wall recommended to prevent water line damage.

 Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper or stainless steel tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available. Adjustable front rollers to assist with door alignment.

- "BUILT-IN LOOK" SPECIFICATIONS

 Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing / electrical connections.

 Remove all wall / floor molding prior to installation.



Note: For planning purposes only. Always con: Refer to Product Installation Guide for detailed installation Refer to Product Installation subject to change. Accessories

30" **Electric** Cooktop

800 Series – Black Frameless NET8068UC





NET8068UC Black

NET8068SUC Black with Stainless Steel Frame Also available in:

cooking process. power to speed up the which adds even more and features SpeedBoost® cooktop is sleek in design, The 800 Series electric

Features & Benefits

Bridge element accommodates oblong pans and many diameters of cookware.

Each zone's timer automatically shuts off when cooking is done. SpeedBoost® offers shorter heat-up times for liquids.

PreciseSelect® offers 17 different direct cooking level settings.

Element Performance	
Power of Front Left heating element	1,800 W
Power of Back Left heating element	1,800 W
Power of Back Right heating element	3,600 / 1,400 W
Power of Front Right heating element	1,200 W
Element Size	STATE OF THE
Dimension of Front Left heating element	7"
Dimension of Back Left heating element	7"
Dimension of Back Right heating element	9", 6"
Dimension of Front Right heating element	6"
Technical Details	The second
Watts	8,300 W
Circuit breaker	40 A
Volts	208-240 V
Frequency	60 Hz
Plug type	No plug
Energy source	Electric

Dimensions & Weight	
Overall appliance dimensions (HxWxD)	1/4" +4" x 31" x 21 1/4"
Required cutout size (HxWxD)	4" x 28 7/8" x 20"
Minimum distance from counter front	2 1/4"
Minimum distance from rear wall	2"
Net weight	31 lbs
Accessories — Optional	



HEZ390210 8" AutoChef® pan





pan







Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Electric Cooktop

800 Series -Black Frameless NET8068UC



Installation Details

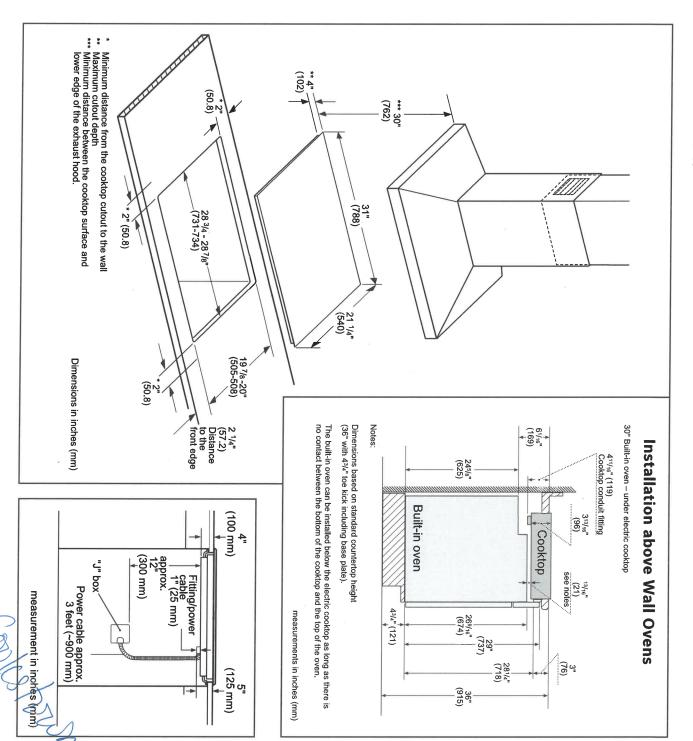

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

24" U ocket Handle Dishwasher

500 Series – Stainless Steel SHPM65Z55N





Stainless Steel SHPM65Z55N

Also available in:

SHPM65Z56N SHPM65Z52N

the door at the end of escape and fresh air in for automatically releases All-new AutoAir™ option the cycle to let moisture


Features & Benefits

drier dishes.

44 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted

The Flexible 3rd Rack with fold down sides adds 30% more* loading area, perfect for utensils and ramekins

protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are away or at home. The AquaStop® leak




	AutoAll Option
Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5
Capacity	
Number of place settings 16	16







Technical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	67"
 Install length from corner of unit 	45"
Minimum water pressure (lb/sin)	14
Length outlet hose (in)	79"
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes
Net weight (lbs)	91 lbs
Accessories-Optional	
Junction Box	SMZPCJB1UC
Bosch Dishwasher Water Supply Hose	SMZSH002UC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector	SMZEP001UC



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time-without consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


ed to a Bosch dishwasher with 2 racks.


U ocket Handle Dishwasher


500 Series -Stainless Steel SHPM65Z55N





Installation Details

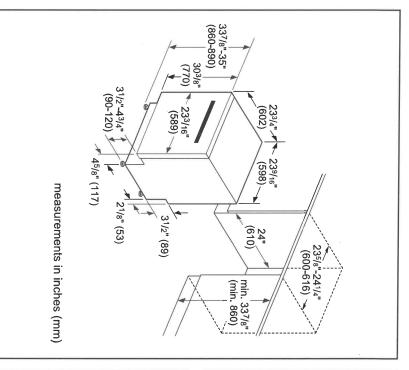



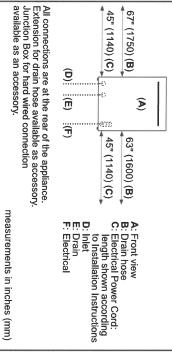

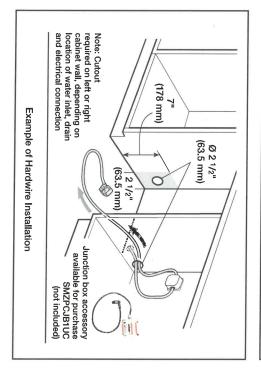



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Set 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications at any time, without to be consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


24" **Pocket** Handle Dishwasher

500 Series – Stainless Steel SHPM65Z55N



Installation Details





Note: Plumbing installations will vary - refer to local codes Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Colonia

PROFESSIONAL FRIGIDAIRE

Single Wall Oven

FPEW3077RF



Signature Features



owerPlus* Convection



PowerPlus* No Preheat
Oven is ready in no time. Start
baking immediately with PowerPlus*
No Preheat.



PowerPlus* Temperature Probe Ensures great results the first time.



Smudge-ProofTM
Resists fingerprints and cleans easily.

30" Electric

Product Dimensions

29" 30" 24-3/4"

Height Width Depth

More Easy-To-Use Features

Built with American Pride Designed, engineered and assembled in the U.S.A.

Dual TimersSet two timers when cooking dishes simultaneously.

Convection Conversion
Automatically converts the convection oven to the ideal cooking time for evenly cooked dishes. 2-Hour Self-Clean
A powerful, quick clean for your oven in just 2 hours with PowerPlus* Self-Clean cycle.

PowerGlideTM Rack
Access warm dishes from your oven with
ease — rack glides in and out of the oven
smoothly.

Sabbath Mode (Star-K* Certified)

Available in:



Contraction of the second of t




Single Wall FPEW3077RF Oven

30" Electric

146 Lbs.	Shipping Weight (Approx.)
Yes	Approved for Under-Counter Installation
20	Minimum Circuit Required (Amps)
18.8/17.9	Amps @ 240/208 Volts
4.5/3.7	Connected Load (kW Rating) @ 240/208 Volts ²
240V/208V/60Hz	Voltage Rating
Left Bottom Rear	Power Supply Connection Location
18-5/8" x 24-1/8" x 19-1/2"	Oven Interior (H x W x D)
	Specifications
Yes	Sabbath Mode (Star-K. Certified)
Yes	A.D.A. Compliant ¹
	Certifications
PN# 903056-9010	10'-Long Armored Power Cable
	Optional Accessories
2,200/4,000	Bake/Broil Element (Watts)
PowerPlus* Broil	Broiling System
Even Baking Technology	Baking System
1 Glide, 1 Handle, 1 Offset Rack	Rack Configuration
Yes	Hidden Bake Element
2 Halogen	Oven Light
PowerPlus* Convection	Convection System
5.1	Capacity (Cu.Ft.)
	Oven Features
Yes	Oven Lock-Out
Yes	Auto Oven Shut-Off
Yes	Control Lock
Yes	Kitchen Timer
	Delay Clean
Yes/2, 3, 4 Hours	Self-Clean/Clean Options
Yes	Keep Warm
Yes	PowerPlus* Temperature Probe
PowerPlus No Preheat	Oven Preheat
Yes/No/Yes	Convection Bake/Broil/Roast
Yes	Convection Conversion
Yes/Variable (400 - 550 °F)	Bake/Broil
	Oven Controls
Self-Clean	Oven Cleaning System
Stainless Steel	Handle Design
Smudge-Proof** Stainless Steel	Exterior Door Finish
Extra-Large	Window
PrecisionPro™ Controls	Oven Control/Timing System
	Features

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design of the Property of the Accessible of Accessible Design of the Property of the Accessible Design of the Property of the Accessible of Accessible Design of the Property of the Accessible of the Accessible Design of the Accessible of



NOTE: For planning purposes only. Always consult local and national electric codes Refer to Product Installation Guide for detailed installation instructions on the web at frigidalie.com.




	Depth with Door Open 90*	E-Width (Wrapper)	D-Height (Wrapper)	C-Depth	B-Width	A-Height	Product Dimensions
	45-3/4"	28-1/4"	26-11/16"	24-3/4"	30"	29"	
Co Co				Depth (Min.)	Width (Min.)/(Max.)	Height (Min.)/(Max.)	Cutout Dimensions
				24"	28-1/2"/29"	26-3/4"/28"	

Accessories information available on the web at frigidaire.com



Single Wall Oven

FPEW3077RF 30" Electric

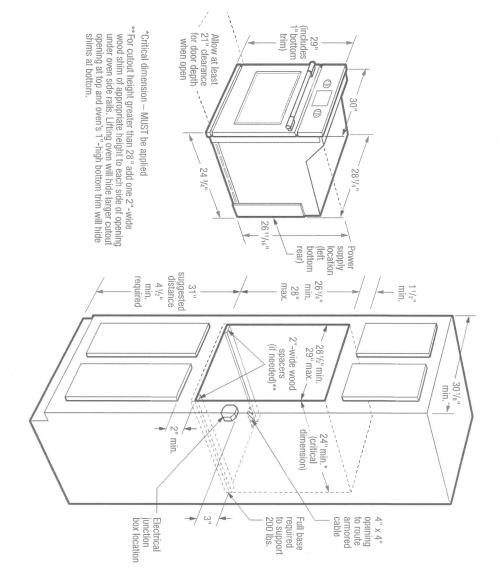

- Single Wall Oven Specifications

 Product Shipping Weight (approx.) 146 Lbs.

 Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

- *Connected Load (kW Rating) @ 240/208 Volts = 4.5/3.7kW

 *Amps @ 240/208 Volts = 18.8/17.9 Amps

 *Recommended Circuit Breaker 20 Amps

 *Always consult local and national electric codes.

 *Minimum 21" clearance for oven door depth when open.

 *Suggested distance from floor is 31". Minimum required distance is 4-1/2".

- Minimum 24" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
 To adapt oven to fit cutout height greater than 28", add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Lifting oven will hide larger cutout opening at top and oven's 1"-high bottom trim will hide shims at bottom. (Standard 1"-High Bottom Trim included.)

- Full oven base of solid plywood or similar material required, capable of supporting 200 Lbs.
 Base must be level and cabinet front must be square.
 Single Wall Oven is NOT approved to be used in stackable or side-by-side installation.
 Single Wall Oven is approved to be used alone in under-counter installation or beneath any approved Frigidaire gas or electric cooktop. (Refer to Gas or Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications pages on web.)
 Single Wall Oven is approved to be used in combination with any Frigidaire Warmer Drawer. (Refer to model-specific Warmer Drawer product page for Combination Installation Specifications.)
 Single Wall Oven is approved to be used in combination with any Frigidaire Wall Oven is approved to be used in combination with any Frigidaire Wall Oven is approved to be used in combination with any Frigidaire Built-In Microwave Oven.

Optional Accessories

-10'-Long Armored Power Cable - (PN# 903056-000)





FRIGID AIRE

ROF Ш S SIONAL

FPMO3077TF

MICROWAVE


30" BUILT-IN WITH CONVECTION



AVAILABLE COLORS



SIGNATURE FEATURES




Convection

Get the great-tasting results of a conventional convection oven combined with the speed of microwave technology with the PowerPlus^{7*} 2-in-1 Convection Microwave Oven.





Smudge-Proof™ Stainless Steel Resists fingerprints and cleans easily.



PowerSense™ Auto Defrost
Take the guesswork out of defrosting
meat, poultry, or fish with PowerSense™
Auto Defrost.

PRODUCT DIMENSIONS

leight	19"
Vidth	29-13/16"
epth	23"

MORE EASY-TO-USE FEATURES

PowerSense™ Broil & Grill Grill fresh or frozen pizza at the touch of a button.

PowerBright® LED Lighting
See the power. See the results in action. LED interior microwave light stays on while your dish cooks.

Keep Warm Consistently keep your dishes warm, for up to 90 minutes, until everything and everyone is ready.

Drop-Down Door Faster, easier access to what you are cooking with Drop-Down Door configuration.

Adjustable Timer

Now you can adjust the cooking time of your dish while it's cooking. The adjustable timer allows you to add 30 seconds on the timer.



FPMO3077TF MICROWAVE 30" BUILT-IN WITH CONVECTION

FRIGIDAIRE

PROFESSIONAL

FEATURES	
Control/Timing System	Pro-Select®
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Microwave Capacity (Cu.Ft.)	1.6
PowerPlus™ Convection	Yes
Watts (IEC-705 Test Procedure)	1,000
Interior LED Light	Yes
Interior Color	Stainless Steel
Turntable Diameter	14-3/16"
Turntable On/Off	
Control Lock	Yes
Clock	Yes
Touch Pad Buttons	28
Power Levels	High (1-9)
Accessory Metal Rack	Yes
MICBOWAVE CONTROL OFFICIE	


17-3/4"-18" 28"-28-3/8" 22"


19" 29-13/16" 23"

MICROWAVE CONTROL OF HONS	NS
Popcorn Button	Yes
Sensor Cook Button	Yes
Sensor Reheat Button	Yes
Broil/Grill	Yes
Preheat/Warm	Yes
Snack Button	
Beverage	
Melt & Soften Options	4
Auto Reheat Options	
Snack Menu Options	
Auto Cook Options	

Auto Defrost Options Multi-Stage Cooking Option	3
Keep Warm	Yes
Add 30 Seconds	Yes
Sensor Cooking Options	Οī
Sensor Reheat Options	ហ
Vegetable Cook Sensor	Yes
Delay Start	
User Preferences	Yes
Adjustable Timer	Yes
POWER RATINGS	
Frequency (MHz)	2,450
Watts @ 120 Volts	1,750
Amps @ 120 Volts	15.5

Frequency (MHz)	2,450
Watts @ 120 Volts	1,750
Amps @ 120 Volts	15.5
SPECIFICATIONS	
Oven Interior (HxWxD)	9-27/32"×16-1/2"×16-1/:
Power Supply Connection Location	Right Top Rear
Voltage Rating	120V/60Hz/20A
Connected Load (kW Rating) @ 120 Volts ⁾	1.75
Minimum Circuit Required (Amps)	20
Plug Type (NEMA)	LCDI (5-20P)
Shipping Weight (Approx.)	100 Lbs.
For its on adjoint the wind 1907 dealers to the in-	# F

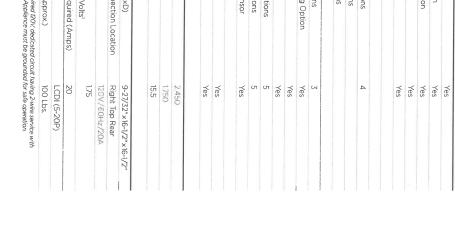










Note: For planning purposes only, Always consult Refer to Product Installation Guide for detailed Specifications subject to change. A

30" BUILT-IN WITH CONVECTION

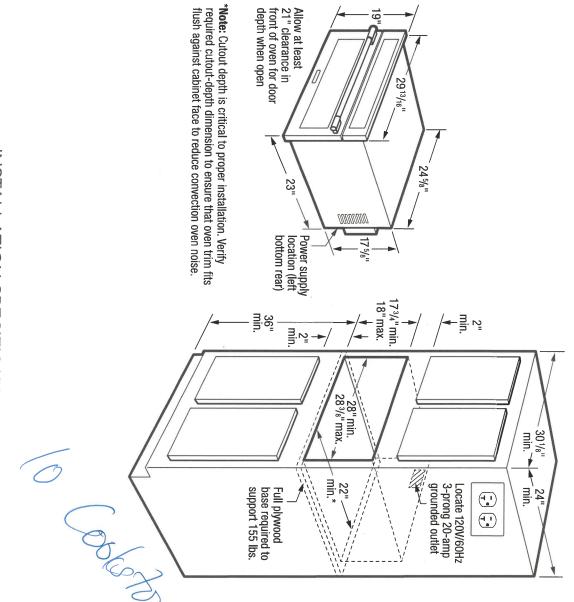

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (Approx.) 100 Lbs.
 Voltage Rating 120V/60 Hz/20 Amps
 Connected Load (kW Rating) @ 120 Volts = 1.75 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
 Amps @ 120 Volts = 20 Amps
 Always consult local and national electric codes.
 Microwave can stand alone on countertop or be built in with optional 30" or 27" Trim Kit (ordered by individual part number) which includes Bottom Duct Assembly shipped in separate box.
 Allow 21" minimum clearance for 90° door swing.
 Minimum 22" deep oven cutout dimension is critical for proper installation for oven and faceplate to fit flush against cabinet front.

c UL) us

- Consult local building code, in the event that cutout opening may be required to be enclosed with sides, ceiling and rear partition.
 Full oven base of solid plywood or similar material required, capable of supporting 155 Lbs.
 Base must be level and front of cabinet square for proper operation.
 Can NOT be installed above any gas wall oven.
 Built-In Microwave is approved to be used in combination with any Frigidaire: Electric Single Wall Oven and/or Warmer Drawer. (Refer to model-specific Combination Installation Specification pages on web.)
 When used in combination with another Frigidaire* built-in product, a minimum clearance of 2" is required from the bottom of the microwave cutout to the top edge of the companion product's faceplate. Please refer to companion product's installation instructions for cutout dimensions.





EFRUN **CC6**



PURLED" light system boosts light output, distributes light better and improves energy-efficiency.




Backlit electronic push button controls.

Internal




Easy-to-install low-profile baffle filters.



Accessories Custom Liners Blower CFM Vertical Sones

Backdraft Damper	Duct Size: Internal Blower	Electrical	Amps @ 120V	Installation Requirements	CFM Reducer Kit	Custom Liners
10" round / Vertical only Included	3-1/4" x 10" V or H	Direct Wire	6.0/9.5		ARP310 (for use with CC65)	30"-ALCC630SB, 36"-ALCC636SB, 42"-ALCC642SB



Installation height above the cooking surface: 24"-30"

For more details see the product specifications sheet found at www.BESTRangeHoods.com









FRO AD WASHER

Ft. I.E.C.

Perfect Steam" Washer with LuxCare® Wash, SmartBoost" and IQ-Touch" Controls







ES

SIGNATURE FEATURES



THE MOST EFFECTIVE STAIN-REMOVING WASHER WITH SMARTBOOST"

r washer with vater and detergent maximizing the



PERFECT STEAM" REMOVES TOUGH STAINS

Unlike many washers, our Perfect Steam** rises from the bottom, gently lifting dirt and stains from fibers.



WORLD'S 1ST ADAPTIVE
DISPENSER*** DESIGNED
TO ACCEPT PODS®
Get the ultimate clean no matter

type of detergent you prefer with the Adaptive Dispenser".



THOROUGH CLEANING WITH THE LUXCARE® WASH SYSTEM
OUR LUXCARE® Wash System offers a thorough clean with improved wash actions, temperature control, and smart load sensing.

EFLS627U TT/IW

PRODUCT DIMENSIONS

32"	27"	38"

De ₩

MORE EASY-TO-USE FEATURES

15-MINUTE FAST WASH

SOLID SOIL LEVEL CLEANS CAKED-ON STAINS The solid soil level gives you a deeper clean to get rid of those ugh stains that get caked on, like mud or dirt

SANITIZE OPTION

remove 99% of bac

STAINSOAK*** OPTION ELIMINATES PRE-TREAT Unlike other washers, it starts by premixing water determent

nd stain remover before the stain remover before the staining solution. Storm and time are optimized the staining solutions. re the cycle begins to create a powerfution. Then, the temperature, tumbling ptimized based on the stain you select.

ENERGY STAR®-CERTIFIED

iteria to guarantee high-qu without sacrificing clean.

ACTIVEWEAR CYCLE

10-YEAR MOTOR WARRANTY PLUS LIFETIME TUB WARRANTY Rest easy knowing your washer is backed by a 10-year motor

& SECOND FLOOR GUARANTEE

So quiet you can even run drooms without noticing it.3

FITS MORE ROOMS WITH REVERSIBLE WASHER DOOR

designed to fit just ab

Extra Large capacity
Easily cleans a king-sized comforter with extra large
5.1 cu.ft. drum.

Available in:








itanium (TT)

FRONT LOAD WASHER



Sidu-by Sidu units in umber counter installation require cashene half counters by auditer cabeneby. An electrical supply with quantiful these paray receptors to sentence. The power supply cloud must be in accordance with a united attitude of Martinal Energy Counter and the Counter of Martinal Energy Counter (State Street Association).	pprox.)	Amps@120 Volts	Watts@120 Volts	Connected Load (kW Rating) @ 120 Volts	Voltage Rating	Water Inlet Location	Power Sumby protion	Island White	Colour -	SPECIFICATIONS	Urain Hose Extension Kit - PN # 137098000	TACK		ACCESSORIES	Freestanding, Under Counter, Stacked (Under Dryer), Pedestal, Hidden (In Closet), Second Floor	INSTALLATION OPTIONS	End-of-Cycle Chime	Delay state	Dolay Stort	Soll Laval Calactions	Chood	Add Steam	wash/hillse lemperature compinations	Heavy Duty, Whitest Whites, Normal, Activewear, Colours, 15-Min. Fast Wash, Delicates, Rinse & Spin, Clean Washer	CYCLES	NSF* Certified/Sanitize	ENERGY STAR*	Adjustable Leveling Legs	Spiri Speed (Krw)	rumple Speed (RPM)	Auto Fabric Softener Dispenser (Liquid Only)	Auto Detergent Dispenser (Liquid/Powder/PODS*)		Auto Prewash Detergent Dispenser (Liquid / Powder)	Automatic Water Level Adjustment	Automatic Temperature Control	Wash Drum	Integral Water Heater	Wash System	Adaptive Dispenser"	Lighting	Count System	Rehard System	M-10001 CONTOIS	200	FEATURES	Capacity I.E.G.
we supply circuit must be included	247 Lbs.	12	1 200	1200/100/12	לא עשל המין ונימו	Too to the dos	Disk	IVA	And the second s	de n'aria mandrata de la companya d	Optional	Optional	Optional	The second secon	Yes		On/Off	Yes	J.	The state of the s	691	S. Comments		9		Yes	Yes	Yes	1,300	Variable	Yes	Yes	Yes	Yes	Yes	Yes	Stainless Steel	Yes	LixCare	Yas Yas	Luxury-uulet	Perfect Balance	Yes	Yes	Yes		5.1 Cu.Ft.

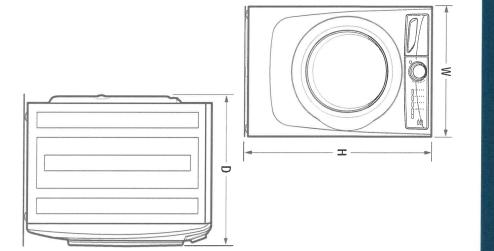

Depth (to Centre of Arc Not Including Hose) (with Door 90° Open)	Width	Height (without 15" Pedestal) (with 15" Pedestal)	PRODUCT DIMENSIONS
32" 50-5/8"	27"	38" 53-1/4"	

(O Collapsia)









FRONT LOAD WASHER




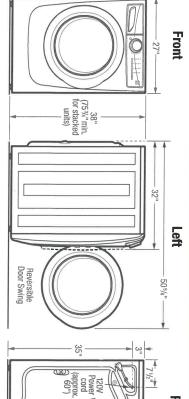



15" Pedestal Drawer Installation

detailed podestal installation, er to instructions included in pedestal or on web. the pedestal or on web. destal Installation may require utility hookup locations, or details, refer to Product tallation Guide on web. r height to 53 1/4". lestal installation,



Built-In Installations Front O Side nted

Installation Cle Washer can be be (side by side or a Vissher can be built in alone or with dryer visible by side or stacked) in closet, recess or moder counter installation with O" minimum learance required around sides and back of mitig), Io achieve O"minimum rear clearance when installed with dryer, dryer MUST be vented traight back or with quick-turn 90° elbow. It can dryer requires additional 3", steam hose learance at back of unit(s), Installation of closet learance at back of unit(s), Installation of closet toor(s) requires additional 4"minimum clearance etween front of unit(s) and door(s). Location for plumbing, exhaust and utility hookups MUST re considered when planning any built-in ristallation. For additional installation details, effer to Product Installation duides on web.

3"↓ 60" sq.in.

r under counter, requires of and/or cabinetry to account

Stacking Units:
Stacking dryer above washer requires use of Stacking dryer above washer requires use of optional Stacking Kit (PN# STACKIT7X) with modified utility hookup locations for dryer. For complete installation details, refer to instructions included with Stacking Kit or on web.

Front Load Washer Specifications

- Product Weight 237 Lbs. / Shipping Weight 247 Lbs.
 An electrical supply with grounded three-prong receptacle is required.
 The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances.
 Do not use same circuit as dryer.)
- Voltage Rating 120V/60Hz
 Connected Load (kW Rating) @ 120 Volts = 1.2 kW

- Amps @ 120V = 12A
 Equipped with 120V 3-wire power supply cord, approx. 60" long.
 Always consult local and national electric & plumbing codes.
 To maximize detergent effectiveness, ambient temperature should never be below 60°F.
- Can be installed alone, with or without optional 15" pedestal drawer, or stacked beneath matching Electrolux Dryer, which requires installation of optional dryer stacking kit. (For installation details, refer to instructions included with optional pedestal or stacking kit or on web.)

 Can be built in alone or with matching Electrolux Dryer (side by side or stacked) in closet, recess or under counter installation with 0" minimum clearance required around sides and back of unit(s). To achieve 0" minimum rear clearance when installed with dryer, dryer MUST be vented straight back or with quick-tum 90° elbow. Steam dryer requires additional 3/4" steam hose clearance at back of unit(s). Installation of closet door(s) requires additional 1" minimum clearance between front of unit(s) and door(s). Location of plumbing, exhaust and utility hookups MUST be considered when planning any built-in installation.

 Under-counter installation requires custom-built countertop and/or cabinetry to accommodate unit(s) height.

- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.
 For garage installation, washer MUST be located minimum 18" above floor.
 Floor MUST be solid with 1" maximum slope. To ensure vibration or movement does not occur, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Leveling legs supplied to level washer properly and reduce excessive noise and vibration.
- H/C water faucets MUST be installed within 42" of washer's water inlet and MUST be 3/4" garden hose type, to connect to 48-1/2" inlet hoses.

 Water pressure MUST be between 20 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain required with standpipe diameter of 1-1/4" min. and height of 24" min./96" max. above floor, capable of eliminating 17 gallons per minute. Attached 59" drain hose can reach 79"-high standpipe.

Refer to Product Installation Guide Nances.ca for detailed instructions

- Pedestal Drawers Titanium (PN# EPWD257UTT), Island White (PN# EPWD257UIW).

 Dryer Stacking Kit (PN# STACKIT7X).

 Drain Hose Extension Kit (PN# 137098000).







ECT RIC FRONT LOAD DRYER

EFMC627U TT/IW

8.0 Cu. 工

Perfect Steam" Dryer with Instant Refresh" and 1Q-Touch" Controls





SIGNATURE FEATURES



PREDICTIVE DRY" MORE ACCURATELY PREDICTS DRY TIMES

Knows after 90 seconds a more accurate time your clothes will be dried to perfection so you don't have to keep checking on your load.



INSTANT REFRESH" CYCLE
REVIVES FABRICS

ייייייטיט wnnkles and quickly refresh items with steam in 10 minutes.



DRYING WITH LUXCARE®
DRY SYSTEM

A more precise sensor for a better dry to protect your clothes from over-drying, but also to help make sure you don't have wet clothes left in the load.



15-MINUTE FAST DRY¹
Quickly dry the items you need most

PRODUCT DIMENSIONS

epth	idth	ight
31-1/2"	27"	38"

MORE EASY-TO-USE FEATURES

ENERGY STAR®-CERTIFIED

Rigorously tested to do more with less. Electrolux dryers meet strict criteria to guarantee high-quality energy efficient performance.

PERFECT STEAM™ WRINKLE RELEASE OPTION Gently releases wrinkles and reduces static to keep clothes oking their best

EXTENDED TUMBLE OPTION KEEPS

CLOTHES TANGLE-FREE

Gently tumbles your clothes without heat to keep them tangle-free — perfect for when you cannot remove clothes right after the cycle ends.

LUXCARE® LINT SHIELD HELPS AVOID MESSES Traps lint so it doesn't make a mess, even if you empty it while there are clothes in the dryer.

ACTIVEWEAR CYCLE
Takes care of delicate and expensive activewear

EXTRA-LARGE CAPACITY DRYER

Dry more in each load with our 8.0 cu.ft. dryers.

PLATINUM STAR® LIMITED WARRANTY
Our exclusive limited warranty that includes three-year
on parts and one year on labour.² coverage

9 CYCLES TO CARE FOR EVERY FABRIC Perfectly dry every item with tailored cycles for tow allergen, delicates, and more.

FITS MORE ROOMS WITH REVERSIBLE DOOR Enjoy easy loading no matter how your washer and dryer are configured.

OPTIONAL PEDESTALS AND STACKING KIT FOR MORE INSTALLATION OPTIONS
Raise your units with optional pedestal drawers that provextra storage. Or use the optional stacking kit for conven placement in small spaces.

vailable in: Code Amiliand


-Redest line based on smallert loutifiest Div yorks selected for various leaf rempositions. Esplittip based on protect truststates mit besettant, buth francise artifiest of dyes of package, thoules to must laste been proctassed on or after July 1, 2013. See limited warranty for details, Limited line offer,

ELECTROLUXAPPLIANCES.GA

ELECTRIC FRONT LOAD DRYER



"Side by Side wells in under counter instabilien require custom hull counterlop "Risk must dust previewer, semi-ripid appload and allow deductions for others as stack on mee for adultional information.	Shipping Weight (Approx.)	Heating Element & 240 Volts (Watts)	Amps @ 240 voits	COMMENTED LOSD (KW HADING) @ 240 VOIIS	voilage nating	Mother Dation	Privar Sunniv Connection Oceanion	Maximum Exhaust Duct Length** (Ft.)	Island White	Titanium	COOH -	SPECIFICATIONS		Assembly Hose Kit - PN# 5304495002	Drying Rack PN# A04840701	Dryer Stacking Kit - PN# STACK[17X	Island White - PN# EPWD257UNV	Luxury-Glide Pedestal with Spacious Storage Drawer-	ACCESSORIES	A LIBERTA LIBERTA LAND AND A LIBERTA AND AND AND AND AND AND AND AND AND AN	West Programmes (#1 CASSES), SECOND FIGOR	Freestanding, Under Counter", Stacked (Above Washer),	INSTALLATION OPTIONS	DIYVESS LEVES	LEIR DIX	THE COURSE	Extended tumble	CIG-U-Oyge CHINE	Deay Start (Hours)	Mandal timed bry Selections	ERECTORIC AUTO DITY SYSTEM	Add Steam	Temperature Selections	OPTIONS	Inned Dry (30, 45, 60, 75), Allergen, Heavy Duty/Towels, Normal 15-Min. Fast Dry, Activewear, Mixed Load, Delicates, Instant Refresh	CYCLES	ENERGY STAR®	Adjustable Leveling Legs	Reversible Door	Tumble Speed (RPM)	Dryer Drum	Moisture Sensor.	Tumble System	Lighting	Sound System	Dry System	Perfect Steam" Dry System	IQ-Touch" Controls	10	FEATURES	Capacity D.V.L.	Capacity D.O.F.
and or cabinetry and vents. Refer to installation	140 Lbs.	5,400	25	6.0	240V/60HZ/30A	(Teg)	Door	125	W	7			The state of the s	Optional	Ontional	Optional	Optional			Yes	100	Урс		5	Yes	Yes	Yes	UU/UU	12	4	Yes	Yes	5	en e	m. 9	an for the beautiful black and relative for the function of the statement statement, and relative functional and relative for the statement of	Yes	Yes	Yes	50	Stainless Steel	Yes		Luxury-Design® LED	Luxury-Quiet"	Predictive Dry ^{to}	Yes	Yes	Yes		0.0 (41.11.	B D C 1 Et

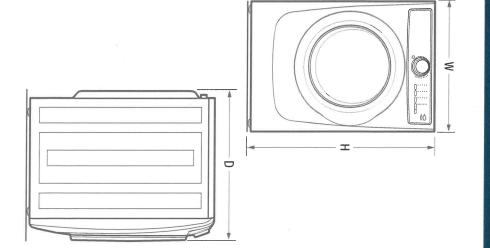

Height (without 15" Pedestal) (with 15" Pedestal) Width
(to Centre of Arc Not Including Hose)








ELECTRIC EFMC627UTT/IW **FRONT LOAD** DRYER



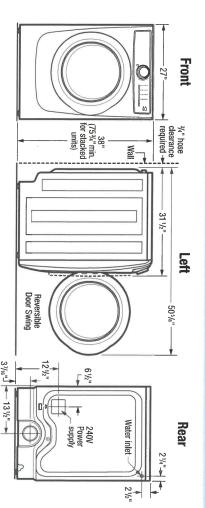

15" Pedestal Drawer Installation

Built-In Installations


Elevates dryer height to 53 1/4," ord detailed pedestal installation, refer to instructions included with pedestal or on web. "Pedestal installation may require Pedestal utility hookup locations." or details, refer to Product installation Guide on web.

Front

Side

3" 60" sq.in.

O



Closet Installation:

If washer and dryer are installed in same closet, door(s)

MUST be vented with 120 sq. in, minimum louvered

opening, equally divided, located 3" from top and bottom
of door. Louvered door(s) with equivalent air openings for
full-length of door is acceptable. Air openings MUST
remain unobstructed with door(s) installed.

clearance required around sides and back of unit(s). To achieve 0 "minimum reaclearance dryer MUST be vented straight back or with quick-turn 90" elbow. Steam dryer requires additional 3/4" steam hose clearance at back of unit(s), Installation of closet door(s) requires additional 1" minimum clearance between front of unit(s) and door(s). Location of plumbing, exhaust and utility hookups MUST be considered when planning any built-in installation. For additional installation dealls, refer to Product Installation Guides on web. one or with washer d) in closet, recess

ى₂

Under Counter Installation:
Installation of dryer alone or side by side
Mits washer under counter, requires custom-built
countertop and/or cabinetry to accommodate

Stacking Units:
Stacking dryer above washer requires use of optional Stacking Kit (PN# STACKIT7X) with modified utility hookup locations for dryer. For complete installation details, refer to instructions included with Stacking Kit or on web.

Electric Dryer Specifications

- Product Weight 130 Lbs. / Shipping Weight 140 Lbs.

 Voltage Rating 240/60 Hz/30A

 Single phase 3- or 4-wire cable, 240 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line. (Do not use same circuit as washer.)

 Connected Load (kW Rating) @ 240 Volts = 6.0 kW

 Amps @ 240V = 25A

- Dryer MUST employ a 3-conductor NEMA 10-30 type SRDT or 4-conductor NEMA 14-30 type SRDT or ST (as required), rated at 240 volt AC minimum, 30 amp power supply cord marked for use with clothes dryers (not supplied). Grounding through neutral link prohibited in specific applications and certain locales, requiring use of 4-wire system. (For detailed electrical requirements, refer to Product Installation Guide on web.)

 Always consult local and national electric & plumbing codes.

 Can be installed alone, with or without optional 15" pedestal drawer, or stacked above matching Electrolux Washer, which requires installation of optional dryer stacking kit. (For installation details, refer to instructions included with optional pedestal or stacking kit or on web.)

 Can be built in alone or with matching Electrolux Washer (side by side or stacked) in closet, recess or under counter installation with 0" minimum clearance required around sides and back of unit(s). To achieve 0" minimum rear clearance, dryer MUST be vented straight back or with quick-tum 90° elbow. Stean dryer requires additional 3/4" steam hose clearance at back of unit(s). Installation of closet door(s) requires additional 1" minimum clearance between front of unit(s) and door(s). Location of plumbing, exhaust and utility hookups MUST be considered when planning any built-in installation.

 Under-counter installation requires custom-built counterfop and/or cabinetry to accommodate unit(s) height.

- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.

 For garage installation, dryer MUST be located minimum 18" above floor.

 Floor MUST be solid with 1" maximum slope. To ensure vibration or movement does not occur, reinforcement of floor may be necessary. Do NOT install on carpeted surface.

 Dryer MUST exhaust to outside of building, NOT into any concealed space.

 Dryer equipped for 4-way venting and approved for up to 125-foot-equivalent of duct tength, determined by length of run and number of elbows needed.

 Exhaust installation requires minimum 4"-diameter rigid or semi-rigid metal duct with approved, unobstructed vent hood having swing-out damper(s). If installing rigid metal duct (preferred), do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents. If installing semi-rigid metal duct, do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents. (Refer to Product Installation Guide on web for additional Information).

 Do NOT use flexible plastic or metal foil duct and use shortest run possible.

 Leveling legs supplied to level dryer properly and reduce excessive noise and vibration.

 Water inlet hose for steam setting connects to cold water supply with "Not connector and requires 3/4" clearance between back of unit and whill

only. Refer to Product Installation Guide waspallances.ce for detailed instructions.

Optional Accessories

- Pedestal Drawers Titanium (PN# EPWD257UTT), Island White (PN# EPWD257UM)
 Dryer Stacking Kit (PN# STACKIT7X).
 Drying Rack (PN# A04840701).
 Assembly Hose Kit (PN# 5304495002).

