

# Freestanding Range

CPEH3077RF



## Signature Features



**PowerPlus® Convection**  
Powerful performance delivers consistent results. Evenly cooked dishes, every time, with PowerPlus® Dual-Fan Convection Bake and Roast.



**PowerPlus® Preheat**  
With PowerPlus® Preheat, your oven is ready in a few minutes for a powerful start to every delicious meal.



**PowerPlus® Temperature Probe**  
Ensures great results the first time. Set and monitor dish temperature with the PowerPlus® Temperature Probe.



**Smudge-Proof™**  
Resists fingerprints and cleans easily.

34 CookStove

## 30" Electric

Product Dimensions	
Height (Min./Max.)	36-1/8" / 36-5/8"
Width	29-7/8"
Depth (Including Handle)	28-3/4"

## More Easy-To-Use Features

**SpacePro™ Bridge Element**  
2-in-1 cooktop element offers endless meal options. Cook two separate dishes at once, or combine two elements into one for large pots or griddle use.

**Professional-Grade Design, Without the Remodel**  
Upgrade your kitchen and get the look of a built-in range, without the remodel. The range slides into 30" cutouts.<sup>1</sup>

**Keep Warm Zone**  
Consistently keep dishes warm until the rest are ready for a delicious meal, every day.

**Convection Conversion**  
Automatically converts the convection oven to the ideal cooking time for evenly cooked dishes.

Sabbath Mode (Star-K® Certified)

Available in:




Stainless (F)

Elements	Size	Watts
Right Front	9" / 12" Expandable	1,800 / 3,000
Right Rear	6"	1,200
Left Front	7"	1,800
Left Rear	7"	1,800
Left Bridge	SpacePro™ Bridge	800
Centre	Keep Warm Zone	100

<sup>1</sup> Fits the cutout of a 30" freestanding range.

Features	
Oven Control/Timing System	PrecisionPro Controls™
Surface Type	Black Porcelain Glass
Window	Extra-Large with Black-Tint Finish
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Exterior Finish (Side Panels)	Black
Convection System	PowerPlus Dual-Fan Convection
Oven Cleaning System	Self Clean
Drawer Functionality	Storage
Oven Controls	
Bake / Broil	Yes / Yes
Effortless™ Convection Conversion	Yes
Convection Bake / Broil / Roast	Yes / No / Yes
PowerPlus® Convection	Yes
PowerPlus® Preheat	Yes
PowerPlus® Temperature Probe	Yes
Keep Warm	Yes
Self Clean	2, 3, 4 Hours
Rapid Clean Option	2 Hours
Kitchen Timer / Timed Cook Option	Yes (2) / No
Auto Oven Shut-Off	Yes
Cooktop Features	
Right Front Element (Watts)	SpaceWise® Expandable 9 7/12" - 1,800 / 3,000
Right Rear Element (Watts)	6" - 1,200
Left Front Element (Watts)	7" - 1,800
Left Rear Element (Watts)	7" - 1,800
Bridge Element (Watts)	SpacePro™ Bridge - 800
Centre Element (Watts)	Keep Warm Zone - 100
Hot Surface / Element On Indicator Light	Yes / Yes
Oven Features	
Capacity (Cu. Ft.)	5.1
Oven Light	2
Hidden Bake Element	Yes
Rack Configuration	1 PowerGlide™, 1 Handle, 1 Offset
Baking System	Even Baking Technology
Bake Element / Broil Element (Watts)	2,200 / 4,000
Optional Accessories	
Griddle	PN # 316432200
Certifications	
Sabbath Mode (Star-K® Cert.)	Yes
Specifications	
Oven Interior (H x W x D)	18-5/8" x 24-1/8" x 19-1/2"
Power Supply Connection Location	Left Bottom Rear
Voltage Rating	240V / 208V / 60Hz
Connected Load (kW Rating) @ 240/208 Volts¹	13.0 / 9.8
Minimum Circuit Required (Amps)	40
Shipping Weight (Approx.)	300 Lbs

<sup>1</sup>Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

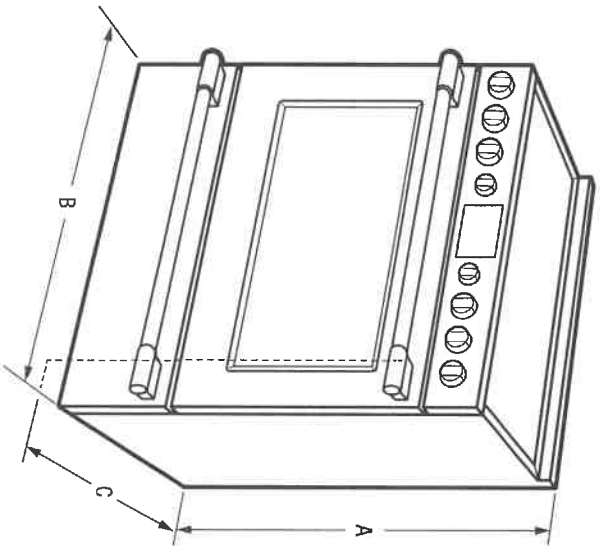

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.ca](http://frigidaire.ca).



Product Dimensions	
A - Height (Min./Max.)	36-1/8" / 36-5/8"
B - Width	29-7/8"
C - Depth (Including Handle)	28-3/4"
Depth with Door Open 90°	46"

Cabinet Cutout Dimensions	
Height (Standard)	36"
Width (Min.)	30-1/8"
Depth (Min.)	24"

Accessories information available on the web at [frigidaire.ca](http://frigidaire.ca)


34 Cookstove

FRIGIDAIRE



Chimney Hood  
FHW C3055LS

30" Wall Mount

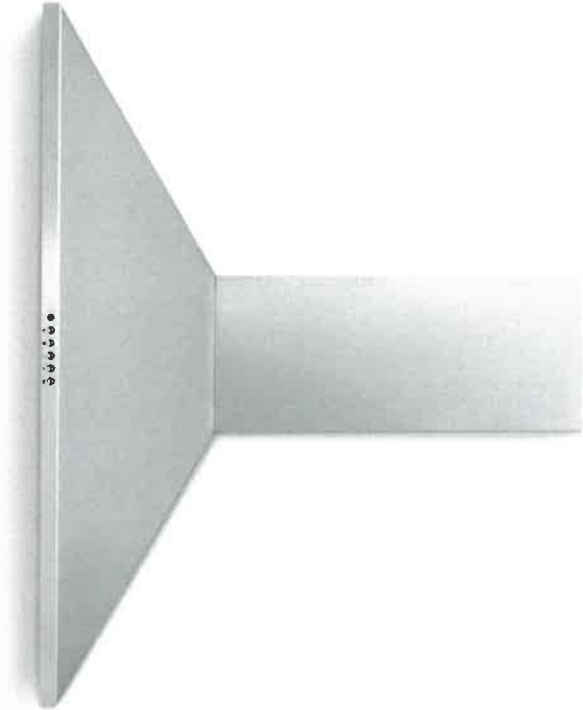

Signature Features

Stainless Steel Canopy Design

Classic hood design is constructed of durable stainless steel and very attractive.

Centrifugal Fan

Move air quietly and efficiently — up to 400 cu. ft. of air per minute.

Washable Filters

Dishwasher-safe for easy cleaning. The aluminum filter provides strength and durability not found in foam filters.

Halogen Lighting

For bright illumination of the cooktop surface.

037 Cookstove

Features

Nominal Width	30"
Installation Type	Wall Mount
Style	Stainless Steel/ Chimney
Air Discharge	Vertical
Air Delivery (CFM)	400
Blower Type	Centrifugal
Controls	Electronic Push Button
Fan Speeds	3
Sound Level (dBA)	69.9
Dual Halogen Lights	Yes
Dishwasher-Safe Filters	Yes
Exhaust Duct	Convertible*
Duct Required	6" Round

Optional Accessories

Duct-Free Kit	PN# FHWRT59LS
10' Flue Extension Kit	PN# FHWDX5LS

Specifications

Product Dimensions -	
Height (With One Cover) (With Flue Extension)	26-25/32" min. 31-11/16" max 45" max
Width	29-7/8"
Depth	19-11/16"
Voltage Rating	120V/60Hz/15A
Amps @ 120 Volts	4.0
Connected Load (kW Rating) @120 Volts †	0.516
Shipping Weight (Approx.)	80 Lbs.
Sones Rating	7.9

\* Ventilation is convertible to be either ducted outside or recirculating. Recirculating mode requires use of optional Duct-Free Kit.

† For use on adequately wired 120V, dedicated circuit having 2-wire safety ground and ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric codes. Check local building codes for requirements, as they may vary per locale. Refer to product instructions for detailed installation instructions on the web at frigidaire.ca


Specifications subject to change

Available in:



Stainless  
(S)



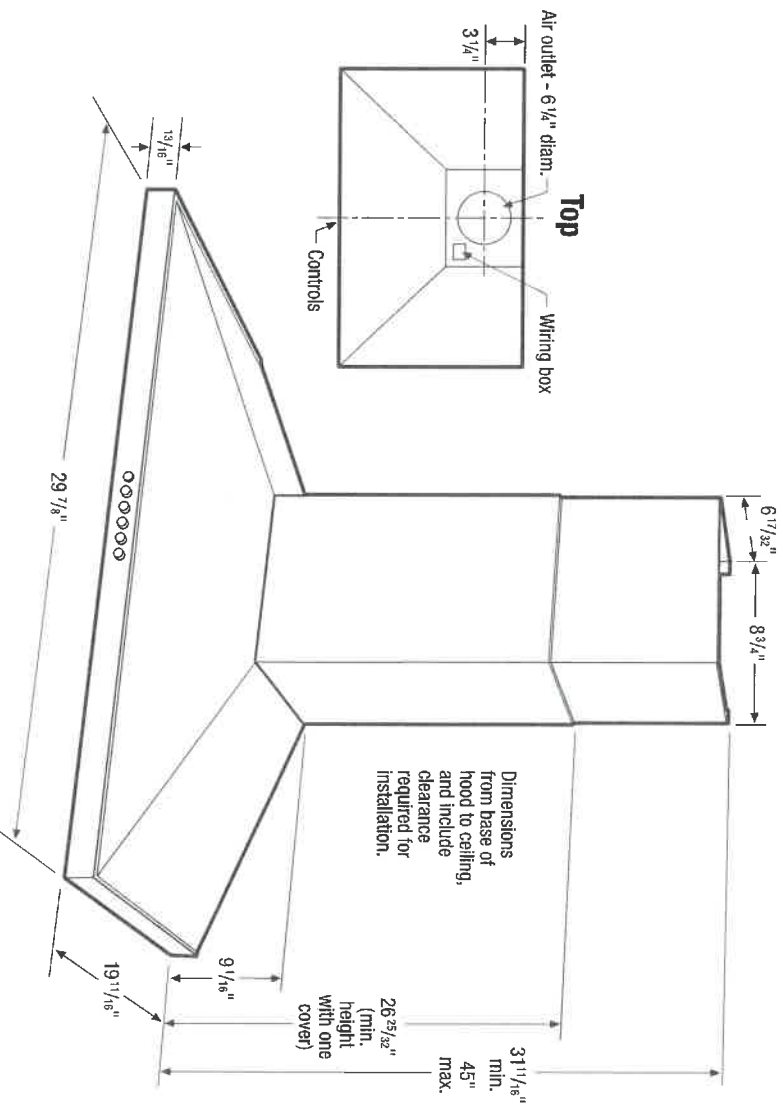

## Chimney Wall-Mount Hood Specifications

- Product Shipping Weight (approx.) - 80 Lbs.
- Wall-Mount Installation
- Ventilation system is preset to exhaust air outside. If outside ducting is not possible, optional Duct-Free Recirculation Kit (PN # FHWKR155LS) is available to convert ventilation to allow air to recirculate inside. *(Refer to Ducted Option Specifications for outside ventilation.)*
- Sones Rating - 7.9
- Voltage Rating - 120V / 60 Hz / 15 Amps
- Connected Load (KW Rating) @ 120 Volts = 0.516KW
  - (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 4 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Minimum installation height allowed from bottom of hood to standard 36"-high electric or gas cooking surface is 26" - 35". (NOT more than 32" recommended). For detailed instructions regarding install heights in 8" and 10" ceiling applications, refer to installation guide on web.
- To prepare mounting surface, adequate structure and support must be provided, capable of supporting 100 lbs.

## Ducted Option Specifications

- For outside ventilation,
  - Exhaust Duct Required – 6" round
  - For most efficient airflow exhaust, use a straight run or as few elbows as possible.
  - Use metallic flex ducting only to connect rigid duct directly to transitions (*if allowed by code*).
  - Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
  - Cold weather installations should have additional backdraft damper installed.
  - Refer to installation instructions on web for detailed exhaust duct preparation and converting vent blower system for recirculating inside.
- Note: For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.ca](http://frigidaire.ca) for detailed instructions.***
- ### Optional Accessories
- Duct-Free Recirculation Kit – (PN# FHW/RK1T55LS).
  - 10" Flue Extension Kit – (PN# FHW10X55LS).

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.ca](http://frigidaire.ca) for detailed instructions.

## Optional Accessories

- Duct-Free Recirculation Kit - (PN # FHW/RKT55LS).
- 10' Flue Extension Kit - (PN # FHW10X55LS).

Accessories information available  
on the web at [frigidaire.ca](http://frigidaire.ca)



**FRIGIDAIRE**

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](mailto:frigidaire.ca)  
 FHWC3055L 05/14 • 2014 Electrolux M

2014 Electrolux Major Appliances, NA

**Specifications  
subject to change.**  
**Printed in Canada**


Major Appliances, NA

*subject to change*  
Printed in Canada

27 Coors

# French Door Refrigerator

FPBC2277RF

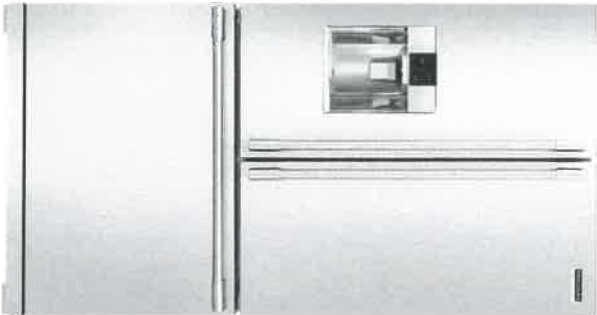

## Signature Features



**PureAir Ultra® Filtration System**  
Fresh air offers great taste. PureAir Ultra® Filtration removes up to 7 times more odour than baking soda to keep ingredients tasting fresh.\*



**SpacePro™ Shelving System**  
Offers quick access to fresh ingredients with organizational solutions designed for space optimization like SpacePro™ Slide-Under & Flip-Up Shelves and SpacePro™ Adjustable Crisper Bins.



**SpacePro™ Slide-Under Shelf**  
Slides under to fit a variety of tall foods and beverages to optimize your space.



**Smudge-Proof™ Stainless Steel**  
Resists fingerprints and cleans easily.

Product Dimensions	
Height (Including Hinges & Rollers)	69-7/8"
Width (Doors)	36"
Depth (Including Door)	28-1/2"

## More Easy-To-Use Features

**PureSource Ultra® II Water Filtration**  
Drink and cook with Pure Water. PureSource Ultra® II Water Filters remove 99.3% of lead and 99.99% of cysts from your household water.<sup>2</sup>

**Counter-Depth Design**  
Built-in look, maximize your space. Save over 4 inches of kitchen floor space with our counter-depth design.<sup>3</sup>

**SpacePro™ Adjustable Crisper Bins**  
Optimize your space and keep food fresh with our crisper bins that adjust a variety of ways and keep produce at the ideal humidity level.

**SpacePro™ Flip-Up Shelves**  
Adjusts to fit a variety of foods and beverages, big or small, for quick access.

**SpacePro™ Freezer System**  
Optimize your freezer space with the PowerGlide™ Freezer Drawer and the SpacePro™ Freezer Basket with Adjustable Divider, keeping frozen foods organized and accessible.

**Automatic Alerts**  
Alerts you if the door is left open, if the temperature rises or if the power goes out, so your food stays at its optimal temperature.

**SpacePro™ Full-Width Drawer**  
Keep a variety of foods fresh and easily accessible with our SpacePro™ Drawer.

**SpacePro™ Door Bins**  
Access fresh food from our gallon-size door bins quickly.

Sabbath Mode (Star-K® Certified)

Available in:





Stainless (F)

<sup>1</sup>Based on a six-hour closed door test of certain common odours in the fresh food compartment of a 21 Cu. Ft. refrigerator.  
<sup>2</sup>Tested and certified by NSF International. See performance data sheet for individual contaminants and reduction performance.  
<sup>3</sup>Compared to a Frigidaire Standard-Depth French Door bottom mount refrigerator.

34 Cookston

Features	
Door Design	Square Doors
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Stops / Door Closers	Yes / Yes
Door Hinge Covers	Hidden
Rollers - Front/Rear	Adjustable / Yes
Energy Saver Plus Technology	
Water Filter Location	Top-Right Fresh Food Section
Sound Package	Quiet Design
Dispenser	
Controls	PrecisionPro™
Dispenser Design	Flush, Single-Paddle
Number of Dispenser Buttons	16
Crushed Ice / Cube Ice / Chilled Water	Yes / Yes / Yes
Ice Option / Freeze Option	No / PowerPlus® Freeze
Display On / Off Option	
Lock / Light	No / Yes
Temp / Door Ajar / Power Failure Alerts	Yes / Yes / Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes
Refrigerator Features	
Lighting	PowerBright™ LED
Water Filter Type	PureSource Ultra® II
Air Filter Type	PureAir Ultra®
Quarter-Width Fixed Shelves	1 SpacePro™ Flip-Up
Half-Width Fixed Shelves	1 SpacePro™ Slide-Under
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	2 SpacePro™
Cantilever Shelves	Yes
SpacePro™ Full-Width Drawer	1
Hanging Wine Rack / Can Dispenser	1 Clear / No
SpacePro™ Adjustable Crisper Drawer / Humidity Controls	2 Clear / 2
Dairy Compartment	
SpacePro™ Fixed Door Bins	1 Clear (Right Door)
2-Lite Fixed Door Bins	2 White (1 per door)
Gallon Adjustable Door Bins	
2-Lite Adjustable Door Bins	1 Clear
Dispenser Bin	
Non-Slip Bin Liner / Bottle Retainers	3 Grey / Yes (Dispenser Bin Only)
Freezer Features	
PowerGlide™ Pull-Out Drawer	Yes
Sliding Full-Width Freezer Baskets	2 SpacePro™
Basket Dividers	1 (Bottom Basket)
Lighting	PowerBright™ LED
Automatic Ice Maker (2nd Ice Maker)	Yes
Certifications	
Sabbath Mode (Star-K® Certified)	Yes
Specifications	
Total Capacity (Cu. Ft.)	22.6
Refrigerator Capacity (Cu. Ft.)	15.7
Freezer Capacity (Cu. Ft.)	6.9
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V / 60Hz / 15A
Connected Load (kW rating) @ 120 Volts	1.02
Amps @ 120 Volts	8.5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	345 Lbs.

For use on adequately wired 120V dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

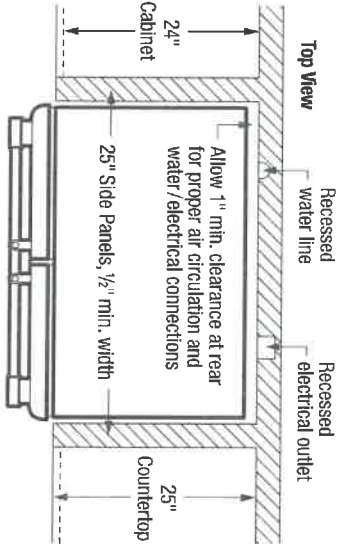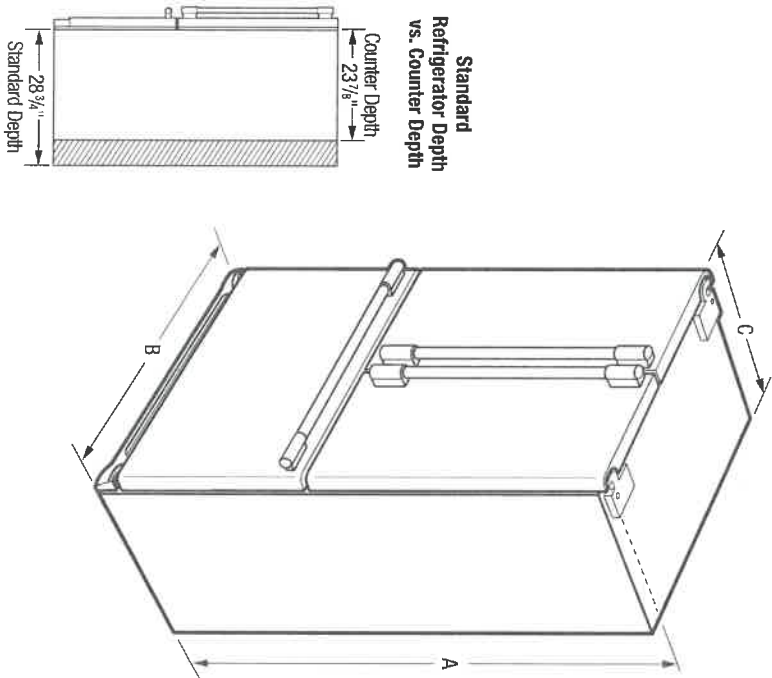

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.ca](http://frigidaire.ca).

Product Dimensions	
A - Height (Incl. Hinges & Rollers)	69-7/8"
B - Cabinet Width / Door Width	35-7/8" / 36"
C - Depth (Incl. Door)	28-1/2"
Depth with Door Open 90°	42-1/2"
Depth with Drawer Fully Extended (Incl. Handle)	45-1/2"

"Built-In Look" Cutout Dimensions	
Height (Incl. Hinges and Rollers)	70-1/4"
Width	36"
Depth	25"


Accessories information available on the web at [frigidaire.ca](http://frigidaire.ca)

27 Cookstove



FRIGIDAIRE  
P R O F E S S I O N A L .

Dishwasher  
FPID2497RF

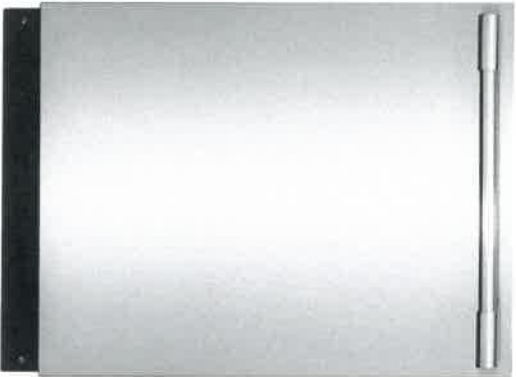

24" Built-In

Product Dimensions

Height (Adjustable)	33-3/4" - 35-3/4"
Width	24"
Depth (Including Door)	24-1/4"

More Easy-To-Use Features

**PowerPlus™ Dry**  
Flawlessly finishes dishes so they are cabinet-ready.

**PowerSense Technology™**  
Automatically adjusts the cycle time based on how much cleaning your dishes need.

**PowerPlus™ Filtration System**  
For a consistent, reliable clean, our Frigidaire Professional dishwasher has a removable stainless steel filter that prevents re-depositing of food particles.

**Delicate-Care™ Soft Grips**  
Holds delicate dishes like glasses in place so they don't move around during the cleaning process.

**Multiple Cycle Options**  
Features a variety of cleaning solutions for a range of cleaning needs like Sanitize to help kill germs, Rinse Only to keep food from sticking to plates, and PowerPlus™ Wash to clean crusty dishes with dried-on food.

**PowerBright™ Floor Light**  
Alerts you to when dishes are complete with an LED light that beams on the floor.

**Holds up to 14 Place Settings**  
Wash even more at once with large capacity racks that fit up to 14 place settings in a single load.

**Stemware Holders and Fold-Down Times**  
Easily switches from stemware holders to fold-down times, fold-down times for when you need to fit larger items on the top rack like pots and pans and stemware holders for when you need to secure glasses.



Available in:

Stainless (F)  
*\*Compared to the normal cycle on 2014 Frigidaire® dishwasher models.  
†Then a traditional lower spray arm*

frigidaire.ca

Signature Features




**PowerPlus™ 30-Minute Wash**  
Powerful clean, fast. Washes dishes in a quarter of the time.<sup>1</sup>



**PrecisionPro™ Wash Zones™**  
Target clean dishes with hard-to-reach areas of bottles and delicate stemware.



**OrbitPower™ Wash Technology**  
Powerful clean, with 4 times better wash coverage.<sup>2</sup>




**Smudge-Proof™ Stainless Steel**  
Resists fingerprints and cleans easily.

37 Cookstove

Features	
Control Design	Fully-Integrated Pro-Select®
Digital Display	Yes
Door Latch/Stay-Put Door Hinge Design	Yes/Yes
Low Rinse-Aid Indicator Light	Yes
Interior Design/Interior Colour	Tall Tub/Stainless Steel
Wash System	Direct Feed
Wash Arm	OrbitPower™
Wash Levels/Wash Speeds	5/Variable
PowerSense Technology™	Yes
AquaSurge™ Technology	Yes
Sound Package	SilentDesign™
Filter/Filter Trap	S. Steel/Removable
Soft Food Disposer	
dB Level	47
Drying System	PowerPlus™ Dry
Cycles	
Number of Cycles	7
PowerPlus™ (Heavy)	Yes
Normal	Yes
Light	
Quick Wash (30-Min.)	Yes
Favourite	Yes
China Crystal	Yes
Rinse Only	Yes
Energy Saver Plus	Yes
Upper Rack Wash Only	
Cycle Indicator Light/Control Lock	Yes/Yes
Cycle Complete Floor Beam Indicator	LED
Options	
Heat/No Heat Dry	Yes
Hi-Temp Wash	Yes
NSF® Certified Sanitize Rinse	Yes
Delay Start	1-24 Hour
Rack System	
Rack Design	Deluxe
Rack Coating	Nylon TuffRacks™
SpaceWise® Upper Rack -	
Rack Handles	Yes
Delicate-Care™ Soft Grips	Yes
Fold-Down Times	Yes
Cup Shelves/Stemware Grips	2/6
Versa-Tray™	
Adjustable Rack Height	Yes
Lower Rack -	
SpaceWise® Silverware Basket	3-Piece Split
Fold-Down Times	2 Full Rows
Small Items Cover	3
Certifications	
ENERGY STAR®	Yes
NSF® International Certification	Yes
Specifications	
Water Inlet Location	Bottom Left
Water Usage (Gallons)	4.0 - 8.0
Water Pressure (PSI)	20 - 120
Integral Air Gap on Supply	Yes
Leveling Legs	3
Power Supply Connection Location	Right Bottom Front
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts¹	1.44
Amps @ 120 Volts	15
Shipping Weight (Approx.)	75 Lbs

¹For use on adequately wired 120V, dedicated circuit having 3-wire service with a separate ground wire. Appliance must be grounded for safe operation.

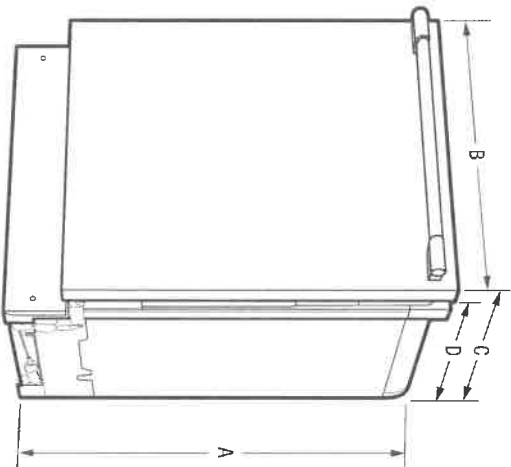

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.ca](http://frigidaire.ca).



Product Dimensions		Cutout Dimensions	
A - Height (Adjustable)	33-3/4" - 35-3/4"	Height (Min.)	34"
B - Width	24"	Height (Max.)	35-3/4"
C - Depth (Including Door)	24-1/4"	Width (Min.)	24"
D - Depth (To Tub Flange)	22-1/2"	Depth (Min.)	24"
Depth with Door Open 90°	50-1/4"		

Accessories information available on the web at [frigidaire.ca](http://frigidaire.ca)

FRIGIDAIRE

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)  
FPID2497R 04/15

© 2015 Electrolux Major Appliances, NA

Specifications subject to change. Printed in Canada

34 Cookstove



FRIGIDAIRE  
PROFESSIONAL

FPMO3077TF

MICROWAVE  
30" BUILT-IN WITH CONVECTION

Smudge-Proof  
Stainless Steel



AVAILABLE COLORS



Stainless

SIGNATURE FEATURES



PowerPlus™ 2-in-1 Convection  
Oven or Microwave

Get the great-tasting results of a conventional convection oven combined with the speed of microwave technology with the PowerPlus™ 2-in-1 Convection Microwave Oven.



PowerSense™ Cooking Technology

Results you can trust. PowerSense™ Cooking Technology automatically senses ideal time and power levels.



Smudge-Proof™ Stainless Steel

Resists fingerprints and cleans easily.



PowerSense™ Auto Defrost

Take the guesswork out of defrosting meat, poultry, or fish with PowerSense™ Auto Defrost.

PRODUCT DIMENSIONS

Height	19"
Width	29-13/16"
Depth	23"

MORE EASY-TO-USE FEATURES

PowerSense™ Broil & Grill

Grill fresh or frozen pizza at the touch of a button.

PowerBright® LED Lighting

See the power. See the results in action. LED interior microwave light stays on while your dish cooks.

Keep Warm

Consistently keep your dishes warm, for up to 90 minutes, until everything and everyone is ready.

Drop-Down Door

Faster easier access to what you are cooking with Drop-Down Door configuration.

Adjustable Timer

Now you can adjust the cooking time of your dish while it's cooking. The adjustable timer allows you to add 30 seconds on the timer.

34 looks like

FPMO3077TF  
MICROWAVE

30" BUILT-IN WITH CONVECTION

FRIGIDAIRE  
P R O F E S S I O N A L

FEATURES

Control / Timing System	Pro-Select <sup>®</sup>
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Microwave Capacity (Cu. Ft.)	1.6
PowerPlus <sup>®</sup> Convection	Yes
Watts (IEC-705 Test Procedure)	1000
Interior LED Light	Yes
Interior Color	Stainless Steel
Turntable Diameter	14-3/16"
Turntable On/Off	
Control Lock	Yes
Clock	Yes
Touch Pad Buttons	28
Power Levels	High (1-9)
Accessory Metal Rack	Yes

MICROWAVE CONTROL OPTIONS

Popcorn Button	Yes
Sensor Cook Button	Yes
Sensor Reheat Button	Yes
Broil/Grill	Yes
Preheat/Warm	Yes
Snack Button	
Beverage	
Melt & Soften Options	4
Auto Reheat Options	
Snack Menu Options	
Auto Cook Options	
Auto Defrost Options	3
Multi-Stage Cooking Option	Yes
Keep Warm	Yes
Add 30 Seconds	Yes
Sensor Cooking Options	5
Sensor Reheat Options	5
Vegetable Cook Sensor	Yes
Delay Start	
User Preferences	Yes
Adjustable Timer	Yes

POWER RATINGS

Frequency (MHz)	2,450
Watts @ 120 Volts	1,750
Amps @ 120 Volts	15.5

SPECIFICATIONS

Oven Interior (HxWxD)	9-27/32" x 16-1/2" x 16-1/2"
Power Supply Connection Location	Right Top Rear
Voltage Rating	120V/60Hz/20A
Connected Load (kW Rating) @ 120 Volts <sup>1</sup>	1.75
Minimum Circuit Required (Amps)	20
Plug Type (NEMA)	LCOI (5-20P)
Shipping Weight (Approx.)	100 Lbs.

<sup>1</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.




Plug Type (NEMA)  
5-20P

PRODUCT DIMENSIONS

A - Height	19"
B - Width	29-13/16"
C - Depth	23"

CUTOUT DIMENSIONS

Height (Min. - Max.)	17-3/4"-18"
Width (Min. - Max.)	28"-28-5/8"
Depth (Min.)	22"

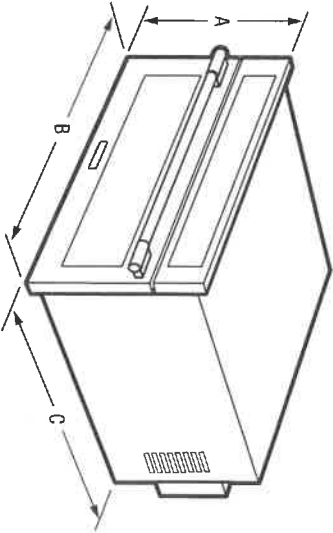

37 Cookstove



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com


FRIGIDAIRE  
USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com  
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FPMO3077T 10/17  
©2017 Electrolux Home Products, Inc.

FPMO3077TF  
MICROWAVE

30" BUILT-IN WITH CONVECTION

FRIGIDAIRE  
PROFESSIONAL

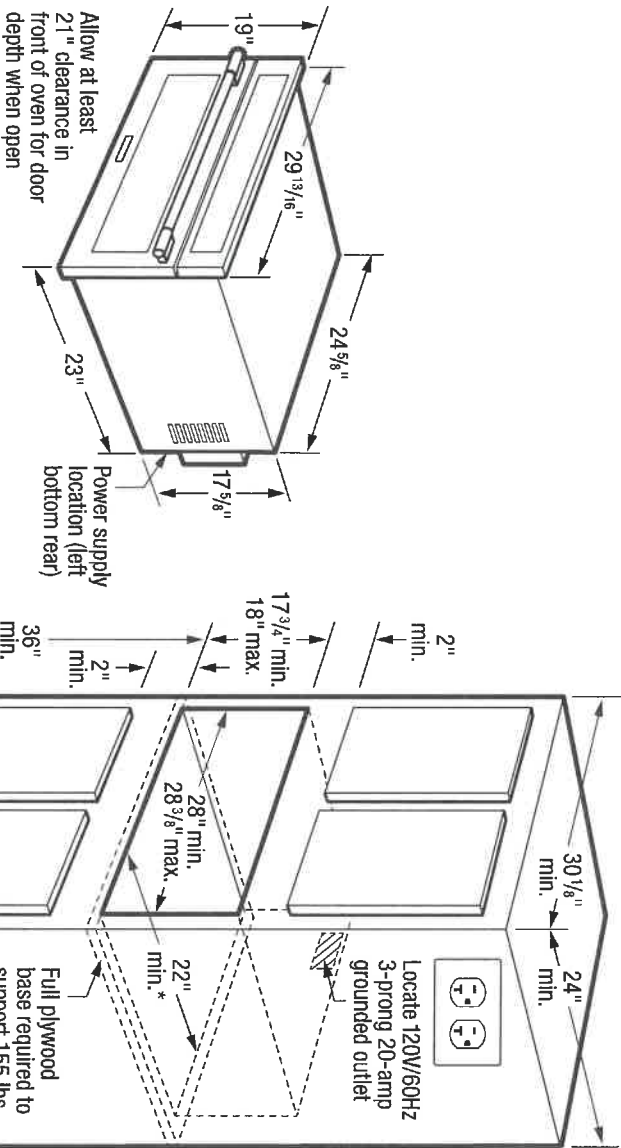

**\*Note:** Cutout depth is critical to proper installation. Verify required cutout-depth dimension to ensure that oven trim fits flush against cabinet face to reduce convection oven noise.

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (Approx.) - 100 Lbs.
- Voltage Rating - 120V/60 Hz/20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.75 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 20 Amps
- Always consult local and national electric codes.
- Microwave can stand alone on countertop or be built in with optional 30" or 27" Trim Kit (ordered by individual part number) which includes Bottom Duct Assembly - shipped in separate box.
- Allow 21" minimum clearance for 90° door swing.
- Minimum 22" deep oven cutout dimension is critical for proper installation for oven and faceplate to fit flush against cabinet front.



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

*Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com). Specifications subject to change. Accessories information available on the web at [frigidaire.com](http://frigidaire.com)*

- Consult local building code, in the event that cutout opening may be required to be enclosed with sides, ceiling and rear partition.
- Full oven base of solid plywood or similar material required, capable of supporting 155 Lbs.
- Base must be level and front of cabinet square for proper operation.
- Can NOT be installed above any gas wall oven.
- Built-in Microwave is approved to be used in combination with any Frigidaire® Electric Single Wall Oven and/or Warmer Drawer. (Refer to model-specific Combination Installation Specification pages on web.)
- When used in combination with another Frigidaire® built-in product, a minimum clearance of 2" is required from the bottom of the microwave cutout to the top edge of the companion product's faceplate. Please refer to companion product's installation instructions for cutout dimensions.

FPMO3077T 10/17  
©2017 Electrolux Home Products, Inc.

37 Cookston