Printed 2021-08-30 / 11:54 AM / Page 1 of 4

Site: WASAGA Lot: 1

Model: CORAL (60-04)
Purchaser: IAN BOYLE
Purchaser: JOSEPHINE BORG

Phone:

joziborg@icloud.com

647-746-5171

HOMES

SHORELINE POINT

#1 WINDOWS / EGRESS WINDOW FORMING SKETCH #2 ALL TRADES RAISE CEILING HER	3 PIECE STAINLESS STEEL APPLIANCES WITH WHITE WASHER & DRYER  STAINLESS STEEL HOOD FAN  STRUCTURALS *PART 1*  IN BASEMENT, APPROX 48 " X 48" IF POSSIBLE ( WINDOW WELL MAY BE REQUIRED)- SEE	INCLUDED IN APS
WINDOWS / EGRESS FORMING SKETCH ALL TRADES RAISE C	STAINLESS STEEL HOOD FAN  STRUCTURALS *PART 1*  IN BASEMENT, APPROX 48 " X 48" IF POSSIBLE ( WINDOW WELL MAY BE REQUIRED)- SEE	INCLUDED IN APS
WINDOWS / EGRESS FORMING SKETCH ALL TRADES RAISE C	STRUCTURALS *PART 1* " X 48" IF POSSIBLE ( WINDOW WELL MAY BE	) -
WINDOWS / EGRESS FORMING SKETCH ALL TRADES RAISE C	" X 48" IF POSSIBLE ( WINDOW WELL MAY BE	
ALL TRADES RAISE CEILING	JEIOUT INI DACAMENIET TO O FEET	18-Jun-21
	TEIGHT IN BASIMENET TO 9 FEET	18-Jun-21
	STRUCTURALS *PART 2*	
#1 NA		08-Aug-21
#2 NA		08-Aug-21
#3 ALL TRADES MAIN FLOOR RE	MAIN FLOOR REDESIGN FOR BEDROOM 3, CLOSETS & FRAMELESS GLASS SHOWER IN LIEU OF TUB	08-Aug-21
#4 ALL TRADES THAT THE FLOO CONFIRM***	***NOTE - SHOWER IN MAIN BATH - REQUESTING THE FINISHED SIZE OF SHOWER TO BE 4' X 3' , ***REQUESTING THAT THE FLOOR AT THE SHOWER DOOR LOCATION ONLY BE FLUSH (NO CURB), IF POSSIBLE, OFFICE/SITE TO CONFIRM***	08-Aug-21
#5 REDESIGN FEE (	REDESIGN FEE (NEW DRAWINGS, PERMITS)	08-Aug-21
#6 **THIS DOES NOT INCLUDE	OT INCLUDE ANY KITCHEN CHANGES (NOTE FOR DECOR DNLY)	08-Aug-21
#7 NA		08-Aug-21
#8 WINDOWS ADD OPERABLE	ADD OPERABLE WINDOW PANEL- QTY 1 IN FAMILY ROOM- SEE SKETCH A	08-Aug-21
#9 KITCHEN / PLUMBING- KITCHEN S664- MATTE BLACK-	PLUMBING- KITCHEN- POT FILLER- TRADITIONAL TWO HANDLE POT FILLER FAUCET WITH DUAL SHUT OFFS- MOEN- S664- MATTE BLACKSEE SPEC	08-Aug-21
#10 NA		08-Aug-21
#11 FRAMING / TILES WALL, INCLUDE	MAIN BATH - SHOWER NIECHE ( SHAMPOO/SOAP SHELF) 18 INCHES WIDE X 14 INCHES HIGH BUILT INTO THE WALL, INCLUDE MARBLE SURROUND AND TILED BACK- SEE SKETCH B	08-Aug-21
#12 NA		08-Aug-21
#13 DRYWALL SMOOTH CEILIN	SMOOTH CEILINGS ON MAIN FLOOR	08-Aug-21
#14 EXTERIOR DOOR 8 FOOT HIGH SL	8 FOOT HIGH SLIDING DOOR AT REAR - SEE SKETCH A	08-Aug-21
#15 FIREPLACE INCLUDES ACRY STANDARD	50" ELECTRIC FIREPLACE- DIMPLEX PRISIM BLF5051- WALL BUILT INTO ROOM APPROX 8" DEEP TO ACCOMIDATE, INCLUDES ACRYLIC ICE AD MULTI COLOURED LIGHTS, FAN FORCED HEATER AND ELECTRICAL. IN LEIU OF STANDARD	08-Aug-21
#16 INSULATED GARAGE-	AGE- EXTERIOR WALLS- SEE SKETCH	08-Aug-21
	COLOURS	
1 ELECTRICAL ELECTRICAL-MA	ELECTRICAL-MAIN HALL -3 POT LIGHTS ON SAME SWITCH- DELETE STANDARD LIGHT- SEE SKETCH B	8 9714
2 ELECTRICAL SPACE EVENLY-	ELECTRICAL- RELOCATE STANDARD KITCHEN LIGHT TO OVER ISLAND, ADD 2 CAPPED LIGHTS ON SAME SWITCH- SPACE EVENLY- SEE ISLAND SKETCH FOR LOCATION A	-
3 ELECTRICAL ELECTRICAL- KIT	ELECTRICAL- KITCHEN- QTY 6 POT LIGHT, ON SEPARATE SWITCH. SEE SKETCH A	
4 ELECTRICAL ELECTRICAL- MA	ELECTRICAL- MASTER BATH- QTY 2 POTLIGHT ON SEPARATE SWITCH B	
5 ELECTRICAL ELECTRICAL- EN	ELECTRICAL- ENSUITE 2- QTY 2 POTLIGHTS ON SEPARATE SWITCH- SEE SKECH B	
6 ELECTRICAL ELECTRICAL- FAN	FAMILY ROOM- QTY 8 POTLIGHT ON SEPARATE SWITCH. STANDARD LIGHT TO REMAIN- SEE SKETCH A	
7 ELECTRICAL ELECTRICAL- EXT	ELECTRICAL- EXTERIOR POT LIGHT FOR FRONT PORCH, ON SAME SWITCH AS COACH LIGHT- SEE SKETCH A	
8 ELECTRICAL ELECTRICAL- MA WALK IN CLOSET	ELECTRICAL- MASTER BEDROOM QTY 8 ON SEPARATE SWITCH, STD LIGHT TO REMAIN-SEE SKETCH B ***( NOTE-WALK IN CLOSETS IN MASTER BED TO HAVE STD CEILING LIGHT)	
9 ELECTRICAL SKETCH B	ELECTRICAL- MASTER BEDROOM FOYER- QTY 1 POTLIGHT ON SAME SWITCH, DELETE STANDARD LIGHT- SEE	
10 ELECTRICAL ELECTRICAL- BED	BEDROOM 2- QTY 4 POTLIGHTS ON SEPARATE SWITCH- STD LIGHT TO REMAIN- SEE SKETCH B	
11 ELECTRICAL STANDARD LIGH	ELECTRICAL- MASTER BATH- QTY 2 WALL SCONCE ROUG- IN, CENTER OVER EACH SINK, ON SAME SWITCH. DELETE STANDARD LIGHT FIXTURE- SEE SKETCH B	
12 ELECTRICAL STANDARD LIGH	STANDARD HIGHT FIXTURE—SEE SKETCH B OF LETT STANDARD HIGH FIX STANDARD HIGH FIX SKETCH B OF LETT STANDARD HIGH FIX SKETCH B OF LETT STANDARD HIGH FIX SKETCH B OF LETT SKETCH B OF LETT STANDARD HIGH FIX SKETCH B OF LETT S	4

Printed 2021-08-30 / 11:54 AM / Page 2 of 4

Lot: Site: WASAGA

Model: Purchaser: IAN BOYLE CORAL (60-04)

Purchaser:

**JOSEPHINE BORG** 

Email: Phone: joziborg@icloud.com 647-746-5171





	PLUMBING- SOAP DESPENSER - MOEN PATTERSON- S3955 IN MATTE BLACK- QTY 2- INSTALL TO LEFT AND RIGHT	PLUMBING /	5
	PLUMBING- LAUNDRY SINK FAUCET- SINGLE HANDLE PULL DOWN- MOEN 7585- CHROME- SEE SPEC	PLUMBING	49
	PLUMBING- KITCHEN FAUCET- MOEN PATTERSON SINGLE HANDLE PULLDOWN- S72003- BLACK MATTE- SEE SPEC	PLUMBING	48
	WATERLINE FOR FRIDGE V	PLUMBING	47
	NA		46
	KITCHEN HARDWARE- BERENSON- HALIBURTON- MATTE BLACK- 160MM- QTY 30	KITCHEN.	45
	CABINET- LAUNDRY- UP 1	KITCHEN	44
	CABINETS- KITCHEN- UP 1	KITCHEN	43
	SOFT CLOSE ON ADDITIONAL DRAWERS AND DOORS	KITCHEN	42
	RISER PANEL TO BE INSTALLED IN REMAINING SPACE BETWEEN TOP OF EXTENDED CABINETS AND CEILING. ENSURE RISER IS INSTALLED FLUSH WITH CABINET BOX	KITCHEN	41
	48 INCH EXTENDED UPPERS FOR STANDARD LAYOUT, INCLUDES 2 FT 6 INCH EXTRA FEET FOR CABINET EXTENSION	KITCHEN	40
	TWO TONE KITCHEN CABINETS- ISLAND DIFFERENT COLOUR THAN PERIMITER	KITCHEN	39
	FLOATING SHELVES IN KITCHEN- SEE SKETCH- QTY 3- NOTE COLOUR: ADAMELLO 2 - SEE SKECTH	KITCHEN	38
	STANDARD BANK OF DRAWERS TO REMAIN- SEE SKETCH FOR LOCATION	KITCHEN	37
	BASE MICROWAVE WITH DRAWER BELOW- UP 1- SEE SKETCH/ SPECS	KITCHEN	36
	COOKTOP CABINET WITH POT DRAWERS, INCLUDES CUT OUT FOR COOKTOP/RANGE TOP SEE- SPEC/ SKETCH	KITCHEN	35
	-1	KITCHEN	34
	2 BIN- GARBAGE AND RECYCILING- FULL HEIGHT DOOR SEE SKETCH	KITCHEN	33
	HOOD RANGE-INCLUDING 600CFM FAN, MDF FINISH. LINE UP WITH COOKTOP AND SPICE DRAWERS- SEE SKETCH	KITCHEN	32
	QTY 4 PLAIN CLEAR GLASS DOORS WITH MATCHING INTERIOR AND QTY 6 GLASS SHELVES, QTY 3 IN EACH CABINET- SEE KITCHEN SKETCH	KITCHEN	21
	BUILT IN WALL OVEN WITH WARMING DRAWER BELOW (IN LIEU OF CABINETS)	KITCHEN	30
	HIDDEN LIGHT VALANCE- UP 1 * PUCK LIGHTS SOLD SEPERATELY*	KITCHEN	29
	WINE FRIDGE OPENING- DUMMY DOOR AT SIDE-SEE SKETCH AND SPECS	KITCHEN	28
	SPICE RACK X 2 ( LOCATED ON EITHER SIDE OF COOKTOP) SEE SKETCH- COMFORT 2 PULL OUT FRAME- 23 5/8 WIDE- SEE SKETCH AND SPECS	KITCHEN	27
	BASE PIE CUT CORNER CABINET- SEE SKETCH- U P 1 💉	KITCHEN	26
	CABINETS- EXTEND ISLAND CABINETS (UP 1)AND COUNTERTOP (UP 3) BY 2 FT 6 INCHES- ****NOTE END OF ISLAND AND END OF STOVE WALL TO LINE UP	KITCHEN	25
	CABINETS- EXTEND CABINETS (UP 1) ON STOVE WALL AND COUNTERTOP (UP 3) BY 2 FT 6 INCHES-*** NOTEEND OF CABINETS AND END OF ISLAND TO LINE UP	KITCHEN	24
	GAS LINE FOR COOKTOP INCLUDES 15 AMP PLUG	HVAC	23
	ELECTRICAL- MICROWAVE - 20AMP ON A SEPARATE CIRCUIT- SEE SKETCH, SEE SPEC	ELECTRICAL	22
	ELECTRICAL- WINE FRIDGE- 15AMP ON SEPARATE CIRCUIT- SEE SPEC	ELECTRICAL	21
		ELECTRICAL	20
	ELECTRICAL- WALL OVEN- 30AMP ON SEPARATE CIRCUIT- SEE SPEC AND KITCHEN SKETCH	ELECTRICAL	19
	ON SAME SWITCH AS HIDDEN LIGHT VALANCE - SEE SKETCH C	ELECTRICAL	17
	FOR LOCATION OF PUCK LIGHTS - SEE SKETCH C	ELECTRICAL	16
	ELECTRICAL- PLUG ABOVE FIREPLACE FOR FUTURE TV, BESIDE CABLE, INSTALL 65" AFF- SEE SKETCH A 🗸	ELECTRICAL	15
	ELECTRICAL- KITCHEN- SHIFT STD LIGHT IN BREAKFAST AREA BY APPROX 4 FEET FROM REAR, CENTERED IN ROOM SEE SKETCH A	ELECTRICAL	14
Aug 8/21	ELECTRICAL- ENSUITE 2 BATH- QTY 1 WALL SCONCE, CENTER OVER SINK ON SAME SWITCH. DELETE STANDARD LIGHT - SEE SKETCH B	ELECTRICAL	13
DATE SELECTED	DESCRIPTION		

Printed 2021-08-30 / 11:54 AM / Page 3 of 4

Lot: Site: WASAGA

Model: Phone: Purchaser: Purchaser: CORAL (60-04) IAN BOYLE 647-746-5171 **JOSEPHINE BORG** 

joziborg@icloud.com

Email:





<	3		5
	GLASS STAIRCASE RAILING, WITH SQUARE OAK POST, SQUARE OAK HANDARIL AND 3/8" INCH GLASS	RAILINGS	8 8
	AREA, BREAKFAST AREA ENDING AT KITCHEN CABINETS	MOULDING	88
			87
	COMFORT HEIGHT - QTY 2- MASTER AND ENSUITE 2	CABINETS	86
	MASTER ENSUITE- BANK OF DRAWERS- CENTER BETWEEN SINKS ( 1 LARGE, 2 SMALL) SEE SKETCH /	CABINETS	85
	HARDWARE FOR MASTER ENSUITE CABINETS-96MM MATTE BLACK- HALIBURTON-QTY 7	CABINETS	84
	LAUNDRY CABINET HARDWARE-	CABINETS	83
	CABINET-ENSUITE 2 BATH- UP1 /	CABINETS	82
	CABINET- MASTER ENSUITE CABINET- UP 2 ·V	CABINETS	81
	CABINET- LAUNDRY- UPPER CABINETS UP 1	CABINETS	80
	TILE- ENSUITE 2 SHOWER FLOOR TILE- UP 2 🦯	TILE	79
	TILE- ENSUITE 2- SHOWER WALL- UP 2- STACKED VERTICLE	TILE	78
	TILE- ENSUITE 2- FLOOR TILE- UP 2- STACKED /	TILE	77
	MASTER ENSUITE AND ENSUITE 2- SHOWER JAMB- QUARTZ	TILE	76
		TILE	75
		TILE	74
	TILE- MASTER ENSUITE FLOOR TILE- 12 X 24- STACKED- UP 5	TILE	73
	TILE- MAIN FOYER- UP 4- STACKED	TILE	72
		TILE	71
	HARDWOOD IN MASTER BEDROOM AND BEDROOM 2- UP 3	HARDWOOD	70
		HARDWOOD	69
	STAIN FOR STAIRS TO MATCH HARDWOOD AS CLOSE AS POSSIBLE- 1 FLIGHT	PAINT	68
	HARDWOOD- FAMILY ROOM, DINING ROOM, MAIN HALL, LIBRARY- UP 3	HARDWOOD	67
	CABINET-LAUNDRY -*** DUE TO WASHER/DRYER BEING HIGH, ENSURE THAT A BACKSPLASH BETWEEN UPPER CABINETS & COUNTER REAMIN 20 INCHES- SEE SKETCH**	CABINETS	66
	LAUNDRY COUNTER- TO GO ACROSS WASHER/DRYER, WATERFALL SIDE THAT ENDS AT SINK COUNTER. COUNTER GOES ACROSS SINK, INCLUDES SUPPORT GABLESQUARTZ- UP 2	COUNTERTOP	65
	ENSUITE 2 COUNTER- UP 1	COUNTERTOP	64
	MASTER ENSUITE COUNTER- UP 3 🗸	COUNTERTOP	63
	KITCHEN BACKSPLASH- SLAB- UP 3	COUNTERTOP	62
	KITCHEN COUNTERTOP- STANDARD LAYOUT- UP 3	COUNTERTOP	61
	PLUMBING- LAUNDRY SINK- BLANCO- 402242-FORMERA U1- SEE SPEC 🗸	PLUMBING / COUNTERTOP	60
	PLUMBING- KITCHEN SINK- BLANCO PRECIS U SUPER SINGLE SILIGRANT- 402660- CORAL BLACK- SEE SPEC	PLUMBING / COUNTERTOP	59
	PLUMBING-ENSUITE 2 SINK- QTY 1 RECTANGLE- 4220CIY- SEE SPEC	PLUMBING / COUNTERTOP	58
	PLUMBING- MASTER ENSUITE SINKS- QTY 2- 4220CIY- RECTANGLE- SEE SPEC 🖟	PLUMBING / COUNTERTOP	57
	PLUMBING- ENSUITE 2 BATH- ALIGN- DESIGNER GRAB BAR- CHROME- 18 INCH- YG0418, INSTALL BESIDE TOILET 🗸	PLUMBING	56
	PLUMBING- MASTER BATH- ALIGN-ACCESSORIES- PIVOTING PAPER HOLDER QTY 1- MATTE BLACK YB0408, QTY 1-24" TOWEL BAR YB0424 AND QTY 1-TOWEL RING YB0486 TO BE INSTALLED NEAR SINK FOR HAND TOWEL	PLUMBING	55
	PLUMBING- MASTER BATH- ALIGN TWO HANDLE ROMAN TUB FAUCET- T393-4796- MATTE BLACK- SEE SPEC 🤣	PLUMBING	54
	PLUMBING- MASTER BATH-ALIGN SINGLE HANDLE SINK FAUCET IN BLACK MATTE - 6190- QTY 2- SEE SPEC	PLUMBING	53
	PLUMBING- MASTER BATH- ARRIS- BLACK MATTE- POSI-TEMP SHOWER W/ 3 FUNCTION TRANSFER VALVE/TRIM & SLIDE BAR W/ HAND SHOWER- TS22002EP/U361C1/UTS23005/62320/3887EP/A725- SEE SPECS	PLUMBING	52
Aus 8/21	NA		51
DATE SELECTED	DESCRIPTION		Γ
			7

Printed 2021-08-30 / 11:54 AM / Page 4 of 4

WASAGA

Site:

Lot: 1
Model: CORAL (60-04)
Purchaser: IAN BOYLE

Purchaser: JOSEPHINE BORG
Phone: 647-746-5171
Email: joziborg@icloud.com

SHORELINE POINT WASAGA BEACH HOMES


Γ		DESCRIPTION	DATE SELECTED
91	HVAC	AIR CONDITIONER- COMPLETE LENNOX AIR CONDITIONER (13 ACX) INSTALLED	12/8911
92	TRIM	TRIM- UP 2- CONTEMPORARY BEVEL	
93	TRIM	HARDWARE- INTERIOR DOORS- WEISER HALIFAX SQUARE ROSE IN MATTE BLACK. INCLUDES BLACK HINGES - QTY	
94	TRIM	INTERIOR DOORS- MASONITE-QTY 12- MELROSE ( HALLOW, SMOOTH) IN LIEU OF STANDARD - SEE SKETCH	


GE 1 OF 2**  PURCHASER VENDOR INITIALS APPROVAL	**PAGE	sketches, PES and/or colour charts <u>PRIOR to installation.</u>
NE +	SHORELINE	accompanied with a PES. It is the responsibility of all <u>Trades</u> to inform the builder of any discrepancies on
1 70 M	WASAGA	Any upgrades in the colour chart must be
SIGNATURES	SAL BEN	***FOR TRADE USE***
	4220CIY- QTY 2	Master Ensuite - SINK(s)
CALCATTA GOLD QUARTZ- UP 3		Master Ensuite - COUNTERTOP
96MM MATTE BLACK HALIBURTON- QTY 7		Master Ensuite - CABINETS  Master Ensuite - HANDLES/KNOBS
SNOW QUARIZ		Master English CABINETS
MARBLE ICEBURG 2 X 4- UF 2		Master Ensuite - SHOWER FLOOR
		Master Ensuite - SHOWER WALL
D- UP 5		Master Ensuite - FLOORING
NA		Bedroom 5 - FLOORING
NA		Bedroom 4 - FLOORING
NA		Bedroom 3 - FLOORING
NORTHERN SOLID SAWN WIRE BRUSHED WHITE OAK 5" - ORION- UP 3	NORTHERN	Bedroom 2 - FLOORING
NORTHERN SOLID SAWN WIRE BRUSHED WHITE OAK 5" - ORION- UP 3	NORTHERN	Master Bedroom - FLOORING
NA NA		Upper Hall - FLOORING
SIC	SND ELOOP	POWGET ROOM - FAUCET
SID		Powder Room - SINK
NA		Powder Room - COUNTERTOP
NA A		
TIMELESS WHITE POLISHED 12 X 24- UP 4- STACKED		Powder Room - FLOORING
	POWDER ROOM	
NA		Stair Stain - SERVICE STAIRS (if applicable)
STAIRS TO HATCH HARDWOOD CLOSE ON POSSING	STAN	Stair Stain - BASEMENT STAIRS (if applicable)
LOSE AS POSSIBLE	STA	Stair Stain - MAIN STAIRS
SQUARE OAK HANDRAIL		Railing Details - HANDRAIL
3 1/2" SQUARE OAK POST W/ BEVEL CORNERS		Railing Details - POSTS
3/8" CLEAR TEMPERED GLASS		Railing Details - PICKETS
IRS	STAIRS	DAVELLIEHT VEC VOOIL - LEOOVING
2	NOVI DEVI	Library / Dell - FLOORING
NORTHERN SOLID SAWN WIRE BRUSHED WHITE OAK 5" - ORION- OF 3	NORTHERN	DINING ROOM - FLOORING
	NORTHERN	Main Hall - FLOORING
	NORTHERN	FAMILY / Living Room - FLOORING
	/ DININ	GREAT ROOM
PATTERSON - S72003- MATTE BLACK		Kitchen - FAUCET
BLANCO PRECIS U SUPER SINGLE- CORAL BLACK- 402660	В	Kitchen - SINK
SLAB- CALCATTA GOLD QUARTZ- UP 3		Kitchen - BACKSPLASH
CALCATTA GOLD QUARTZ- UP 3		Island - COUNTERTOP
CALCATTA GOLD OHARTZ- UP 3		Nitchen - COLINTERTOR
REFERSON HALIBURTON 160MM- MATTE BLACK- OTY 30	P.	Servery - CABINETS
EURO ADAMELLO UP 2		Island - CABINETS AND OPEN SHELVES
MOSAIC MDF VANILLA MILKSHAKE- UP 1		Kitchen - CABINETS
	NORTHE	Breakfast - FLOORING
NORTHERN SOLID SAWN WIRE BRUSHED WHITE OAK 5" - ORION- UP 3	NORTHE	Kitchen - FLOORING
	KITCHEN	The second secon
LOFT ASH 12 X 24- STACKED		Basement Foyer - FLOORING
LOFI ASH 12 A 24- SIACKED		Side Hall - FLOORING
f		Main Foyer - FLOORING
NCES	ENTRANCES	

Avy 18/24	A A	Vendor APPROVAL	2 OF 2**	**PAGE
		DÉCOR CONSULTANT	S O Z	HOMES
<		PURCHASER SIGNATURE	installation.	discrepancies on sketches, res and/o
70		PURCHASER SIGNATURE	nust be accompanied with a PES.  les to inform the builder of any	Any upgrades in the colour chart must be accompanied with a PES.  It is the responsibility of all Trades to inform the builder of any
ATE	SIGNATURES / D	10年10年10日	SE***	***FOR TRADE USE***
	0	0		CONTACT:
	JOSEPHINE BORG	JOS		PURCHASER(S):
р.		WASAGA SHORELINE		SITE / LOT:
2		the Vendors's selection must be accept	been pre-selected or installed. In this event	construction progress some items may have been pre-selected or installed. In this event the Vendors's selection must be accepted by the purchaser
S. S.	urfacturing/manufacturers Due to	NB.	urchaser has checked and acknowledged accuracy of colour and selections before signing.	Purchaser has checked and acknowledged ac
1/2	9	plus costs	are subject to a \$5000 administration fe	Any changes to the colour chart after signing are subject to a \$5000 administration fee plus costs
INITIALS		R	DISCLAIMER	SACTE CONTRACTOR
YES	ELECTRICAL for Bar Fridge	6" STD		HOOD FAN VENT SIZE
YES	ELECTRICAL for Cooktop	DECLINED	D	GAS LINE & ELECTRICAL TO DRYER
YES	ELECTRICAL for Built-in Micro			GAS LINE & ELECTRICAL TO STOVE
YES	ELECTRICAL for Built-in Oven	APPLIANCE REQUIREMENTS	APPLIA	GAS LINE TO BBO
UPGARDE	BATH ACCESSORIES			Mirrors
Selection of the	MESTAL STATE	S	A THE PARTY OF THE	
	50" DIMPLEX	1000	- The State of the	Location / Insert / Mantle
		EIREDI ACE		- minoughout
	WARM GREY			PAINT - Throughout
	STD			Interior Doors
	CONTEMPORARY BEVEL- UP 2			Casing/Baseboards
		TRIM / PAINT		radiul y - DACKOT DAGI
NIOEN- /282	Laundry - FAUCEI	CARRARA WHITE- UP 2	CAR	Laundry - COUNTERTOP
FORMERA U 1	Laundry - SINK		SIERRA	Laundry - CABINETS
K1700BORB	Laundry - HANDLES/KNOBS	LOFT ASH 12 X 24- STACKED	LOFT A	Laundry - FLOORING
A Book Park		LAUNDRY		THE PARTY OF THE P
NA	Ensuite Bath - FAUCET(s)	NA		Ensuite Bath - SINK(s)
	NA			Ensuite Bath - COUNTERTOP
	NA			Ensuite Bath - HANDLES/KNOBS
	NA NA			Ensuite Bath - CARINETS
	NA NA			Ensuite Bath - SHOWER FLOOR
	NA			Ensuite Bath - TUB / SHOWER WALL
	NA			Ensuite Bath - FLOORING
NA	Shared Bath - FAUCET(s)	NA		Shared Bath- SINK(s)
	NA			Shared Bath- COUNTERTOP
	NA			
	NA			Shared Bath- CABINETS
	NA 3			Shared Bath- SHOWER JAMB
	NA NA			Shared Bath- IUB / SHOWER WALL
	NA			Shared Bath- FLOORING
STD	Main Bath - FAUCET(s)	4220CIY QTY 1	4220	ENSUITE 2 SINK(s)
	Ę			ENSUITE 2 COUNTERTOP
	K500 CRYSTAL	~		1:1
	MOSAIC GLACIER WHITE MDF- UP 1	MOSAIC GLA		2
	SNOW QUARTZ	SN		
İ		MARBLE		ENSUITE 2 SHOWER FLOOR
п	FLOW WHITE MATTE 12 X 24- UP 2-STACKED	FLOW WHITE MATTE 12 X 24- UP 2-S		ENSUITE 2- FLOORING
Total State of		2ND FLOOR CONTINUED	ZND FL	
		MED COLOON OF	C711001110	

SHOREINE POINT

Aval 2

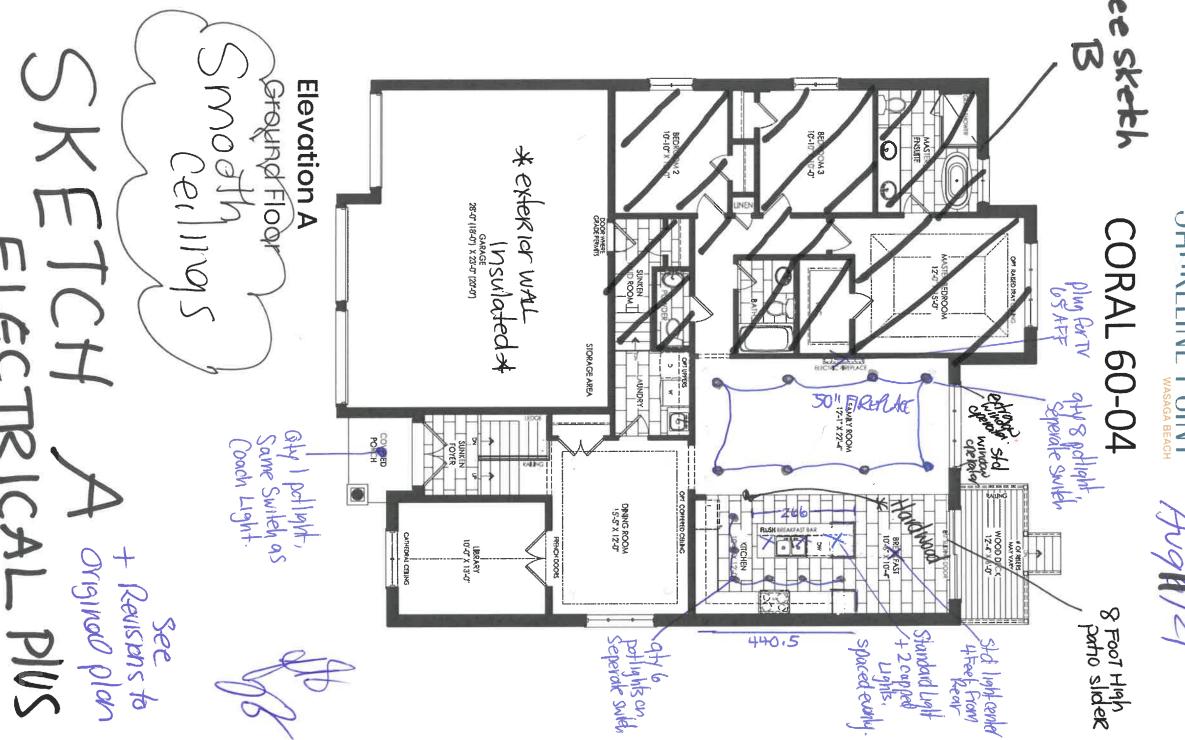

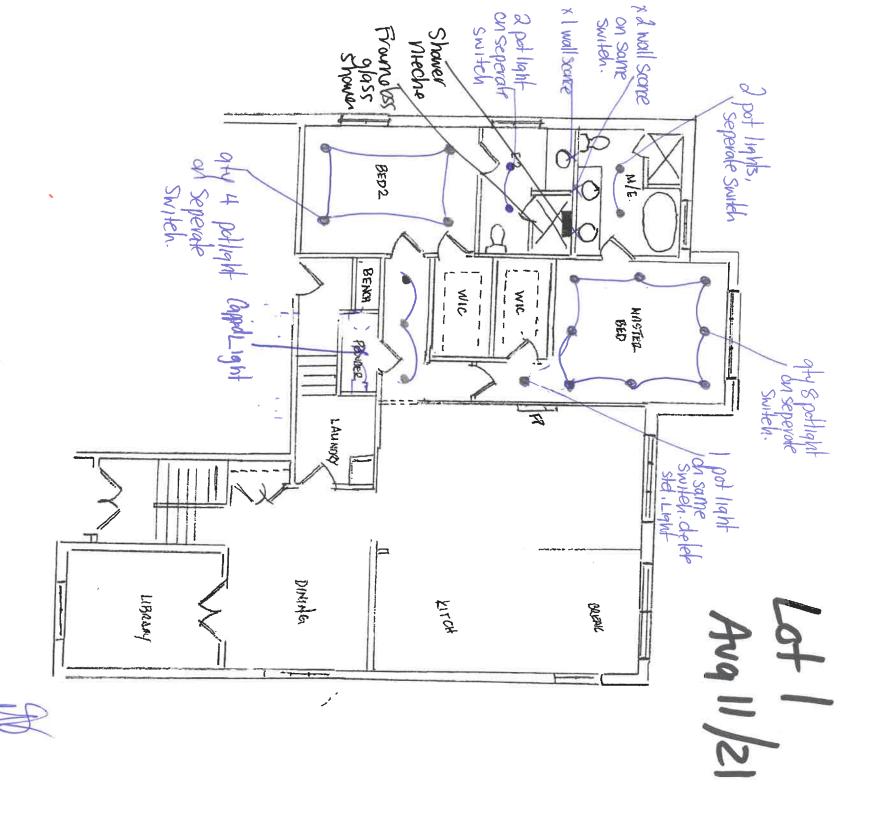


ECTRIC ROVISIONS TO ORIGINAL PLAN Plus

# SHORELINE POINT


CORAL 60-04

10+1 Aug4/21

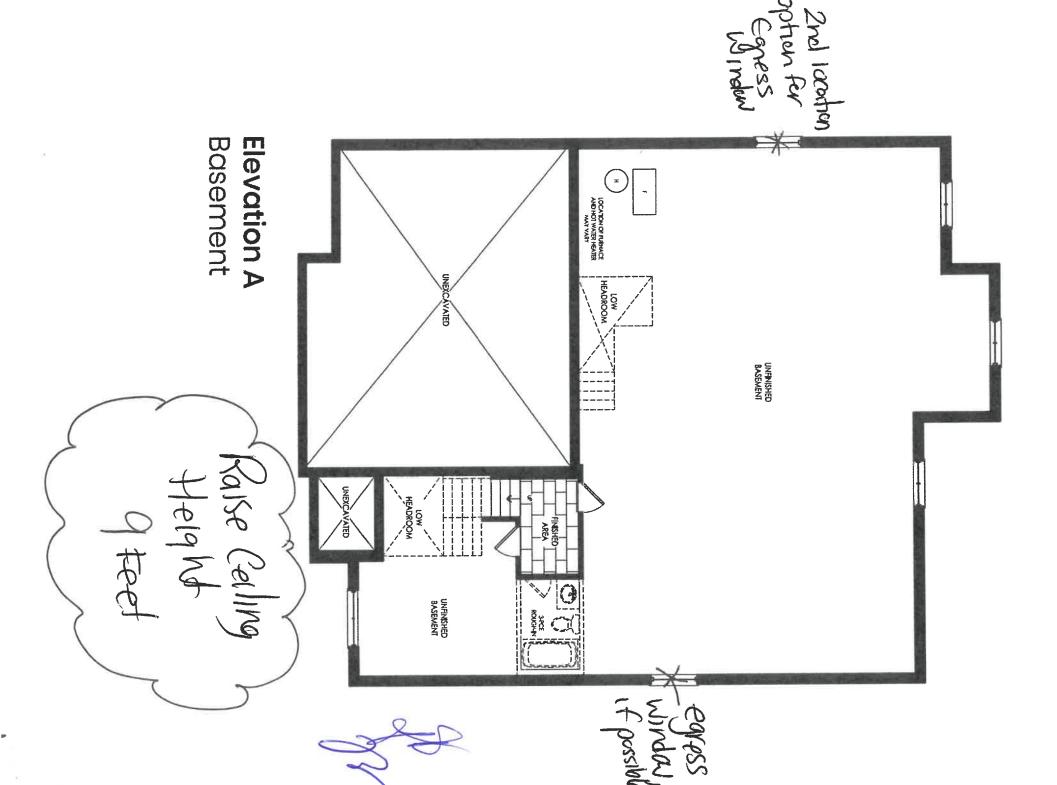


# SHORELINE POINT

**CORAL 60-04** 

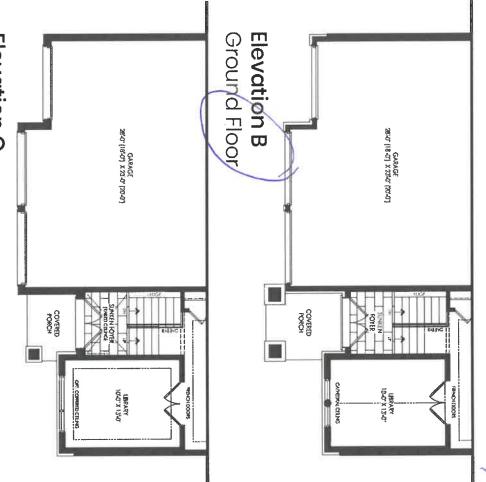

Elevation C

Ground Floor

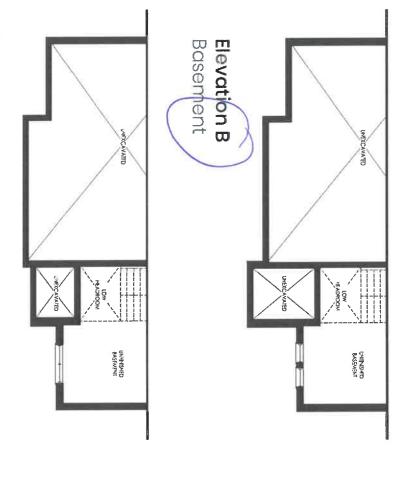



**Elevation C**Basement

102L plaster Moulding

021 000 BED2 BENCH Master 1021 Z, MOULDINGA Breakhad DINIAS. LIBRARY FITCH BURAL Cabinuts

LOT Masaga

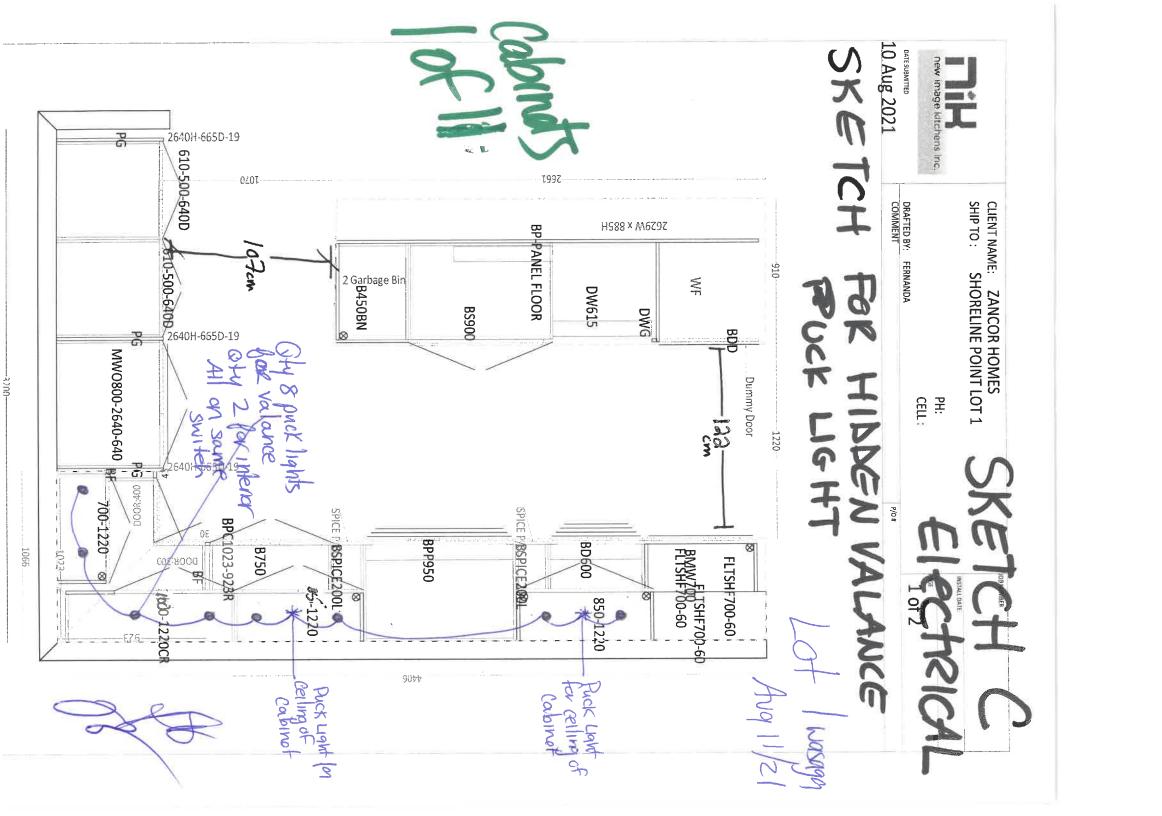

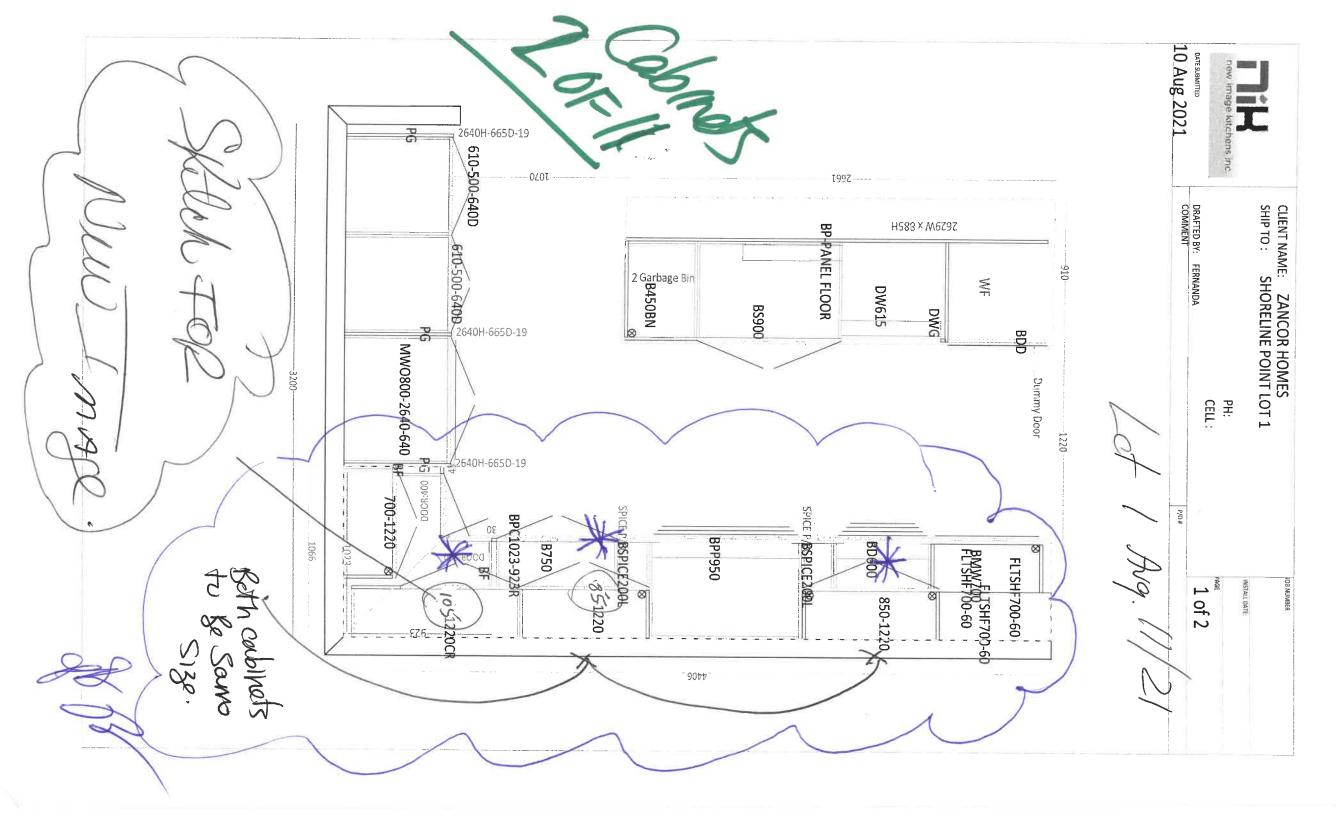

16 Jun 2021 60-04 CLIENT NAME: ZANCOR HOMES SHIP TO: SHORELINE POINT 750-760 BAN'K OF DRAWERS VS900 Chsuite 2 AUNDRY UPPERS MASTER ENSUITE OPT. BASEMENT BATH LAUNDRY 2300 VS850 750-760 PH: VS850 VS900 M12 521 750-760 BS700 21 of 22 Comfort Height 9 \$ NOT TO ALE countertop

Kitchen Extras MOTE : END OF ISLAND AND @ Stendard bant drowers (a) extended island overall 2'6" & @ wall over w/ worming chance polar (3) Hidden Light Valoure S 2 spice pull out

B Floating shows oth 3

Space for wine Gridg + I duming day

3 2 Bir Recycle (4) extend stove wall by 2'6"
(18) cooktop/Rängetop m/ pet drawer & but 18 550" opprox Hood Range to Line with cooktep + Spice drawer 2 double clocks with 4 clear plans aglass + (3 glass shelves in each) Base pricat and downer bolas STOVE WALL TO LINE UP. 10 Ang 11/21

(18) Soft Close - adaitheral cabinets (a) Kitchen Hardware - 160mm Marth Black (A) Riser panel - install blush with Box to Kithen Extras (b) Cxtended uppers- 48"

Ser. 3.


7 82



# SHORELINE POINT


Kitchen CANOPY "TRANSITIONAL ! \*See price book for details\* **ADDITIONAL \$950** 

### TRANSITIONAL




TransitionalHOOD3-900w-750h-550d

**FAN Insert** \*Optional Available\*







# SHORELINE POINT

# Kitchen FAN INSERT AVG-276PS for optional Canopy 6 inch vent as per spec

\*See price book for details\*






AVC-276PS




AVC-276PS 30" Insert hood - MSRP: \$469.00

Dimensions Stainless steel grade Control Lighting Blower type Blower performance Blower performance Duct transition Ducting	Dimensions 27/172/(V)/x 10 1/4" (D) x 12 3/6" (H) 27/172/(V)/x 10 1/4" (D) x 12 3/6" (H) Exterior Appearance 304 Fastures Electricite push buttoris 2 buttos, 2W LED (buttoris 2 buttos, 2W LED (buttoris 600 CFM, 3-speed Speed 1, 256 CFM Speed 3, 500 CFM Speed 3, 600 CFM 2 aurwintum micro hole filters (included) 6" Round (Top) Ducted Electrical Requirements 120V / 50Hz / 2-7 Amps Warranny
Model number	AVC-276PS
The state of the s	CONTRACTOR AND
Lindai numbar	AUC.276DS
Model number	AVC-276PS
The state of the s	
	Carrier Services
Pilota mathemat	ALL ALLE AND DE ALLEGERICA
CITIENS:ON	" Y [ ] BU DE Y [ ALL   711 17
Contract of the Contract of th	Exterior Appearance
The second secon	Extentior appearance
Cialniess steel grade	304
The same of the sa	
	Features
Control	Electronic push buttons
The state of the s	
	2 bulbs, 2W LED (bulbs indic
	COO CELL TENONS
Charles Charles	GULI CTIVI, O-speed
SOUND DESIGNATION	Speed 1, 295 CFM
Y	
	Speed 2, 457 CTM
	Speed 3, 600 CFM
	The state of the s
Filter type	2 and services made note that
Duct transition	6" Round (Top)
Durching	Disched
STATE OF THE PARTY	Plactrical Requirements
	TOTAL PROPERTY OF THE PARTY OF
medical requirements	120V / 60Hz / 2.7 Amps
	Warranty
MINE THE PERSON NAMED IN	

### Installation



N-N	Cabinet height	
12 3/8"	Hood height	0
28" to 30"	Recommended height between cooking surface and bottom of the anod	100
36"	Floor to counter top height (standard)	09
aldenea	Floor to ceiling height	11

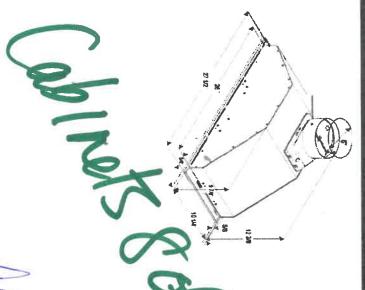

Duct transition


6" Round top





STAPLES:

Dupl 2

# **UPGRADE KNOBS & HANDLES (NIK)**

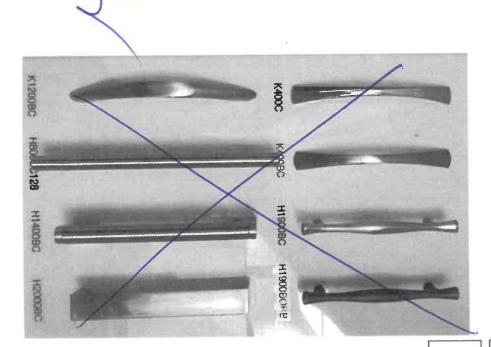

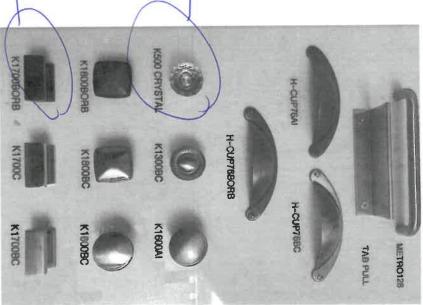

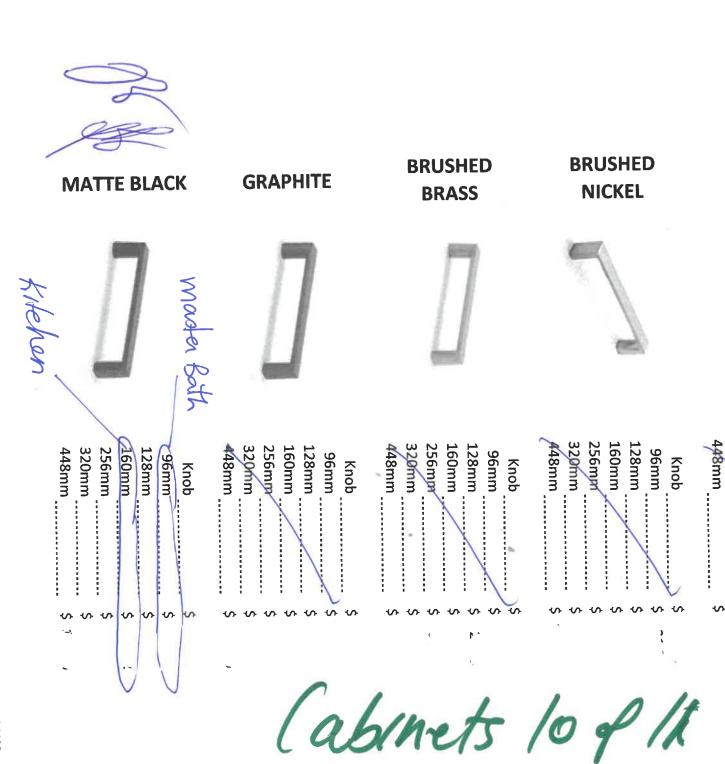

: m Z ANCOR

\*ALL PRICES ARE PER PIECE\*

**BERENSON - HALIBURTON** 

128mm

96mm

Knob

256mm

160mm

320mm

**CHROME** 

**UPGRADED HARDWARE -**New Image Kitchens

# Comfort II Pull-Out Frame - 23 5/8 in (600 mm) Height

To buy, choose from the options below.

Sign in to view prices

ADD TO CART

Product Dimensions - Width: Select an option

110 mm 160 mm 190 mm 210 mm 220 mm 310 mm 320 mr

Interior Dimensions Required - Width: Select an option

Min. 145 mm Min. 195 mm Min. 225 mm Min. 265 mm Min. 355 mm

Opening: Select an option

Left Side Right Side

Finish: Select an option

Chrome Chrome and Maple Gray/Chrome Thick Chrome

Installation: Select an option

Left side | Right side

WEBKIT1214701 WEBKIT1214700 Product number \$ WEBKIT1214717 WEBKIT1214718 WEBKIT1214716 WEBKIT1214713 WEBKIT1214712 WEBKIT1214709 WEBKIT1214707 WEBKIT1214708 WEBKIT1214710 WEBKIT1214705 WEBKIT1214703 WEBKIT1214704 WEBKIT1214706 WEBKIT1214699 WEBKIT1214702 Product
Dimensions Width ◆ 210 mm 110 mm 210 mm 160 mm 110 mm 190 mm 190 mm Interior Dimensions
Required - Width Min. 195 mm Min, 265 mm Min. 225 mm Min. 225 mm Min. 195 mm Min. 145 mm Opening Right
Side
Left
Side
Side
Side
Side
Left
Side
Side
Right
Side
Right
Side
Right
Side
Left
Side
Left
Side Right Right Side Right Side Finish ♦ Chrome Thick Chrome Chrome and Maple Thick Chrome Chrome Chrome Chrome Gray/Chrome Maple Gray/Chrome Gray/Chrome Chrome Thick Maple Gray/Chrome Right side Gray/Chrome Installation Left side Left side Left side Right side Right side Left side Right side Right side Right side Right side Left side Left side Right side Right side Left side Left side Right side Right side Left side

View More

### DESCRIPTION

Multi-purpose frame for pull-out baskets system for base cabinets.

# TECHNICAL SPECIFICATIONS

Material	- D	Product Dimensions - Depth
Metal	3	
Soft-Stop Mechanism	Interior Dimensions Required - Height	Product Dimensions - Height
Yes	526 mm	602 mm

## Method™

Traditional | Transitional | Modern


A modern blend of flat planes and curves gives Method faucets and a chic look.

PLRINBING PAGE 1af. 16

Other Chrome Single Handle Pullout Kitchen Faucet \*\*

Model 7585

KITCHEN




To order, combine the model number with one of these finish letter(s): Chrome (C) & Spot Resist™ Stainless (SRS).
\*\* Deckplate included

**FINISH OPTIONS:** 

### rris<sup>TM</sup>

# Traditional | Transitional | Modern


Sharp angles and tubular lines dominate each piece in this modern collection.



with 3 Function Transfer Valve/Trim and Slide Bar with Hand Shower \* Model T\$22003EP / U361Cl / UTS23005 / 62320 / 3887EP / A725 Posi-Temp®/tub/Shower Faucet

Other Property Chrome

7 -



Posi-Temp® Shower Only with 3 Function Transfer Valve/Trim and Slide Bar with Hand Shower \*
Model TS22002EP / U361CI / UTS23005 / 62320

/ 3887EP / A725

0ther Chrome

FINISH OPTIONS:

To order, combine the model number with one of these finish letter(s): LifeShine® Brushed Nickel (BN), Matte Black (BL).
To order Chrome (C) model, use model number only.
Please see the 2020 Shower Design Guide for installation

 $\bigcirc$ 


BB

四

# Traditional | Transitional | Modern

Convenient flow control over a cooktop.

Dual joints allow for maximum reach and dual shut-off valves mean never reaching over a hot surface to turn it off.



Traditional Two Handle Pot Filler Faucet with Dual Shut-Offs \*

Model S664

Chrome

Modern Two Handle Pot Filler Faucet with Dual Shut-Offs \*

Novavailable in ORB finish Model S665

Chrome

**Black Stainless** 

Other


LumBing 30f/6



To order, combine the model number with one of these finish letter(s): Spot Resist™ Stainless (SRS), Polished Nickel (NL), Oil Rubbed Bronze (ORB), Matte Black (BL) & Brushed Gold (BG)

To order Chrome (C) models, use model number only.

± Single hole installation only



# Paterson®

# Traditional | Transitional | Modern

Distinctive details, like a flowing high-arc spout and gently contoured handle, add charm without the fuss.



Single Handle Pulldown Kitchen Faucet \*

Model S72003\*

Other



Model S52003\*

PlumBing PAR 40/10

0ther Chrome ڻ



Model S72103\*

Chrome

Other



**FINISH OPTIONS:** 

To order, combine the model number with one of these finish letter(s): Chrome (C), Spot Resist™ Stainless (SRS) & Matte Black (BL). ± Single hole installation only

### Soal 9 otion Dispens

Traditional **Transitional** Modern

However you define your faucet's style, you can assure a coordinated look with Moen soap dispensers.

**Other** Chrome Model 3944 Transitional Soap or Lotion Dispenser SRS ORB BL

Transitional Soap or Lotion Dispenser

Model 3942

0ther

 $\circ$ 

SRS BL

≶

Chrome

Paterson Soap or Lotion Dispenser

Model S3955

To order, combine the model number with one of these finish letter(s): Chrome (C), Spot Resist™ Stainless (SRS), Oil Rubbed Bronze (ORB), Matte Black (BL) & Glacier White (W)

**FINISH OPTIONS:** 

Other  $\bigcirc$ SRS

KITCHEN

PLMBing



# Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align



Single Handle Vessel Lav Faucet with Push-Button Drain without Overflow ~ Not Available in BL Model 6192 / 140780

Chrome Other

Single Handle Lav Faucet with Lift Rod Drain ^
Model 6190

Chrome

Other

BLACKIMAI

Two Handle Adjustable
Widespread (8" - 16") Lav Faucet
with Lift Rod Drain
Model T6193 / 69000 II ( Constant

Chrome

Other

Two Handle Bidet Faucet Not Available in BL or BG Model T519 1, 9265 Chrome


0ther

To order, combine the model number with one of these finish letter(s) LifeShine® Brushed Nickel (BN), Matte Black (BL) & Brushed Gold (BG) To order Chrome (C) model, use model number only.

\*\* T90331 / 140680

FINISH OPTIONS:


^ Deckplate included - Deckplate sold separately - 172666 series



### Align®

# Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align faucets and accessories bring a refreshed modern look to your home.



Two Handle Roman Tub Faucet Model T393 / 4796

Chrome

Other

Chrome Tub Drain Half Kits Available \*\*

Other

\$78.10

\$195.48



Two Handle Roman Tub Faucet with Hand Shower Not Available in Bl Model T394 / 9796 hower

Chrome

Other 0

Chrome

ub Drain Half Kits Available


Other

Single Handle Freestanding Tub Filler Faucet Model 395 / TS50100

Chrome **Other** 

Ŕν





### FINISH OPTIONS:

To order, combine the model number with one of these finish letter(s): LifeShine® Brushed Nickel (BN), Matte Black (BL) & Brushed Gold (BG) To order Chrome (C) model, use model number only.


\*\* T90331 / 140680

^ Deckplate included ~ Deckplate sold separately – 172666 series


### gn®

Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align

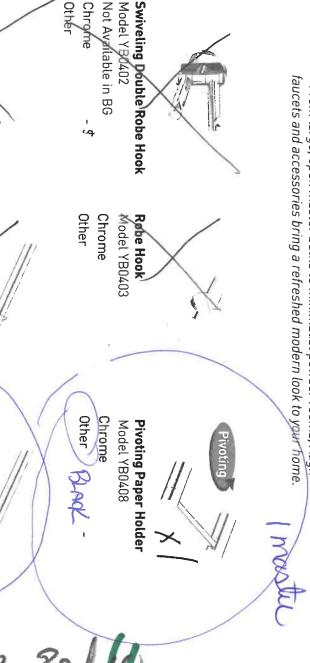

Other



36

Trong.

YG0442 <del>700436</del> 7

-Y6042'

18")- YG0418 \*

YG0412

Models:

Chrome

Other

ot Available in BL

18

MISH

2 MCome

Designer Grab Bar

Chrome

0ther

少い・こ

master

NSU!

Single Post Paper Holder Model YB0409 Not Available in BG

18" Towel Ban Model YB0418

**24" Towel Bar** Model YB0424

mastu

Chrome Other

Chrome

Other

FINISH OPTIONS:

To order, combine the model number with one of these finish tetter(s): Chrome (CH), LifeShine® Brushed Nickel (BN), Matte Black (BL) & Brushed Gold (BG)

유

BZ

8

BG



### Sink Specifications

Coal Black	Concrete Grey	White	Metallic Grey	Cinder	Truffle	Anthracite	Cafe	Colour
402660	402266	401820	401683	401397	401143	400890	400889	SKU

# Design and planning tips

- Min cabinet size: 36 in ( 915 mm ) Bowl Depth: 9 1/2 in ( 240.0 mm )

Warranty Mounting clips, Sink template, Installation instructions, 3½" (90 mm) stainless steel strainer(s), Limited Lifetime

To protect from damage, this model should be shipped a pallet.

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer. Codes/Standards: CSA B45.8-18/ IAPMO Z403-2018

### Specifications:

### **Optional Accessories**

Floating Grid	Cleaner	Biancoclean Silgranit	CapFlow Strainer Cover
406535		406200	517666
			lean Silgranit Grid

Mechanical Pop-up Strainer 406244

### SILGRANIT PRECIS U SUPER SINGLE



PumBing Papa 90+14

### Warranty

Code/Standards Compliance
BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.




BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5

Tel & Fax Tel: 905-4

https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/ Need support? Learn more by watching our sink & faucet How-to videos:

Tel: Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.



### **FORMERA**

### Stainless Steel



- · Refined brushed satin finish
- Premium 304 series, pragage stainless steel with 18/10 chrome-nickel content for excellent durability and corpsion resistance
- Rear position drain holes for maximum usable bowl and cabinet storage
- 3½" (90 m) stainless steel strainer(s) included
- Ternance, installation instructions and clips included
- Limited Lifetime Warranty

Undermount Installation	FORMERA U 134	FORMERA U 2	FORMERA U SUPER SINGLE
/	33" r r r r r r r r r r r r r r r r r r	14 // 1   14 // 1   7 // 14 // 1   7 //	32' T T T T T T T T T T T T T T T T T T T
	402244	402243	402241
Sink Specification			
Minimum Cabinet Size*	36" (915 mm)	36" (915 mm)	36" (915 mm)
Bowl Depth	9° (229 mm)	9" (229 mm)	9" (229 mm)
Cubed Weight	75 lb. (34 kg)	75 lb. (34 kg)	75 lb. (34 kg)
Stainless Steel Gauge	18	18	18
Optional Accessories			
	Grid (Large Bowl) 402251	Grid 402251	Grid 402248
	Grid (Small Bowl) 402252		

PunBing Pare 10c Build your BLANCE

### Build your BLANCO UNIT with Faucets and Accessories













CapFlow 517666

\*Depending on cabinel construction, a different cabinet size may be required. Consult the cabinet manufacturer.

### **FORMERA**

### Stainless Steel



· Refined brushed satin finish

- Premium 304 series, 18 gauge stainless steel with 18/10 clymedurability and corrosion resistance
- Rear positioned drain holes for maximum usable bowl and cabinet storage.
- 31/2" (90 mm) stainless steel strainer(s) included
- . Template, installation instructions and clips included
- cUPC listed
- · Limited Lifetime Warranty

Undermount Installation	FORMERA U 1	FORMERA U BAR
	25° 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	- 16" - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
/	402242	402245
Sink Specification		
Minimum Cabinet Size*	27" (685.mm)	18" (455 mm)
Bowl Depth	9" (229 mm)	8" (203 mm)
Cubed Weight	54 lb. (24.5 kg)	39 lb. (17,7 kg)
Stainless Steel Gauge	18	18
Optional Accessories		
	Grij 402249	Grid 402253

Londay Sing.





LINUS Faucet

See Page 50





RIVANA HIGH ARC Faucet

See Page 52





RIVANA BAR - PRFP Faucet 517666 See Page 52

CATRIS Faucet See Page 49

CATRIS FI.EXO Faucet See Page 49

RIVANA SEMI-PRO Faucet See Page 52

RIVANA HIGH ARC faucet See Page 52

ALTA Faucet

See Page 50

211/2" RECTANGULAR UNDERMOUNT SINK

### ☐ 4220CIY **Undermount Sink**

### Product Specs:

- Vitreous china
- Front overflow hole
- Template and mounting hardware supplied

# Overall Dimensions (W x D x H):

(OD): 545mm(21½") x 355mm(14") x 190mm(7½") (ID): 485mm(19") x 295mm(11%") x 140mm(5½")

### Compliance Certifications:

- Meets or exceeds the following: IAPMO cUPC
- · ASME A112.19.2 / CSA B45.1-2013

### Shipping:

Cube 1.64


G₩ 25 lbs




Notes:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

and Biscuit available through Direct import (CIF) only.



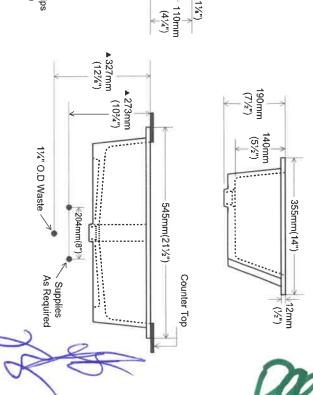



Countertop
Cut Out (Template Supplied)



Home > Washers > Washer & Dryer Sets > LG

LG WM4500HBA LG DLEX4500B



LG LG

Washer

Dryer

Appliance Spec's Page 10/37

Find a product... C

YOVVER JOOKCE

WD100CV

Ratings
UL Listed

Electrical Requirements

120V, 5 Amps

**Type** Electric

DIMENSIONS

Product WxHxD 29" x 14 1/8" x 30 7/8"

(50 9/16 with drawer open)

Click and Save! Live Agents

+ Page 2 d 37

#### Jill Barry

From:

Sent:

Subject:

Jillian Barry <jillianbarry5@gmail.com> July 2, 2021 2:36 PM Jill Barry

1 Wasagg Ang 11/21

# Jenn-Air JDTSS246GI

Width, 7 Wash Cycles, Fully Integrated, 16 Capacity (Place Jenn-Air Rise JDTSS246GL Built-In Undercounter Dishwasher, Stainless Steel (Interior), 38 dB Decibel Level, 24 inch Exterior

Settings), 3 Loading Racks, Wifi Enabled, Stainless Steel colour Same/Next Day Delivery Available FREE extended Up to 3 years warranty! In Stock Availability: E S

#### Jill Barry

Jillian Barry <jillianbarry5@gmail.com> July 2, 2021 2:35 PM Jill Barry

Subject:

Sent: From:

Width Height Depth **Net Weight** Dimensions Minimum Height Depth With Door Open 90 Degree49 **Depth Closed Excluding Handles** 26 Maximum Height **Gross Weight** Carton Height Carton Depth Carton Width 33 1/2 34 1/2 83.0 24 94 3 26 34 23 1/16 7/16 7/8 1/2 1/2 1/4


Exterior Width, Both Compartments Convection, Both... Jenn-Air Rise JJW3830IL Double Wall Oven, 30 inch

Expand

Availability: Aug (

\*2-10 business days

FREE extended Up to 3 years warranty!

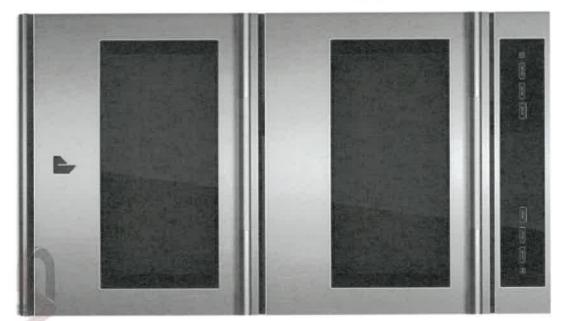

PAGE 50/37

Masaga

JENNAIR DETAILED PLANNING DIMENSIONS

1 of 2

DOUBLE WALL OVENS JW28271-27"x 52-3/8"x 25-5/16" JW28301, JW38301-30"x 52-3/8"x 25-5/16"

PRODUCT DIMENSIONS - DOUBLE OVENS

#### В Ó D

### 27"(68.6 CM) MODELS

A. 52-3/8" (133 cm) overall height

B. 27" (68.6 cm) overall width

C. JW2827IM - 26-3/8" (67 cm) JW2827IL - 27-3/16" (69 cm)

D. 23-1/4" (59.1 cm) max. recessed depth

E 49-1/4" (125.1cm) recessed height

F. 66" (167.6 cm) flexible conduit length measured from the conduit clamp

located at the rear of the oven.

Do not remove the conduit clamp.

25-7/16" (64.6 cm) recessed width

### 30"(76.2 CM) MODELS

A. 52-3/8" (133 cm) overall height

B. 30" (76.2 cm) overall width

C. JJW2830IM - 26-3/8" (67 cm) JJW3830IL - 27-3/16" (69 cm) JJW2830IL – 27-3/16" (69 cm) JJW3830IM – 26-3/8" (67 cm)

D. 23-1/4" (59.1 cm) max. recessed depth

F. 66" (167.6 cm) flexible conduit length not remove the conduit clamp. measured from the conduit clamp located at the rear of the oven. Do

G. 28-7/16" (72.2 cm) recessed width

E. 49-1/4" (125.1cm)

# **DOUBLE OVENS INSTALLED IN CABINET**

### 27"(68.6 CM) MODELS

A. 27" (68.6 cm) min. cabinet width

B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door

- 03

C. 14-3/4" (37.5 cm) bottom of cutout to floor is acceptable. to floor is recommended. 4"-1914" (10.2-48.9 cm) bottom of cutout

O

D. 25-1/2" (64.8 cm) cutout width

E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door

50-1/4" (127.6 cm)<sup>-</sup> recommended cutout height

Q

Ģ 24" (60.7 cm) cutout depth

\*NOTE: The cutout height can be between 49-1/2 (125.7 cm) and 52-3/16" (132.6 cm) for 27" double ovens.

- O

### 30"(76.2 CM) MODELS

A. 30" (76.2 cm) min. cabinet width

B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door

C. 14-3/4" (37.5 cm) bottom of of cutout to floor is acceptable. cutout to floor is recommended. 4"-14-3/4" (10.2-37.5 cm) bottom

D. 28-1/2" (72.4 cm) cutout width

E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door

50-1/4" (127.6 cm)" recommended cutout height

G. 24" (60.7 cm) cutout depth

\*NOTE: The cutout height can be between 49-1/2" (125.7 cm) and 52-3/16" (132.6 cm) for 30" double

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Pefer to the Installation or Use & Care Guide BEFDE selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All LennAir® appliances are appropriately UL, CUL or CSA approved.

®/™ © 2018 JennAir. All rights reserved. JEN 25280-006

JENNAIR

Musuchs

7

# JENNAIR® DETAILED PLANNING DIMENSIONS

DOUBLE WALL OVENS JJW2827I-27"x 52-3/8"x 25-5/16" JJW2830I, JJW3830I-30"x 52-3/8"x 25-5/16"

# ELECTRICAL REQUIREMENTS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

## ELECTRICAL CONNECTION

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

 Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located under the control panel on the upper oven cavity on double ovens.
 See the following illustration.

Models rated from 7.3 to 9.6 kW at 240 V (5.4 to 7.4 kW at 208 V) require a separate 40 A circuit. Models rated at 4.8 kW and below at 240 V (3.6 kW and below at 208 V) require a separate 20 A circuit.

- A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored, or nonmetallic sheathed, copper cable (with grounding wire).
- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
  Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.
  Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

Page 70f37

For power requirements for models JJW2827I, JJW2830I and JJW3830I, refer to the following table.

JJW3830I	JJW2830I	JJW28271	Model	
9.2	8.7	8.7	WW	240 VAC
6.9	6.5	6.5	kW	208 VAC



Double Oven

A. Model/Serial/Rating Plate

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide BEFORE selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JannAir\* appliances are appropriately UL, CUL or CSA approved.

®/™ © 2018 JennAir. All rights reserved. JEN 25280-006

JENNAIZ.

Masas

# Jenn-Air JD3030IL

Lat 121

Jenn-Air Rise JJD30301L Warmer Drawer, 30 inch Exterior Width, 1.5 cu. ft. Capacity, Stainless Steel coldur

Availability: 2 - 4 Business Days

FREE extended

warranty!

Up to 3 years

#### **Clearance Dimensions** 120 V grounded outlet (or located in adjacent cabinet) Toe kick Warming drawer cutouts Front view П O £ 125 :**J**E

30" (76.2 cm) 2½" (6.4 cm)	27" (68.6 cm) 242" (6.4	WARMING MININ DRAWER SIZE BETW CUTO
	4 cms S	MINIMUM (BETWEEN H
91/8" (23.2 cm)	73.2 cm	CUTOUT HEIGHT (B)
1" (2.5 cm)/ 4¼" (10.8 cm)	1" (2:5 cm)/ 1/4" (10.8 cm)	MINIMUM/ RECOMMENDED (C)
28½" (72.4 cm)	25%." (64.8 cm)	CUTOUT WIDTH (D)
30" (76.2 cm)	27 (68.6 cm)	MINIMUM CABINET WIDTH (E)


Warming drawer can be installed as an indoor single or double installation or installed under a single oven. Two warming drawers under a single oven are shown.

**NOTE:** The warming drawer cannot be leveled after being installed.

For outdoor installation, follow the cutout dimensions above. Install the outdoor warming drawer in a permanent fixture.

Custom Wood Drawer Front

If you plan to install a custom wood panel to match your cabinets, we recommend consulting a qualified cabinetmaker or carpenter. The back of the wood panel must be sealed to avoid moisture damage.

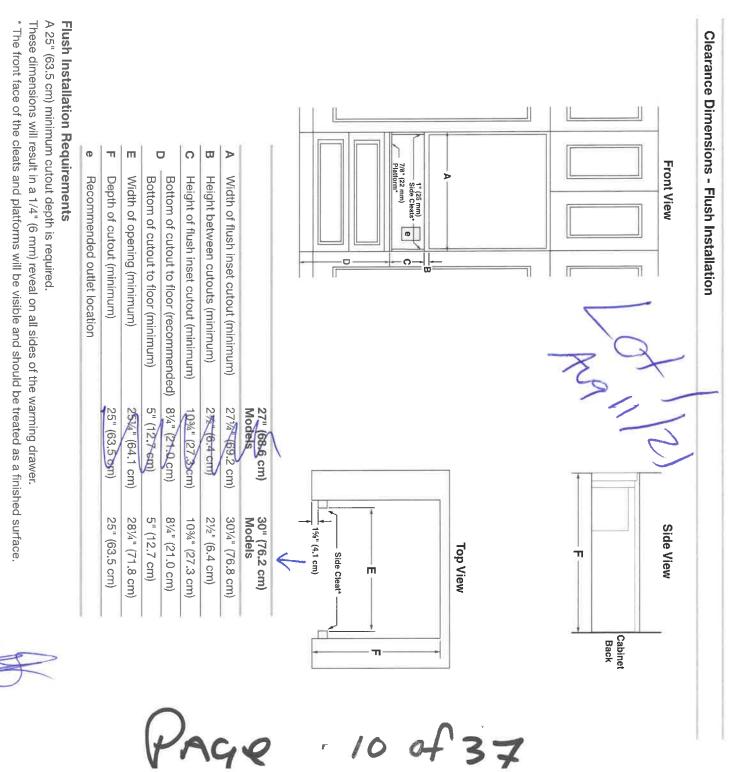

O

### Electrical Requiremen

### WARNING



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord

fire, or electrical shock. Failure to follow these instructions can result in death,

**IMPORTANT:** The warming drawer must be electrically grounded in accordance with local codes and ordinances, or in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate.


A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02769-7471


CSA Infernational 8501 East Pleasant Valley Ro Cleveland, OH 44131-5575

A 120 V, 60 Hz, AC only 15 A fused, electrical circuit is required. A time-delay fuse or circuit breaker is als recommended. It is recommended that a separate ci serving only this warming drawer be provided. er is also arate circuit

below. The model/serial/rating plate is located above the left-hand side receiving slide. The warming drawer must be removed to view the model/serial/rating plate. See the illustration



Model/serial/rating plate



## **INSTALL** ATION INSTRUCTIONS

nstall Warming Drawer

## 9

**Excessive Weight Hazard** 

warming drawer. Use two or more people to move and install

Failure to do so can result in back or other injury.

- Turn off power supply. Using 2 or more people, move warming drawer close to its final location. Remove and discard shipping materials, tape, and film from the warming drawer. Remove and set aside racks and other parts from inside warming drawer.
- Ю Check that the warming drawer Temperature control knob is set to the OFF position.
- ω Support the warming drawer on a sturdy surface level with the cutout opening.





**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong

Do not use an adapter.

Do not use an extension cord.

fire, or electrical shock. Failure to follow these instructions can result in death,

- 4. Plug the power supply cord into the grounded 3 prong outlet.
- ំប opening. Slide the warming drawer over halfway into the cutout
- 6. Open warming drawer and slowly push against the front panel to slide the drawer completely into the cabinet until the flanges on the front panel meet the cabinet face.

# Jenn-Air JMDFS30HL

Capacity, 950W Watts, Stainless Steel Interior, 30 inch... Jenn-Air Rise JMDFS30HL Microwave Drawer, 1.2 cu. ft.

Expand

Aug 11/2

FREE extended Up to 3 years warranty!

StainioxS

Page 120137


Сī

### 刀 ® DIME Z S

MICROWAVE PRODUCT DRAWERS

	S
5	<u> </u>
)	+
4	_
	3
<b>\</b>	2

	Overall Height (E)	Control Panel to Drawer Space (D)	Drawer Height (C)	Control Panel Height (B)	Overall Width (A)	
	16" (40.6 cm)	$\sqrt{1/4}$ " (0.6 cm)	12- <b>1/</b> 4" (32.4 cm)	3" (7.6 cm)	23-7/8" (60/6 cm)	24" STAINLESS STEEL JMDFS24GS
A	16" (40.6 cm)	/ 1/4" (0.6 cm)	17-11/16" (32.3 cm)	3/ (7.6 cm)	23-7/8" (60.6 cm)	<b>24" NOIR<sup>тм</sup></b> JMDFS24HM
	16" (40.6 cm)	1/4" (0.6 cm)	12-3/4" (32.4 cm)	3" (7.6 cm)	29-15/16" (76 cm)	<b>30" RISE™</b> JMDFS30HL
$\Omega$	16" (40.6 cm)	1/4" (þ.6 cm)	12-11/16" (\$2.3 cm)	3" (7.6 cm)	29-15/16" (76 cy)	30" NOIRTM JMDFS30HM
Page 130	f	37	2			




FRONT VIEW

Med and the second of the seco

# JENNAIR® DIMENSIONS

MICROWAVE PRODUCT DRAWERS

	24" STAINLESS STEEL	<b>24" NOIR</b> TM JMDFS24HM	30" RISE™ JMDFS30HL	30" <b>NOIRTM</b> JMDFS30HM
Recessed Width (F)	21-5/8" (54.9 cpn)	21-5/8" (54.9 cm)	21-5/8" (54.9 cm)	21-5/8" (54.9 cm)
Conduit Channel Width (G)	4-11/16" (M.9 cm)	4-11/16" (1) scm)	4-11/16" (11.9 cm)	4-11/16" (11.9 cm)
Depth without Drawer (H)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (\$5.6 cm)
Depth with Drawer (I)	23-1/2" (59.7 cm)	23-11/16" (60.1 cm)	23-9/16" (58.9 cm)	23-11/16" (60.1 cm)

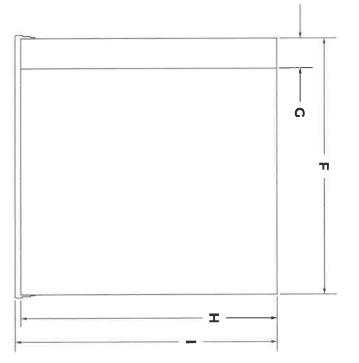


TOP VIEW

### JENNAIR® DIMENS SNOI

## MICROWAVE PRODUCT DRAWERS

	24" STAINLESS STEEL JMDFS24GS	24" NOIR™ JMDFS24HM	30" RISE™ JMDFS30HL	30" NOIR™ JMDFS30HM
Recessed Height (3)	14-5/8" (37.1 cm)	14-5/8" (37.1 cm)	14-5/8" (37.1 cm)	14-5/8" (37.1 cm)
Drawer Open Depth (K) (Flush Receptacle)	38-5/16" (97.3 cm)	38-1/2" (97.8 cm)	38-3/8" (97.4 cm)	38-1/2" (97.8 cm)
Drawer Open Depth (K) (Non-flush Receptacle)	42-13/16" (108.7/cm)	43" (109.2 cm)	42-13/16" (108.8 cm)	43" (109.2 cm)
Depth with Drawer (L) (Flush Receptacle)	23-5/19 (59.2 cm)	23-1/2" (59.7 cm)	23-3/8" (59.3 cm)	23-1/2" (59.7 cm)
Depth with Drawer (L) (Non-flush Receptacle)	27/13/16" (70.6 cm)	28" (71.1 cm)	27-13/16" (70.7 cm)	28" (71.1 5m)
Depth without Drawer (M) (Flush Receptacle)	21-7/8" (55.6 cm)	/21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
Depth without Drawer (M) (Non-flush Receptacle)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)
Conduit Channel Length (N)	4" (10.2 cm)	4" (10.2 cm)	4" (10.2 cm)	4" (10.2 cm)
Conduit Channel Height (O)	1-3/4" (4.4 cm)	1-3/4" (4.4 cm)	1-3/4" (4.4 cm)	1-3/4" (4.4 cm)

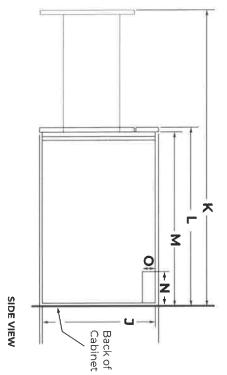


# JENNAIR® DIMENSIONS

# MICROWAVE

AND CLEARANCE


Cabinet Bottom to Cabinet Door Top (F)	Cutout Top to Oven or Countertop Bottom (E)	Platform to Top of Cutout Height (D)	Cutout Height (C)	Width Between Side Cleats (B)	Cutout Width (A)	
2" (5.1 cm)	2" (5.1 cm)	16-1/8" (41 cm) min.	17" (43.2 cm)	28-7/16" (72.2 cm)	30-1/4"-30-9/16" (76:8-77:6 cm) min.	30" RISETM JMDFS30HL
2" (5.1 cm)	2" (5.1 cm)	16-1/8 (41 cm) min.	17" ( <del>/</del> 3.2 cm)	28-7/16" (72.2 cm)	30-1/4"-30-9/18" (76.8-77.6 cm/ min.	30" NOIR™ JMDFS30HM

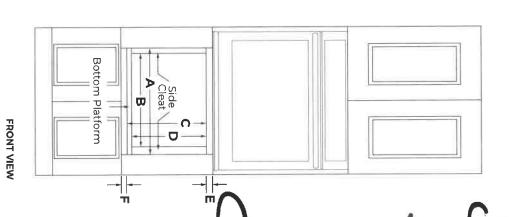

# JENNAIR® DIMENSIONS

## MICROWAVE AND CLEARANCE

Cutout Depth (J) (Non-flush Receptacle)	Cutout Depth (J) (Flush Receptacle)	Cabinet Face to Front of Platform Depth (I)	Microwave Back to Cabinet Back Depth (H)	Side Cleat Depth (G)	
28-1/16" (71.2 cm)	23-9/16" (59.8 cm) min.	1-15/16" (4.9 cm)	3-1/2" (8.9 cm)	1/8" (0.39 cm)	30" RISETM JMDFS30HL
/ 28-3/16" (71.6 cm)	23-11/16" (60.2 cm) min.	2-1/16"/(5.3 cm)	3-1/2"/ (8.9 cm)	1/8" (0.39 cm)	30" NOIR™ JMDFS30HM

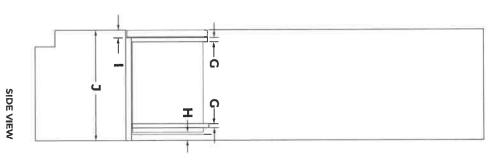

20 B

#### JE N N A I R ® DIME S ONS

. .

MICROWAVE DRAWERS


ELECTRICAL REQUIREMENTS


CHECKLIST

120 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required.

A time-delay fuse or dedicated circuit is recommended.

Do not use an extension cord.

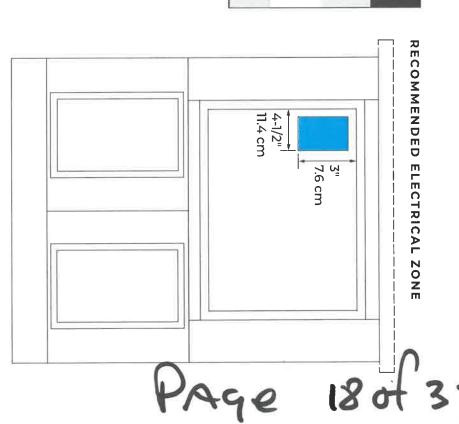

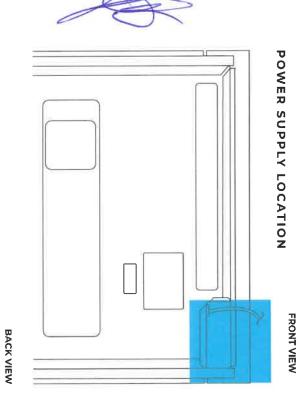

IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.

# Jenn-Air JGCP436HL

Cooktop, 6 Burners, 20K BTU, Stainless Steel colour Jenn-Air Rise JGCP436HL Rangetop, 36 inch Exterior Width, Gas

Same/Next Day Delivery Available

Availability: In Stock

FREE extended

warranty!


Up to 3 years

#### D | M Z ONS

### JENNAIR® PRODUCT RANGETOPS



	30" RANGETOP JGCP430H	<b>36" RANGETOP</b> JCCP436H	48" RANGETOP JGCP548H
Overall Width (A)	29-3/4" (75.6 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)
Grate Depth (8)	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
Depth wit hout Control Panel (C)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)
Depth with Control Panel Overhang (D)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)
Depth with Knobs: RISE" (E)	29-1/8" (74 cm)	29-1/8" (74 cm)	29-1/8" (74 cm)
Depth with Knobs: NOIR" (E)	29" (73.7 cm)	29" (73.7 cm)	29" (73.7 cm)

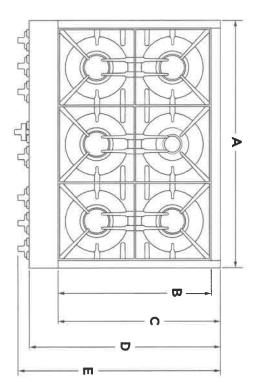

TOP VIEW







# DIMENSIONS

# JENNAIR® RANGETOPS

	30" RANGETOP JGCP430H	<b>36" RANGETOP</b> JCCP436H	<b>48" RANGETOP</b> JCCP548H
Grate Width (F)*	27-7/16" (69.7 cm)	33" (83.8 cm)	44-3/8"* (112.7 cm)
Gas Inlet to Surface (G)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)
Center to Gas Inlet (H)	11" (27.9 cm)	14-1/8" (35.9 cm)	19-5/8" (49.8 cm)
Recessed Rangetop Width (I)	29-1/8" (74 cm)	35" (88.9 cm)	47-1/4" (120 cm)

<sup>\*</sup>Includes width of grates and griddle.





N

### D IMENSIONS


# JENNAIR® RANGETO PRODUCT

PS		* IN
30" RANGETOP JGCP430H	36" RANCETOP JGCP436H	48" RANGETOP JGCP548H
9" (22.9 cm)	9" (22.9 cm)	9" (22.9 cm)
7-13/16" (19.8 cm)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)
7" (17.8 cm)	7" (17.8 cm)	7" (17.8 cm)
7-7/16" (18.9 cm)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)
21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
25-1/2" (64.8 cm)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)

Recessed Rangetop Height (L)

Control Panel Height (K)

Height with G rates (J)

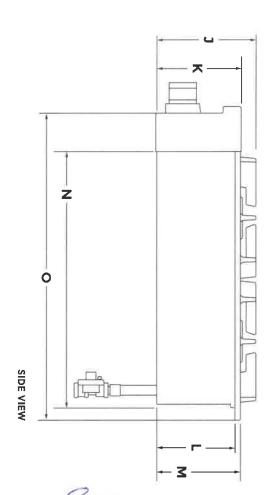



#### D **≤** Z 0 Z


JENNAIR® RANGETOPS

OPENING AND CLEARANCE

G 2911/21

			-
	<b>30" RANGETOP</b> JGCP430H	<b>36" RANGETOP</b> JCCP436H	48" RANGETOP JCCP548H
Combustible A rea Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Ma terial (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.

<sup>\*</sup>Dimension reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by at least 1/4" (0.6 cm) flame retardant millboard, which is in turn covered with at least No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024"(0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

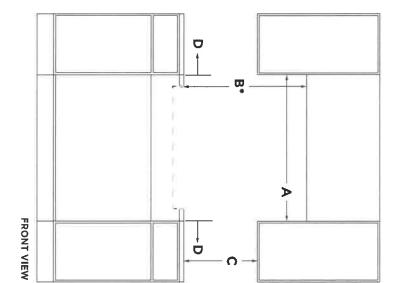

# DIMENSIONS


# JENNAIR® RANGETOPS

OPENING AND CLEARANCE

12 pg 121

Recommended Upper Cabinet Depth (E) Cutout to Wall Depth (F)*	30" RANGETOP JCCP430H 13" (33 cm) 1-1/2" (3.8 cm) min.	36" RANGETOP JCCP436H 13" (33 cm) 1-1/2" (3.8 cm) min.	48" RANGETOP 3CCP548H 13" (33 cm) 1-1/2" (3.8 cm) min
Cutout to Wall Depth (F)"	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.
Cabinet to Countertop Height (G)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)
Cabinet Depth (H)	24" (61 cm)	24" (61 cm)	24" (61 cm)

<sup>\*</sup>If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop

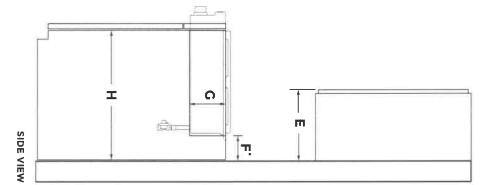

Page 24 of 37


U

#### 0

#### D I M II N S 0 Z

# JENNAIR® RANGETOPS OPENING AND CLEARANCE

			•
	30" RANGETOP JGCP430H	<b>36" RANGETOP</b> JGCP436H	48" RANGETOP JGCP548H
untertop and Cabinet tout Width (I)	29-1/4" (74.3 cm)	35-1/4" (89.5 cm)	47-3/8" (120.3 cm)
untertop and Cutout Depth (3)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)
tch Width (K)	5/16" (0.8 cm)	5/16" (0.8 cm)	5/16" (0.8 cm)
tout Width (L)	29-7/8" (75.9 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)

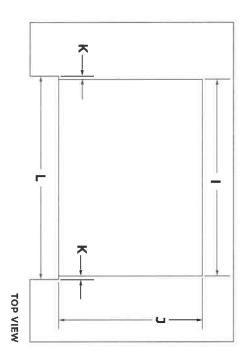

Page as of 37

# DIMENSIONS

JENNAIR® RANGETOPS


ELECTRICAL REQUIREMENTS

CHECKLIST

A 120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL OUTLET ZONE

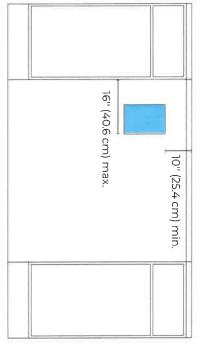

TRONI VIEW

Page 26 of 37

•

#### U **≤** Z S 0 Z

#### JENNAIR® RANGET OPS

15/12/

CAS REQUIREMENTS

#### RECOMMENDE D GAS SUPPLY LOCATION

2" (5.1 cm) 12-1/2" (31.7 cm) (1.9 cm) 6-7/8" (17.5 cm) 1-1/2" (3.8 cm) min.\*

TOP VIEW

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-J/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

GAS SUPPLY ZONE

Gas Supply Zone 14" (35.6 cm)

FRONT VIEW

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.

•

# enn-Air JS48PPDUDE

2 - Total

inch Width, ENERGY STAR Certified, Counter Depth,... Jenn-Air Pro Style JS48PPDUDE Built In Refrigerator, 48

Expand










### Stainless

# JENN-AIR® DETAILED PLANNING DIMENSIONS


48" SIDE-BY-SIDE REFRIGERATORS WITH ICE & WATER DISPENSER

JS48PPDUDE – 48%" x 83%" x 27¾" (with handles)
JS48SSDUDE – 48%" x 83¾" x 27½" (with handles)

### PRODUCT DIMENSIONS

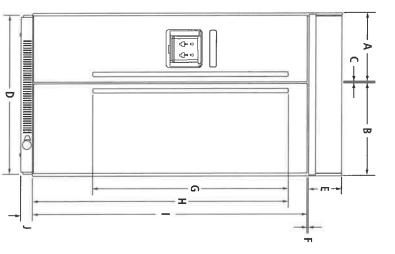

#### FRONT VIEW



68.8	271/8	Euro Style Stainless
70.5	273/4	Depth with handles Pro-Style* Stainless
63.8	251/8	Depth with doors
56.2	221/8	Depth without doors
26.1	101/4	Euro Style Stainless
27.6	101/8	Width from side of refrigerator to refrigerator handle – door fully open 110° Pro-Style® Stainless
5.1	2	Euro Style Stainless
6.7	25%	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless
20.3	00	Euro Style Stainless
21.3	83/8	Width from side of refrigerator to freezer handle – door fully open 110° Pro-Style* Stainless
119.4	47	Width of recessed refrigerator
7.6	ω	Height of bottom grille
180.2	71	Height of doors
167.0	65¾	Euro Style Stainless
163.5	6311/6	Height to top of handles Pro-Style® Stainless
127.1	50	Euro Style Stainless
115.7	45%	Height of handles Pro-Style® Stainless
1.0	3/8	Space between doors and top grille
21.7	85%	Height of top grille
122.9	48%	Overall width (Including side trim)
1.0	3/8	Space between doors
68.6	27	Width of refrigerator door (including hinge side offset)
50.8	20	Width of freezer door (including hinge side offset)
cm	⋽.	de principal de la companya del companya del companya de la compan
DUDE	JS48PPDUDE JS48SSDUDE	MODEL #
>	2	9
		& WATER DISPENSER
I OT 3		

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air\* appliances are appropriately UL, CUL or CSA approved.

SJENN-AIR

8116AdZw915


# JENN-AIR® DETAILED PLANNING DIMENSIONS

48" SIDE-BY-SIDE REFRIGERATORS WITH ICE & WATER DISPENSER JS48PPDUDE - 48%" x 83%" x 27%" (with handles) JS48SSDUDE - 48%" x 83%" x 27%" (with handles)

## DIMENSIONS AS INSTALLED

MODEL #

JS48PPDUDE JS48SSDUDE

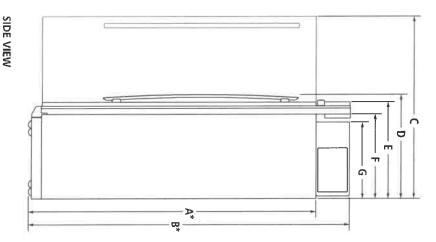

		⊒.	Cm
<b>&gt;</b>	A* Height without compressor (min.)	743/8	188.9
<b>₩</b>	<b>B*</b> Height of recessed refrigerator (min.)	83%	211.8
0	Depth with refrigerator door open 90° (min.)	511%	129.7
D	Depth with handles (min.) Pro-Style <sup>®</sup> Stainless	273/4	70.5
	Euro Style Stainless	271/8	68.8
ш	Depth with doors (min.)	251/8	63.8
TI	Depth without doors (min.)	221/%	56.2
ရ	Depth of compressor (min.)	195%	49.8
*Add	*Add 11/4" (3.2 cm) to the height dimension when leveling legs are fully extended.	are fully e	xtended.

\*Add ရ

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air\* appliances are appropriately UL, CUL or CSA approved.

SJENN-AIR 8116AdZw915


JENN-AIR® DETAILED PLANNING DIMENSIONS

3 of 3

# 48" SIDE-BY-SIDE REFRIGERATORS WITH ICE & WATER DISPENSER

JS48PPDUDE – 48%" x 83%" x 27%" (with handles) JS48SSDUDE – 48%" x 83%" x 27%" (with handles)

# OPENING/CLEARANCE DIMENSIONS

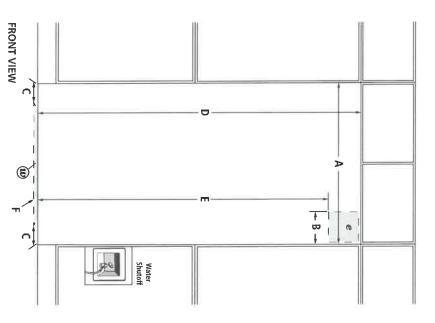

d	
	i
	11010000
<b>F</b>	

æ	e	71	m	٥	0		Þ		MODEL #
Recommended water connection location	Recommended electrical connection location	Depth of recommended water connection location (max.)	Height to recommended electrical location	Height (min.)	Distance from side of cabinet to recommended water connection location	Width of recommended electrical location	Width (min.)		EL#
٠	tion	_	77	84	a	131/2	471/2	≥.	JS48P JS48S
		2.5	195.6	213.4	15.2	34.3	120.7	cm	JS48SSDUDE

## ELECTRICAL REQUIREMENTS

Aqe 31 a/ 37

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch.

Minimum length of power cord is 84" (213.4 cm). Do not use an extension

# WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

### Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

### LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]) and contents of the refrigerator and must be at the same level as flooring in the room.

#### **BACK VIEW**

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air<sup>3</sup> appliances are appropriately UL, CUL or CSA approved.



8116AdZw915



#### 「万尺 D 0 OUNTER 85 VERAGE

DETAILED PLANNING DIMENSIONS GUIDE

JUBFR242HL, JUBFR242HL, JUBFR242HM, JUBFR242HM, JUBFR242HX, JUBFR242HX

237%" (W) x 343%" (H) x 23½6" (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

LH: JUBFL242HX RH: JUBFR242HX	Base Unit (Panel Ready)
LH: JUBFL242HL RH: JUBFR242HL	RISE <sup>TM</sup> Model
LH: JUBFL242HM RH: JUBFR242HM	NOIRTM Model

\* Hinges ch

# RISE™ STAINLESS HANDLE KIT OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

- W11231237
- For use with Custom Overlay panels
- Quantity One handle per kit

# NOIR™ STAINLESS HANDLE KIT

- W11231236
- For use with Custom Overlay panels
- Quantity One handle per kit

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice

W11356581B

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

### П

#### DER J 0 OUNTER BIL VERA GII

DETAILED PLANNING DIMENSIONS GUIDE
JUBFR242HL, JUBFL242HL, JUBFR242HM, JUBFL242HM, JUBFR242HX, JUBFR242HX
237%" (W) x 343%" (H) x 23½6" (Depth without door panels/handles)

<i></i>	22 (60.7 343/6" (87.32 cm)**)	PRODUCT DIMENSIONS
	23%" (60.72 cm)	ENSIONS
305%" (77.5 cm)**	Depth (no handle)	
3%e"(9 cm)*	\$ P	_

Page 33 4/37

VARIANT	DEPTH (NO HANDLE)
RISE™ Model	23 <sup>13</sup> / <sub>16</sub> " (60.4 cm)
NOIR™ Model	23 <sup>15</sup> / <sub>16</sub> " (60.8 cm)
Panel ready models	23 <sup>11</sup> / <sub>16</sub> " (60.2 cm)

\*Add 5/8" (1.6 cm) to the height dimension when leveling legs are fully extended.
\*\*For custom panel models, this will vary.
†Add 1/4" (6.4 mm) to the height dimension for height with hinge covers.


## JEZZ>IZ

### TIR OUNTER BIL ERA GI

# 

I	C	П	m	D	C	œ	Α	DIMENSION	
Depth with door open 90°	Depth with handle	Depth with door	Depth without door	Width from side of beverage center to handle – door open 90°	Height to top of handle	Width of the grille	Width of door	DESCRIPTION	
48" {12	26½6" (67.5 cm)	23 <sup>13</sup> / <sub>16</sub> " (60.4 cm)		27/16" (6.2 cm)	28½6" (71.3 cm)	23 <sup>13</sup> / <sub>16</sub> " (60.5 cm)		RISETM Model	
48" (121.9 cm)	261/8" (66.3 cm)	23 <sup>15</sup> / <sub>16</sub> " (60.8 cm)	21 <sup>11</sup> / <sub>16</sub> " (55.1 cm)	1 <sup>15</sup> / <sub>16</sub> " (5 cm)	28½6" (71.3 cm)	23 <sup>13</sup> / <sub>16</sub> " (60.5 cm)	23¾" (60.3 cm)	NOIR™ Model	10+1-8
4715/16" (121.8 cm)	**	23 <sup>1</sup> 1⁄16" (60.2 cm)		**	**	23 <sup>13</sup> / <sub>16</sub> " (60.5 cm)		Panel ready models (with 3/4" panel)	July 11/21

<sup>\*</sup>For custom pane! models, this will vary.

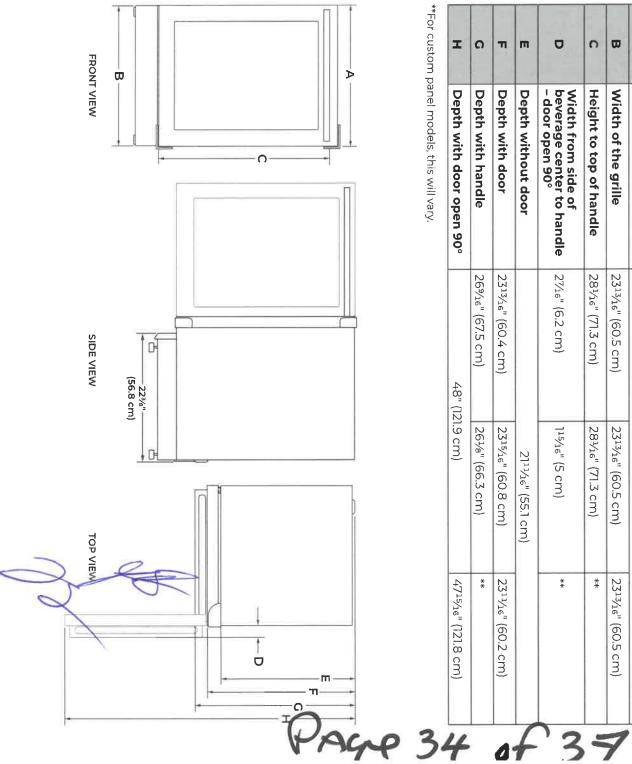

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


### OUNT U



DETAILED PLANNING DIMENSIONS GUIDE
JUBFR242HL, JUBFR242HM, JUBFR242HM, JUBFR242HX, JUBFR242HX
237%" (W) x 343%" (H) x 23½6" (Depth without door panels/handles)


**OPENING DIMENSIONS** 

# **ELECTRICAL SUPPLY LOCATION**

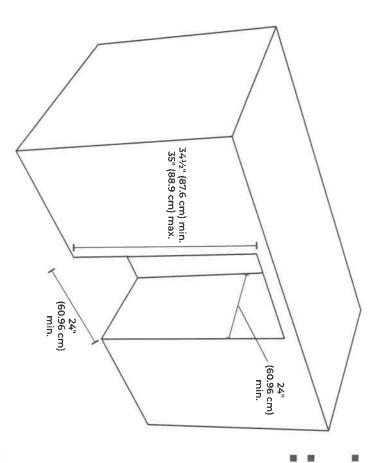

**NOTE:** Make sure there is 3" (7.6 cm) space between beverage center and adjacent appliance/wall for door swing.

- Power cord length is 5 ft (152.4 cm) Lighter yellow area indicates recommended recessed power outlet (located behind the beverage center).
- For flush installation, the power outlet can be installed in adjacent cabinetry with a cutout on the power cord side for routing of the power cord.



Dimension - F	Dimension - E
13/4" (4.44 cm)	213/4" (55.16 cm)

Dimension - D

121/16" (30.64 cm) 91/4" (23.47 cm)

Dimension -

0

Dimension - B Dimension -

D

3" (7.55 cm) 4½" (11.37 cm)

DETAILED PLANNING DIMENSIONS GUIDE ביטשקר באינה באליק באינה באליקה באלי NDER 0 OUNTER W Ш

**ELECTRICAL REQUIREMENTS** 

## LOCATION REQUIREMENTS

## **AWARNING**



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, or electrical shock.

A 115 V, 60 Hz, AC only, 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your beverage center be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

# WARNING



**Explosion Hazard** 

Keep flammable materials and vapors, such as gasoline, away from beverage center.

Failure to do so can result in death, explosion, or fire.

For the beverage center to be flush with the front of the base cabinets, remove any baseboards or moldings from the rear of the opening.

Flooring under product must be at the same level as the room. If the floor of the opening is not level with the kitchen floor, shim the opening to make it level with the kitchen floor.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



## U 刀 OUNTER Ш

DETAILED PLANNING DIMENSIONS GUIDE
JUBFR242HL, JUBFR242HL, JUBFR242HM, JUBFR242HM, JUBFR242HX, JUBFR242HX
237%" (W) x 343%" (H) x 23146" (Depth without door panels/handles)

#### WOOD PANEL GUIDE

#### **ACAUTION**

the risk of potential pinching. Pinch Hazard
Installation of door panels with less than a %" (0.95 cm) gap between the door panel and the adjacent cabinet increases

#### IMPORTANT:

The graphics in following sections show a custom panel for a door with the hinges installed on the right-hand side. If your beverage center has the hinges installed on the left-hand side, rotate the custom frame 180° so the hinge markings will be on the left.


Age 37H

- Panel dimensions shown are the minimum size to cover the appliance door. Panels can be made taller/wider to match surrounding cabinetry.
- The recommended thickness of the overlay panel is 3/4" (19 mm).
- Custom solid door overlay panel must not weigh more than 20 lbs (9.07 kg).
- Overlay panels weighing more than recommended may cause damage to your appliance. Custom glass door overlay panel must not weigh more than 10 lbs (4.54 kg).
- SOLID DOOR OVERLAY PANEL

### 415/16" (125 mm) + (53 233½" (60.3 cm)

Solid door overlay panel and hinge routing dimensions

# **GLASS DOOR OVERLAY PANEL**

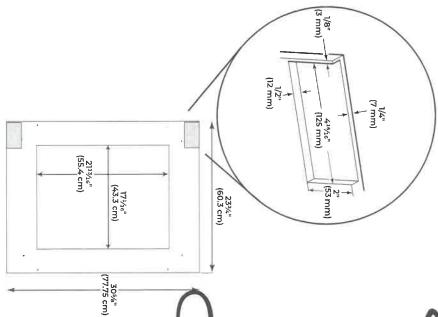

Glass door overlay panel and hinge routing dimensions

W11356581B