### Simone Walker

Steve Miller <smiller@appliancecanada.com> September 25, 2021 8:39 AM Simone Walker

Sent: From:

<u>.</u>

Fraz Tabassam

Subject: Attachments: Lot 107A Caledon Club (Tabassam) Lot 107 Caledon Club.pdf

Good morning Simone,

Specs for Lot 107 A Caledon Club are attached.

The purchaser is requesting a 72" high rough opening for the fridge (if possible) Fraz is cc'd on the e-mail.

Thanks,

Steve Miller

Appliance Canada 8701 Jane Street 905 660 2424 Ex. 2344 Concord, On. L4K2M6

Appliance Canada

1074 Specs

# LG REFRIGERATION

Life's Good

InstaView™ Door-in-Door® LFXC22596\_
3-Door Counter Depth Refrigerator with

InstaView™ Door-in-Door®

Dual Ice Maker


Counter Depth PrintProof<sup>™</sup> Finish Smart Cooling<sup>™</sup> System

Door Cooling + LG SmartThinQ®


SmartDiagnosis™ LoDecibel™ Quiet Operation ENERGY STAR® Qualified







1 Piece (Clear)	Door Bin Construction
7 Total (Including Door-in-Door®)	No. of Bins
Yes	Dogr-In-Door® with ColdSaver** Panel
Yes	InstaView™ Dop~in-Door®
	REFRIGERATOR DOOR
Ceiling LED (Frameless)	Refrigerator Light
Yes	Glide N' Serve <sup>14</sup> Drawer
2 Humidity Crispers	Crisper Bins
Spill Protector's Tempered Glass	Shelf Construction
Hybrid Cantilevered	Cantilevered Shelves
4 Split	No. of Shelves
	REFRIGERATOR
Yes	LoDecibel Quiet Operation
Yes	Sabbath Mode
Yes	Auto Clasing Door Hinge
Yes	Child Lock
Yes	Door Alarm
Flectronic/Digital	Temperature Controls
Membrane / White LED	Display Type
	CONVENIENCE
Yes	Evaporator
Yes	Fresh Air Filter
6	Temperature Sensors
Yes	Multi-Air Flow's System
Yes	Smart Cooling™ System
Yes	l mear Compressor
	COOLING
LT1000P	Water Filter
Yes	Dispenser Light
Yes	Dua, Ice
Slim SpacePlus®	Ice System
7.5 + 4.0 lbs	ice Storage Capacity (lbs)
6.5 lbs	(cePlus <sup>m</sup> Production (lbs)
6.0 .bs	Daily Ice Production (Ibs)
Integrated Tall Ice & Water Dispenser	Dispenser Type
Yes	Ice & Water Dispenser
	WATER & ICE SYSTEM
Yes	ENERGY STAR® Qualified
664	Energy Consumption (kWh/Year)
21.9	ENERGY (Carry)
7.30	Total Capacity (cu.fr.)
14,50	Constant (and fee)
	CATACLE 4
	つるひょうけく

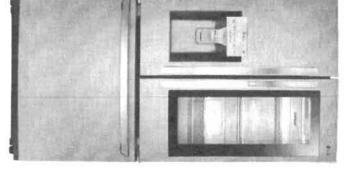


Sealed System (Parts & Labor) Compressor (Parts & Labor) Linear Compressor (Parts Only) UPC CODES LFXC2596S LFXC2596M LFXC2596FM	Height to Top of Case Height to Top of Door Hinge Width Width (Door Open 90° with Handle) Width (Door Open 90° with Handle) Width (Door Coen 90° without Handle) Door Edge Clearance with Handle Door Edge Clearance without Handle Installation Clearance Weight (Unit/Carton) Carton Dimensions (WxHxD) LIMITED WARRANTY Parts & Lahor	Surface Fingerprint & Smudge Resistant Exterior Handles All Available Colors DIMENSIONS/CLEARANCES/WEIGHTS Depth with Handles Depth without Door Depth (Total with Door Open)	Freezer Handle SmartthinO SMART FEATURES wi-ff Enabled Works with SmartDiagnosis <sup>Tu</sup> MATERIALS AND FINISHES Contaur Door Hidden Hunges	FREEZER  Door Type  Drawers  DuraBase'* Solid Drawer Base  Drawer Dividor  Freezer Light
5 Years 5 Years 6-10 Years 6-10 Years 048231797214 048231797221 048231802581	68 3/8" 35 3/4" 44 1/4" 49 1/4" 49 1/4" 4 112" 11/3" Sicies 1/8", Top 1", Back 2" 289 lbs. / 319 lbs. 38" x / 3" x 36"	Smooth Yes  Matching Commercial  PrintProof** Stain-ess Steel,  PrintProof** Malte Black Stainless Steel  PrintProof** Black Stainless Steel  PrintProof** Black Stainless Steel  31 1/4* 28 3/4* 24 3/4*	SmartPull" Handle Yes Amazon Alexa, Google Assistant Yes Yes	Pull Drawer 2-Tier Organization Yes Yes Yes LED Lighting

# FRIGID

# FGIC3066TB

#### 30" INDUCTION BUILT-IN COOKTOP

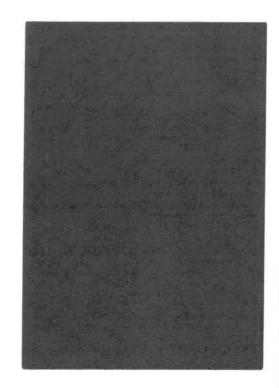

### AVAILABLE COLORS



## SIGNATURE FEATURES



Amazingly Fast
Set amazingly fast heat with induction
that bods water 50% factor than an electric
cooktop.



Even Heat

Whip up delicious meals with induction that delivers incredibly even heat across the surface of the pan so you got golden results every time.



Easy To Clean

Don't stress over spills with induction's easy-to-clean surface that generales heat only to your pan, not your cooktop meaning spills can't ourn onto the surface.



Auto Sizing<sup>11</sup> Pan Detection
Make flufty parkakes with ease using AutoSizing<sup>11</sup> Fan Detection that automatically
senses the size of your pain to only send neat
to whatever small, medium, or large pan you are using.

## PRODUCT DIMENSIONS

Jepth 2:-1/2"	WIST 50-3/4"

# MORE EASY-TO-USE FEATURES

True Temperature Melt & Hold Get cerrectly melted goodness with True Temperature Melt & Hold that delivers low, prouse heat for melting delicate ingrudients or sauces without scorching or burning for mo to one hour.

Temperature Precision
Soar steaks, criso sandwichos, melt chocolate
or simmer sauges with the precise temperature
control of induction

Safe Surface
The Safe Surface — Induction only heats pans and the food in them: the area around the pans stays cool to the touch.

Energy Efficiency
Since induction only heals your cookward and
not your kitcher, less energy is lost throughout
the cooking process.

### Cooktop Timer

Use the built-in timer function to set a specified amount of time you want items to cook.

Cookware Compatibility

Most stainless steel and cast iron cookware is compatible with induction: elements. An easy rule of thumby if a magnet sticks to the bottom of the cookware, it's induction-mendly.

### CERTIFICATIONS

A.D.A.- Compliant
When properly installed, this model
is A.D.A.-qualified based on the
Junted States Access Foard's A.D.A./A.B.A.
Accessibility Cuidelines and the Department
of Justice's 2010 A.D.A. Standards for
Accessible Design



Left Rear Induction 6 1,4	Left Front Induction 7" 1,8	Certier Induction IC" 2.5	Right Front Industron 77 1.8	ELEMENTS SIZE WAT	
1,450,7000		2,500,73,800	1,500/2,600	WATTS	

#### 30" INDUCTION FGIC3066TB BUILT-IN COOKTOP

# FRIGIDAIRE GALLERY

Ŧ	
m	
Þ	
4	
_	
7	
₩.	
Ä	
-1	

0 27 10 0	
Cantrols	Glass-โอนตก
Sunse lype	Plack Ceramic Glass
Pight Front Floment (Vatts)	7" - 1,800/.2600
Contor Element (Watts)	0" - 2,500 / 3,800
Left Front Flement (Vatts)	7"-1800/2800
(Iff: 8- or Element (Valida))	= 145(-200)
SA MAN AND AND THE	Yo
Control Consen	Center Septe
ande colo	
And I was	

#### A.C.A. Game have

SPECIFICATIONS	
Power Supply Connection Location	Right Rear
Voltage Rating	24CV/209V/60H:
Connected Load	72/6.2
(PW Rating) (§ 240, 208 Volts)	į
Amps & 240/208 Valte	3547551
Minmum Crouit Required (Amps)	30
Approved to Electric Single	Ye.
Vidil Civen Confortation Installation	The real property of the second secon

### PRODUCT DIMENSIONS

0.400/30 c	- WEST
E-[149](n	11.0°
2009 2	35.0
CUTOUT DIMENSIONS	
Math (MerNex.)	28-1/2"-24-7/8"
Management of the Assessment	14.5







Note: For planning purposes only, Always consult local and national electric gas and blumbing codes.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidale.com / frigidale.ca
FGIC3066T 02/15
FGIC3066T 02/15
FGIC3066T 02/16

ACLDS.

# FRIGID,


#### FGEW3069UF

Available Colors : Stainless Steel

Version: 01/20

Single Wall Oven

30" Single Electric Wall Oven with Air Fry



# Product Specifications

## Certifications & Approvals

ADA Compliant - All Brands	Yes
Agency Approval(All Brands)	UL/CSA
Sabbath Mode	Yes
Electrical Specifications	•
Amps @ 240 Volts	40A
Connected Load @ 240V	4.5/3.4
Connection Location	Left Rear Bottorn
Voltage Rating	240V / 208V 60Hz
Dimensions: Cut-Out	
Depth	24"
Height	27-1/4" - 28-1/8"
Width	28-1/2" - 29"
Dimensions: Exterior	
Depth	24-3:4*
Depth(w/ 90" Door Open)	45-3/4*
Height	29"
Width	30*
General Specifications	
Frigidaire Fit Promise	Yes
Prop 65 Label	Yes

Bake	2200 Watts
Baking System	True Hidden Bake
Broil	6 pass 4000 Watts
Broiling System	Variable (400°F to 550°F)
Cleaning System	Self Clean w Steam Clean Option
Convection	2500 Watts
Convection System	Single Fan
Interior Lighting	2 Halogen
Oven 1 Inletior Color	Midnight Black
Oven 1 Interior Depth	19-1/2"
Oven 1 Interior Haight	18-5/8*
Oven 1 Interior Width	24-1/8"
Rack Configuration	2 HD Handle Racks & 1 Glide Rack
Rack Positions	6 Positions
Туре	Main
Window	XL Window

Under-CounterApproved Yes	Installation Type	Oven 1 Capacity 5.1	Capacities	Timer Function Yes	Temperature Probe Yes	Self-Clean 2 - 4 Hours	Quink Preheat Yes	Oven Light Yes	Lorkout Yes	Keypad Entry Time & Temp Yes	Keep Warm Yes	Interface Capacit	Delay Clean Yes	Cook Duration Yes	Convection Conversion Yes	Broil	Bake	Cooking Controls	Window XL Window	Type Main	Rack Positions 6 Positions
						ours						Capacitive Touch		Andrew State of the Control of the C		de			indow		Hions

# INDUCTION COOKTOP INSTALLATION INSTRUCTIONS

For typical under counter installation of an electric built-in oven see Figure below

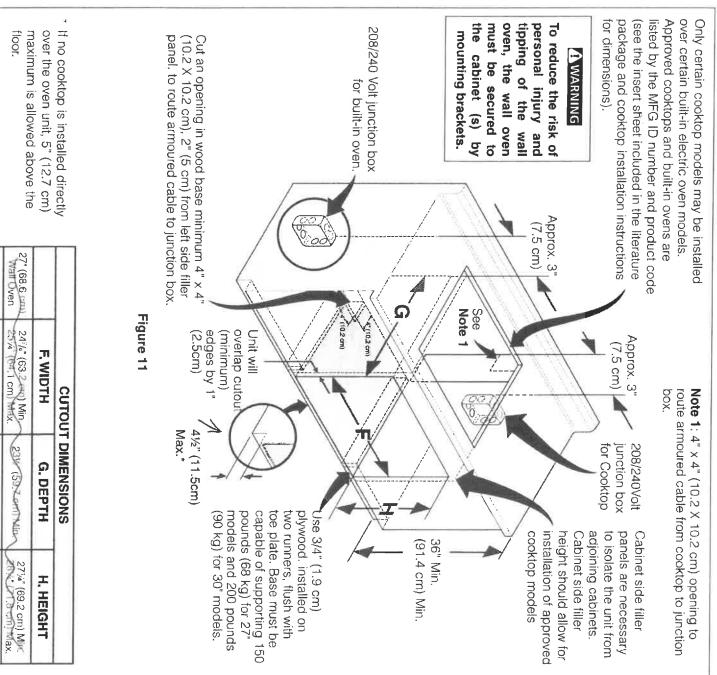


Figure 10- TYPICAL UNDER COUNTER INSTALLATION OF A SINGLE ELECTRIC BUILT-IN OVEN
WITH AN ELECTRIC COOKTOP MOUNTED ABOVE

30\* (76.2 cm) Wall Oven

28½" (72.4 cm) Min. 29" (73.7 cm) Max.

23½" (59.7 cm) Min.

271%" (69.2 cm) Min. 281/4" (71.8 cm) Max

231/ 59 Com No


27% (69.2 cm) Min

### 24" Recessed Handle Dishwasher


100 Series - Stainless Steel SHEM3AY55N





# **Installation Details**

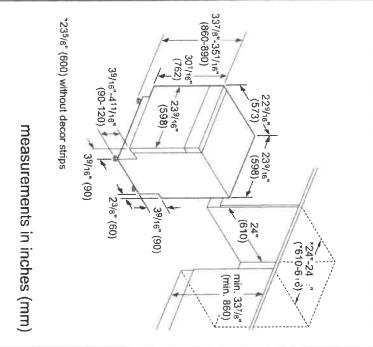

Toe-kick Drain hose Included:

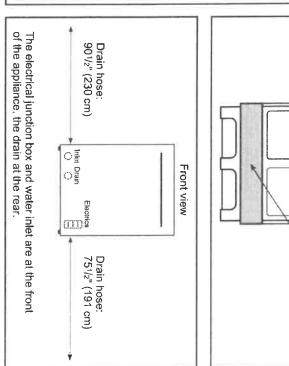

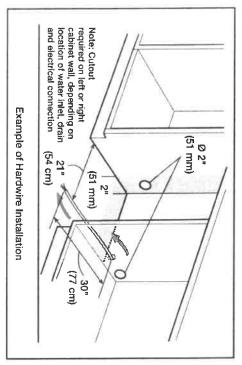

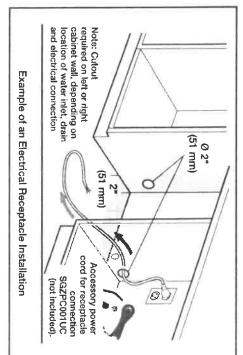

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST. Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warrantles: Please see Use & Care manual or Bosch website for statement of limited warrantly.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904.

SBSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

# ARP

# 24" FLUSH MOUNT DEFLECTOR VENT: **INSTALLATION INSTRUCTIONS** SKMD24F0AS

# IMPORTANT NOTES TO THE INSTALLER

- Read all of the Installation Manual that is included with configuration. the Microwave Drawer before installing in the flush mount
- Observe all governing codes, ordinances, and safety instructions.
- Be sure to leave these instructions with the consumer.

Parts includes:

2	-	Qty.
LX-CZB055MRE0 Mounting screws	PREF-B019MRP0 Flush Mount Deflector Vent	
		Part number

1. Prepare cabinet opening as shown in Figures 1, 2A, 2B, 2C


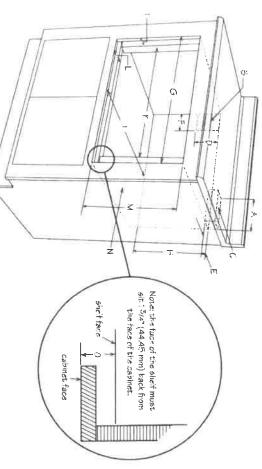


Figure 1

- A. 6" (152.40 mm)
  B. Suggested electrical outlet location
  C. Anti-Tip block
  D. 5" (127 mm)

- 4" (101.60 mm)
- 9
- H 3. 24-3/16" (614.35 mm) minimum 24-1/2" (622.3 mm) maximum H. 14-13/16" (376.24 mm) to bottom of Anti-Tip block
- 1-1/16" (26.97 mm) 23-1/2" (596.90 mm) minimum depth 22-1/8" (561.97 mm)
- 1-3/4" (44.45 mm)
- 16-7/8" (428.62 mm) opening Floor must support 100 lb (45.4 kg) 1-3/4" (44.45 mm)

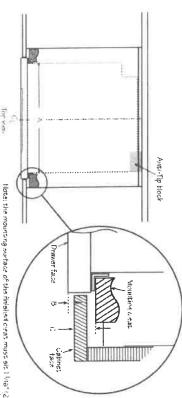


A. 22" (558.8 mm) mounting cleat opening width B. 1/4" (6.35 mm)
C. 1-1/16" (26.97 mm)

- Note: the mounting ourface of the finished creat must sit I Not" (2687 min) back from the face of the cabinet [pushing the face of the drawer out Na" (6.25 mm)]

Figure 2A


# AVG




# AVM-278PS 30" Insert hood - **MSRP**: **\$639.00**

Electrical requirements Warranty 1-year Warranty	Ducting Electrical Requirements	Duct transition	Filter type	Blower performance	Blower type	Lighting	Control	Features	Dimensions	Dimensions	Stainless steel grade	Exterior Appearence	Model number	Selected Model
120V / 60Hz / 2.7 Amps  Parts and labour, in-home service	Ducted	stainless steel baffle filters included 6" Round (Top)	Speed 3, 4.0 sones 2 aluminium superior micro hole filters and	Speed 1, 1.0 sones	860 CFM, 3-Speed	2 bulbs, 3W LED (bulbs included)	Mechanical push buttons		27 3/8" (W) x 11 3/4"(D) x 13 1/2"-16" (H)		201		AVM-278PS	

### Dimensions

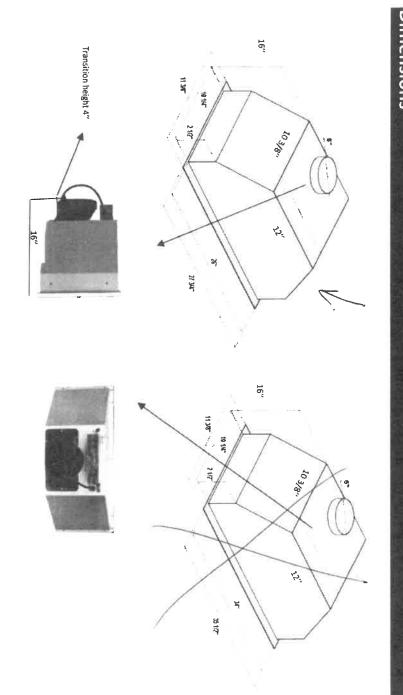

### Installation



m	0	C	В	A	
Cabinet height	Hood height (including transition height (4"))	Recommended height between cooking surface and bottom of the hood	Floor to counter top height (standard)	Floor to ceiling height	
N/A	16"	28" to 30"	36"	variable	

# Duct transition Top 6" Round

may be incomplete and/or may change without notice. The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us,