

Simone Walker

From: Steve Miller <smiller@appliancescanada.com>
Sent: August 9, 2021 8:02 AM
To: Simone Walker
Subject: Lot 120A Caledon Club
Attachments: Xerox_Scan_003.pdf

Good morning Simone,

Specs for Lot 120A Caledon Club (Diep) are attached.

The purchaser decided on a full depth fridge (they are aware it will protrude approximately 9" from the counter)

I included a spec for a chimney hood (6" duct) that they will likely go with.

Thanks,

Steve.

Specs

120A
Caledon



REFRIGERATION

LFX28968

Ultra-Capacity 3 Door French Door Refrigerator

GREAT ELEGANCE, SIZE, AND CONVENIENCE.

If you've ever wished you had more space to get more organized, your wish has been granted. With 27 cubic feet, you get that extra space. You also get extras like Smart Cooling technology, designed to help keep all that extra food fresher, longer. Plus, our own Slim SpacePlus® Ice System frees up even more room in the door and shelf. And, with French-doors it's real easy getting food in or out of this refrigerator.

STYLE AND DESIGN


- 27 cu.ft.
- Slim SpacePlus® Ice System
- Premium Finishes in Stainless Steel, Smooth White and Smooth Black
- Contoured Doors with Matching Commercial Handles
- SmartPull™ Freezer Handle
- Hidden Hinges
- Premium LED Interior Light

PERFORMANCE

- Smart Cooling System
- Linear Compressor
- 10 Year Limited Manufacturer's Warranty on Linear Compressor
- Multi-Air Flow
- Fresh Air Filter
- Electronic Temperature Controls
- Tall Ice & Water Dispenser
- Premium Water Filtration System
- IcePlus™ Accelerated Freezing Function
- ENERGY STAR® Qualified
- Door Alarm
- LoDecibel™ Quiet Operation

ORGANIZATION

- 4 Spill Protector™ Tempered Glass Shelves
- Full Width Glide N' Serve™ Drawer
- 2 Humidity Crispers
- 6 Door Baskets (2 Adjustable Gallon Size) and Dairy Corner
- DuraBase™ Solid Drawer Base

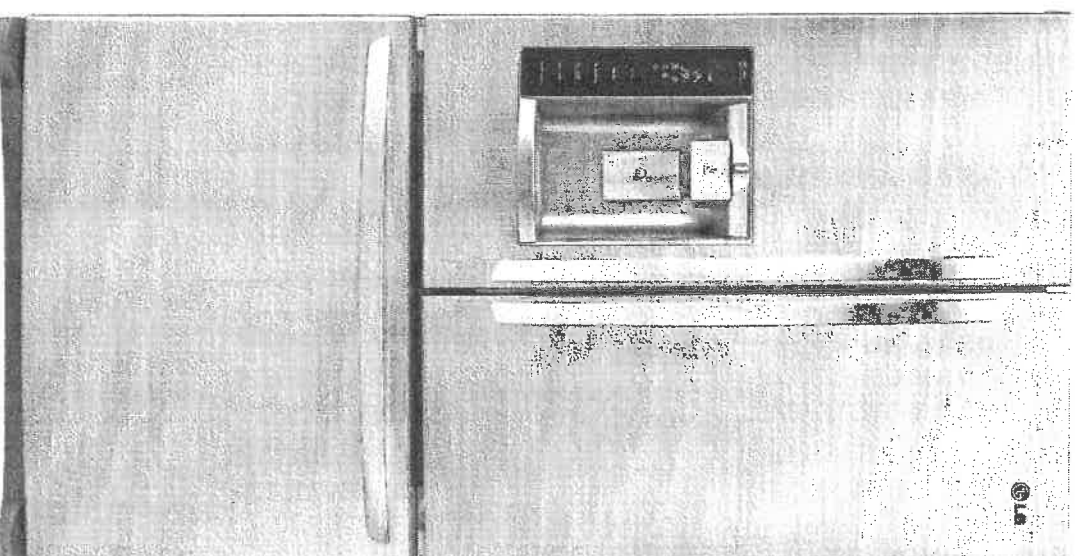

KEY FEATURES

Ultra Capacity

Stock-up and store everything you need. With a cavernous 27 cubic feet of space, this LG French Door refrigerator gives you ample space for all of your family's favorite foods and keeps them conveniently organized and within reach.

Slim SpacePlus® Ice System

Ice makers are great, but not if it means you can't fit all of your food in the fridge. The Slim SpacePlus® Ice System provides maximum shelf space* and allows even more space for door bins.

10-Year Limited Warranty on Linear Compressor

When you buy a refrigerator, you don't want to worry that it won't last. Because the Linear Compressor uses fewer moving parts and operates more efficiently, LG confidently backs the compressor with a 10-year limited warranty.



*Standard width french door refrigerator excludes other LG manufactured products



REFRIGERATION

LFX28968

Ultra-Capacity 3 Door French Door Refrigerator

CAPACITY

Refrigerator	17.9 cu. ft.
Freezer	8.9 cu. ft.
Total	26.8 cu. ft.

FEATURES

ENERGY STAR® Qualified	• (7.15 kWh/year)
Ice & Water Dispenser	•
Dispenser Type	Integrated Tail Dispenser
Ice System	Slim SpacePlus®
Daily Ice Production	3.5 lbs/3.8 lbs+plus
Ice Storage Capacity	2.8 lbs
Water Filtration System	Compact Filter LT700P
Smart Cooling System	•
Dispenser Light	•
Multi Air Flow Cooling	•
Fresh Air Filter	•
Temperature Sensors	•
Linear Compressor	6
Display Type	•
Temperature Controls	Membrane / White LED
Door Alarm	Electronic/Digital
Child Lock	•
LockTech™ Quiet Operation	•
Auto Closing Door Hinge	•
ADA Compliant	•

REFRIGERATOR

No. of Shelves	4 Fixed
Folding Shelf	1
Cantilevered Shelves	•
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve™ Drawer	•
Refrigerator Light	Premium LED

REFRIGERATOR DOOR

No. of Shelves/Bin	6 (2 Adjustable Gallon Size)
Door Bin Construction	Clear Bins with Deco
Dairy Corner	•

FREEZER

Door Type	Pull Drawer
Drawers	2
DuraBase™ Solid Drawer Base	•
Drawer Divider	•
Ice Bin	•
Freezer Light	Premium LED
Handle	SmartPull™ Handle

MATERIALS AND FINISHES

Contour Door	•
Hidden Hinges	•
Toe Grille	•
Surface	•
Back	Coated Metal, Stainless Steel
Available Colors	Flush & Metal cover over mechanical parts
Handles	Smooth White (SW), Smooth Black (SB), Stainless Steel (ST) Matching Commercial Handles

DIMENSIONS/CLEARANCES/WEIGHT


Depth with Handles	35 3/8"
Depth without Handles	32 7/8"
Depth without Door	29"
Depth (Total with Door Open)	47 5/8"
Height to Top of Case	68 3/8"
Height to Top of Door Hinge	69 3/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	4 1/2"
Door Edge Clearance without Handle	1 1/3"
Installation Clearance	Sides 1/8", Top 1", Back 1"
Weight (Unit/Carton)	342 lbs./367 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 38"

WARRANTY

1 Year Parts and Labor,
7 Years on the Sealed System,
10 Years on Linear Compressor

UPC CODES

LFX28968ST Stainless Steel	048231 784405
LFX28968SW Smooth White	048231 784412
LFX28968SB Smooth Black	048231 784429

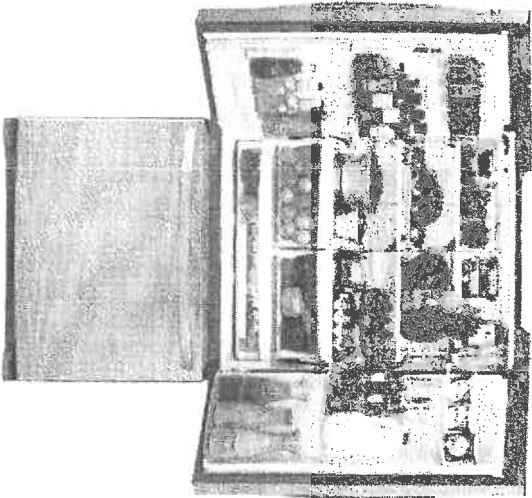

LG Electronics U.S.A., Inc.

1000 Sylvan Avenue Englewood Cliffs, NJ 07632

Customer Service and Technical Support: (800) 243-0000

LG.com


Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate.

© 2015 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. SJ2315

FRIGIDAIRE GALLERY

FGIC3666TB

BUILT-IN COOKTOP
36" INDUCTION

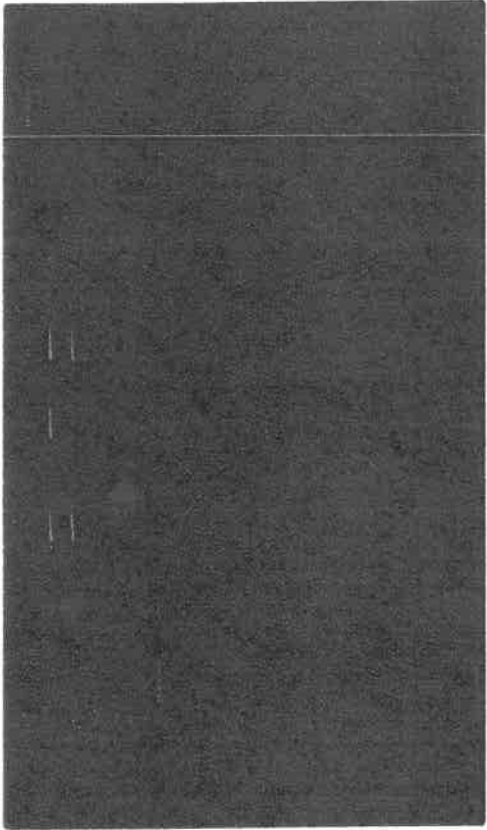


AVAILABLE COLORS



SIGNATURE FEATURES



Amazingly Fast
Get amazingly fast heat with induction that boils water 50% faster than an electric cooktop.

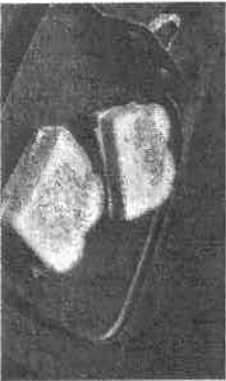

Even Heat
Whip up delicious meals with induction that delivers incredibly even heat across the surface of the pan so you get golden results every time.



Easy To Clean
Don't stress over spills with induction's easy-to-clean surface that generates heat only to your pan, not your cooktop, meaning spills can't burn onto the surface.



Auto Sizing™ Pan Detection
Make fluffy pancakes with ease using Auto Sizing™ Pan Detection that automatically senses the size of your pan to only send heat to whatever smelt, meat, int. or large pan you are using.

PRODUCT DIMENSIONS

Width	36-3/4"
Depth	21-1/2"
Height	4-3/8"

MORE EASY-TO-USE FEATURES

True Temperature Melt & Hold

Get perfectly melted goodness with True Temperature Melt & Hold that delivers low, precise heat for melting delicate ingredients or sauces without scorching or burning for up to one hour.

Temperature Precision

Sear steaks, crisp sandwiches, melt chocolate, or simmer sauces with the precise temperature control of induction.

Safe Surface

The Safe Surface™—induction only heats pans and the food in them; the area around the pans stays cool to the touch.

Energy Efficiency

Since induction only heats your cookware and not your kitchen, less energy is lost throughout the cooking process.

Cooktop Timer

Use the built-in timer function to set a specified amount of time you want items to cook.

Cookware Compatibility

Most stainless steel and cast iron cookware is compatible with induction elements. An easy rule of thumb: if a magnet sticks to the bottom of the cookware, it's induction-friendly.

CERTIFICATIONS

A.D.A.-Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Boards A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.




Of note: For safety reasons, Frigidaire Air-Cut™ and Air-Cut™ water coolers are not recommended for use in wet areas.

ELEMENTS	SIZE	WATTS
Right Front	Induction 8"	2,300/5,200
Right Rear	Induction 7"	1,800/2,600
Center	Induction 10"	2,500/5,800
Left Front	Induction 8"	2,300/5,200
Left Rear	Induction 7"	1,800/2,600

FGIC3666TB
BUILT-IN COOKTOP
36" INDUCTION

FRIGIDAIRE
GALLERY

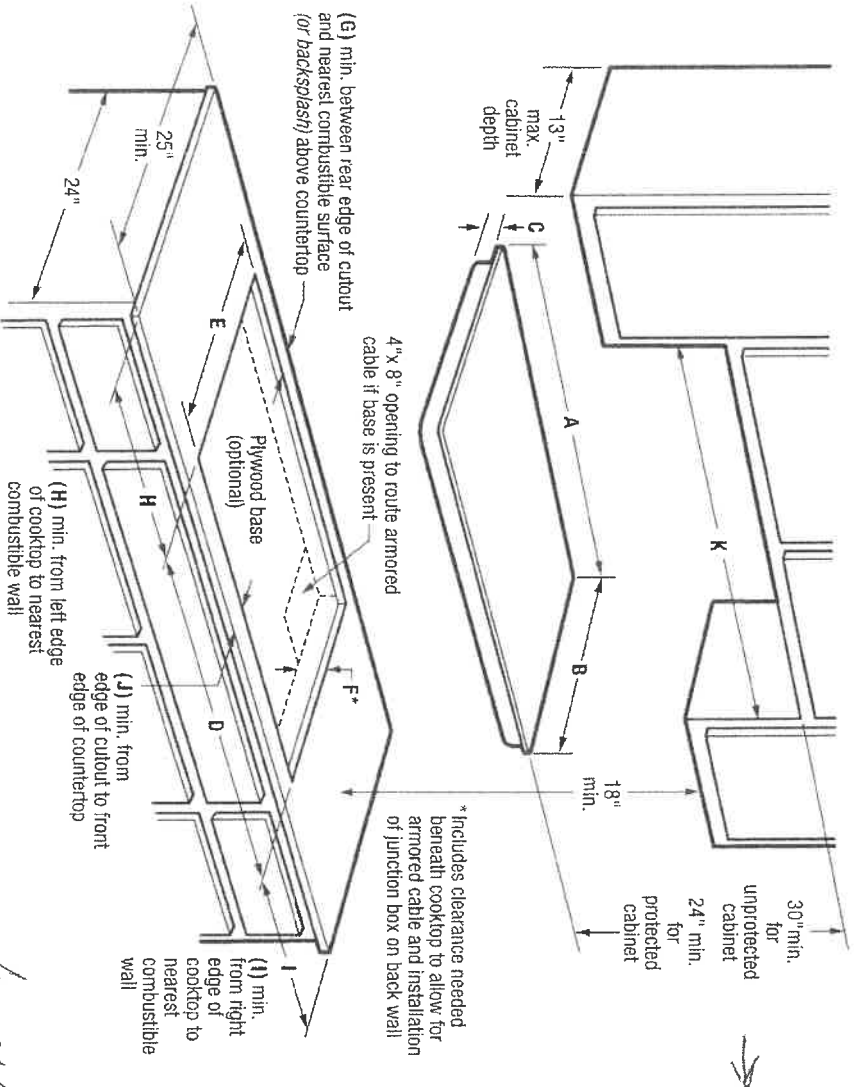

PRODUCT DIMENSIONS	
A-Width	36-3/4"
B-Depth	24-1/2"
C-Height	4-7/8"
CUTOUT DIMENSIONS	
D-Back (Max)	36-3/8"
E-Depth (Max)	36-1/8"
F-Height (Max)	20-1/2"
G-Height (Max)	4-1/2"
REQUIRED CLEARANCES	
H-Back	1-1/2"
I-Depth	2"
J-Depth	2-1/2"
K-Cabinet Cutting Width (Min)	36"
UTILITY CONNECTION LOCATIONS	
POWER SOURCE	Induct Riser

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) - 54 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, AC, only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 9.6/8.3 kW
- Amps @ 240/208 Volts = 45.0/45.2 Amps
- Recommended Circuit Breaker - 40 Amps
- Always consult local and national electric codes.
- Cooktop cutout height includes clearance needed beneath cooktop to allow for armored cable and installation of junction box on back wall. Position center of junction box 10" inward from right side of cooktop cutout, and 12" down from underside of countertop.
- Overhead cabinetry should not exceed a 15" maximum depth
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 36".
- Allow 30" minimum clearance between top of cooktop platform and bottom of unprotected wood or metal overhead cabinet, or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGSS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

- Allow 2" minimum clearance between rear edge of cutout and nearest combustible surface (or backsplash) above countertop.
- Allow 2" minimum required clearance from left edge of cooktop to nearest combustible wall and 2" minimum from right edge of cooktop to nearest combustible wall.
- Installation of drawer not recommended beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Electric Built-in Cooktop model FGIC36661 is approved to be used over any Frigidaire Electric Single Wall Oven. (Refer to Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications page on web).

OPTIONAL ACCESSORIES

- Granite Countertop Installation Kit - (PIN # 805081-9010).



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5835 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

HOME APPLIANCES

LG COOKING

LWMC3063

Combi Wall Oven

1.7 cu.ft. Microwave (Speed Oven)

Infrared Heating™

4.7 cu.ft. Oven

True Convection

Steam Cooking

Self+EasyClean


SmartThinQ® Technology



Enjoy new ways to control your home with LG smart appliances

- Start or stop your Oven remotely
- Set your Monitor Status from your smartphone
- Works with the LG SmartThinQ® app

SmartThinQ®



SUMMARY

Total Oven Capacity (cu. ft.)

6.4 (Upper & Lower)

Colors

Stainless Steel / Black Stainless Steel

UPPER OVEN FEATURES

Capacity (cu.ft)

1.7

Interior (Capacity) - Upper MW/O / Lower Oven

Stainless / Enamel Coating

Microwave power output

950W

Microwave mode power consumption

1650W

Convection Bake mode power consumption

1600W

Convection Element (W)

1300W (Sheath heater)

Broil Upper Element (W)

1200W (500W + 700W)

Broil Lower Element (W)

375W

Microwave

Yes

Convection Bake

Yes

Broil

Yes

Speed cook

Yes

- # of Defrost (2 Menu)

Meat / Poultry / Fish / Bread

- # of Sensor cook (9Menu)

Beverage / Casserole / Chicken / Pasta / Pizza / Plate of food / Rice / Soup / Vegetable

- # of Auto cook (28Menu)

Bacon (regular sliced) / Bagel (frozen) / Baked potatoes (7-9oz ea) / Brwnie / Cod filets (1 lb) / Corn dog (frozen) / Fresh vegetable / Frozen chicken wings / Frozen meat / Frozen chicken nuggets / Frozen pizza (regular crust) / Frozen soft pretzels / Frozen vegetable / Garlic bread (baked, frozen) / Hamburger (12 oz) / Hot dog (1/2" thick) / Pork chop (1.2" thick 6-7oz) / Pork chops (1.2" thick 6-7oz) / Pork loin (1.2" thick 14-15oz) / Rice / Salmon steak (1" thick) / Sausage / Sirloin steak (1" thick, 1lb-2.1lb) / Tenderloin / Vegetable-canned

Butter / Cream Cheese / Frosting / Ice Cream

Butter / Caramel / Cheese / Chocolate / Marshmallow

LOWER OVEN FEATURES

Capacity (cu.ft)

4.7

Easy Clean®

Yes

Self Clean

Yes (3.4.5 hours)

Variable cleaning time

Yes (3.4.5 hours)

Variable broil

Yes (Full/Center / High/Med/Low)

Broil element

2,500 watts inner / 1,500 watts outer

Bake element

2,500 watts

Bake element type

Hidden (8 pass)

of rack position

5

12 hrs. shut-off

Yes

- # of light

2 (Halogen Lamp)

Convection conversion

Yes (2,000 watts Sheath heater)

-Convection element

Yes

Convection System/Model/Cooking System

True Convection

Convection Fan

Single Speed

Oven cooking mode

Con/Bake / Con/Broast / Bake / Broil / Steam Roast / Steam Roast / Probe / inner mode (Seal/Inn Menu/Proof)

Oven Control Features

Glass Touch (SmoothTouch™)

Door Lock

Yes

CONTROL

Oven Control Type

Glass Touch (SmoothTouch™)

Display

White VFD

Language

English / Spanish / French

Smart Function

Wi-Fi / Smart Buzzer

Clock

12 hr or 24 hr (option)

Kitchen Timer

Yes

Timed Cook

Yes

Temperature Unit of Measure

Fahrenheit / Celsius

Cooking Complete Reminder Volume

Beeper (1 Loud, 2 Low, 3 Mute)

Sabbath Mode

Yes

APPEARANCE

Stainless Steel / Black Stainless Steel

Available Colors

Stainless Steel Finish (Aluminum)

Handle/Knobs

Black Stainless Steel Finish (Aluminum)

Oven Door Feature

WideView™ Window

Scratch-Resistant

Yes

Print/Proof™ Finish

Yes (Black Stainless Steel Only)

SmartThinQ® SMART FEATURES

SmartDiagnosis™

Yes

Wi-Fi Connectivity

Yes

Works with Google Assistant and Amazon Alexa

SmartThinQ® with Innot and SideChef

Yes

DIMENSIONS/CLEARANCES/WEIGHT

Shipping Weight (lbs)

244 lbs

Product Weight (lbs)

194 lbs

Product (W x H x D)

29 3/4" x 43 5/11" x 24 1/2"

Cut-out (W x H x D)

28 1/2" x 43 7/16" x 23 1/2"

Overall Depth (in) - including handle

26 7/16"

Oven Interior Dimensions (Upper) (in) (W x H x D)

20 8/11" x 8 9/25" x 17 5/13"

Oven Interior Dimensions (Lower) (in) (W x H x D)

24 1/2" x 17 5/8" x 18 7/8"

Carton Dimensions (in) (W x H x D)

33" x 30" x 50"

POWER/RATINGS

Max. Amp load

40A

Rating

7.8kW

Requirements

120 / 240 VAC, 120 / 208 VAC

ACCESSORIES

Glass Tray(Upper)

Yes

Metal Tray(Upper)

Yes

Rack(Upper)

Yes

Broiler pan & Grid

Yes

Gliding Rack

1

Heavy Duty Rack

2

Meat probe

Yes

Scouring Pad

Yes

WARRANTY

Parts & Labor

1 Year

UPC CODES


048231339810

LWMC3063ST (Stainless Steel)

048231339827

LWMC3063BD (Black Stainless Steel)

048231339827

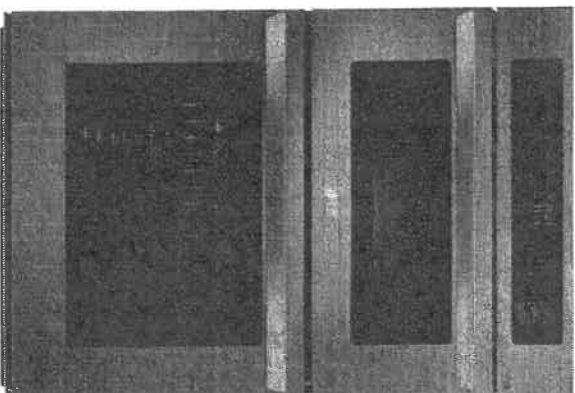

LG COOKING

LWC3063

Combi Wall Oven

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


DIMENSIONS / CLEARANCES / WEIGHT	
Product Dimensions (in) (W x H x D)	29 3/4" x 43 9/11" x 24 1/2"
Cut-out (W x H x D)	28 1/2" x 43 7/16" x 23 1/2"
Overall Depth (in) - including handle	26 7/8"
Actual Depth with Door Open (Uppe) (in)	37 1"
Actual Depth with Door Open (Lower) (in)	43.7"
Oven Interior Dimensions (Upper) (in) (W x H x D)	20 8/11" x 8 9/25" x 17 5/13"
Oven Interior Dimensions (Lower) (in) (W x H x D)	24 1/2" x 17 5/8" x 18 7/8"
Carton Dimensions (in) (W x H x D)	33" x 30" x 50"
POWER RATINGS	
Max. Amp Load	40A
Rating	7.8kW
Requirements	120 / 240 VAC, 120 / 208 VAC

INSTALLATION REQUIREMENTS


- The cabinet base platform must be able to support 202 lbs (91.65 kg) for a Microwave Combination Wall Oven. If the cabinet does not have a solid bottom, two braces or runners must be installed level with the bottom of the cutout to support the weight of the oven. Make sure the base is level and the front of the cabinet is square. If the cabinet base is not level, the oven racks will tend to slide out when opening the door.
- If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.
- If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick shim both sides equally to establish the cutout width.
- The junction box must be flush with the rear wall of the cabinet as shown below.
- Allow at least a 23" clearance for the door depth when it is open.
- Kitchen cabinets in contact with the oven must be heat resistant up to 194°F (90°C), and fronts of nearby units up to at least 158°F (70°C).

CUTOUT DIMENSIONS

- Cabinet Width: 30" (762 mm)
- Recommended Minimum Cutout Location from Floor: 12" (304.8 mm)
- Cutout Depth: 23 1/2" Min. (595.9 mm)
- Cutout Width: 28 1/2" Min. (723.9 mm) 28 5/8" Max. (727 mm)
- Cutout Height: 43 7/16" Min. (1103 mm) 43 1/2" Max. (1106 mm)

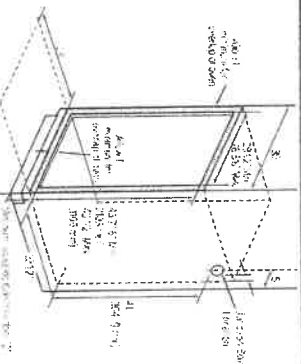


PRODUCT DIMENSIONS

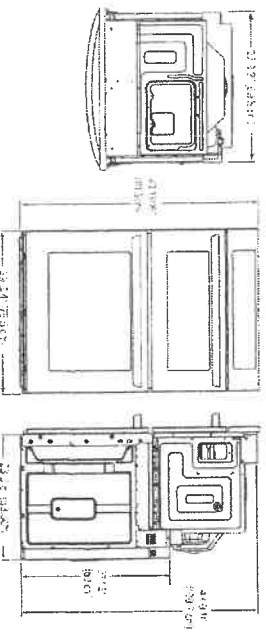

ELECTRICAL CONNECTIONS


- Be sure the wall oven is installed and grounded properly by a qualified installer or service technician.
- This wall oven must be electrically grounded in accordance with local codes or, in their absence, with the National Electrical Code ANSI/NFPA No. 70- latest edition in United States, or with CSA Standard C22.1-1982 and C22.2 No.01982 (or latest edition), Canadian Electrical Code, Part 1, and all local codes and ordinances.
- This wall oven must be supplied with the proper voltage and frequency, and connected to an individual, properly grounded branch circuit, protected by a circuit breaker or fuse. For the circuit breaker or fuse required by this model, see the rating plate to find the wattage consumption and refer to the table below to get the circuit breaker or fuse amperage.
- A Microwave Combination Wall Oven can consume up to 7,800 W at 240 VAC. A 50 Amp circuit breaker with wire gauge #8 AWG must be used.
- Do Not ground to a gas pipe.
- Do Not have a fuse in the neutral or grounding circuit.
- A UL-listed conduit connector must be provided at the junction box.
- Prepare the electrical connection as follows:
 - Turn off the circuit breaker or remove fuses to the oven branch circuit.
 - With the oven positioned directly in front of the cabinet opening, connect the flexible conduit to the electrical junction box as shown below. Position the conduit in such a manner that it will be on top of the oven in a natural loop when the oven is installed.
 - If local codes permit connection of the frame grounding conductor to the neutral(white) wire, follow the instructions for a 3-wire circuit connection.
 - If used in mobile homes or new construction, or a recreational vehicle, or local codes do not permit connection of the frame grounding conductor to the neutral(white) wire, follow the instructions for a 4-wire circuit connection.

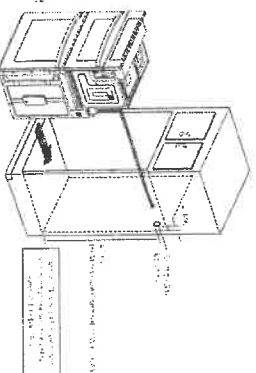

INSTALL THE OVEN

Install the oven into the cabinet as follows:

- Slide the oven into the opening.
- Loop (do not tie) a 36" (91 cm) string around the conduit before the oven is slid into place. Lay the string over the top of the oven and use it to keep the conduit from falling behind the oven.
- Lift oven into cabinet cutout using the oven opening as a grip. Carefully push against the oven front frame. Do not push against outside edges.
- While sliding the oven back, pull the string so that the conduit lies on the top of the oven in a natural loop.
- d When you are sure the conduit is out of the way, slide the oven 3/4 way back into the opening. Remove the string by pulling on one end of the loop.
- Secure the oven.
 - Using the mounting holes on the oven side trim as a guide, drill pilot holes for screws provided. (For securing the Combi Oven, use a minimum of 4 screws, one on each side in both the upper and lower ovens.)
 - Secure the oven to the cabinet with screws provided. If the cabinet is particle board, you must use 3/4" particle board screws. These may be purchased at any hardware store.
- Install the metal bottom trim.
 - Place the metal bottom trim centered over the pre-drilled mounting holes on the lower base.
 - Using 3 screws provided, secure the bottom trim to the bottom edge of the cabinet.
- Reinstall the oven door.





HOME APPLIANCES

LG DISHWASHERS

LDP6797ST/WW/BB
Top Control Dishwasher with QuadWash™


- 15 Place Settings
- QuadWash™
- 10-Year Warranty on Inverter Direct Drive Motor
- SmartThinQ® Technology with wi-fi
- EasyRack™ Plus
- Glide Rail
- Height Adjustable 3rd Rack
- LoDecibel™ Quiet Operation (44 dBA)
- Dual Zone
- ENERGY STAR® Qualified




SmartThinQ

Enjoy new ways to control your home with LG smart appliances

- Get notifications when dishes are clean
- Monitor the cycle time from your smartphone
- Works with the LG SmartThinQ® app



works with the Google Assistant

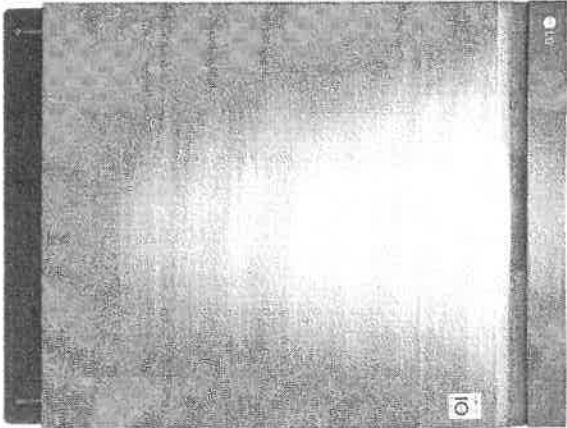

CAPACITY	
Total Place Settings	15
Upper Rack Dish Height Limit	11"
Lower Rack Dish Height Limit	12.5"
RACKS AND BASKETS	
Cutlery Baskets	Yes
Cup Rack	Yes
Stemware Holder	Yes
Fold Down Tines	Yes (Half Fold on Upper & Lower)
BPA-Free Nylon Coated Racks and Tines	Yes
Rack Handle	Yes (Upper/Lower)
Glide Rail	Yes (Upper)
EasyRack™ Plus System	Yes
Height Adjustable Upper Rack	Yes (One Touch, 3 level)
Height-Adjustable 3rd Rack	Yes
STYLE AND DESIGN	
Control Panel Location	Top
Electronic Controls	Hidden SmoothTouch™ Controls with LED Display
Signal Light/Cycle Indicator Lights	3
Time Remaining Indicator	Yes (LED)
Tub Material	NeueFluor™ Stainless Steel
Tub Light	No
Handle	Flush
All Available Colors	Matte Black, Stainless Steel, Black, Stainless Steel, Stainless Steel, Black, White
FEATURES	
TrueSteam®	No
QuadWash®	Yes
Inverter Direct Drive Motor	Yes
LoDecibel™ Quiet Operation	44 db
Number of Wash Cycles	9 (Auto, Heavy, Delicate, Normal, Turbo, Download Cycle, Machine Clean, Rinse, Express)
Number of Options	8 (Dual Zone, Heat Load, Energy Saver, High Temp, Extra Dry, Delay Start, Control Lock, Night Dry)
Number of Spray Arms	3 (Top, Upper, Lower)
SenseClean™ Wash System	Yes
Vary Wash	Yes
Detergent and Rinse Aid Dispenser	Yes
Hybrid Condensing Drying System	Yes
End of Cycle Indicator	Yes (Beeper + END indication on display)
Hidden Water Heater	Yes

Safety Heat Switch (Leak)	Yes
Soil (Turbidity) Sensor	Yes
Tub Insulation (Damping Sheet,	Yes
Sound Absorbing Material (Fan) Base)	Yes
BPA-Free Nylon Coated Racks and Tines	Yes
Anti-Bacterial Treatment (Sump, Inner / Outer filter, Drain pump case, Drain hose)	Yes
Balanced Door	Yes
Multi-Level (S) Water Direction	Yes (Top Nozzle (Down), Upper Nozzle (Up/Down), Lower Nozzle (Up/Down))
3-Stage Filtration System	Yes

SmartThinQ® SMART FEATURES	
wi-fi Enabled	Yes
Voice Activation	Yes
Works with	Google Assistant
Cycle Complete Notification	Yes
Monitor Cycle Time	Yes
POWER RATINGS	
ENERGY STAR® Qualified	Yes
CEE Tier	1
Energy Use (kWh/Year)	258 kWh
Water Factor (WF)	2.8
DIMENSIONS / CLEARANCES / WEIGHT	
Product Dimensions (in) (W x H x D)	23.25" x 33.67" x 24.6"
Product Weight (lbs)	83.8 lbs
Depth with Door Closed with Handle (in)	24.5/Pl
Depth with Door Open (in)	50.5"
Shipping Weight with Carton (lbs)	28" x 34.7" x 29.6"
Carton Dimensions (in) (W x H x D)	97.1 lbs
LIMITED WARRANTY	
Labor	1 Year
Parts	1 Year
Control Board and Rack Parts	5 Years
Inverter Direct Drive Motor	10 Years
Stainless Steel Door Liner or Tub	Lifetime
UPC CODES	
LDP6797ST Stainless Steel	04823102156
LDP6797WW White	04823102170
LDP6797BB Black	04823102163


© 2018 LG Electronics U.S.A. Inc. All rights reserved. LG Life's Good is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Min./net/c. weights and measurements are approximate. Some features may require internet access. Content and services may vary by product and are subject to change without notice. 7/22/18



AVH-368CS

36" Wall mounted hood - MSRP: \$879.00


Model		AVH-368CS
Control		Soft touch with LED display
Lighting		2 bulbs, 3W LED (bulbs included)
Blower type		860 CFM, 6-Speed
Blower performance		Speed 1, 2, 4 sones Speed 6, 6.2 sones
Filter type		3 aluminium superior micro hole filters and stainless steel baffle filters included
Duct transition		6" Round (Top)
Ducting		Ducted
Chimney (ducted out)		For ceiling heights up to 9'0"
Stainless steel grade		Exterior Appearance 201
Electrical requirements		Electrical Requirements 120V / 60Hz / 2.7 Amps
Dimensions		Dimensions 35 1/2" (W) x 19 3/4" (D) x 3 1/4" (H)
1-year Warranty		Warranty Parts and labour, in-home service

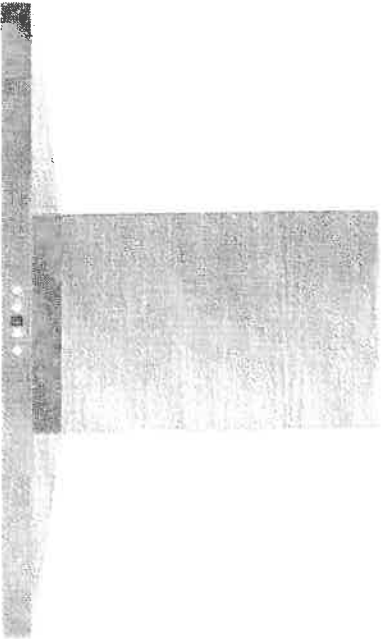


The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice

AVH-308CS/368CS


Dimensions

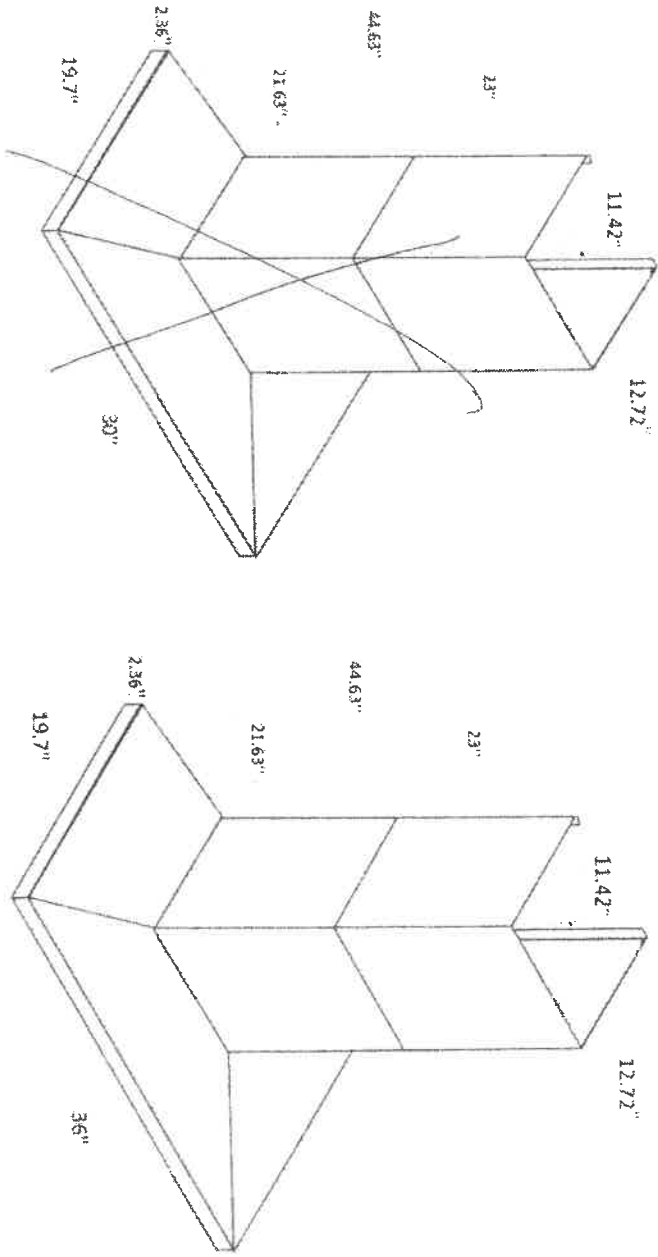

Installation

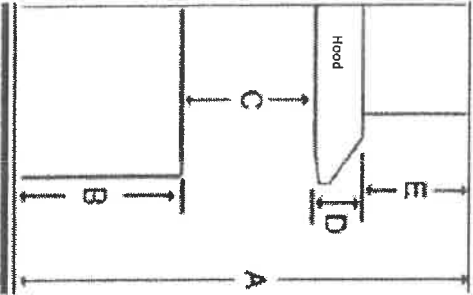

A	Floor to ceiling height	variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2.36"
E	Chimney height	Max 44.63"

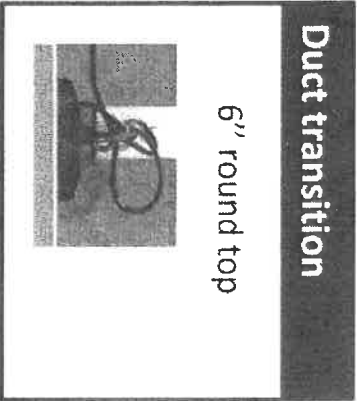

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Need technical support? 1(888) 651-2534