

LMC2075_
NeoChef Countertop Microwave Oven

2.0 cu.ft. Oven Capacity

Smart Inverter

EasyClean® Interior


SmoothTouch™ Glass Touch

16" Turntable Diameter

LED Interior Light


10 Year Warranty on Magnetron

Available in Black Stainless Steel, Stainless Steel.

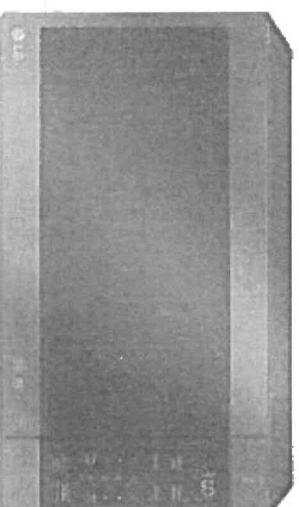


CAPACITY	
Cavity Size	2.0 cu. ft.
FEATURES	
Watts	1,200 Output / 1,350 Microwave
Turntable Diameter	16"
Display	SmoothTouch™ Glass Touch
Lighting	White LED
COOKING FEATURES	
Power Levels	10
Sensor Cooking Options	7 (Potato, Fresh Vegetable, Frozen Vegetable, Frozen Entree, Bacon, Rice, Soften Butter)
Sensor Reheat Options	5 (Beverage, Casserole, Pizza, Dinner Plate, Pie)
Defrost Options	4 (Meat, Poultry, Fish, Bread)
Quick Start	Yes
CONVENIENCE FEATURES	
EasyClean® Interior	Yes
Clock	Yes
Completion Beeper	Yes
Energy Saving Button	Yes (turns off LED display)
SAFETY FEATURES	
Child Lock	Yes
MATERIALS/FINISHES	
Available Colors	Black Stainless Steel (BD), Stainless Steel (ST)
Cavity Material	Metal
Cavity Coating	EasyClean® Enamel (Gray Interior)

POWER/RATINGS	
Input Volt/Hz	120/60
Input Amps/Watts (Microwave)	14A/1600W
DIMENSIONS	
Cavity (WxHxD)	16 11/16" x 11 1/4" x 18 1/16"
Exterior (WxHxD)	23 7/8" x 13 9/16" x 19 5/16"
Net Weight	36.4 lbs.
Shipping Weight	40.7 lbs.
Shipping Dimensions (WxHxD)	27 3/4" x 15 2/5" x 21 1/4"
LIMITED WARRANTY	
1 Year Parts and Labor (In Home Service) 10 Years Limited on Magnetron (In Home Service)	
UPC CODES	
LMC2075BD (Black Stainless Steel)	048231337181
LMC2075ST (Stainless Steel)	048231337198



LMC2075ST



LMC2075BD

1 of 2
100%

~~100%~~

1.DIMENSIONS OF THE INSTALLATION OPENING(FIG 1)

The following opening dimensions in feet must be available in the

Installation cabinet :

HEIGHT : 16 $\frac{1}{2}$ " , WIDTH : 25 $\frac{1}{2}$ " , DEPTH : 19 $\frac{1}{2}$ " or 22"

WARNING:This trim kit uses air flow from the top, bottom and sides of the trim frame.

Blocking the air flow can cause the microwave to function improperly and

may cause damage to the microwave.

Allow a 1" clearance beyond the edge of the trim frame to provide proper air flow.

On 27" models, allow 1 $\frac{1}{8}$ " at the top, 1 $\frac{1}{16}$ " on the sides and 1 $\frac{1}{4}$ " at the bottom for

overlap of the Trim Frame over the edges of the cutout. On 30" models, allow

1 $\frac{1}{8}$ " at the top, 2 $\frac{1}{8}$ " on the sides and 1 $\frac{1}{4}$ " at the bottom for overlap of the

Trim Frame over the edges of the cutout.

FOR INSTALLATION ABOVE A BUILT-IN OVEN

Microwave oven should be installed on a 3/8" plywood base and support

by 2x4 or 1x2 equivalent runners on all sides. Base must be capable of

supporting a minimum of 100 lbs (45.3 kg).

2.INSTALL THE ANTI-TIP BRACE(FIG 2)

1.Draw a line on the cutout floor at the center of the cutout, and extend the line 1/2" down the face of the cabinet.

2.Draw a line on the top front face of the cabinet at the center of the cutout. The line should extend 1/2" up the face of the cabinet. This center line will be used for mounting the top bracket (see step 7).

3.Fold or cut the front edge of the template, along the front guide line. Place the template flush along the front edge of the cutout floor. Mark the center line of the template with the center line of the cutout floor. Mark the center positions with an awl or center punch for the anti-tip brace location as shown.

3.INSTALL THE ANTI-TIP BRACKET AND BOTTOM DUCT (FIG 3)

1.Disconnect the microwave oven before proceeding with the installation.
2.Fasten the anti-tip bracket to the bottom duct by using four round-head screws.
3.Remove any loose items inside the microwave oven,including the turntable and turntable support.Carefully turn the microwave upside down.
4.Install bottom duct with four round-head screws as shown.

FIG 1

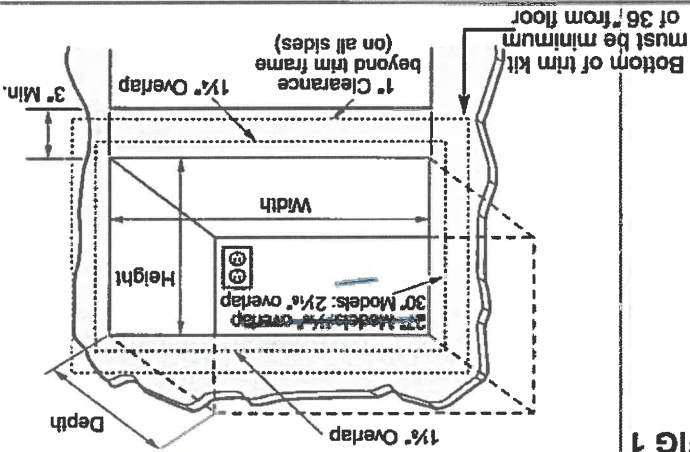


FIG 2

DIMENSIONS:

A = 1 1/2"
B = 3"
C = 18 3/16"
D = 1 1/2"

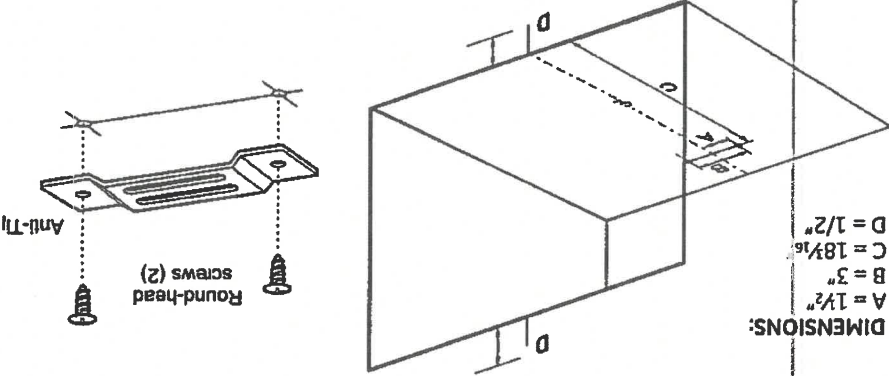


FIG 3

